TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Table of Contents

INTRODUCTION 3
DOCUMENT HISTORY 5
DEFINITIONS AND ABBREVIATIONS 12
1. Common Objects 13
1.1. Common Objects in NDC Requests 13
1.1.1. HTTP header 15
1.1.2. Passenger Types 15
1.2. Common Objects in NDC Responses 16
1.2.1. AirlineTaxonomy 16
1.2.2. HTTP 478 Error 17
1.2.3. ERRORS 17
1.2.4. OTHER ERRORS 17
2. NDC Certification and Use Cases 19
2.1. Certification Process 19
2.1.1. Production Readiness 19
2.1.2. Periodical Compatibility 24
2.1.3. General Instructions 24
2.2. Use Cases 26
3. Offer API 30
3.1. General 30
3.1.1. airline-profile 30
3.2. Offer Flow 1 32
3.2.1. shop 32
3.2.2. price-detail 43
3.3. Offer Flow 2 50
3.3.1. shop-bestprice 50
3.3.2. shop-upsell 60
3.4. LTT Monitoring 69
4. Order API 71
4.1. Booking API 71
4.1.1. order-create 71
4.1.2. flight-quote 79
4.1.3. order-reserve 84

75dabb313-821a-49d6-b5ee-d105b8469fdb

4.1.4. order-pay 87
4.1.5. order-retrieve 97
4.2. Servicing API 115
4.2.1. order-infoupdate 115
4.2.2. order-split 120
4.2.3. service-addremove 123
4.2.4. order-reshop 126
4.2.5. order-cancel 133
4.2.6. rebook-quote 137
4.2.7. order-rebook 153
4.2.8. order-refund-delete 158
4.2.9. addinfant-quote 162
4.2.10. order-addinfant 167
4.3. Ancillary API 171
4.3.1. preorder-exst 171
4.3.2. seat-availability 175
4.3.3. service-catalog 182
4.3.4. service-list 188
4.3.5. ancillary-quote 195
4.4. Order Change Notification 201
4.4.1. Overview 201
4.4.2. Integration 205
4.4.3. Limitations 205
4.4.4. Supported Functionalities 205
4.4.5. Output Parameters 206
4.4.6. Input Parameters 209
4.4.7. Special Considerations 209
4.4.8. WARNINGS 211

75dab313-82ba-49d6-b5ee-d105b8469fdb

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

INTRODUCTION

The purpose of this document is to serve as an integration reference for clients connecting to TK NDC Offer and Order APIs. Currently, NDC schema version 21.3.6 is being utilized by the APIs. There is no customization of the standard schema. Client implementations are expected to generate their code according to 21.3.6 schema version. This document is being updated as new methods or modification/addition of functionality for existing methods are implemented.

You must become a registered NDC agency at https://www4.thy.com/acenteportalui to start API integration process.

This document is expected to be utilized along with an API collection that demonstrates common flows for the integrators. The API collection and other additional documents can be found at your AgencyPortal pages at:

https://www4.thy.com/acenteportalui/#shared/products/NDC/201

Definition of Methods

#	Method	RQ/RS	Definition
1	airline-profile	AirlineProfileRQ/RS	Used to retrieve locations for which offers shall be requested
2	shop	AirShoppingRQ/RS	Used to retrieve flight offers based on search criteria
3	price-detail	OfferPriceRQ/RS	Used to create priced offer that can turn into an order
4	shop-bestprice	AirShoppingRQ/RS	Used to retrieve priced flight offers (only cheapest per flight combination) based on search criteria
5	shop-upsell	OfferPriceRQ/RS	Used to retrieve upsell offers that can turn into an order
6	order-create	OrderCreateRQ/OrderViewRS	Used to create order
7	order-infoupdate	OrderChangeRQ/OrderViewRS	Used to update info on the order
8	flight-quote	OrderQuoteRQ/OrderReshopRS	Used to quote latest fares for flight order items
9	order-reserve	OrderChangeRQ/OrderViewRS	Used to get a payment time limit to keep order as a reservation
10	order-pay	OrderChangeRQ/OrderViewRS	Used to commit/pay for flight order items and ancillary offer items
11	order-retrieve	OrderRetrieveRQ/OrderViewRS	Used to retrieve up-to-date order details
12	seat-availability	SeatAvailabilityRQ/RS	Used to retrieve priced seat map
13	service-catalog	ServiceListRQ/RS	Used to retrieve possible chargeable and non-chargeable ancillary service details
14	service-list	ServiceListRQ/RS	Used to create offers for chargeable and non-chargeable ancillary services
15	ancillary-quote	OrderQuoteRQ/OrderReshopRS	Used to create quoted offers for chargeable ancillary services
16	service-addremove	OrderChangeRQ/OrderViewRS	Used to add/remove non-chargeable services to/from the order
17	order-reshop	OrderReshopRQ/OrderReshopRS	Used to create refund offers for an order or check voidability
18	order-cancel	OrderChangeRQ/OrderViewRS	Used to cancel (void, refund, reservation cancel) an order
19	rebook-quote	OrderQuoteRQ/OrderReshopRS	Used to create offers for an order to update/add/remove flights
20	order-rebook	OrderChangeRQ/OrderViewRS	Used to add/remove flights to/from an order
21	order-split	OrderChangeRQ/OrderViewRS	Used to split NDC order into two distinct orders

CONFIDENTIAL & RESTRICTED

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Notes on Input/Output Parameters

1. The object types specified in Input Parameters and Output Parameters sections of each method are not the actual object types as specified within NDC schemas, but a high-level classification as “Complex”, “String”, “Integer” etc. to demonstrate general usage. For actual object specification, NDC schemas can be consulted.
2. Repetition (#) denotes the number of occurrences of the related object in the request or response.
3. Being mandatory for a sub-object will be dependent on the existence of its parent if the parent is optional. For the example table below mandatory-ness of SalesAgentID, SalesBranch, SalesBranchID are dependent on existence of their optional ancestor SalesAgent.

Parameter	Description	Mandatory/ Repetition (#)	Type/Example
/DistributionChainLink/SalesAgent/	Sales agent information	NO / 0..1	Complex
/DistributionChainLink/SalesAgent/SalesAgentID	Agent user id if available	YES / 1	String / 03
/DistributionChainLink/SalesBranch	Sales branch information	YES / 1	Complex
/DistributionChainLink/SalesBranch/SalesBranchID	3 letter (Pseudo City Code) PCC of the agency as defined in TK AgencyPortal	YES / 1	String / XYZ

Notes on objects of type ID_Type

For all fields of type ID_Type returned in TK NDC API responses, integrators MUST NOT introduce any dependency to the content of the field.

```
<BaggageAllowance>
  <ApplicablePartyText>Party</ApplicablePartyText>
  <BaggageAllowanceID>FBA_30KGM</BaggageAllowanceID>
  <TypeCode>Checked</TypeCode>
  <WeightAllowance>
    <MaximumWeightMeasure>30.0</MaximumWeightMeasure>
    <WeightUnitOfMeasurement>KGM</WeightUnitOfMeasurement>
  </WeightAllowance>
</BaggageAllowance>
```

Consider the above example in which BaggageAllowanceID is chosen to include the allowed baggage info for readability or other reasons. The application processing such response must not depend on the “_30KGM” information to infer an allowance of 30 KGM. Instead, the dedicated structured objects (MaximumWeightMeasure and WeightUnitOfMeasurement) must be processed to infer such information.

CONFIDENTIAL & RESTRICTED

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

DOCUMENT HISTORY

Version	Date	Explanation
0.1	21.07.2023	Documentation for common NDC objects, api access guide and the following order messages included: order-create, order-reserve, flight-quote, order-pay, order-retrieve
0.2	29.08.2023	Changes are summarized in:  TK NDC Order Messages - Integratio
0.3	28.09.2023	Sections 14 and 15 are added for newly introduced methods order-reshop and order-cancel. The requirement of sending transactionId parameter as part of http header is added to Section #2. UC-14,15, and 16 added to Section #3.2 for the new methods. Section #4.6: Item 13 added Section #4.7: NDC-1424 error is added to the list Section #6.6: Item 2 added Section #7.7: Errors with codes NDC-4168 through NDC-4173 added, unused error NDC-1018 removed Section #8.5.3 is added right after 8.5.2 Section #9.5: α/UnitPrice/Discount object details added to the response details Section #9.7.1: NDC-1368 error is added Section 12.7: NDC-1035 error is added Section 13.7: NDC-4190 error is added
0.4	14.11.2023	"Notes on objects of type ID_Type" added to INTRODUCTION Section 1: Explanation on ip whitelisting capability added. Section 2: Error sections added. Section 3.1: Offer methods and order-infoupdate added. Section 4: New section "Offer API" added for offer methods. Section 5: Order methods reorganized under new section OrderAPI. Section 3.2: Use-cases updated according to offer options and new methods. Section 3.3: New section added for "Certification Process". Section 5.1.1: Area code and IdentityDoc are no longer mandatory in order-create requests. Section 5.1.1.8: NDC-4087 error name and description updated. Section 5.1.4: NOT_AUTHORIZED_FOR_PAYMENT error is added for order-pay. Section 5.1.4.7: New error codes added for order-pay: NDC-1524,NDC-1122,NDC-1339,NDC-1530,NDC-4004,NDC-1531,NDC-4154,NDC-1532,NDC-1533,NDC-1534,NDC-1535 Section 5.1.5.5: -New fields /PaxList/Pax/LangUsage and /PaxList/Pax/LangUsage/LangCode added to order-retrieve response. (I. Passenger&Contact Information) -Fields updated for providing Cabin Baggage allowance as a BaggagAllowance object. (IV. Free Baggage and Extra Baggage (for applicable ancillaries) Information) -Description for /OrderItem/ and δ/DeliveryStatusCode updated (V. Order Items for flights) -new output field introduced(α/FareDetail/Price/TaxSummary/Tax/QualifierCode), description for α/Ticket/ConnectedDocNumber updated, new field introduced α/Ticket/Coupon/SoldAirlineInfo/PaxSegmentRefID (X. TicketDocInfo For Paid Flights and Paid Ancillaries) Section 5.2.1: New method order-infoupdate introduced. Section 5.2.3.7: NDC-4190 error added. Section 5.2.4: NDC-4099, NDC-4100, NDC-4037, NDC-1130 errors added for order-reshop.

CONFIDENTIAL & RESTRICTED

		Section 5.2.5: NDC-1405, NDC-4094, NDC-4097, NDC-4096, NDC-4095, NDC-4174, NDC-4159, NDC-4038, NDC-4204, NDC-4077, NDC-4084, NDC-4083, NDC-4098, NDC-4037, NDC-1368 errors and NDC-8026 warning are added for order-cancel. Section 5.2.6 and 5.2.7: rebook-quote and order-rebook methods introduced for reissue/exchange operations. Section 5.3.1: NDC-2026, NDC-1205, NDC-1206 errors added for seat-availability. Section 5.3.3: Special Considerations for service-list item #5 on weight and piece concept updated. Errors NDC-1205 and NDC-1206 are added. Section 5.3.4: NDC-4168, NDC-4169, NDC-4170, NDC-4171, NDC-4172, NDC-4173 errors added Section 5.4: Order Change Notification introduced
0.5	09.02.2024 21.02.2024 21.02.2024

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

		- BookletQty - IssueInfo - OriginalIssueInfo - ExchReissueInd
	28.02.2024	Section 4.2.1.8 warning messages added. Section 4.2.1.6 Item:8 Reissue availability definition changed. Section 4.3.1.6 Item:8 Reissue availability definition changed. Section 4.2.3.5 Output parameters, Restriction parts revised. Section 4.3.2.5 Output parameters, Restriction parts revised. Section 4.2.1.5 Output parameters, Duration fields added. Section 4.2.2.5 Output parameters, Duration fields added. Section 4.2.3.5 Output parameters, Duration fields added. Section 4.3.1.5 Output parameters, Duration fields added. Section 4.3.2.5 Output parameters, Duration fields added.
	02.03.2024	Section 2 is split into two subsections to accommodate new explanation regarding the use of AirlineTaxonomy object described in 2.2.1 Section 3.3 requirement for PCI compliance added: Integrators that will process payments via Credit Card must provide their PCI compliance certificate along with their certification submission. Section 4.1 newly added, making old sections 4.1 and 4.2 become 4.2 and 4.3 respectively. Section 4.1.1 airline-profile newly added Section 4.2 Offer Flow 1 and 4.3 Offer Flow 2, the following explanation added: Offer Flow 1 is expected to be used for lower LTT (Look-to-Ticket) scenarios. Offer Flow 2 can be used for both lower and higher LTT (Look-to-Ticket) scenarios. Section 4.2.1.6 item #8 revised 4.2.1.8 WARNINGS section newly added Section 4.3.1.6 item #8 revised Section 4.4 LTT Monitoring newly added Section 5.1.1.7 NDC-4999 error is added Section 5.1.3.2 item #1 updated Section 5.1.3.6 updated as below: 1. Reserving an NDC order resets the PriceGuaranteeTimelimitDateTime for all flight order items~~; in alignment with this, price detail for flight order items will be removed (if exists) from the order~~. A flight-quote will be expected for new price details to be set for the order before it can be paid for. For this reason, FLIGHT_QUOTE_BEFORE_PAYMENT_IS_REQUIRED_WARNING is returned within the response after successful execution of all order-reserve requests. 2. Even though PriceGuaranteeTimelimitDateTime will be reset,~~As the fare details for the order is removed as a result of order-reserve operation,~~ baggage allowance and ~~price~~ fare related information will ~~not~~ still be present in the returning OrderViewRS. The fare and baggage allowance details returned at this point must be considered informative as with a new flight-quote to be performed later, they are subject to change. Section 5.1.3.7 NDC-4999 error is added Section 5.1.4.4 input parameter for cash payments updated as below: /PaymentFunctions/PaymentProcessingDetails/PaymentMethod/SettlementPlan~~OfflinePayment~~ — For cash payments, always expected as: <SettlementPlan~~OfflinePayment~~><PaymentTypeCode>CA</PaymentTypeCode></SettlementPlan~~OfflinePayment~~> /PaymentFunctions/PaymentProcessingDetails/PaymentMethod/SettlementPlan~~OfflinePayment~~/PaymentTypeCode Section 5.1.4.6 items #5, 6, 9, 10 newly added Section 5.1.4.8 EMPTY_OFFLINE_PAYMENT_INFO error key changed to EMPTY_SETTLEMENT_PLAN_INFO Section 5.2.2.7 NDC-4999 error is added

CONFIDENTIAL & RESTRICTED

<table>
<tr><td></td><td></td><td>
* validateVoid context added to order-reshop function Section 5.2.4
Section 5.2.4.1, 5.2.4.4, 5.2.4.5, updated to reflect the newly added context validate_void.
Section 5.2.4.6 item #4 newly added
Section 5.2.4.7
- error key UNPAID_ORDER_NOT_SUITABLE_FOR_REFUND updated as UNPAID_ORDER_NOT_SUITABLE_FOR_REFUND_OR_VOID
- Errors NDC-4999, NDC-1411, NDC-1412, NDC-1343, NDC-1341, NDC-1410, NDC-1413 added.
Section 5.2.4.9 NDC-8028 void pre-validation success warning added
Section 5.2.5.7 NDC-1334, NDC-4999, NDC-1413 errors are added
Section 5.2.6.II omitted parameter added (/OriginDestList/OriginDest/OriginDestID)
Section 5.2.6.III new output parameter added (/BaggageAllowance/WeightAllowance/TotalMaximumWeightMeasure)
Section 5.2.6.6 items #1, #3, #15 newly added.
* Section 5.2.6.6 item #14 (very important instruction on brand rules during rebooking) added
Section 5.2.6.7 errors NDC-4999 and NDC-1207 added
Section 5.2.7.4 input parameter for cash payments updated as below:
<table>
<tr><td>β/PaymentMethod/SettlementPlan~~Offlin~~
~~ePayment~~</td><td>For cash payments, always expected as:
<SettlementPlan~~OfflinePayment~~></td></tr>
<tr><td>β/PaymentMethod/SettlementPlan~~Offlin~~
~~ePayment~~/PaymentTypeCode</td><td><PaymentTypeCode>CA</PaymentTypeCode>
</SettlementPlan~~OfflinePayment~~></td></tr>
</table>
Section 5.2.7.6 item #1 newly added
Section 5.2.7.7 NDC-1062 error added
Section 5.4.5 α/Ordinal is changed as below
<table>
<tr><td>α/Ordinal</td><td>1</td><td>1 for Carrier, ~~2~~1 for Seller, ~~3~~2 for Distributor</td></tr>
</table>
* Section 5.4.6 significantly updated.
</td></tr>
<tr><td>0.6</td><td>16.06.2024

24.06.2024

26.06.2024</td><td>
Section 5.1.1.4 Input parameters are updated to integrate with multiple contact information.
Section 5.1.1.7 NDC-1133 error is added instead of NDC-1004
Section 5.1.2.5 TourCode is added to Output parameters.
Section 5.2.3.2 Limit of maximum two SelectedOffers is deleted.
Section 5.2.3.4 SelectedOffers can be sent more than two.
Section 5.3.1.2 Limitations, new restrictions are added.
Section 5.3.1.6 Table: SeatCharacteristicCode in item #1 is updated.
Section 5.3.1.7 NDC-1300 error is added.
Section 5.3.3.7 NDC-4236 error is added.

Section 5.1.4 Input parameters for credit card transactions are added
Section 5.2.7 Input parameters for credit card transactions are added
Section 5.1.5.5.V Output parameter of ServiceRefID is added and described.
Section 5.1.5.5.V δ/DeliveryStatusCode added

Introduction modified to add NDC schema version, 21.3.6
Section 1, outlining the onboarding process is significantly updated to be aligned with new procedures.
Section 3.3.4 of Certification Process is updated.
Section 4.1.1.6 item # 4 added.
Section 5.1.5.6 item #5 added.
Section 5.2.4.6 item #6 “Involuntary Servicing” added.
</td></tr>
</table>

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

		Section 5.2.6.6 item #16 “16.Schedule Change Handling (including flight cancellations)” added. Section 5.2.6.7 NDC-1414 (CANCELLED_SEGMENTS_CANNOT_BE_RETAINED) error added. Section 5.4 “Order Change Notification” is significantly updated including old new flight details addition for schedule change events. Section 5.1.5.6. item #7 added Section 5.1.1.6. items #14 and #15 added Section 5.2.4.6. item #7 added
	28.06.2024	Section 5.1.5.6 item #5 is revised with the fields which are added to the orderviewRS. Section 5.1.5.6 item #6 is added which is describing how to display schedule change case in orderviewRS.
	01.07.2024	Section 4.2.1.6 item #7 and #9 updated Section 4.3.1.6 item #7 and #9 updated Section 4.2.2.7 NDC-4254 error added
0.7	14.07.2024	Section 3.2 Offer Flow 1 section: Diagram updated, bound-update removed Section 3.3 Offer Flow 2 diagram added Section 3.2.1.6 item #7 updated
	26.07.2024	Section 4.2.2.6 item #6 and Section 4.2.2.2 item #3 are added which is describing not allowed to order-split for a passenger who has an ancillary orderItem. Section 4.2.2.7 NDC-4258 Error message added
	21.08.2024	Section 1.2.3 NDC-1131 error code added for Common Objects
	4.09.2024	Section 4.1.4.7: New error codes added for order-pay: NDC-1064, NDC-1065, NDC-1066, NDC-1067, NDC-1068, NDC-1069, NDC-1070, NDC-1071, NDC-1072, NDC-1073
	19.09.2024	Section 4.1.4.7, Section 4.2.5.7 and Section 4.2.7.7: New error code added for order-pay, order-rebook and order-cancel: NDC-1074. Section 4.1.4.6 item#11, Section 4.2.5.6 item #3 and Section 4.2.7.6 item#2, are added.
		Section 4.2.4.8, for order-reshop: NDC-1419, NDC-1420, NDC-1425 and NDC 1426 new error messages are added. Also, Section 4.2.4.6 item #8 is added for order-reshop
	23.09.2024	Section 1 is removed and moved into a new document.
	23.09.2024	Section 4.2.7.7. NDC-1064, NDC-1065, NDC-4284 and NDC-1208 errors are added. Section 4.2.7.9 NDC-8009 warning is added. Section 4.3.17 NDC-1134 error is added. Section 4.3.2.5 RFIC for chargeable ancillaries is added. Section 4.3.3.5 and Section 4.3.4.5 tax details for ancillaries are added.
	1.10.2024	Section 4.1.4.6 is updated for item#12 NDC-8039 warning message is added
	2.10.2024	Section 1.2.3: Errors; NDC-1132, NDC-1135, NDC-1515 added Section 2.1: bound-update method is removed Section 2.2: bound-update removed from use case flows

CONFIDENTIAL & RESTRICTED

		Section 2.3.2: instructions added for API vs. UI Certification Section 4.2.2: bound-update removed
0.8	03.10.2024	Section 4.2.6.7. NDC-1451 and NDC-1452 errors are added.
	30.10.2024	Section 4.1.4.7. NDC-1085 error is added.
	15.11.2024	Section 4.1.4.7. NDC-1086 error is added. Section 4.1.4.7: New error codes added for order-pay: NDC-1075, NDC-1076, NDC-1077, NDC-1078, NDC-1079, NDC-1082.
	19.11.2024	Section 4.1.4.7. Errors; NDC-1087, NDC-1088 added
	21.11.2024	Section "4.1.1.6. Special Considerations": INF and CHD pax age calculation rules added
	06.12.2024	Seat-availability offer context (pre-order) is added
	07.01.2025	Section 1.1 New distributionChain for sub agency flow is added and current versions are updated Section 3.3.1.2 Limitation for TR agencies are added Section 3.2.1.4 Request parameters are updated with FareTypeCode Section 3.2.1.6 Public fare offer response case when private fare request, is added Section 3.2.1.7 Errors are updated with new private fare flow error codes Section 3.3.1.4 Request parameters are updated with FareTypeCode Section 3.3.1.6 Public fare offer response case when private fare request, is added Section 3.3.1.7 Errors are updated with new private fare flow error codes
	08.01.2025	Section 4.2.3.7. NDC-1028 and NDC-1209 errors is added. Section 4.3.3. is updated with pre-order service-list flow. Section 4.3.4.6. item #4 is updated and #5-6 are added. Section 4.3.4.7. NDC-1028 and NDC-1209 errors are added. Section 4.4.1. Overview samples are updated. Section 4.4.5. OutputParameters table for "Possible values for ReasonCode and ChangeTypeCodes" and tabel for "III. Fields to be returned for SCHEDULE_CHANGE" are updatedSection “4.2.6.7” ERRORS and “4.2.6.9” WARNINGS are added NDC-1416, NDC-1417, NDC-1415, NDC-1545, NDC-1546, NDC-1547 and NDC-1418
	10.01.2025	Section “4.2.4.7” ERRORS and “4.2.4.9” WARNINGS are added NDC-1417, NDC-1545, NDC-1546, NDC-1547 and NDC-1418
	10.01.2025	Section “4.1.4.7” ERRORS and “4.1.4.8” WARNINGS are added NDC-1091, NDC-1092, NDC-1093, NDC-1094, NDC-1095 and NDC-4302Section 4.1.2.7. NDC-1204, NDC-4999, NDC-1427, NDC-1428, NDC-1429, NDC-1430, NDC-1431, NDC-1432, NDC-1433, NDC-1434, NDC-1435, NDC-1436, NDC-1437, NDC-1438, NDC-1439, NDC-1440, NDC-1441, NDC-1442, NDC-1443, NDC-1453 error messages are added.
	14.01.2025	In the Section “4.1.4.4” For EasyPay Payment Method expected request part is added inside Input Parameters and In the Section “4.1.5.5.IX” For EasyPay Payment Method expected response part is added inside Output Parameters.

0.9	24.02.2025	The values that service of an order can get are added.
0.9	08.04.2025	The changes stemming from the new logic for setting priceGuaranteeTimeLimit are described under related titles. 4.1.2.1, 4.1.3.1, 4.1.3.5, 4.1.3.6, 4.2.2.5
0.9	13.06.2025	The method definitions related to order-rules have been removed and Related to 4.1.4.4 section new information is added for **CardIssuingCountryCode field.**
0.9	24.06.2025	UATP card payment information has been added and new message definitions have been included. And new error messages (NDC-1145) is added under the "Errors" title (Jira task id: NDCIN-6080)
0.9	25.06.2025	Description of the following items are updated 4.1.1.4. Input Parameters δ/ExpiryDate and, 4.2.1.4. Input Parameters β/IdentityDoc/ExpiryDate
0.9	03.07.2025	Price section has been deleted for VI.Order Items for Non-Chargeable Services
0.9	21.07.2025	Section 4.1.1.4 β/OtherAddress and details are added Section 4.1.1.6 Item #17-18-19-20 are added Section 4.1.1.7 NDC-1098 and NDC-1099 errors are added Section 4.1.1.8 NDC-4297, NDC-4298, NDC-4305, NDC-4306 errors are added Section 4.2.1.4 α/PostalAddress and α/OtherAddress details are updated Section 4.2.1.6 Item #2 and #3 are updated. Section 4.2.1.8 NDC-4241, NDC-4107, NDC-4208, NDC-4209, NDC-4229,, NDC-4305, NDC-4306 errors are added. Section 4.2.3.7 NDC-8079 error is added. Section 4.2.6.6 NDC-1451 and NDC-1452 errors are added. Section 4.2.6.8 NDC-8099 warning is added. Section 4.2.7.7 NDC-1536 error is added. Section 4.3.1.7 NDC-8079 error is added. Section 4.3.2.7 NDC-8079 error is added. Section 4.3.3.7 NDC-8079 error is added. Section 4.3.3.4 Pax/PaxRefID is added. Section 4.3.4.7 NDC-8079 error is added. Section 4.4.1 Table is updated. Section 4.4.2 Bearer and Oauth 2.0 Authentication Types and option to share the encrypted informtion are updated. Section 4.4.5 Possible values for ReasonCode and ChangeTypeCodes table is updated (delay functionality and 21-Other type are added). β/New/Warning and β/Old/Warningn are added to output tables. Section 4.4.6 Input Parameteres and response samples are added. Section 4.4.7 Item #3 is added.
0.9	30.07.2025	Item 5. And 6. is added under Airline-Profile Special Consideration 3.1.1.6.
0.9	13.11.2025	Sections 4.2.1.7, 4.2.1.8, 4.2.2.7, 4.3.1.7 Shop, priceDetail and shopBestprice Errors and Warnings are updated
0.10	25.11.2025	Explanations of DeliveryStatusCode values are added to the table.
0.10	17.12.2025	The limitation item and error message suggesting that the pax who has ancillary cannot be divided have been removed from the Limitations and Errors section.
0.10	01.02.2026	Section 3.2.1.6 and 3.3.1.6 limitations are updated about FareTypeCode usage.
0.10	19.02.2026	Section 3.2.2.5 and 3.3.2.5 output parameters are updated with paymentFunctions.
0.10	28.02.2026	Section 3.2.1.5, 3.2.2.5, 3.3.1.5 and 3.3.2.5 output parameters are updated with negotiatedCode.

0.10	11.03.2026	For Section 4.2.4.3, 4.2.4.5, 4.2.4.6 and 4.2.4.10, CIP Lounge Penalty information is added
0.10	24.04.2026	Section 4.4.2 authentication type other than Oauth 2.0 is removed. Only Oauth 2.0 is supported.
0.10	19.05.2026 20.05.2026	For order-addinfant method, Section 4.2.10 is added. 4.2.10.6 is updated
0.10	06.06.2026	Section 4.2.9 addinfant-quote is added. service-catalog, service-list and ancillary-quote methods are updated for PETC/AVIH
0.10	11.06.2026	The preorder-exst method is added. Special Considerations of seat-availability and service-addremove are updated for seat selection with extra seat.
0.10	12.06.2026	For Section 4.1.4 , Automatic offload on check-in included tickets during BUP ancillary ofer item purchase is added.
0.10	14.06.2026	“XI.EXST (Extra Seat) Details” section is added bellow the Output Parameters of Section 4.1.5.

DEFINITIONS AND ABBREVIATIONS

Term	Explanation
AgencyPortal	TK Agency Portal application where the clients directly connecting to TK systems are defined and managed.
TBD	To be determined
LTT	Look-to-TicketedOrder, the ratio of number of calls to get flight offers divided by the number of calls to pay for orders.

75dab313-82ba-49d6-b5ec-d105b8469fdb

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

1. Common Objects

1.1. Common Objects in NDC Requests

For all NDC request messages, the below objects are common and shall be provided as per below instructions.

Parameter	Description	Mandatory/ Repetition (#)	Type/Example
/DistributionChainLink/	Distribution chain link	YES / 2..3	Complex
/DistributionChainLink/Ordinal	The order of the link in distribution chain	YES / 1	Integer / 1
/DistributionChainLink/OrgRole	Role of organization	YES / 1	String / Seller or Distributor or Carrier
/DistributionChainLink/ParticipatingOrg/	Organization details	YES / 1	Complex
/DistributionChainLink/ParticipatingOrg/Name	Name of the organization	NO / 0..1	String / Agency-A
/DistributionChainLink/ParticipatingOrg/OrgID	ID of the organization as it exists in TK Agency Portal	YES / 1	Integer / 32435423
/DistributionChainLink/SalesAgent/	Sales agent information	NO / 0..1	Complex
/DistributionChainLink/SalesAgent/SalesAgentID	Agent user id if available	YES / 1	String / 03
/DistributionChainLink/SalesBranch	Sales branch information	YES / 1	Complex
/DistributionChainLink/SalesBranch/SalesBranchID	3 letter (Pseudo City Code)PCC of the agency or 9 letter special Id	YES / 1	String / XYZ or ABC012345
/PayloadAttributes/TrxID	A unique id to identify each request message, max of 36 characters expected (alphanumeric + dash char '-')	YES / 1	e35d122d-4850-4917-8c44-e372dafef4ba
/PayloadAttributes/CorrelationID	A unique id to identify a group of messages utilized to fulfil a specific use-case, max of 36 characters expected (alphanumeric + dash char '-')	YES / 1	6a4ea885-8826-4fa7-b9fb-67c2f266142e
/PayloadAttributes/PrimaryLangID	Language preference for response messages to be returned (according to ISO 639-1 language codes), **EN** is assumed if not provided	NO / 0..1	EN
/PayloadAttributes/VersionNumber	IATA XSD schema version	YES / 1	Decimal / 21.36

75dab313-82ba-49f6-b6ed-10fb8469fdb

/PayloadAttributes/TrxID is crucial in handling incident tickets or when verifying the initial implementation for an NDC client. It is the responsibility of the sender to guarantee that TrxID's are not repeated between two request messages.

/PayloadAttributes/CorrelationID is utilized to correlate a sequence of request messages (each with their own unique TrxID) aiming to fulfill a single business use case. For instance, in a possible "prime booking" use case, following NDC requests would be expected from a client in the given order:

AirShoppingRQ(shop) > OfferPriceRQ(price-detail) > OrderCreateRQ(order-create) > OrderChangeRQ(order-pay)

In this use-case, it is expected that all RQ messages in this sequence share the same CorrelationID so they can be correlated as a sequence. It is the responsibility of the sender that the CorrelationIDs are assigned in this manner.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

A DistributionChain object similar to below is expected if **agency is directly connecting to TK NDCAPI**, i.e. DistributionChainLink where Ordinal=1, OrgRole=Seller and Ordinal=2, OrgRole=Carrier

```
<n1:DistributionChain>
  <cns:DistributionChainLink>
    <cns:Ordinal>1</cns:Ordinal>
    <cns:OrgRole>Seller</cns:OrgRole>
    <cns:ParticipatingOrg>
      <cns:Name>A-TK-NDC-Agent</cns:Name>
      <cns:OrgID>01010101</cns:OrgID>
    </cns:ParticipatingOrg>
    <cns:SalesAgent>
      <cns:SalesAgentID>01</cns:SalesAgentID>
    </cns:SalesAgent>
    <cns:SalesBranch>
      <cns:SalesBranchID>ABC</cns:SalesBranchID>
    </cns:SalesBranch>
  </cns:DistributionChainLink>
  <cns:DistributionChainLink>
    <cns:Ordinal>2</cns:Ordinal>
    <cns:OrgRole>Carrier</cns:OrgRole>
    <cns:ParticipatingOrg>
      <cns:Name>Turkish Airlines</cns:Name>
      <cns:OrgID>TK</cns:OrgID>
    </cns:ParticipatingOrg>
  </cns:DistributionChainLink>
</n1:DistributionChain>
```

A DistributionChain object similar to below is expected if **aggregator or consolidator aggregator is connecting to TK NDCAPI on behalf of an agency**. i.e. DistributionChainLink objects with Ordinal=1, OrgRole=Seller and Ordinal=2, OrgRole=Distributor and Ordinal=3, OrgRole=Carrier

```
<n1:DistributionChain>
  <cns:DistributionChainLink>
    <cns:Ordinal>1</cns:Ordinal>
    <cns:OrgRole>Seller</cns:OrgRole>
    <cns:ParticipatingOrg>
      <cns:Name>A-TK-NDC-Agent</cns:Name>
      <cns:OrgID>01010101</cns:OrgID>
    </cns:ParticipatingOrg>
    <cns:SalesAgent>
      <cns:SalesAgentID>01</cns:SalesAgentID>
    </cns:SalesAgent>
    <cns:SalesBranch>
      <cns:SalesBranchID>ABC</cns:SalesBranchID>
    </cns:SalesBranch>
  </cns:DistributionChainLink>
  <cns:DistributionChainLink>
    <cns:Ordinal>2</cns:Ordinal>
    <cns:OrgRole>Distributor</cns:OrgRole>
    <cns:ParticipatingOrg>
      <cns:Name>A-TK-NDC-Aggregator</cns:Name>
      <cns:OrgID>21212121</cns:OrgID>
    </cns:ParticipatingOrg>
  </cns:DistributionChainLink>
  <cns:DistributionChainLink>
    <cns:Ordinal>3</cns:Ordinal>
    <cns:OrgRole>Carrier</cns:OrgRole>
    <cns:ParticipatingOrg>
      <cns:Name>Turkish Airlines</cns:Name>
      <cns:OrgID>TK</cns:OrgID>
    </cns:ParticipatingOrg>
  </cns:DistributionChainLink>
</n1:DistributionChain>
```

75dab213-82ba-49d8-25ee-d105b8469fdb

CONFIDENTIAL & RESTRICTED

DistributionChain object similar to below is expected if an **agency with identified sub agency is connecting to TK NDCAPI**. i.e. DistributionChainLink objects; one for mainagency (Ordinal=1, OrgRole=Seller) and one for sub-agency (Ordinal=2, OrgRole=Seller) and one for carrier (Ordinal=3, OrgRole=Carrier).

```
<n1:DistributionChain>
  <cns:DistributionChainLink>
    <cns:Ordinal>1</cns:Ordinal>
    <cns:OrgRole>Seller</cns:OrgRole>
    <cns:ParticipatingOrg>
      <cns:Name>Sub-Agency</cns:Name>
      <cns:OrgID>03030303</cns:OrgID>
    </cns:ParticipatingOrg>
    <cns:SalesBranch>
      <cns:SalesBranchID>XYZ</cns:SalesBranchID>
    </cns:SalesBranch>
  </cns:DistributionChainLink>
  <cns:DistributionChainLink>
    <cns:Ordinal>2</cns:Ordinal>
    <cns:OrgRole>Seller</cns:OrgRole>
    <cns:ParticipatingOrg>
      <cns:Name>Requester-Agency</cns:Name>
      <cns:OrgID>04040404</cns:OrgID>
    </cns:ParticipatingOrg>
  </cns:DistributionChainLink>
    <cns:DistributionChainLink>
    <cns:Ordinal>3</cns:Ordinal>
    <cns:OrgRole>Carrier</cns:OrgRole>
    <cns:ParticipatingOrg>
      <cns:Name>Turkish Airlines</cns:Name>
      <cns:OrgID>TK</cns:OrgID>
    </cns:ParticipatingOrg>
  </cns:DistributionChainLink>
</n1:DistributionChain>
```

1.1.1. HTTP header

A unique transaction id must be sent for each and every NDC request object as a Key/Value pair as part of HTTP header encapsulating every NDC request.

KEY: transactionid
VALUE: /PayloadAttributes/TrxID (HTTP header parameter being equal to TrxID in the payload)

Gzip encoding must be accepted by providing below in HTTP header

KEY: Accept-Encoding
VALUE: gzip

1.1.2. Passenger Types

The following passenger types are supported within TK NDC API.

Code	CodeInRequests
STUDENT	STU
SENIOR	SNN
INFANT	INF
ADULT	ADT
CHILD	CHD
DISABLED	DIS
TEACHER	TEA
UNACCOMPANIED	UNN
YOUNGADULT	B15

75da3313-82ba-49d6-b5ee-d105b8469fdb

YOUTH	YTH
LABOR	LBR
LABOR_CHILD	LNN
LABOR_INFANT	LIF
ETHNIC	VFR
ETHNIC_CHILD	VFN
ETHNIC_INFANT	VFF
SEAMAN	SEA
VETERAN	MRE
MEDICAL	MED
VETERAN_CHILD	MNN
VETERAN_INF	MNF
COMPANION	CMA
S_COMPANION	CMP
IT_ADULT	IT
IT_CHILD	INN
IT_INFANT	ITF

1. “CodeInRequests” values should be used when indicating passenger types in NDC request maessages, such as AirShoppingRQ.
2. All passenger types might not be available for all clients, routes, etc. based on the filing rules. Some passenger types may only be available for certain private fares.

1.2. Common Objects in NDC Responses

1.2.1. AirlineTaxonomy

AirlineTaxonomy object of type `AirlineTaxonomyType` is utilized within multiple NDC response messages to specify types for different services or offer/order items. A custom taxonomy is used which includes the below codes for now. In future new types could be added to this list.

CodesetCode	ValueText
FLIGHT	Services/Items for flight
ANCILLARY_CHARGEABLE	Services/Items for ancillaries that are chargeable
ANCILLARY_NONCHARGEABLE	Services/Items for ancillaries that are non-chargeable
SPECIAL_NEED	Services/Items for special needs
RESIDUAL	Services/Items generated for residual amounts during reissue

CodesetNameCode will always be set as TK_Codeset to indicate a custom code set as shown in the sample is provided below.

```
<AirlineTaxonomy>
  <TaxonomyFeature>
    <CodesetCode>FLIGHT</CodesetCode>
    <CodesetNameCode>TK_Codeset</CodesetNameCode>
    <ValueText>Services/Items for flight</ValueText>
  </TaxonomyFeature>
</AirlineTaxonomy>
```

1.2.2. HTTP 478 Error

NDC API requests that are denied due to network security policies will receive an HTPP 478 error with below payload. Although a valid request is not expected to receive this error, integrators must consult technical support if they receive this response during test integration.

```
<html>
  <head>
    <title>Request Rejected</title>
  </head>
  <body>The requested URL was rejected. Please consult with your administrator.
    <br>
    <br>Your support ID is: 7865365270613525534<br>
    <br>
    <a href='javascript:history.back();'>[Go Back]</a>
  </body>
</html>
```

1.2.3. Errors

Code	Error Key	Description
NDC-1100	INVALID_SALESBRANCH_FOR_ORDINAL_1	Salesbranch is not valid for ordinal.
NDC-1101	UNIDENTIFIED_CLIENT	Unidentified client.
NDC-1102	UNAUTHORIZED_REQUEST	Unauthorized request.
NDC-1103	INVALID_ORGID_FOR_ORDINAL_1	Orgid is not valid for ordinal1.
NDC-1104	INVALID_ORGID_FOR_ORDINAL_2	Orgid is not valid for ordinal2.
NDC-1105	ORDINAL_1_INVALID	Ordinal1 is not valid.
NDC-1106	COUNTRY_CODE_NOT_FOUND_IN_PROFILE	Country code is not found in agency profile.
NDC-1107	CITY_CODE_NOT_FOUND_IN_PROFILE	City code is not found in agency profile.
NDC-1108	PSEUDO_CITY_CODE_NOT_FOUND_IN_PROFILE	Pseudo city code is not found in agency profile.
NDC-1109	SOR_CODE_NOT_FOUND_IN_PROFILE	Sor code is not found in agency profile.
NDC-1110	IATA_CODE_NOT_FOUND_IN_PROFILE	IATA code is not found in agency profile.
NDC-1111	CURRENCY_CODE_NOT_FOUND_IN_PROFILE	Currency code is not found in agency profile.
NDC-4071	MAX_OF_36_CHARS_EXPECTED_FOR_CORRELATION_ID	Correlation id size must be at most 36 chars.
NDC-4072	MAX_OF_36_CHARS_EXPECTED_FOR_TRX_ID	Transaction id size must be at most 36 chars.
NDC-1112	SELLER_IS_EXPECTED_AS_ORDINAL_1	For Ordinal1, there should always be seller.
NDC-1113	INVALID_ORG_ROLE	OrgRole can only be Seller or Distributor.
NDC-1114	INVALID_ORDINAL	Ordinal is expected as 1 or 2.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1131	CARRIER_REQUIRED_FOR_HIGHEST_ORDINAL	Highest Ordinal is required to be Carrier.
NDC-1132	$ORDINALS_MUST_BE_SEQUENTIAL$	Ordinal values must be sequential with no missing numbers in the chain.
NDC-1135	$VALIDATOR_CODE_NOT_FOUND_IN_PROFILE$	Validator code is not found in agency profile.
NDC-1515	$IATACODE_REQUIRED_FOR_BSP$	For BSP/ARC transactions, caller must have IATA code defined within TK AgencyPortal.

1. NDC-4999 ORDER_IS_LOCKED_BY_ANOTHER_OPERATION error is returned if an operation that would result in a change in the order is triggered while another operation that would result in a change in the order is already in progress.

1.2.4. Other Errors

Code	Error Key	Description
NDC-4161	EMPTY_PARTICIPATING_ORG_TYPE	Participating organization cannot be empty.
NDC-4162	EMPTY_PARTICIPATING_ORG_TYPE_ORG_ID	Participating organization id cannot be empty.

NDC-4163	EMPTY_SALES_BRANCH_TYPE	Sales branch cannot be empty.
NDC-4164	EMPTY_SALES_BRANCH_TYPE_SALES_BRANCH_ID	Sales branch id cannot be empty.
NDC-4230	AGENCY_ID_NOT_FOUND_IN_HEADER	Agency id is not found in header.
NDC-4231	AGENCY_NOT_FOUND_IN_PORTAL	Agency is not found in portal.
NDC-4051	EMPTY_DISTRIBUTION_CHAIN	Distribution chain must be provided.
NDC-4232	EMPTY_SALES_AGENT_TYPE_SALES_AGENT_ID	Sales agent id cannot be empty.
NDC-4239	AGENCY_SOR_DETAILS_CONFLICT_WITH_REQUEST	Agency SOR details conflict with request.

75dab313-82ba-49d6-b5ee-d105b8469fdb

2. NDC Certification and Use Cases

2.1. Certification Process

The certification process for integrators will consist of two phases covering the timeframe before, during and after cut-over. Namely; Production Readiness and Periodical Compatibility.

Integrators that will process payments via Credit Card must provide their PCI compliance certificate along with their certification submission.

Integrators who are themselves are high LTT SELLERS or AGGREGATORS that will process offer transactions on behalf of high LTT SELLERS must use "Offer Flow 2" in their certification submission. This requirement must be addressed before the beginning of certification submissions.

2.1.1. Production Readiness

Certification process will start with capability verification on TEST systems. Based on the use cases given in Section2.2, there are currently four levels in certification as shown below.

Certification Levels
LEVEL-1: Go-live minimum (shopping, booking, and payment)
LEVEL-2: Paid order management
LEVEL-3: Unpaid order handling
LEVEL-4: Ancillary & special service management

The use cases needed to complete each level are presented in table below. The table also includes the descriptions of these use cases, their mandatory/optional status and alternative use case options for fullfiling the level requirements.

In addition, in Section2.2 you can find detailed information on the methods used within the use cases as well as the optional methods that may be applied in the flows.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

	USECASE CODE	USECASE	DESCRIPTION	STATUS	ALTERNATIVES
LEVEL-1	UC-1	AirlineProfile	AirlineProfile Mandatory Basic airline info, required for all systems Returns all supported origin-destination pairs, configurations, and metadata. Base reference for all other services.	Mandatory	Basic airline info, required for all systems
	UC-2	ServiceCatalog General	ServiceCatalogGeneral Mandatory Works together with UC-1 Provides service catalog, class, cabin, and branded fare details. Complements UC-1.	Mandatory	Works together with UC-1
	UC-3	OneWayOfferGen	OneWayOfferGen Mandatory Generates one-way flight offers; the minimum shopping capability.	Mandatory	
	UC-5	RoundTripOfferGen	RoundTripOfferGen Mandatory Minimum set together with UC-3 Generates round-trip offers; completes the base shopping functionality.	Mandatory	Minimum set together with UC-3
	UC-4	MultiCityOfferGen	MultiCityOfferGen Optional Advanced level, recommended for aggregators Generates multi-leg (multi-city) offers; typically used by advanced aggregators or corporate OTAs.	Optional	Advanced level, recommended for aggregators

CONFIDENTIAL & RESTRICTED

LEVEL-1	UC-7	ReserveOrder	ReserveOrder Mandatory If Hold & Pay is not implemented Manages booking and later payment; 'Book Now, Pay Later' model. Must be integrated with: - OrderCreate (to reserve the booking without immediate payment) - OrderReshop / OrderPay (for later payment) - OrderCancel (if hold expires or user cancels)	Mandatory	Among UC-6, UC-7, and UC-8, at least one must be implemented for certification. The partner should clearly declare which flow is supported (e.g., "UC-6 DirectPay only"). Other flows are alternatives, not cumulative.
	UC-8	BookHoldPay	BookHoldPay Alternative Alternative to UC-7; only one required Hold & Pay flow; order is held for a period before payment. Must be integrated with: - OrderCreate (hold booking) - OrderPay (finalize payment) - OrderRetrieve (to view held order details)	Alternative	Among UC-6, UC-7, and UC-8, at least one must be implemented for certification. The partner should clearly declare which flow is supported. Other flows are alternatives, not cumulative.
	UC-6	DirectPay	DirectPay Alternative Can be used instead of UC-8 Processes booking and payment in a single step for immediate confirmation. Must be integrated with: - OrderCreate (for booking creation and payment in one step) - OrderViewRS or OrderRetrieve (for post-payment confirmation) - OrderCancel (for error or timeout reversal)	Alternative	Among UC-6, UC-7, and UC-8, at least one must be implemented for certification. The partner should clearly declare which flow is supported (e.g., "UC-6 DirectPay only"). Other flows are alternatives, not cumulative.
LEVEL-2	UC-9	OrderInfoUpdate	OrderInfoUpdate Mandatory Essential for post-sale tracking Updates or tracks order information after booking.	Mandatory	Essential for post-sale tracking

LEVEL-2	UC-10	OrderChangeNotif	OrderChangeNotif Optional Push mechanism for active monitoring Sends order change notifications to agents in real-time.	Optional	Push mechanism for active monitoring
	UC-16	RefundPaidOrder	RefundPaidOrder Mandatory Initiates refund for already paid orders.	Mandatory	
	UC-17	VoidPaidOrder	VoidPaidOrder Alternative Alternative to RefundPaidOrder depending on scenario Cancels a paid order instead of refunding; depends on airline rules.	Alternative	Alternative to RefundPaidOrder depending on scenario
	UC-19	PaidOrderSplit RefundBoth	PaidOrderSplitRefundBoth Optional Used for aggregator or B2B platforms Handles partial refunds for split paid orders in multi-passenger PNRs.	Optional	Used for aggregator or B2B platforms
	UC-20	RebookPaidOrder	RebookPaidOrder Optional Allows rebooking of already paid tickets.	Optional	
LEVEL-3	UC-18	CancelUnpaidOrder	CancelUnpaidOrder Mandatory If unpaid scenarios are supported Cancels orders where payment has not yet been made.	Mandatory	If unpaid scenarios are supported
	UC-21	RebookUnpaidOrder	RebookUnpaidOrder Alternative Alternative to UC-22 Allows rebooking for unpaid bookings.	Alternative	Alternative to UC-22
	UC-22	RebookAnd PayUnpaidOrder	RebookAndPayUnpaidOrder Alternative Alternative to UC-21; only one required Rebooks and then processes payment for previously unpaid orders.	Alternative	Alternative to UC-21; only one required

LEVEL-4	UC-11	AddRemove SpecialNeed	AddRemoveSpecialNeed Optional SSR or PNR-based requests Adds or removes special service requests (SSR) in an order.	Optional	SSR or PNR-based requests
	UC-12	AddRemove FreeSeat	AddRemoveFreeSeat Optional Manages free seat selection additions or removals.	Optional	
	UC-13	PayFlightsAnd Ancillaries	PayFlightsAndAncillaries Alternative Alternative to UC-14/15 Processes flight and ancillary payments together in one step.	Alternative	Alternative to UC-14/15
	UC-14	PayFlightsThen Ancillaries	PayFlightsThenAncillaries Alternative Either UC-13 or this one is sufficient Pays for flights first, then ancillaries in a sequential flow.	Alternative	Either UC-13 or this one is sufficient
	UC-15	PayFlightsThen MultiAncillaries	PayFlightsThenMultiAncillaries Alternative Alternative to UC-13/14; only one required Handles multiple ancillary types in a sequential payment flow.	Alternative	Alternative to UC-13/14; only one required

Minimum expected certification level is Level-2. To be certified for a Level, implementation of the related message flows as detailed in Section 2.2 must be demonstrated. All use-cases in lower level certifications are prerequisites for higher level certifications.

Production Readiness will consist of the following steps:

1. Integrator will submit NDC request/response messages generated by actual test (not through manual post) for each and every call made to TK NDCAPI to satisfy the flow provided for a use-case.
2. For each use-case, TK will review the messages and approve the use case or provide feedback for required changes. If modification is required, those specific use cases will be resubmitted and re-evaluated until all use cases are approved. Upon approval of all use cases, API certification for Production Readiness for relevant levels will be granted to the integrator.
3. If integrator is also developing a UI solution on top of TK NDC API. An online session will be held where for each API-approved use case, integrator demonstrates the required flows through the UI application. This live session is to be recorded for future reference. Integrator will be asked to provide the NDC request/response messages for all use cases demonstrated during this session. This demo session and related messages will be evaluated by TK. If modifications requested, relevant parts of the demo will be repeated. Upon approval of the demo session(s), UI certification for Production Readiness for relevant levels will be granted to the integrator.

2.1.2. Periodical Compatibility

All use cases certified as part of Production Readiness process will be evaluated periodically, if any major deviation (affecting the system or service quality) is found compared to the Production Readiness certification, modification may be requested by TK to resolve the differences.

After post-golive, if integrator wishes to change the way TK NDC API is utilized (change in flow, specific change in parameters sent or processed, etc.), a review and approval must be requested from TK.

2.1.3. General Instructions

To better track statuses accross multiple iterations, each use-case is expected to be submitted separately. The submissions can be made via the Issue Tracking Panel, which you can access from the Agency Portal.

The use cases and the issues related to integration must be submitted accordance with the folder structure below.




After creating a user with the Developer Role, you can access the documents.

Latest versions of all API integration documents (v0.9), FAQ (v2) and Postman Collection (v0.6) can be found at https://www4.thy.com/acenteportalui/#/shared/products/NDC/201


If you are unable to access the Agency Portal, please update your password at parola.thy.com website. The password is different from the one used for the Developer Portal. If you do not have an account, contact your agent manager.

Turkish Airlines NDC API | Integration Document

In order to submit your use cases, usecase must be specified based on use case level under “TKCONNECT/API TEST INTEGRATION/ Certification” section as shown below.





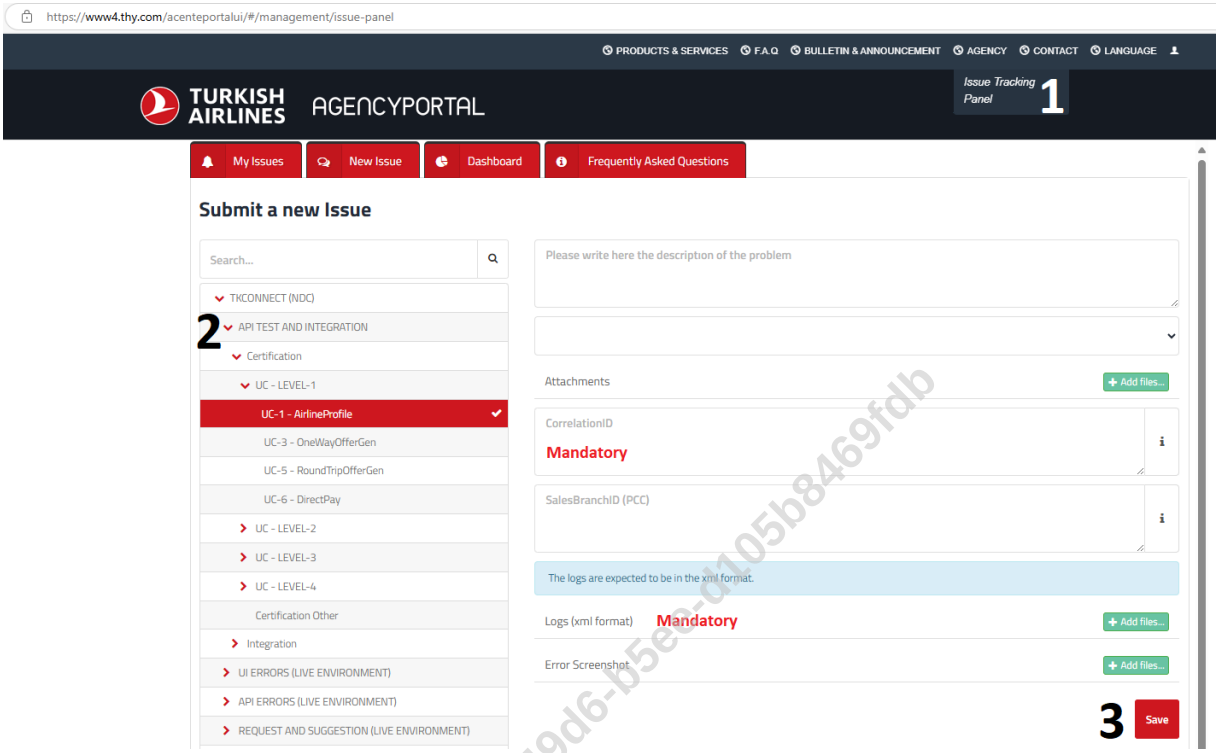


Any questions regarding the issues encountered during the integration may submitted by provided TrxID, CorrelationID and the relevant use case logs under “TKCONNECT/API TEST INTEGRATION/ Integration” section as shown below.

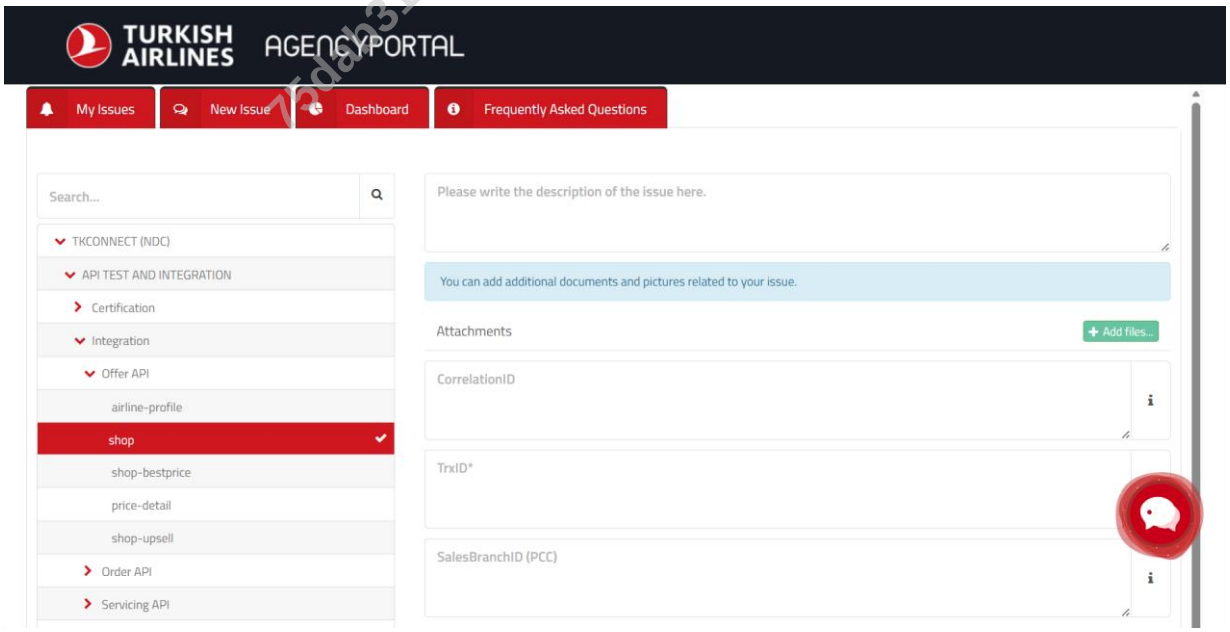

CONFIDENTIAL & RESTRICTED





2.2. Use Cases

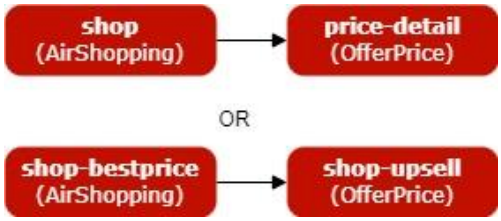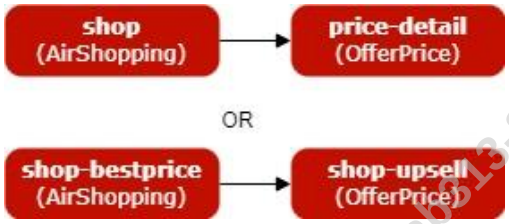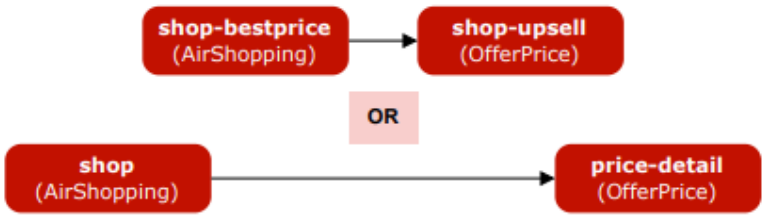Use Case #	Name	Prerequisites/Instructions
UC-1	AirlineProfile	A basic call
		
UC-2	ServiceCatalogGeneral	Call must be in general_context
		
UC-3	OneWayOfferGen	Search criteria must be for one-way
		
UC-4	MultiCityOfferGen	Search criteria must be for multi-city
		
UC-5	RoundTripOfferGen	Search criteria must be for round-trip
		
UC-6	DirectPay	A PricedOffer created by price-detail or shop-upsell must exist
		

75dab813-82ba-49d0-b5ee-d105b8469f0b

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

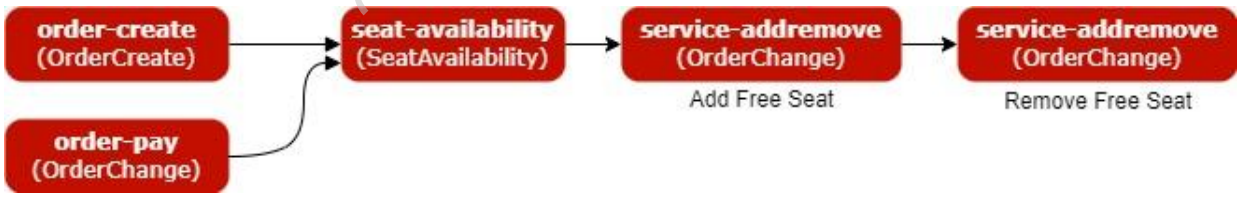UC-7	ReserveOrder	A PricedOffer created by price-detail or shop-upsell must exist
		
UC-8	BookHoldPay	A PricedOffer created by price-detail or shop-upsell must exist
		
UC-9	OrderInfoUpdate	Order must have been created One call to add new info, one call to remove existing info
		
UC-10	OrderChangeNotif	Order must have been created
Must demonstrate processing IATA_OrderChangeNotifRQ by responding with IATA_Acknowledgment message.		
UC-11	AddRemoveSpecialNeeed	First call to add second call to remove special need.
		
UC-12	AddRemoveFreeSeat	First call to add, second call to remove free-of-charge seat. This flow is for order_context.
		
UC-13	PayFlightsAndAncillaries	Payment must include flights and ancillaries. At least two distinct ancillaries required.This flow is for order_context.
		


75dab313-82ba-49d6-b5e3-d1058469fdb

CONFIDENTIAL & RESTRICTED


TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document


UC-14	PayFlightsThenAncillaries	First payment for flights, second for ancillaries. At least two distinct ancillaries required. This flow is for order_context.

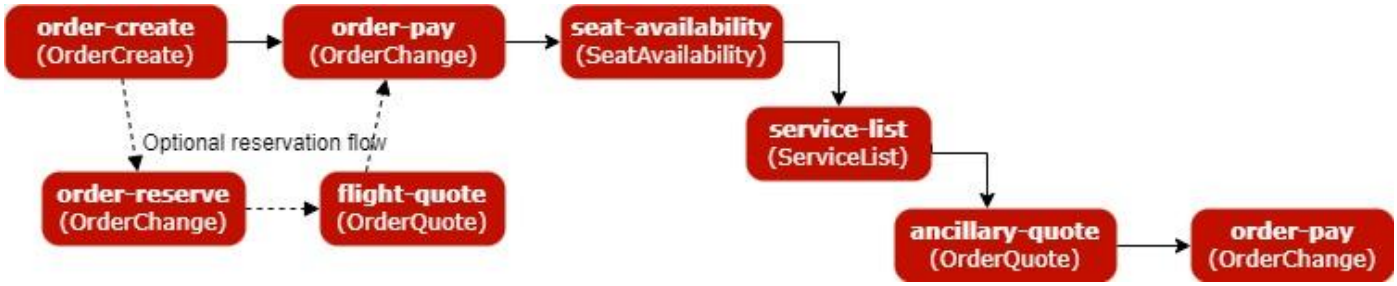


UC-15	PayFlightsThenMultiAncillaries	First payment for flights second and third for ancillaries.

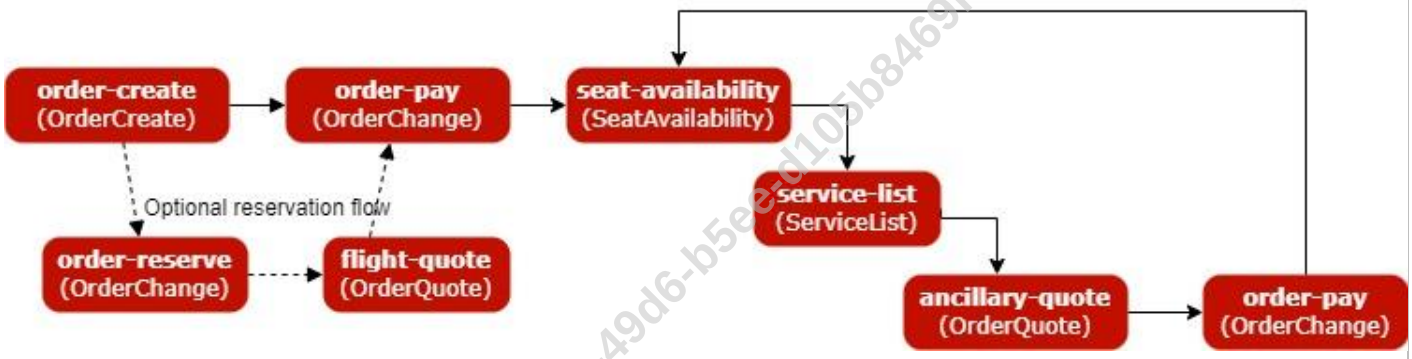

UC-16	RefundPaidOrder	Order must be paid. order-reshop to get a refund offer, order-cancel to accept it.

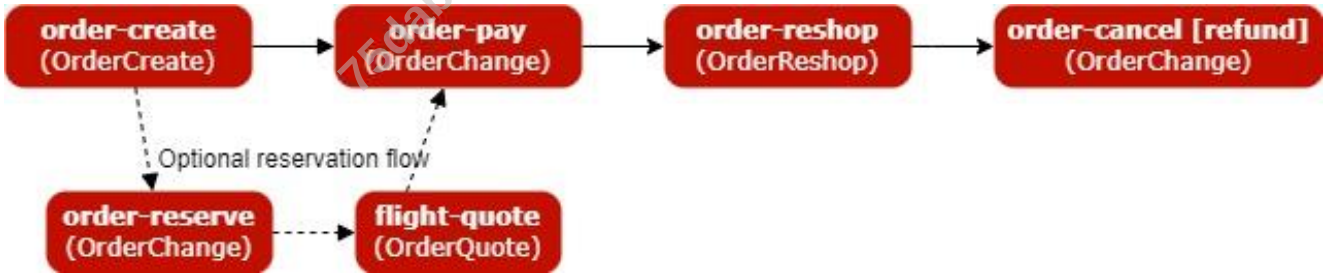



UC-17	VoidPaidOrder	Order must be paid. order-cancel is called after order-pay, no re-shop step.

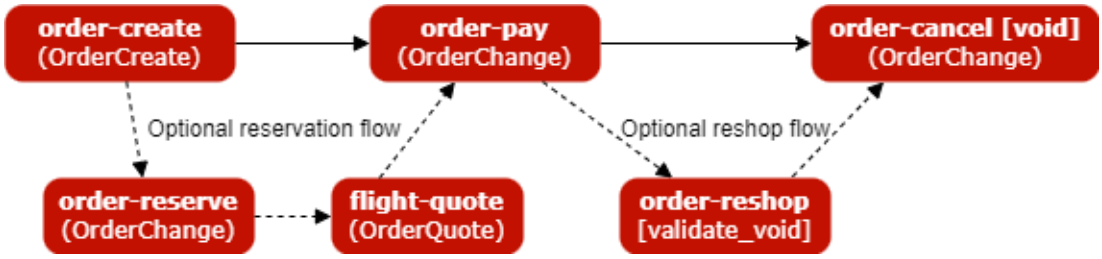

CONFIDENTIAL & RESTRICTED

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

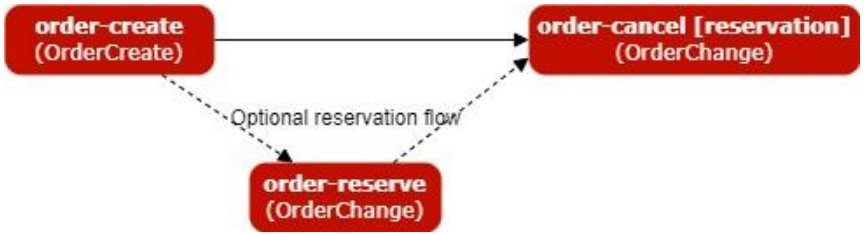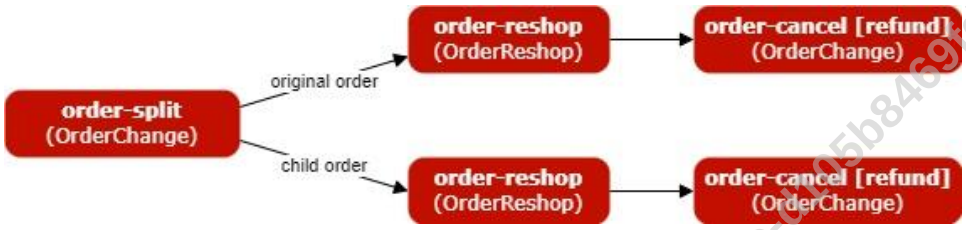UC-18	CancelUnpaidOrder	Order must be unpaid. order-cancel is called after order-create or order-reserve.
		
UC-19	PaidOrderSplitRefundBoth	Order must have been created and paid
		
UC-20	RebookPaidOrder	Order must have been created and paid. After rebook validation ReshopOffers must be requested through (shop, shop-bestprice, shop-upsell)
		
UC-21	RebookUnpaidOrder	Order must have been reserved and unpaid. After rebook validation ReshopOffers must be requested through (shop, shop-bestprice, shop-upsell)
		
UC-22	RebookAndPayUnpaidOrder	Order must have been reserved and unpaid. After rebook validation ReshopOffers must be requested through (shop, shop-bestprice, shop-upsell)
		

CONFIDENTIAL & RESTRICTED

3. Offer API

3.1. General

3.1.1. airline-profile

Overview

Operation Name	airline-profile
Operation URL	$NDCAPI_BASEURL$/airline-profile
NDC message input	IATA_AirlineProfileRQ
NDC message output	IATA_AirlineProfileRS
Main function	Show general information about airline NDC api, such as origin and destinations that are served
Main inputs	Carrier Code
Main outputs	Origin and destinations as airport and city codes
Prerequisites	-
To be followed by	-

Limitations

1. Currently, only supported origin&destinations are provided within the response.

Supported Functionalities

1. All supported location pairs, both as city pairs and airport pairs, are included in the OriginDestinationList.

Input Parameters

Fields under IATA_AirlineProfileRQ/Request/ to be used in the airline-profile request are:

Parameter	Explanation	Mandatory/ Occurrence	Type / Example
AirlineProfileFilterCriteria/AirlineProfileCriteria/OwnerCode	Owner code of airline company	YES / 1	String / TK

Output Parameters

In response to the AirlineProfileRQ, an AirlineProfileRS will be returned with airport pairs and city pairs that are served by Turkish Airlines.

Fields under IATA_AirlineProfileRS/Response/ to be returned are:

Parameter	#	Explanation
AirlineProfile/ProfileOwner/	1	Airline details
AirlineProfile/ProfileOwner/AirlineDesigCode	1	Airline code
AirlineProfile/AirlineProfileDataItem/SeqNumber	1	Always 1
AirlineProfile/AirlineProfileDataItem/OfferFilterCriteria/	1..N	Offer filter criteria
AirlineProfile/AirlineProfileDataItem/OfferFilterCriteria/ OfferFilterCriteriaChoice/ α	1	One for each origin&destination pair
α/OfferFilterCriteriawithOriginandDest/	1	Origin and destination details
α/OfferFilterCriteriawithOriginandDest/DirectionalIndText	1	1 for unidirectional or 3 for bidirectional
α/OfferFilterCriteriawithOriginandDest/OfferDestPoint/	1	Contains destination point details
α/OfferFilterCriteriawithOriginandDest/OfferDestPoint/ IATA_LocationCode	1	Airport or city code, e.g. IST

α/OfferFilterCriteriawithOriginandDest/OfferOriginPoint	1	Contains origin point details
α/OfferFilterCriteriawithOriginandDest/OfferOriginPoint/ IATA_LocationCode	1	Airport or city code, e.g. LON

Special Consideration

1. In response to the AirlineProfileRQ, an AirlineProfileRS will be returned with a list of airport and city pairs served by Turkish Airlines.
2. If default OwnerCode is not provided as TK in the request, ONLY_AIRLINE_TK_ALLOWED error is returned.
3. If OwnerCode element is empty, EMPTY_OWNER_CODE error is returned.
4. AirlineProfile is not expected to change frequently and it generates a response of 10+ MB; hence integrators are required to call this service only once a day and store and utilize the results on their servers.
5. The airlineProfile response is generated uniquely according to each agency. For aggregators, it's expected to generate airlineProfile separately for each agency.
6. The AirlineProfile method is important for us in order to see the LTT ratios. The TK NDC API has a semi-dynamic Origin & Destination list that uses business rules to determine which offers to generate. Therefore, the AirlineProfile implementation is mandatory for PROD certification. We expect you to call it once a day and cache it.


ERRORS

Code	Error Key	Description
NDC-4077	EMPTY_OWNER_CODE	Owner code must be entered.
NDC-1024	ONLY_AIRLINE_TK_ALLOWED	Ownercode is not valid.

75dab313-82ba-49d6-b5ee-d1b5b8169fd9

3.2. Offer Flow 1

Offer Flow 1 is expected to be used for lower LTT (Look-to-Ticket) scenarios.

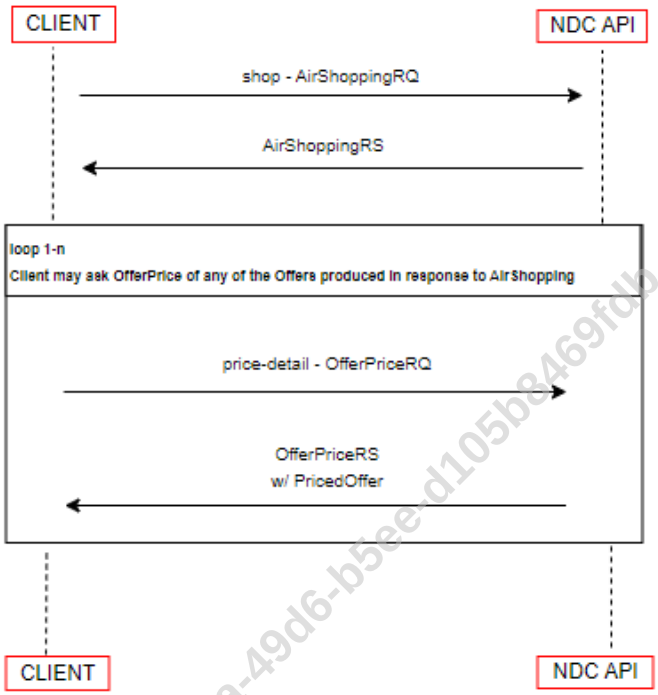

3.2.1. shop

Overview

The purpose of this method is to display all available offers for a specific date with origin and destination details.

Operation Name	shop
Operation URL	$NDCAPI_BASEURL$/shop
NDC message input	IATA_AirShoppingRQ 21.3
NDC message output	IATA_AirShoppingRS 21.3
Main function	Displays all offers for a specific date for determined origin and destination
Main inputs	Shopping date, Pax details, origin and destination airports
Main outputs	Offers for a specific date(s)
Prerequisites	Agency user is authenticated and has permission to access
To be followed by	price-detail



TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Limitations

1. The number of passengers is limited to 9, which can be a mix of passenger types other than infant. The number of passengers, including infants, are limited to 15.
2. Infants cannot be requested with no presence of adult. The number of infants cannot exceed the total number of adults.
3. In case of multicity searches (trip type other than one way or round trip), occurrence of OriginDestCriteria is limited to 4.
4. Bound based cabin selection.

Supported Functionalities

1. One Way, Round Trip and Multi City trip types
2. Mono and multi passenger searches.
3. Operating and Marketing airline information for Codeshare & Interline flights.
4. Cancellation & change rules
5. Queries with Account Code

Input Parameters

Parameter	Description	Mandatory/ Repetition (#)	Type / Example
FlightRequest/	Flight details	YES / 1	Complex
FlightRequest/ FlightRequestOriginDestinationsCriteria/		YES / 1	Complex
FlightRequest/ FlightRequestOriginDestinationsCriteria/ OriginDestCriteria/α	Journey details	YES / 1..N	Complex
α/DestArrivalCriteria/	Destination details	YES / 1	Complex
α/DestArrivalCriteria/IATA_LocationCode	IATA airport code	YES / 1	String / FRA
α/OriginDepCriteria/	Departure details	YES / 1	Complex
α/OriginDepCriteria/Date	Departure date	YES / 1	Date / 2023-07-03
α/OriginDepCriteria/IATA_LocationCode	Departure airport	YES / 1	String / IST
α/OriginDestID	Always OD1	YES / 1	String / OD1
α/CabinType/	Cabin type details	NO / 2	Complex
α/CabinTypeCode	3 for Economy, 2 for Business	YES / 1	Integer / 3
α/CabinType/PrefLevel/	Prefer option details	YES / 1	Complex
α/CabinType/PrefLevel/PrefLevelCode	Always “preferred”	YES / 1	String / Preferred
PaxList/	Passenger list	YES / 1	Complex
PaxList/Pax/	Passenger details	YES / 1..9-15(Inc INFs)	Complex
PaxList/Pax/PaxID	Not processed, required only per xsd	YES / 1	Integer / 1
PaxList/Pax/PTC	Passenger type	YES / 1	String / ADT
OfferCriteria/	Additional search criteria	NO / 0..1	Complex
OfferCriteria/ FareCriteria	Fare Criteria	NO / 0..1	Complex
OfferCriteria/ FareCriteria/ FareTypeCode	Fare type code of fare information	YES / 1	String / 758(Not valid for IT,VFR,LBR etc.)
OfferCriteria/ProgramCriteria	Program identifier	YES / 1	Complex
OfferCriteria/ProgramCriteria/ ProgramAccount	Program account	YES / 1	Complex
OfferCriteria/ProgramCriteria/ ProgramAccount/AccountID	Account ID of the program account	YES / 1	String / CCC123456

75dab313-82ba-4f06-b5ee-d105b8469fdb

CONFIDENTIAL & RESTRICTED

OfferCriteria/ProgramCriteria/ProgramOwner/	Program owner information	YES / 1	Complex
OfferCriteria/ProgramCriteria/ ProgramOwner/Carrier/	Carrier info	YES / 1	Complex
OfferCriteria/ProgramCriteria/ ProgramOwner/Carrier/AirlineDesigCode	Always TK	YES / 1	String / TK
ResponseParameters		NO / 1	Complex
ResponseParameters/ReasonCode	112 for reshop queries	YES / 1	String / 112

Output Parameters

Parameter	#	Explanation
AirShoppingRS/DataLists/	1	Offers' data collection
AirShoppingRS/DataLists/BaggageAllowanceList/	1	Baggage allowances
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/	1..N	Baggage allowance details
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/ApplicablePartyText	1	Always "Party"
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/BaggageAllowanceID	1	Unique baggage allowance ID
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/ PieceAllowance /TotalQty	1	Piece details
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/TypeCode	1	Default "Checked"
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/WeightAllowance/	1	Weight details
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/WeightAllowance/MaximumWeightMeasure	1	Maximum weight
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/WeightAllowance/WeightUnitOfMeasurement	1	Weight measurement type
AirShoppingRS/DataLists/DatedMarketingSegmentList/	1	Marketing segments
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment	1..N	Marketing segment details
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/	1	Arrival details
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/AircraftScheduledDateTime	1	Date of arrival
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/IATA_LocationCode	1	Arrival airport code, e.g. IST
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/StationName	1	Name of airport of arrival, e.g. Istanbul Airport
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/TerminalName	1	Terminal Code/Name where flight arrives to
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/CarrierDesigCode	1	Carrier Code, e.g. TK
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/CarrierName	1	Carrier name, e.g. Turkish Airlines
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/DatedMarketingSegmentID	1	Marketing Segment ID

AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/DatedOperatingSegmentRefId	1	Ref ID of Operating Segment
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/	1	Departure details
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/AircraftScheduledDateTime	1	Date of departure
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/IATA_LocationCode	1	Departure airport code, e.g. AMS
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/StationName	1	Name of airport of departure, e.g. Schiphol Airport
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/TerminalName	1	Terminal Code/Name where flight departs from
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/MarketingCarrierFlightNumberText	1	Flight number
AirShoppingRS/DataLists/DatedOperatingLegList/	1	Operating Legs
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/	1..N	Operating Legs details
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/	1	Arrival details
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/AircraftScheduledDateTime	1	Date of arrival
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/IATA_LocationCode	1	Arrival airport code, e.g. IST
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/StationName	1	Name of airport of arrival, e.g. Istanbul Airport
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/TerminalName	1	Terminal Code/Name where flight arrives to
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/	1	Aircraft details
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/CarrierAircraftTypeCode	1	Aircraft code
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/CarrierAircraftTypeName	1	Aircraft name
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/DatedOperatingLegID	1	Operating Leg ID
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/	1	Departure details
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/AircraftScheduledDateTime	1	Date of departure
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/IATA_LocationCode	1	Departure airport code, e.g. AMS
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/StationName	1	Name of airport of departure, e.g. Schiphol Airport
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/TerminalName	1	Terminal Code/Name where flight departs from
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/IATA_AircraftType/	1	Aircraft type details
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/IATA_AircraftType/IATA_AircraftTypeCode	1	Aircraft code by IATA
AirShoppingRS/DataLists/DatedOperatingSegmentList/	1	Operating Segments

AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/	1..N	Operating Segment details
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/CarrierDesigCode	1	Carrier Code, e.g. TK
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/CarrierName	1	Carrier name, e.g. Turkish Airlines
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/DatedOperatingLegRefID	1	Reference ID of operating leg
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/DatedOperatingSegmentId	1	ID of operating segment
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/Duration	1	Duration of segment
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/OperatingCarrierFlightNumberText	1	Flight number
AirShoppingRS/DataLists/OriginDestList/	1	Origins and destinations
AirShoppingRS/DataLists/OriginDestList/OriginDest/	1..N	Origin and destinations details
AirShoppingRS/DataLists/OriginDestList/OriginDest/DestCode	1	Airport code of destination
AirShoppingRS/DataLists/OriginDestList/OriginDest/OriginCode	1	Airport code of origin
AirShoppingRS/DataLists/OriginDestList/OriginDest/OriginDestID	1	ID of origin-dest pair
AirShoppingRS/DataLists/OriginDestList/OriginDest/PaxJourneyRefID	1	Journey Ref ID(s) for each O&D
AirShoppingRS/DataLists/PaxJourneyList/	1	Journeys
AirShoppingRS/DataLists/PaxJourneyList/PaxJourney/	1..N	Journeys details
AirShoppingRS/DataLists/PaxJourneyList/PaxJourney/Duration	1	Duration of Journey
AirShoppingRS/DataLists/PaxJourneyList/PaxJourney/PaxJourneyID	1	Journey ID
AirShoppingRS/DataLists/PaxJourneyList/PaxJourney/PaxSegmentRefID	1	Segment Ref ID
AirShoppingRS/DataLists/PaxList/	1	Passenger List
AirShoppingRS/DataLists/PaxList/Pax/	1..N	Passenger details
AirShoppingRS/DataLists/PaxList/Pax/PaxID	1	Id of a passenger
AirShoppingRS/DataLists/PaxList/Pax/PTC	1	Passenger type, e.g. CHD, INF, ADT
AirShoppingRS/DataLists/PaxSegmentList/	1	Segment List
AirShoppingRS/DataLists/PaxSegmentList/PaxSegment/	1..N	Segments details
AirShoppingRS/DataLists/PaxSegmentList/PaxSegment/DatedMarketingSegmentRefId	1	Marketing Segment ID that is linked to Pax Segment ID
AirShoppingRS/DataLists/PaxSegmentList/PaxSegment/PaxSegmentID	1	Segment ID that will be used for further segment references
AirShoppingRS/DataLists/PenaltyList/	1	Penalty List
AirShoppingRS/DataLists/PenaltyList/Penalty/	1..N	Penalty details
AirShoppingRS/DataLists/PenaltyList/Penalty/DescText	1	Penalty description
AirShoppingRS/DataLists/PenaltyList/Penalty/PenaltyID	1	ID of penalty
AirShoppingRS/DataLists/PenaltyList/Penalty/Price/	1	Price details of penalty
AirShoppingRS/DataLists/PenaltyList/Penalty/Price/TotalAmount	1	Price of penalty
AirShoppingRS/DataLists/PenaltyList/Penalty/Price/TotalAmount[CurCode]	1	Cur code of price of penalty
AirShoppingRS/DataLists/PenaltyList/Penalty/TypeCode	1	Reason of penalty
AirShoppingRS/DataLists/PriceClassList/	1	Price class list
AirShoppingRS/DataLists/PriceClassList/PriceClass/	1..N	Price class details
AirShoppingRS/DataLists/PriceClassList/PriceClass/CabinType/	1	Cabin type details

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

AirShoppingRS/DataLists/PriceClassList/PriceClass/CabinType/CabinTypeCode	1	Cabin type code, 3 for Economy, 2 for Business
AirShoppingRS/DataLists/PriceClassList/PriceClass/CabinType/CabinTypeName	1	Cabin type name, Economy or Business
AirShoppingRS/DataLists/PriceClassList/PriceClass/Code	1	Brand code
AirShoppingRS/DataLists/PriceClassList/PriceClass/FareBasisCode	1	Fare Basis code
AirShoppingRS/DataLists/PriceClassList/PriceClass/Name	1	Brand name
AirShoppingRS/DataLists/PriceClassList/PriceClass/PriceClassID	1	ID of price class
AirShoppingRS/DataLists/ServiceDefinitionList/	1	Service definitions
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/	1..N	Service definition details
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/Desc/	1	Service definition's description details
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/Desc/DescText	1	Service definition's description
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/Name	1	Service name
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/OwnerCode	1	Owner code of the service
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/RFISC	1	RFISC of the service
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/RFISC/ServiceDefinitionID	1	ID of the service
AirShoppingRS/OffersGroup/	1	Offers
AirShoppingRS/OffersGroup/CarrierOffers/	1	Offers
AirShoppingRS/OffersGroup/CarrierOffers/Offer/	1..N	Offer details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/	1..N	Baggage associations details of an offer
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/BaggageAllowanceRefID	1	Reference ID of baggage associations
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/OfferFlightAssociations/	1	Flight Segments
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/OfferFlightAssociations/PaxSegmentReferences/	1	Segment details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/OfferFlightAssociations/PaxSegmentReferences/PaxSegmentRefID	1..N	Reference ID of segment
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/PaxRefID	1..N	ID of Pax reference
AirShoppingRS/OffersGroup/CarrierOffers/Offer/JourneyOverview/	1	Journey Overview
AirShoppingRS/OffersGroup/CarrierOffers/Offer/JourneyOverview/JourneyPriceClass/	1..N	Price class details of journey
AirShoppingRS/OffersGroup/CarrierOffers/Offer/JourneyOverview/JourneyPriceClass/PaxJourneyRefID	1	Reference ID of Pax journey
AirShoppingRS/OffersGroup/CarrierOffers/Offer/JourneyOverview/JourneyPriceClass/PriceClassRefID	1	Reference ID of price class
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferExpirationTimeLimitDateTime	1	Expiration date of the offer
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferID	1	ID of offer
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/	1	Offer item details

CONFIDENTIAL & RESTRICTED

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/	1..N	Fare details for every passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/	1..N	Fare details for every segment of a passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/NegotiatedCode	1	Fare information (70J for public or 758 for private)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/PaxSegmentRefID	1..N	Reference ID of Pax segment
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/Price/	1	Price details of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/Price/EquivAmount	1	Equivalent amount of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/Price/EquivAmount[CurCode]	1	Cur code of equivalent amount of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/Price/TaxSummary/	1	Tax details of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/Price/TaxSummary/TotalTaxAmount	1	Total tax of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/Price/TotalAmount	1	Total amount of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/Price/TotalAmount[CurCode]	1	Cur code of total amount of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/RBD/	1	RBD details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/RBD/RBD_Code	1	RBD code
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/PaxRefID	1..N	ID of Pax reference
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/	1	Price of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/EquivAmount	1	Equivalent amount of price of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/EquivAmount[CurCode]	1	Cur code of equivalent amount of price of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/	1	Tax details of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/TotalTaxAmount	1	Total tax of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/TotalAmount	1	Total amount of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/TotalAmount[CurCode]	1	Cur code of total amount of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/OfferItemID	1	ID of the offer item
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/	1	Price details of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/EquivAmount	1	Equivalent amount of the ticket

CONFIDENTIAL & RESTRICTED

AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/EquivAmount[CurCode]	1	Cur code of the price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/TaxSummary/	1	Tax summary of the price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/TaxSummary/TotalTaxAmount	1	Tax amount of the price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of the price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/TotalAmount	1	Price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/TotalAmount[CurCode]	1	Cur code of the price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/	1..N	Service details of offer item
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/	1	Service association details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/PaxJourneyRef/	1	Pax Journey References
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/PaxJourneyRef/PaxJourneyRefID	1..N	List of PaxJourney ReferenceID(s)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/	1	Service definition references
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/	1	Flight Association Details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/PaxJourneyRef/	1	Pax Journey References
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/PaxJourneyRef/ PaxJourneyRefID	1..N	List of PaxJourney ReferenceID(s)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/PaxRefID	1..N	List of Pax Reference ID(s)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/ServiceID	1	Service ID
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OwnerCode	1	Offer owner code
AirShoppingRS/OffersGroup/CarrierOffers/Offer/PenaltyRefID	1..N	Penalty Ref ID(s)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/PTC_OfferParameters/	1..N	Section to inform if Pax types are priced as requested.
AirShoppingRS/OffersGroup/CarrierOffers/Offer/PTC_OfferParameters/PaxRefID	1	Pax RefID(s)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/PTC_OfferParameters/PTC_PricedCode	1	Priced Pax code
AirShoppingRS/OffersGroup/CarrierOffers/Offer/PTC_OfferParameters/PTC_RequestedCode	1	Requested Pax code

Special Considerations

1. There must be one occurrence of OriginDestCriteria element in case of a one-way search, two instances in case of a round trip and more in case of multi city (not exceeding 6). If exceeds, ORIGIN_DEST_CRITERIA_LIMIT_EXCEEDED is returned.

2. Shopping request is constructed as the OriginDestCriteria elements order in the FlightRequestOriginDestinationsCriteria. OriginDestID element is a must field for each OriginDestCriteria and should be in an order.
3. DestArrivalCriteria/IATA_LocationCode and OriginDepCriteria/IATA_LocationCode fields can be used either with airport code or city code. When a city code is submitted, all airports associated to this city are targeted. When an airport code is submitted, only this specific airport is targeted. “IST” is an exception, both airport code and city code is the same. In case all airports in Istanbul is searched, IATA_LocationCode should be posted as “IST+”
4. In case a city code submitted, offers are generated with all airports associated to this city but all airports are grouped under the city code while generating Datalists/OriginDestList.
5. If there are more than one (1) OriginDestCriteria (RT/MC), the Date input in each OriginDestCriteria must not be a date before the Date input of prior OriginDestCriteria. Otherwise, INCONSISTENT_TRIP_DATE is returned. Both Date inputs can be the same value for same day return journey requests.
6. CabinTypeCode value can get two (2) values. “3” for economy cabin searches, “2” for business cabin searches. Other values apart from “2” and “3” will return INVALID_CABIN_TYPE.
7. Bound based cabin preference is not supported. If there are more than one OriginDestCriteria in the request, system process the cabin preference as “economy” unless all the cabin types for all bounds are requested in “business”. It does not mean that mixed cabin itineraries cannot be created. Depends on the filing, the system may offer the cheapest business offers for economy searches.
8. If the AirShopping query is for reshop purposes then ResponseParameters/ReasonCode should be set as “112”. If ResponseParameters/ReasonCode is set as 112 in the request, to get the offers for reshop purpose, all offers will be received with the price information of the requested new query, not the price difference. In other words, rebooking flow through API does not support “**true re-shopping”.** Penalties and price differences are not reflected in the AirShoppingRS, they can only be retrieved as a result of a rebook-quote request.
9. Only “account code” is supported in terms of private fares. If the system could not find a price with the given account code, NO_OFFERS is returned instead of public fares.
10. Student (STU) Pax type must be single Pax type in the request. If there is a STU type in the request, all other Pax types must be STU too. Otherwise, YOUTH_AND_STUDENT_PASSENGER_ERROR is returned.
11. Youth (YTH) Pax type must be single Pax type in the request. If there is a YTH type in the request, all other Pax types must be YTH too. Otherwise, YOUTH_AND_STUDENT_PASSENGER_ERROR is returned.
12. Disabled (DIS) and Seaman (SEA) Pax types should not be with another Pax type in the request. Otherwise ADT price is returned.
13. Youngadult (B15) is for UK flights only.
14. Labor (LBR), Labor Child (LNN) and LaborInfant (LIF) could be in the request with Labor Pax types only. For ex. If a labor flies with his child, LNN must be in the request instead of CHD.
15. Ethnic (VFR), Ethnic Child (VFN) and Ethnic Infant (VFF) could be in the request with Ethnic Pax types only. For ex. If an Ethnic flies with his child, VFN must be in the request instead of CHD.
16. Veteran (MIL), Veteran Child (MNN), Veteran Infant (MNF) – For each of them, they must be in the request with just another Veteran Pax types in order to get discounted prices. If called with ADT-CHD-INF then all will be priced as adult.
17. Penalties in Datalist/PenaltyList are to indicate the penalty amounts of change and cancellation. If there is no reference to penalties in the offer, it means neither change or cancel is permitted for that offer.
18. Weight information of each pieces has been added to the Baggage Allowance area of piece concept routes.(Exp: IST-JFK)
19. When “FareTypeCode” is added in request parameters, if private fare is not found and there is a filling that matching with request parameters then instead of displaying an error message as “NO_OFFERS”, service returns offers with public fares, if private fares are found then service returns offers with private fares(for example special paxtype requests may still return “NO_OFFERS”).
20. “FareTypeCode” is only valid for pax types which are not require an account code(such as ADT,CHD,INF). This parameter should not be sent in requests for pax types IT,VFR,LBR,STU, etc.

ERRORS

Code	Error Key	Description
NDC-8126	UNRECOGNIZED_CURRENCY	Requested currency does not exist in ISO-4217 currency code list.

NDC-8101	ROUTE_REQUEST_RESTRICTED	Ticket issuance is only permitted for Inbound (Entry) or Outbound (Exit) sectors.
NDC-8043	EMPTY_FARE_TYPE_CODE	Fare Type Code cannot be empty
NDC-8044	INVALID_FARE_TYPE_CODE	Fare Type Code is invalid
NDC-8048	MISSING_FARE_TYPE_CODE	Fare Type Code is missing
NDC-4179	EMPTY_ORIGIN_DESTINATION_LIST	There must be at least one OriginDestinationCriteria element.
NDC-4047	INVALID_ARRIVAL_LOCATION_SIZE	Arrival location code must be three digits unless multi airport is chosen.
NDC-4044	INVALID_DEPARTURE_LOCATION_SIZE	Departure location code must be three digits unless multi airport is chosen.
NDC-4025	INVALID_CITY_AIRPORT_CODE	Invalid city/airport code.
NDC-4180	INVALID_PTC	Invalid passenger type.
NDC-4067	EXCESSIVE_INFANT_ERROR	There must be at least one adult per infant passenger.
NDC-4181	DATE_OUT_OF_LIMIT	Requested date must be within 355 days from now.
NDC-4182	DATE_IS_PAST	Requested date is past.
NDC-2025	NO_OFFERS	There is no offer for the requested date.
NDC-4195	NO_OPERATION	TK has no operations in this route.
NDC-4068	ARRIVAL_AND_ORIGIN_CANNOT_BE_THE_SAME	Arrival and origin location cannot be the same.
NDC-4066	INCONSISTENT_TRIP_DATE	Multi flight requests must be chronological.
NDC-4049	EMPTY_FLIGHT_REQUEST	Flight request must be provided.
NDC-4183	EMPTY_ORIGIN_DEST_ID	OriginDestID cannot be empty.
NDC-4184	EMPTY_PREF_LEVEL_CODE	PrefLevelCode cannot be empty.
NDC-4048	EMPTY_CABIN_TYPE_LIST	Cabin type list must be provided.
NDC-4185	EMPTY_DEPARTURE_DATE	Flight date must be entered.
NDC-4186	EMPTY_CABIN_TYPE_CODE	CabinType section must be provided.
NDC-1023	EMPTY_LOCATION_CODE	Location code must be provided.
NDC-4187	CABIN_TYPE_LIMIT_EXCEEDED	There can be maximum two cabin types.
NDC-4188	INVALID_CABIN_TYPE	Cabin type must be valid.
NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.
NDC-4085	EMPTY_PTC	Passenger type must be entered.
NDC-4189	ORIGIN_DESTINATION_CRITERIA_LIMIT_EXCEEDED	There can be up to 6 OriginDestinationCriteria elements.
NDC-4196	MAX_PAX_COUNT_EXCEEDED	Maximum number of passengers is exceeded.
NDC-2004	SHOP_BACKEND_ERROR	Unable to access to shopping backend system.
NDC-2100	SHOP_CONVERSION_ERROR	
NDC-4456	ROUTE_IS_NOT_FLOWN	The flight(s) included in your AirShopping request include a port that we do not fly to.
NDC-4238	ROUTE_IS_NOT_SUPPORTED	Route is not supported.
NDC-4277	ROUTE_IS_NOT_FOUND	Route is not found.

WARNINGS

Code	Warning Key	Description

NDC-4237	OFFERS_GENERATED_THROUGH_DOMESTIC_SHOPPING_WARNING	Offers in AirShopping response are constructed by Domestic Shopping Engine
NDC-8124	CURCODE_IS_DIFFERENT_THAN_AGENCY_CURRENCY	The requested currency differs from the seller's defined currency. Please resend shop request using the agency's defined currency to create an order successfully

75dab313-82ba-49d6-b5ee-d105b8469fdb

CONFIDENTIAL & RESTRICTED

3.2.2. price-detail

Overview

The purpose of this method is to generate a PricedOffer and to display price details, fare notes of a requested Offer.

Operation Name	price-detail
Operation URL	$NDCAPI_BASEURL$/price-detail
NDC message input	IATA_OfferPriceRQ 21.3
NDC message output	IATA_OfferPriceRS 21.3
Main function	Displays detailed price of selected offer
Main inputs	OfferRefID, OfferItemRefID, PaxRefID, OwnerCode
Main outputs	Offer's price details, cancel and change restrictions and tax details
Prerequisites	Offers should be generated from shop method
To be followed by	order-create



Limitations

1. Only one offer per transaction.

Supported Functionalities

1. One Way, Round Trip and Multi City trip types
2. Mono and multi passenger searches.
3. Operating and Marketing airline information for Codeshare & Interline flights.
4. Detailed cancellation & revalidation & change rules
5. Tax breakdowns

Input Parameters

Parameter	Description	Mandatory/ Repetition (#)	Type / Example
PricedOffer/	Offer details	YES / 1	Complex
PricedOffer/SelectedOfferList/		YES / 1	Complex
PricedOffer/SelectedOfferList/SelectedOffer/		YES / 1	Complex
PricedOffer/SelectedOfferList/SelectedOffer/OfferRefID	ID which is retrieved from AirshoppingRS	YES / 1	String
PricedOffer/SelectedOfferList/SelectedOffer/OwnerCode	Owner Code of the carrier	YES / 1	String / TK
PricedOffer/SelectedOfferList/SelectedOffer/SelectedOfferItem/	Offer Item details	YES / 1	String
PricedOffer/SelectedOfferList/SelectedOffer/SelectedOfferItem/OfferItemRefID	Ref ID which is retrieved from AirshoppingRS	YES / 1	String
PricedOffer/SelectedOfferList/SelectedOffer/SelectedOfferItem/PaxRefID	Pax IDs that retrieved from AirShoppingRS	YES / 1..9-15(Inc INFs)	String / PAX_2

Output Parameters

Parameter	#	Explanation
DataLists/	1	Offers' data collection

DataLists/BaggageAllowanceList/	1	Baggage allowances
DataLists/BaggageAllowanceList/BaggageAllowance/	1..N	Baggage allowance details
DataLists/BaggageAllowanceList/BaggageAllowance/BaggageAllowanceID	1	Unique baggage allowance ID
DataLists/BaggageAllowanceList/BaggageAllowance/TypeCode	1	Default “Checked”
DataLists/BaggageAllowanceList/BaggageAllowance/WeightAllowance/	1	Weight allowance details
DataLists/BaggageAllowanceList/BaggageAllowance/WeightAllowance/MaximumWeightMeasure	1	Maximum weight limit
DataLists/BaggageAllowanceList/BaggageAllowance/WeightAllowance/WeightUnitOfMeasurement	1	Measure of weight, usually KGM
DataLists/BaggageAllowanceList/BaggageAllowance/PieceAllowance/	1	Piece allowance details
DataLists/BaggageAllowanceList/BaggageAllowance/PieceAllowance/TotalQty	1	Maximum piece limit
DataLists/DatedMarketingSegmentList/	1	Marketing segments
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/	1..N	Marketing segment details
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/	1	Arrival details
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/AircraftScheduledDateTime	1	Date of arrival
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/IATA_LocationCode	1	Arrival airport code, e.g. IST
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/StationName	1	Name of airport of arrival, e.g. Istanbul Airport
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/TerminalName	1	Terminal Code/Name where flight arrives to
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/CarrierDesigCode	1	Carrier Code, e.g. TK
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/CarrierName	1	Carrier name, e.g. Turkish Airlines
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/DatedMarketingSegmentId	1	ID of dated marketing segment
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/DatedOperatingSegmentRefId	1	ID of operating segment reference
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/	1	Departure details
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/AircraftScheduledDateTime	1	Date of departure
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/IATA_LocationCode	1	Departure airport code, e.g. AMS
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/StationName	1	Name of airport of departure, e.g. Schiphol Airport
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/TerminalName	1	Terminal Code/Name where flight departs from
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/MarketingCarrierFlightNumberText	1	Flight number
DataLists/DatedOperatingLegList/	1	Collection of operating legs
DataLists/DatedOperatingLegList/DatedOperatingLeg/	1..N	Leg details
DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/	1	Arrival details

DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/AircraftScheduledDateTime	1	Date of arrival
DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/IATA_LocationCode	1	Arrival airport code, e.g. IST
DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/StationName	1	Name of airport of arrival, e.g. Istanbul Airport
DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/TerminalName	1	Terminal Code/Name where flight arrives to
DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/	1	Aircraft details
DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/CarrierAircraftTypeCode	1	Aircraft code
DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/CarrierAircraftTypeName	1	Aircraft name
DataLists/DatedOperatingLegList/DatedOperatingLeg/DatedOperatingLegID	1	Operating Leg ID
DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/	1	Departure details
DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/AircraftScheduledDateTime	1	Date of departure
DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/IATA_LocationCode	1	Departure airport code, e.g. AMS
DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/StationName	1	Name of airport of departure, e.g. Schiphol Airport
DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/TerminalName	1	Terminal Code/Name where flight departs from
DataLists/DatedOperatingLegList/DatedOperatingLeg/IATA_AircraftType/	1	Aircraft type details
DataLists/DatedOperatingLegList/DatedOperatingLeg/IATA_AircraftType/IATA_AircraftTypeCode	1	Aircraft code by IATA
DataLists/DatedOperatingSegmentList/	1	Collection of operating segments
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/	1..N	Operating segment details
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/CarrierDesigCode	1	Carrier Code, e.g. TK
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/CarrierName	1	Carrier name, e.g. Turkish Airlines
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/DatedOperatingLegRefID	1	Reference ID of operating leg
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/DatedOperatingSegmentId	1	ID of operating segment
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/Duration	1	Duration of Segment
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/OperatingCarrierFlightNumberText	1	Flight number
DataLists/OriginDestList/	1	Collection of origins and destinations
DataLists/OriginDestList/OriginDest/	1..N	Origin and destination details
DataLists/OriginDestList/OriginDest/DestCode	1	Airport code of destination
DataLists/OriginDestList/OriginDest/OriginCode	1	Airport code of origin
DataLists/OriginDestList/OriginDest/OriginDestID	1	ID of origin-dest pair
DataLists/OriginDestList/OriginDest/PaxJourneyRefID	1	Reference ID of Pax Journey
DataLists/PaxJourneyList/	1	Journeys

DataLists/PaxJourneyList/PaxJourney/	1..N	Journeys details
DataLists/PaxJourneyList/PaxJourney/Duration	1	Duration of Journey
DataLists/PaxJourneyList/PaxJourney/PaxJourneyID	1	Journey ID
DataLists/PaxJourneyList/PaxJourney/PaxSegmentRefID	1	Segment Ref ID
DataLists/PaxList/	1	Collection of passengers
DataLists/PaxList/Pax/	1..N	Passenger details
DataLists/PaxList/Pax/PaxID	1	Id of a passenger
DataLists/PaxList/Pax/PTC	1	Passenger type, e.g. CHD, INF, ADT
DataLists/PaxSegmentList/	1	Segment List
DataLists/PaxSegmentList/PaxSegment/	1..N	Segments details
DataLists/PaxSegmentList/PaxSegment/DatedMarketingSegmentRefId	1	Marketing Segment ID that is linked to Pax Segment ID
DataLists/PaxSegmentList/PaxSegment/PaxSegmentID	1	Segment ID that will be used for further segment references
DataLists/PriceClassList/	1	Collection of price classes
DataLists/PriceClassList/PriceClass/	1..N	Price class details
DataLists/PriceClassList/PriceClass/CabinType/	1	Cabin type details
DataLists/PriceClassList/PriceClass/CabinType/CabinTypeCode	1	Cabin type code, 3 for Economy, 2 for Business
DataLists/PriceClassList/PriceClass/CabinType/CabinTypeName	1	Cabin type name, Economy or Business
DataLists/PriceClassList/PriceClass/Code	1	Price class code
DataLists/PriceClassList/PriceClass/FareBasisCode	1	Fare Basis code
DataLists/PriceClassList/PriceClass/Name	1	Brand name
DataLists/PriceClassList/PriceClass/PriceClassID	1	ID of price class
DataLists/ServiceDefinitionList/	1	Collection of service definitions
DataLists/ServiceDefinitionList/ServiceDefinition/	1..N	Service definition details
DataLists/ServiceDefinitionList/ServiceDefinition/Name	1	Service name
DataLists/ServiceDefinitionList/ServiceDefinition/OwnerCode	1	Owner code of the service
DataLists/ServiceDefinitionList/ServiceDefinition/ServiceDefinitionID	1	ID of the service
PaymentFunctions/	1..N	Collection payment methods of agency
PaymentFunctions/PaymentSupportedMethod	1	Supported payment method
PaymentFunctions/PaymentSupportedMethod/PaymentRedirectionInd	1	Payment operation requires redirection (true, false)
PaymentFunctions/PaymentSupportedMethod/PaymentTypeCode	1	Payment type code (CA,CC, AC,OT, etc.)
PricedOffer/	1	Offer's details
PricedOffer/BaggageAssociations/	1..N	Offer's baggage allowances
PricedOffer/BaggageAssociations/BaggageAllowanceRefID	1..N	Reference ID of Offer's baggage allowance
PricedOffer/BaggageAssociations/OfferFlightAssociations/	1	Offer Flight Associations
PricedOffer/BaggageAssociations/OfferFlightAssociations/PaxSegmentReferences/	1	Segment details
PricedOffer/BaggageAssociations/OfferFlightAssociations/PaxSegmentReferences/PaxSegmentRefID	1..N	Reference ID of segment
PricedOffer/BaggageAssociations/PaxRefID	1..N	Passengers that have baggage allowance
PricedOffer/JourneyOverview/	1	Journey Overview
PricedOffer/JourneyOverview/JourneyPriceClass/	1..N	Price class details of journey
PricedOffer/JourneyOverview/JourneyPriceClass/PaxJourneyRefID	1	Reference ID of Pax journey
PricedOffer/JourneyOverview/JourneyPriceClass/PriceClassRefID	1	Reference ID of price class
PricedOffer/OfferID	1	Offer's ID

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

PricedOffer/OfferItem/	1	Offer item details
PricedOffer/OfferItem/FareDetail/	1..N	Fare details for every passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/	1..N	Fare details for every segment of a passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/NegotiatedCode	1	Fare information (70J for public or 758 for private)
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/	1..N	Cancel restriction details
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/AllowedModificationInd	1	Flags if cancellation is allowed
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/DescText	1	Cancel restriction description
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/Fee/	1	Cancel restriction penalty fee details
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/Fee/Amount	1	Cancel restriction penalty fee amount
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/Fee/Amount[CurCode]	1	Cancel restriction penalty fee currency
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/JourneyStageCode	1	After Departure Prior To Departure No Show
PricedOffer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/	1..N	Change restriction details
PricedOffer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/ AllowedModificationInd	1	Flags if cancellation is allowed
PricedOffer/OfferItem/FareDetail/FareComponent/ ChangeRestrictions /DescText	1	Change restriction description
PricedOffer/OfferItem/FareDetail/FareComponent/ ChangeRestrictions /Fee/	1	Change restriction penalty fee details
PricedOffer/OfferItem/FareDetail/FareComponent/ ChangeRestrictions /Fee/Amount	1	Change restriction penalty fee amount
PricedOffer/OfferItem/FareDetail/FareComponent/ ChangeRestrictions /Fee/Amount[CurCode]	1	Change restriction penalty fee currency
PricedOffer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/ JourneyStageCode		After Departure Prior To Departure No Show
PricedOffer/OfferItem/FareDetail/FareComponent/PaxSegmentRefID	1	Reference ID of Pax segment
PricedOffer/OfferItem/FareDetail/FareComponent/Price/	1	Price details of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/EquivAmount	1	Equivalent amount of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/EquivAmount[CurCode]	1	Cur code of equivalent amount of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/	1	Tax details of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/TotalTaxAmount	1	Total tax of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of a segment for a single passenger type

CONFIDENTIAL & RESTRICTED

PricedOffer/OfferItem/FareDetail/FareComponent/Price/TotalAmount	1	Total amount of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/TotalAmount[CurCode]	1	Cur code of total amount of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/PaxRefID	1..N	ID of Pax reference
PricedOffer/OfferItem/FareDetail/Price/	1	Price of sum of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/EquivAmount	1	Equivalent amount of price of sum of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/EquivAmount[CurCode]	1	Cur code of equivalent amount of price of sum of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/	1	Tax details of sum of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/	1..N	Tax details
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/Amount	1	Particular tax amount of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/Amount[CurCode]	1	Cur code of tax amount of sum of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/TaxCode	1	Code of tax
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/TaxName	1	Name of tax
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/TotalTaxAmount	1	Sum of all tax amounts of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of sum of all tax amounts of all segments of a single Pax type
PricedOffer/OfferItem/OfferItemID	1	ID of offer item
PricedOffer/OfferItem/Price/	1	Price details of the ticket
PricedOffer/OfferItem/Price/EquivAmount	1	Equivalent amount of the ticket
PricedOffer/OfferItem/Price/EquivAmount[CurCode]	1	Cur code of the price of the ticket
PricedOffer/OfferItem/Price/TaxSummary/	1	Tax summary of the price of the ticket
PricedOffer/OfferItem/Price/TaxSummary/TotalTaxAmount	1	Tax amount of the price of the ticket
PricedOffer/OfferItem/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of the price of the ticket
PricedOffer/OfferItem/Price/TotalAmount	1	Price of the ticket
PricedOffer/OfferItem/Price/TotalAmount[CurCode]	1	Cur code of the price of the ticket
PricedOffer/OfferItem/Service/	1..N	Service details of offer item
PricedOffer/OfferItem/Service/OfferServiceAssociation/	1	Service association details
PricedOffer/OfferItem/Service/OfferServiceAssociation/PaxJourneyRef/	1	Pax Journey References
PricedOffer/OfferItem/Service/OfferServiceAssociation/PaxJourneyRef/PaxJourneyRefID	1..N	List of PaxJourney ReferenceID(s)
PricedOffer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/	1	Service definition references
PricedOffer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/	1	Flight Association Details
PricedOffer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/PaxJourneyRef/	1	Pax Journey References
PricedOffer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/PaxJourneyRef/ PaxJourneyRefID	1..N	List of PaxJourney ReferenceID(s)
PricedOffer/OfferItem/Service/PaxRefID	1..N	List of Pax Reference ID(s)
PricedOffer/OfferItem/Service/ServiceID	1	Service ID

PricedOffer/OwnerCode	1	TK

Special Considerations

1. Offer under PricedOffer section contains the price of the flight(s), detailed fare rules and tax breakdowns that are contained in the requested offer.
2. Offer under PricedOffer section is stored as a Priced Offer and will be given as an input to order-create method.


ERRORS

Code	Error Key	Description
NDC-4191	SHOPPING_OFFER_NOT_FOUND	Shop offer not found (does not exist, expired, or consumed).
NDC-4076	EMPTY_OFFER_REF_ID	OfferRefID cannot be empty.
NDC-4111	UNMATCHED_OFFER_ITEM_REF_ID	OfferItemRefID is not identical with OfferRefID.
NDC-4079	EMPTY_OFFER_ITEM_REF_ID	OfferItemRefID can not be empty.
NDC-4193	INVALID_OFFER_REF_ID	Offer Ref ID is not valid.
NDC-4112	UNMATCHED_PAX_REF_ID	Pax ID is not found.
NDC-4113	MISSING_PAX_REF_ID	One or more Pax IDs are missing.
NDC-4084	EMPTY_PAX_ID	One or more Pax IDs are empty.
NDC-4080	EMPTY_PAX_REF_LIST	There are no Pax IDs.
NDC-4081	MULTIPLE_REFERENCE_IDENTICAL_PAX	Pax IDs can not be the same.
NDC-4077	EMPTY_OWNER_CODE	Owner code must be entered.
NDC-4194	EMPTY_PRICED_OFFER	PricedOffer section must be sent.
NDC-4160	EMPTY_SELECTED_OFFER_LIST	SelectedOfferList section must be sent.
NDC-1517	INVALID_CURRENCY	Not authorized for the requested currency according to AgencyPortal

75dab313-82ba-49d6-b5ec-c89bd09db

3.3. Offer Flow 2

Offer Flow 2 can be used for both lower and higher LTT (Look-to-Ticket) scenarios.

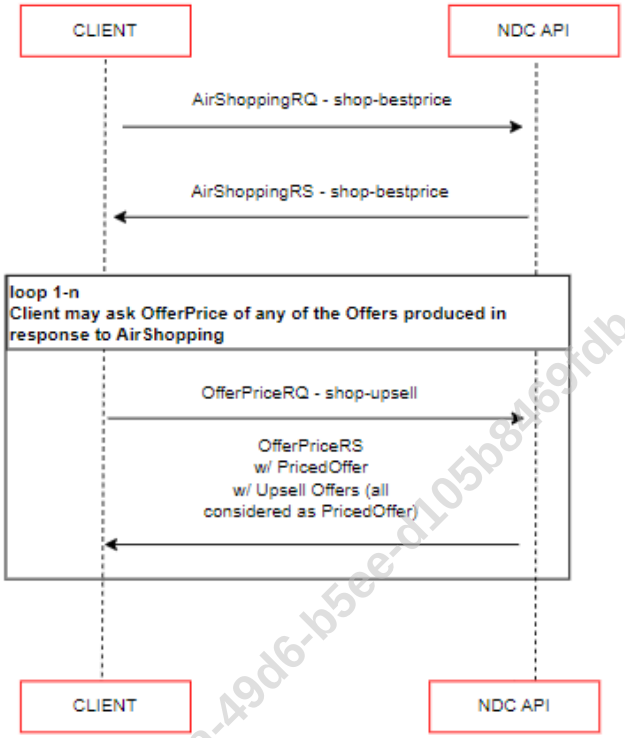

3.3.1. shop-bestprice


Overview

Purpose of shop-bestprice is to generate offers for a specific date with origin and destination details. Each offer comprises the best price of each flight combination. In order to get other price options of the selected offer, shop-upsell method should be triggered.

Operation Name	shop-bestprice
Operation URL	$NDCAPI_BASEURL$/shop-bestprice
NDC message input	IATA_AirShoppingRQ 21.3
NDC message output	IATA_AirShoppingRS 21.3
Main function	Displays all offers for a specific date for determined origin and destination
Main inputs	Shopping date, Pax details, origin and destination airports
Main outputs	Best Price Offers for a specific date(s)
Prerequisites	Agency user is authenticated and has permission to access
To be followed by	shop-upsell method in order to get all prices for the selected flight(s)

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document



Limitations

1. The number of passengers is limited to 9, which can be a mix of passenger types other than infant. The number of passengers, including infants, are limited to 15.
2. Infants cannot be requested with no presence of adult. The number of infants cannot exceed the total number of adults.
3. In case of multicity searches (trip type other than one way or round trip), occurrence of OriginDestCriteria is limited to 6.
4. Bound based cabin selection.
5. Agencies which have countryCode “TR”, should not use this service for domestic flights.

Supported Functionalities

1. One Way, Round Trip and Multi City trip types
2. Mono and multi passenger searches.
3. Operating and Marketing airline information for Codeshare & Interline flights.
4. Cancellation & change rules
5. Queries with Account Code

Input Parameters

Parameter	Description	Mandatory/ Repetition (#)	Type / Example
FlightRequest/	Flight details	YES / 1	Complex
FlightRequest/ FlightRequestOriginDestinationsCriteria/		YES / 1	Complex
FlightRequest/ FlightRequestOriginDestinationsCriteria/ OriginDestCriteria/α	Journey details	YES / 1..6	Complex
α/DestArrivalCriteria/	Destination details	YES / 1	Complex
α/DestArrivalCriteria/IATA_LocationCode	Arrival airport code	YES / 1	String / FRA
α/OriginDepCriteria/	Departure details	YES / 1	Complex
α/OriginDepCriteria/Date	Departure date	YES / 1	Date / 2023-07-03
α/OriginDepCriteria/IATA_LocationCode	Departure airport code	YES / 1	String / IST
α/OriginDestID	OD1 OD2 …	YES / 1	String / OD1
α/CabinType/	Cabin type details	NO / 2	Complex
α/CabinTypeCode	3 for Economy, 2 for Business	YES / 1	Integer / 3
α/CabinType/PrefLevel/	Prefer option details	YES / 1	Complex
α/CabinType/PrefLevel/PrefLevelCode	Always “preferred”	YES / 1	String / Preferred
PaxList/	Passenger list	YES / 1	Complex
PaxList/Pax/	Passenger details	YES / 1..9-15(Inc INFs)	Complex
PaxList/Pax/PaxID	Not processed, required only per xsd	YES / 1	Integer / 1

CONFIDENTIAL & RESTRICTED

PaxList/Pax/PTC	Passenger type	YES / 1	String / ADT
OfferCriteria/	Additional search criteria	NO / 0..1	Complex
OfferCriteria/FareCriteria	Fare Criteria	NO / 0.1	Complex
OfferCriteria/FareCriteria/FareTypeCode	Fare type code of fare information	YES / 1	String / 758 (Not valid for IT,VFR,LBR etc.)
OfferCriteria/ProgramCriteria	Program identifier	YES / 1	Complex
OfferCriteria/ProgramCriteria/ ProgramAccount	Program account	YES / 1	Complex
OfferCriteria/ProgramCriteria/ ProgramAccount/AccountID	Account ID of the program account	YES / 1	String / CCC123456
OfferCriteria/ProgramCriteria/ ProgramOwner/	Program owner information	YES / 1	Complex
OfferCriteria/ProgramCriteria/ ProgramOwner/Carrier/	Carrier info	YES / 1	Complex
OfferCriteria/ProgramCriteria/ ProgramOwner/Carrier/ AirlineDesigCode	Always TK	YES / 1	String / TK
ResponseParameters		NO / 1	Complex
ResponseParameters/ReasonCode	112 for reshop queries	YES / 1	String / 112

Output Parameters

Parameter	#	Explanation
AirShoppingRS/DataLists/	1	Offers' data collection
AirShoppingRS/DataLists/BaggageAllowanceList/	1	Baggage allowances
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/	1..N	Baggage allowance details
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/ApplicablePartyText	1	Always "Party"
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/BaggageAllowanceID	1	Unique baggage allowance ID
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/TypeCode	1	Always "Checked"
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/WeightAllowance/	1	Weight details
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/WeightAllowance/Maximum WeightMeasure	1	Maximum weight
AirShoppingRS/DataLists/ BaggageAllowanceList/BaggageAllowance/WeightAllowance/WeightUnitOfMeasurement	1	Weight measurement type
AirShoppingRS/DataLists/DatedMarketingSegmentList/	1	Marketing segments
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketing Segment	1..N	Marketing segment details
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketing Segment/Arrival/	1	Arrival details
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketing Segment/Arrival/AircraftScheduledDateTime	1	Date of arrival
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketing Segment/Arrival/IATA_LocationCode	1	Arrival airport code, e.g. IST

75dabd13-c2ba-49d6-b5ee-d105b8469fd9

AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/StationName	1	Name of place of arrival, e.g. Istanbul Airport
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/TerminalName	1	Terminal Code/Name where flight arrives to
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/CarrierDesigCode	1	Carrier Code, e.g. TK
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/CarrierName	1	Carrier name, e.g. Turkish Airlines
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/DatedMarketingSegmentID	1	Marketing Segment ID
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/DatedOperatingSegmentRefId	1	Ref ID of Operating Segment
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/	1	Departure details
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/AircraftScheduledDateTime	1	Date of departure
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/IATA_LocationCode	1	Departure airport code, e.g. AMS
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/StationName	1	Name of airport of departure, e.g. Schiphol Airport
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/TerminalName	1	Terminal Code/Name where flight departs from
AirShoppingRS/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/MarketingCarrierFlightNumberText	1	Flight number
AirShoppingRS/DataLists/DatedOperatingLegList/	1	Operating Legs
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/	1..N	Operating Legs details
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/	1	Arrival details
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/AircraftScheduledDateTime	1	Date of arrival
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/IATA_LocationCode	1	Arrival airport code, e.g. IST
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/StationName	1	Name of airport of arrival, e.g. Istanbul Airport
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/TerminalName	1	Terminal Code/Name where flight arrives to
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/	1	Aircraft details
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/CarrierAircraftTypeCode	1	Aircraft code
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/CarrierAircraftTypeName	1	Aircraft name
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/DatedOperatingLegID	1	Operating Leg ID
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/	1	Departure details
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/AircraftScheduledDateTime	1	Date of departure
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/IATA_LocationCode	1	Departure airport code, e.g. AMS

AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/StationName	1	Name of airport of departure, e.g. Schiphol Airport
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/TerminalName	1	Terminal Code/Name where flight departs from
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/IATA_AircraftType/	1	Aircraft type details
AirShoppingRS/DataLists/DatedOperatingLegList/DatedOperatingLeg/IATA_AircraftType/IATA_AircraftTypeCode	1	Aircraft code by IATA
AirShoppingRS/DataLists/DatedOperatingSegmentList/	1	Operating Segments
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/	1..N	Operating Segment details
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/CarrierDesigCode	1	Carrier Code, e.g. TK
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/CarrierName	1	Carrier name, e.g. Turkish Airlines
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/DatedOperatingLegRefID	1	Reference ID of operating leg
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/DatedOperatingSegmentId	1	ID of operating segment
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/Duration	1	Duration of Segment
AirShoppingRS/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/OperatingCarrierFlightNumberText	1	Flight number
AirShoppingRS/DataLists/OriginDestList/	1	Origins and destinations
AirShoppingRS/DataLists/OriginDestList/OriginDest/	1..N	Origin and destinations details
AirShoppingRS/DataLists/OriginDestList/OriginDest/DestCode	1	Airport code of destination
AirShoppingRS/DataLists/OriginDestList/OriginDest/OriginCode	1	Airport code of origin
AirShoppingRS/DataLists/OriginDestList/OriginDest/OriginDestID	1	ID of origin-dest pair
AirShoppingRS/DataLists/OriginDestList/OriginDest/ PaxJourneyRefID	1	Journey Ref ID(s) for each O&D
AirShoppingRS/DataLists/PaxJourneyList/	1	Journeys
AirShoppingRS/DataLists/PaxJourneyList/Duration	1	Duration of Journey
AirShoppingRS/DataLists/PaxJourneyList/PaxJourney/	1..N	Journeys details
AirShoppingRS/DataLists/PaxJourneyList/PaxJourney/PaxJourneyID	1	Journey ID
AirShoppingRS/DataLists/PaxJourneyList/PaxJourney/PaxSegmentRefID	1	Segment Ref ID
AirShoppingRS/DataLists/PaxList/	1	Passenger List
AirShoppingRS/DataLists/PaxList/Pax/	1..N	Passenger details
AirShoppingRS/DataLists/PaxList/Pax/PaxID	1	Id of a passenger
AirShoppingRS/DataLists/PaxList/Pax/PTC	1	Passenger type, e.g. CHD, INF, ADT
AirShoppingRS/DataLists/PaxSegmentList/	1	Segment List
AirShoppingRS/DataLists/PaxSegmentList/PaxSegment/	1..N	Segments details
AirShoppingRS/DataLists/PaxSegmentList/PaxSegment/DatedMarketingSegmentRefId	1	Marketing Segment ID that is linked to Pax Segment ID
AirShoppingRS/DataLists/PaxSegmentList/PaxSegment/PaxSegmentID	1	Segment ID that will be used for further segment references
AirShoppingRS/DataLists/PenaltyList/	1	Penalty List
AirShoppingRS/DataLists/PenaltyList/Penalty/	1..N	Penalty details
AirShoppingRS/DataLists/PenaltyList/Penalty/DescText	1	Penalty description
AirShoppingRS/DataLists/PenaltyList/Penalty/PenaltyID	1	ID of penalty
AirShoppingRS/DataLists/PenaltyList/Penalty/Price/	1	Price details of penalty

AirShoppingRS/DataLists/PenaltyList/Penalty/Price/TotalAmount	1	Price of penalty
AirShoppingRS/DataLists/PenaltyList/Penalty/Price/TotalAmount[CurCode]	1	Cur code of price of penalty
AirShoppingRS/DataLists/PenaltyList/Penalty/TypeCode	1	Reason of penalty
AirShoppingRS/DataLists/PriceClassList/	1	Price class list
AirShoppingRS/DataLists/PriceClassList/PriceClass/	1..N	Price class details
AirShoppingRS/DataLists/PriceClassList/PriceClass/CabinType/	1	Cabin type details
AirShoppingRS/DataLists/PriceClassList/PriceClass/CabinType/CabinTypeCode	1	Cabin type code, 3 for Economy, 2 for Business
AirShoppingRS/DataLists/PriceClassList/PriceClass/CabinType/CabinTypeName	1	Cabin type name, Economy or Business
AirShoppingRS/DataLists/PriceClassList/PriceClass/Code	1	Brand code
AirShoppingRS/DataLists/PriceClassList/PriceClass/FareBasisCode	1	Fare Basis code
AirShoppingRS/DataLists/PriceClassList/PriceClass/Name	1	Brand name
AirShoppingRS/DataLists/PriceClassList/PriceClass/PriceClassID	1	ID of price class
AirShoppingRS/DataLists/ServiceDefinitionList/	1	Service definitions
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/	1..N	Service definition details
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/Desc/	1	Service definition’s description details
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/Desc/DescText	1	Service definition’s description
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/Name	1	Service name
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/OwnerCode	1	Owner code of the service
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/RFISC	1	RFISC of the service
AirShoppingRS/DataLists/ServiceDefinitionList/ServiceDefinition/RFISC/ServiceDefinitionID	1	ID of the service
AirShoppingRS/OffersGroup/	1	Offers
AirShoppingRS/OffersGroup/CarrierOffers/	1	Offers
AirShoppingRS/OffersGroup/CarrierOffers/Offer/	1..N	Offer details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/	1..N	Baggage associations details of an offer
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/BaggageAllowanceRefID	1	Reference ID of baggage associations
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/OfferFlightAssociations/	1	Flight Segments
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/OfferFlightAssociations/PaxSegmentReferences/	1	Segment details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/OfferFlightAssociations/PaxSegmentReferences/PaxSegmentRefID	1..N	Reference ID of segment
AirShoppingRS/OffersGroup/CarrierOffers/Offer/BaggageAssociations/PaxRefID	1..N	ID of Pax reference
AirShoppingRS/OffersGroup/CarrierOffers/Offer/JourneyOverview/	1	Journey Overview
AirShoppingRS/OffersGroup/CarrierOffers/Offer/JourneyOverview/JourneyPriceClass/	1..N	Price class details of journey
AirShoppingRS/OffersGroup/CarrierOffers/Offer/JourneyOverview/JourneyPriceClass/PaxJourneyRefID	1	Reference ID of Pax journey
AirShoppingRS/OffersGroup/CarrierOffers/Offer/JourneyOverview/JourneyPriceClass/PriceClassRefID	1	Reference ID of price class
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferExpirationTimeLimitDateTime	1	Expiration date of the offer

AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferID	1	ID of offer
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/	1	Offer item details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/	1..N	Fare details for every passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/	1..N	Fare details for every segment of a passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareCompenent/NegotiatedCode	1	Fare information (70J for public or 758 for private)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/PaxSegmentRefID	1..N	Reference ID of Pax segment
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/Price/	1	Price details of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/Price/EquivAmount	1	Equivalent amount of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/Price/EquivAmount[CurCode]	1	Cur code of equivalent amount of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/	1	Tax details of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/TotalTaxAmount	1	Total tax of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/Price/TotalAmount	1	Total amount of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/Price/TotalAmount[CurCode]	1	Cur code of total amount of a segment for a single passenger type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/RBD/	1	RBD details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/FareComponent/RBD/RBD_Code	1	RBD code
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/PaxRefID	1..N	ID of Pax reference
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/	1	Price of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/EquivAmount	1	Equivalent amount of price of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/EquivAmount[CurCode]	1	Cur code of equivalent amount of price of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/	1	Tax details of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/TotalTaxAmount	1	Total tax of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of sum of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/TotalAmount	1	Total amount of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/FareDetail/Price/TotalAmount[CurCode]	1	Cur code of total amount of all segments of a single Pax type
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/OfferItemID	1	ID of the offer item
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/	1	Price details of the ticket

AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/EquivAmount	1	Equivalent amount of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/EquivAmount[CurCode]	1	Cur code of the price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/TaxSummary/	1	Tax summary of the price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/TaxSummary/TotalTaxAmount	1	Tax amount of the price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of the price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/TotalAmount	1	Price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Price/TotalAmount[CurCode]	1	Cur code of the price of the ticket
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/	1..N	Service details of offer item
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/	1	Service association details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/PaxJourneyRef/	1	Pax Journey References
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/PaxJourneyRef/PaxJourneyRefID	1..N	List of PaxJourney ReferenceID(s)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/	1	Service definition references
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/	1	Flight Association Details
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/PaxJourneyRef/	1	Pax Journey References
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/PaxJourneyRef/ PaxJourneyRefID	1..N	List of PaxJourney ReferenceID(s)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/PaxRefID	1..N	List of Pax Reference ID(s)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OfferItem/Service/ServiceID	1	Service ID
AirShoppingRS/OffersGroup/CarrierOffers/Offer/OwnerCode	1	Offer owner code
AirShoppingRS/OffersGroup/CarrierOffers/Offer/PenaltyRefID	1..N	Penalty Ref ID(s)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/ PTC_OfferParameters/	1..N	Section to inform if Pax types are priced as requested.
AirShoppingRS/OffersGroup/CarrierOffers/Offer/ PTC_OfferParameters/PaxRefID	1	Pax RefID(s)
AirShoppingRS/OffersGroup/CarrierOffers/Offer/ PTC_OfferParameters/PTC_PricedCode	1	Priced Pax code
AirShoppingRS/OffersGroup/CarrierOffers/Offer/ PTC_OfferParameters/PTC_RequestedCode	1	Requested Pax code

Special Considerations

1. There must be one occurrence of OriginDestCriteria element in case of a one-way search, two instances in case of a round trip and more in case of complex itinerary (not exceeding 6). If exceeds, ORIGIN_DEST_CRITERIA_LIMIT_EXCEEDED is returned.

2. Shopping request is constructed as the OriginDestCriteria elements order in the FlightRequestOriginDestinationsCriteria. OriginDestID element is a must field for each OriginDestCriteria and should be in an order.
3. DestArrivalCriteria/IATA_LocationCode and OriginDepCriteria/IATA_LocationCode fields can be used either with airport code or city code. When a city code is submitted, all airports associated to this city are targeted. When an airport code is submitted, only this specific airport is targeted.
4. In case a city code submitted, offers are generated with all airports associated to this city but all airports are grouped under the city code while generating Datalists/OriginDestList.
5. If there are more than one (1) OriginDestCriteria (RT/MC), the Date input in each OriginDestCriteria must not be a date before the Date input of prior OriginDestCriteria. Otherwise, INCONSISTENT_TRIP_DATE is returned. Both Date inputs can be the same value for same day return journey requests.
6. CabinTypeCode value can get two (2) values. “3” for economy cabin searches, “2” for business cabin searches. Other values apart from “2” and “3” will return INVALID_CABIN_TYPE.
7. Bound based cabin preference is not supported. If there are more than one OriginDestCriteria in the request, system process the cabin preference of the first OriginDestCriteria. It does not mean that mixed cabin itineraries cannot be created. The offers including mixed cabin segments are provided.
8. If the AirShopping query is for reshop purposes then ResponseParameters/ReasonCode should be set as “112”. If ResponseParameters/ReasonCode is set as 112 in the request, to get the offers for reshop purpose, all offers will be received with the price information of the requested new query, not the price difference. In other words, rebooking flow through API does not support “**true re-shopping”.** Penalties and price differences are not reflected in the AirShoppingRS, they can only be retrieved as a result of a rebook-quote request.
9. Only “account code” is supported in terms of private fares. If the system could not find a price with the given account code, NO_OFFERS is returned instead of public fares.
10. Student (STU) Pax type must be single Pax type in the request. If there is a STU type in the request, all other Pax types must be STU too. Otherwise, YOUTH_AND_STUDENT_PASSENGER_ERROR is returned.
11. Youth (YTH) Pax type must be single Pax type in the request. If there is a YTH type in the request, all other Pax types must be YTH too. Otherwise, YOUTH_AND_STUDENT_PASSENGER_ERROR is returned.
12. Disabled (DIS) and Seaman (SEA) Pax types should not be with another Pax type in the request. Otherwise, ADT price is returned.
13. Youngadult (B15) is for UK flights only.
14. Labor (LBR), Labor Child (LNN) and LaborInfant (LIF) could be in the request with Labor Pax types only. For ex. If a labor flies with his child, LNN must be in the request instead of CHD.
15. Ethnic (VFR), Ethnic Child (VFN) and Ethnic Infant (VFF) could be in the request with Ethnic Pax types only. For ex. If an Ethnic flies with his child, VFN must be in the request instead of CHD.
16. Veteran (MIL), Veteran Child (MNN), Veteran Infant (MNF) – For each of them, they must be in the request with just another Veteran Pax types in order to get discounted prices. If called with ADT-CHD-INF then all will be priced as adult.
17. Penalties in Datalist/PenaltyList are to indicate the penalty amounts of change and cancellation. If there is no reference to penalties in the offer, it means neither change or cancel is permitted for that offer.
18. When “FareTypeCode” is added in request parameters, if private fare is not found and there is a filling that matching with request parameters then instead of displaying an error message as “NO_OFFERS”, service returns offers with public fares, if private fares are found then service returns offers with private fares (for example special paxtype requests may still return “NO_OFFERS”).
19. “FareTypeCode” is only valid for pax types which are not require an account code(such as ADT,CHD,INF). This parameter should not be sent in requests for pax types IT,VFR,LBR,STU, etc

ERRORS

Code	Error Key	Description
NDC-8043	EMPTY_FARE_TYPE_CODE	Fare Type Code cannot be empty
NDC-8044	INVALID_FARE_TYPE_CODE	Fare Type Code is invalid
NDC-8048	MISSING_FARE_TYPE_CODE	Fare Type Code is missing
NDC-4179	EMPTY_ORIGIN_DESTINATION_LIST	There must be at least one OriginDestinationCriteria element.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

NDC-4047	INVALID_ARRIVAL_LOCATION_SIZE	Arrival location code must be three digits unless multi airport is chosen.
NDC-4044	INVALID_DEPARTURE_LOCATION_SIZE	Departure location code must be three digits unless multi airport is chosen.
NDC-4025	INVALID_CITY_AIRPORT_CODE	Invalid city/airport code.
NDC-4180	INVALID_PTC	Invalid passenger type.
NDC-4067	EXCESSIVE_INFANT_ERROR	There must be at least one adult per infant passenger.
NDC-4181	DATE_OUT_OF_LIMIT	Requested date must be within 355 days from now.
NDC-4182	DATE_IS_PAST	Requested date is past.
NDC-2025	NO_OFFERS	There is no offer for the requested date.
NDC-4195	NO_OPERATION	TK has no operations in this route.
NDC-4068	ARRIVAL_AND_ORIGIN_CANNOT_BE_THE_SAME	Arrival and origin location cannot be the same.
NDC-4066	INCONSISTENT_TRIP_DATE	Multi flight requests must be chronological.
NDC-4049	EMPTY_FLIGHT_REQUEST	Flight request must be provided.
NDC-4183	EMPTY_ORIGIN_DEST_ID	OriginDestID can not be empty.
NDC-4184	EMPTY_PREF_LEVEL_CODE	PrefLevelCode can not be empty.
NDC-4048	EMPTY_CABIN_TYPE_LIST	Cabin type list must be provided.
NDC-4185	EMPTY_DEPARTURE_DATE	Flight date must be entered.
NDC-4186	EMPTY_CABIN_TYPE_CODE	CabinType section must be provided.
NDC-1023	EMPTY_LOCATION_CODE	Location code must be provided.
NDC-4187	CABIN_TYPE_LIMIT_EXCEEDED	There can be maximum two cabin types.
NDC-4188	INVALID_CABIN_TYPE	Cabin type must be valid.
NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.
NDC-4085	EMPTY_PTC	Passenger type must be entered.
NDC-4189	ORIGIN_DESTINATION_CRITERIA_LIMIT_EXCEEDED	There can be up to 6 OriginDestinationCriteria elements.
NDC-4196	MAX_PAX_COUNT_EXCEEDED	Maximum number of passengers is exceeded.
NDC-2005	SHOP_BACKEND_ERROR	Unable to create offers due to shopping backend error.
NDC-2100	SHOP_CONVERSION_ERROR	
NDC-8101	ROUTE_REQUEST_RESTRICTED	Ticket issuance is only permitted for Inbound (Entry) or Outbound (Exit) sectors.
NDC-4456	ROUTE_IS_NOT_FLOWN	The flight(s) included in your AirShopping request include a port that we do not fly to.
NDC-4238	ROUTE_IS_NOT_SUPPORTED	Route is not supported.
NDC-4277	ROUTE_IS_NOT_FOUND	Route is not found.

f5dab313-82ba-4fd6-b5a2-01518d0d1


CONFIDENTIAL & RESTRICTED

3.3.2. shop-upsell

Overview

shop-upsell allows the user to get upsell offers of an input offer which is generated by shop-bestprice method.

Operation Name	shop-bestprice
Operation URL	$NDCAPI_BASEURL$/shop-upsell
NDC message input	IATA_OfferPriceRQ 21.3
NDC message output	IATA_OfferPriceRS 21.3
Main function	Displays all offers of an input offer which is generated by shop-bestprice method.
Main inputs	OfferRefID, OfferItemRefID, PaxRefID(s)
Main outputs	All Priced Offers
Prerequisites	shop-bestprice performed
To be followed by	order-create



Limitations

1. Only one offer per transaction.

Supported Functionalities

1. One Way, Round Trip and Multi City trip types
2. Mono and multi passenger searches.
3. Operating and Marketing airline information for Codeshare & Interline flights.
4. Detailed cancellation & revalidation & change rules
5. Tax breakdowns

Input Parameters

Parameter	Description	Mandatory/ Repetition (#)	Type / Example
PricedOffer/	Offer details	YES / 1	Complex
PricedOffer/SelectedOfferList/	Offer list	YES / 1	Complex
PricedOffer/SelectedOfferList/SelectedOffer/	Offer	YES / 1	Complex
PricedOffer/SelectedOfferList/SelectedOffer/OfferRefID	ID which is retrieved from shop-bestprice	YES / 1	String
PricedOffer/SelectedOfferList/SelectedOffer/OwnerCode	Owner Code of the carrier	YES / 1	String / TK
PricedOffer/SelectedOfferList/SelectedOffer/SelectedOfferItem/	Offer Item details	YES / 1	Complex
PricedOffer/SelectedOfferList/SelectedOffer/SelectedOfferItem/OfferItemRefID	ID which is retrieved from shop-bestprice	YES / 1	String
PricedOffer/SelectedOfferList/SelectedOffer/SelectedOfferItem/PaxRefID	Pax IDs that retrieved from shop-bestprice	YES / 1..9-15(Inc INFs)	String / PAX_2
ResponseParameters		NO / 1	Complex

ResponseParameters/ReasonCode	112 for reshop queries	YES / 1	String / 112

Output Parameters

Parameter	#	Explanation
DataLists/	1	Offers' data collection
DataLists/BaggageAllowanceList/	1	Baggage allowances
DataLists/ BaggageAllowanceList/BaggageAllowance/	1..N	Baggage allowance details
DataLists/ BaggageAllowanceList/BaggageAllowance/ApplicablePartyText	1	Always "Party"
DataLists/ BaggageAllowanceList/BaggageAllowance/BaggageAllowanceID	1	Unique baggage allowance ID
DataLists/ BaggageAllowanceList/BaggageAllowance/TypeCode	1	Always "Checked"
DataLists/ BaggageAllowanceList/BaggageAllowance/WeightAllowance/	1	Weight details
DataLists/ BaggageAllowanceList/BaggageAllowance/WeightAllowance/MaximumWeightMeasure	1	Maximum weight
DataLists/ BaggageAllowanceList/BaggageAllowance/WeightAllowance/WeightUnitOfMeasurement	1	Weight measurement type
DataLists/DatedMarketingSegmentList/	1	Marketing segments
DataLists/DatedMarketingSegmentList/DatedMarketingSegment	1..N	Marketing segment details
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/	1	Arrival details
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/AircraftScheduledDateTime	1	Date of arrival
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/IATA_LocationCode	1	Arrival airport code , e.g. IST
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/StationName	1	Name of place of arrival, e.g. Istanbul Airport
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/TerminalName	1	Terminal Code/Name where flight arrives to
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/CarrierDesigCode	1	Carrier Code, e.g. TK
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/CarrierName	1	Carrier name, e.g. Turkish Airlines
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/DatedMarketingSegmentID	1	Marketing Segment ID
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/DatedOperatingSegmentRefId	1	Ref ID of Operating Segment
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/	1	Departure details
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/AircraftScheduledDateTime	1	Date of departure
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/IATA_LocationCode	1	Departure airport code , e.g. AMS
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/StationName	1	Name of place of departure, e.g. Schiphol Airport
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/TerminalName	1	Terminal Code/Name where flight departs from
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/MarketingCarrierFlightNumberText	1	Flight number
DataLists/DatedOperatingLegList/	1	Operating Legs
DataLists/DatedOperatingLegList/DatedOperatingLeg/	1..N	Operating Legs details

DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/	1	Arrival details
DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/AircraftScheduledDateTime	1	Date of arrival
DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/IATA_LocationCode	1	Arrival airport code , e.g. IST
DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/StationName	1	Name of place of arrival, e.g. Istanbul Airport
DataLists/DatedOperatingLegList/DatedOperatingLeg/Arrival/TerminalName	1	Terminal Code/Name where flight arrives to
DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/	1	Aircraft details
DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/CarrierAircraftTypeCode	1	Aircraft code
DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/CarrierAircraftTypeName	1	Aircraft name
DataLists/DatedOperatingLegList/DatedOperatingLeg/DatedOperatingLegID	1	Operating Leg ID
DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/	1	Departure details
DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/AircraftScheduledDateTime	1	Date of departure
DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/IATA_LocationCode	1	Departure airport code , e.g. AMS
DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/StationName	1	Name of place of departure, e.g. Schiphol Airport
DataLists/DatedOperatingLegList/DatedOperatingLeg/Dep/TerminalName	1	Terminal Code/Name where flight departs from
DataLists/DatedOperatingLegList/DatedOperatingLeg/IATA_AircraftType/	1	Aircraft type details
DataLists/DatedOperatingLegList/DatedOperatingLeg/IATA_AircraftType/IATA_AircraftTypeCode	1	Aircraft code by IATA
DataLists/DatedOperatingSegmentList/	1	Operating Segments
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/	1..N	Operating Segment details
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/CarrierDesigCode	1	Carrier Code, e.g. TK
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/CarrierName	1	Carrier name, e.g. Turkish Airlines
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/DatedOperatingLegRefID	1	Reference ID of operating leg
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/DatedOperatingSegmentId	1	ID of operating segment
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/Duration	1	Duration of Segment
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/OperatingCarrierFlightNumberText	1	Flight number
DataLists/OriginDestList/	1	Origins and destinations
DataLists/OriginDestList/OriginDest/	1..N	Origin and destinations details
DataLists/OriginDestList/OriginDest/DestCode	1	Airport code of destination
DataLists/OriginDestList/OriginDest/OriginCode	1	Airport code of origin
DataLists/OriginDestList/OriginDest/OriginDestID	1	ID of origin-dest pair
DataLists/OriginDestList/OriginDest/ PaxJourneyRefID	1	Journey Ref ID(s) for each O&D
DataLists/PaxJourneyList/	1	Journeys
DataLists/PaxJourneyList/PaxJourney/	1..N	Journeys details

DataLists/PaxJourneyList/PaxJourney/Duration	1	Duration of Journey
DataLists/PaxJourneyList/PaxJourney/PaxJourneyID	1	Journey ID
DataLists/PaxJourneyList/PaxJourney/PaxSegmentRefID	1	Segment Ref ID
DataLists/PaxList/	1	Passenger List
DataLists/PaxList/Pax/	1..N	Passenger details
DataLists/PaxList/Pax/PaxID	1	Id of a passenger
DataLists/PaxList/Pax/PTC	1	Passenger type, e.g. CHD, INF, ADT
DataLists/PaxSegmentList/	1	Segment List
DataLists/PaxSegmentList/PaxSegment/	1..N	Segments details
DataLists/PaxSegmentList/PaxSegment/DatedMarketingSegmentRefId	1	Marketing Segment ID that is linked to Pax Segment ID
DataLists/PaxSegmentList/PaxSegment/PaxSegmentID	1	Segment ID that will be used for further segment references
DataLists/PriceClassList/	1	Price class list
DataLists/PriceClassList/PriceClass/	1..N	Price class details
DataLists/PriceClassList/PriceClass/CabinType/	1	Cabin type details
DataLists/PriceClassList/PriceClass/CabinType/CabinTypeCode	1	Cabin type code, 3 for Economy, 2 for Business
DataLists/PriceClassList/PriceClass/CabinType/CabinTypeName	1	Cabin type name, Economy or Business
DataLists/PriceClassList/PriceClass/Code	1	Brand code
DataLists/PriceClassList/PriceClass/FareBasisCode	1	Fare Basis code
DataLists/PriceClassList/PriceClass/Name	1	Brand name
DataLists/PriceClassList/PriceClass/PriceClassID	1	ID of price class
DataLists/ServiceDefinitionList/	1	Service definitions
DataLists/ServiceDefinitionList/ServiceDefinition/	1..N	Service definition details
DataLists/ServiceDefinitionList/ServiceDefinition/Desc/	1	Service definition’s description details
DataLists/ServiceDefinitionList/ServiceDefinition/Desc/DescText	1	Service definition’s description
DataLists/ServiceDefinitionList/ServiceDefinition/Name	1	Service name
DataLists/ServiceDefinitionList/ServiceDefinition/OwnerCode	1	Owner code of the service
DataLists/ServiceDefinitionList/ServiceDefinition/RFISC	1	RFISC of the service
DataLists/ServiceDefinitionList/ServiceDefinition/RFISC/ServiceDefinitionID	1	ID of the service
PaymentFunctions/	1..N	Collection payment methods of agency
PaymentFunctions/PaymentSupportedMethod	1	Supported payment method
PaymentFunctions/PaymentSupportedMethod/PaymentRedirectionInd	1	Payment operation requires redirection (true, false)
PaymentFunctions/PaymentSupportedMethod/PaymentTypeCode	1	Payment type code (CA,CC, AC,OT, etc.)
OtherOffers/	0..1	Upsell offers
OtherOffers/Offer/	1..N	Offer details
OtherOffers/Offer/BaggageAssociations/	1..N	Baggage associations details of an offer
OtherOffers/Offer/BaggageAssociations/BaggageAllowanceRefID	1..N	Reference ID of baggage associations
OtherOffers/Offer/BaggageAssociations/OfferFlightAssociations/	1	Flight Segments
OtherOffers/Offer/BaggageAssociations/OfferFlightAssociations/PaxSegmentReferences/	1	Segment details
OtherOffers/Offer/BaggageAssociations/OfferFlightAssociations/PaxSegmentReferences/PaxSegmentRefID	1..N	Reference ID of segment
OtherOffers/Offer/BaggageAssociations/PaxRefID	1..N	ID of Pax reference
OtherOffers/Offer/JourneyOverview/	1	Journey Overview

OtherOffers/Offer/JourneyOverview/JourneyPriceClass/	1..N	Price class details of journey
OtherOffers/Offer/JourneyOverview/JourneyPriceClass/PaxJourneyRefID	1	Reference ID of Pax journey
OtherOffers/Offer/JourneyOverview/JourneyPriceClass/PriceClassRefID	1	Reference ID of price class
OtherOffers/Offer/OfferExpirationTimeLimitDateTime	1	Expiration date of the offer
OtherOffers/Offer/OfferID	1	ID of offer
OtherOffers/Offer/OfferItem	1	Offer item details
OtherOffers/Offer/OfferItem/FareDetail/	1..N	Fare details for every passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/	1..N	Fare details for every segment of a passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/NegotiatedCode	1	Fare information (70J for public or 758 for private)
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/CancelRestrictions	1..N	Cancel restrictions for every segment of a passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/CancelRestrictions/ AllowedModificationInd	1	Flags if cancellation is allowed
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/CancelRestrictions/DescText	1	Cancellation rule description
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/CancelRestrictions/Fee	1	Penalty Fee details
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/CancelRestrictions/Fee/Amount	1	Amount of penalty
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/CancelRestrictions/JourneyStageCode	1	After Departure Prior To Departure No Show
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/ChangeRestrictions	1..N	Change restrictions for every segment of a passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/ AllowedModificationInd	1	Flags if change is allowed
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/DescText	1	Change rule description
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/Fee	1	Penalty Fee details
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/Fee/Amount	1	Amount of penalty
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/ JourneyStageCode	1	After Departure Prior To Departure No Show
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/PaxSegmentRefID	1..N	Reference ID of Pax segment
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/Price/	1	Price details of a segment for a single passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/Price/EquivAmount	1	Equivalent amount of a segment for a single passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/Price/EquivAmount[CurCode]	1	Cur code of equivalent amount of a segment for a single passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/	1	Tax details of a segment for a single passenger type

OtherOffers/Offer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/TotalTaxAmount	1	Total tax of a segment for a single passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of a segment for a single passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/Price/TotalAmount	1	Total amount of a segment for a single passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/Price/TotalAmount[CurCode]	1	Cur code of total amount of a segment for a single passenger type
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/RBD/	1	RBD details
OtherOffers/Offer/OfferItem/FareDetail/FareComponent/RBD/RBD_Code	1	RBD code
OtherOffers/Offer/OfferItem/FareDetail/PaxRefID	1..N	ID of Pax reference
OtherOffers/Offer/OfferItem/FareDetail/Price/	1	Price of sum of all segments of a single Pax type
OtherOffers/Offer/OfferItem/FareDetail/Price/EquivAmount	1	Equivalent amount of price of sum of all segments of a single Pax type
OtherOffers/Offer/OfferItem/FareDetail/Price/EquivAmount[CurCode]	1	Cur code of equivalent amount of price of sum of all segments of a single Pax type
OtherOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/	1	Tax details of sum of all segments of a single Pax type
OtherOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/TotalTaxAmount	1	Total tax of sum of all segments of a single Pax type
OtherOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of sum of all segments of a single Pax type
OtherOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/Tax	1..N	Tax breakdown
OtherOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/Tax/Amount	1	Amount of specified tax
OtherOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/Tax/TaxCode	1	Code of specified tax
OtherOffers/Offer/OfferItem/FareDetail/Price/TaxSummary/Tax/TaxName	1	Name of specified tax
OtherOffers/Offer/OfferItem/FareDetail/Price/TotalAmount	1	Total amount of all segments of a single Pax type
OtherOffers/Offer/OfferItem/FareDetail/Price/TotalAmount[CurCode]	1	Cur code of total amount of all segments of a single Pax type
OtherOffers/Offer/OfferItem/OfferItemID	1	ID of the offer item
OtherOffers/Offer/OfferItem/Price/	1	Price details of the ticket
OtherOffers/Offer/OfferItem/Price/EquivAmount	1	Equivalent amount of the ticket
OtherOffers/Offer/OfferItem/Price/EquivAmount[CurCode]	1	Cur code of the price of the ticket
OtherOffers/Offer/OfferItem/Price/TaxSummary/	1	Tax summary of the price of the ticket
OtherOffers/Offer/OfferItem/Price/TaxSummary/TotalTaxAmount	1	Tax amount of the price of the ticket
OtherOffers/Offer/OfferItem/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of the price of the ticket
OtherOffers/Offer/OfferItem/Price/TotalAmount	1	Price of the ticket
OtherOffers/Offer/OfferItem/Price/TotalAmount[CurCode]	1	Cur code of the price of the ticket
OtherOffers/Offer/OfferItem/Service/	1..N	Service details of offer item
OtherOffers/Offer/OfferItem/Service/OfferServiceAssociation/	1	Service association details
OtherOffers/Offer/OfferItem/Service/OfferServiceAssociation/PaxJourneyRef/	1	Pax Journey References
OtherOffers/Offer/OfferItem/Service/OfferServiceAssociation/PaxJourneyRef/PaxJourneyRefID	1..N	List of PaxJourney ReferenceID(s)

OtherOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/	1	Service definition references
OtherOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/	1	Flight Association Details
OtherOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/PaxJourneyRef/	1	Pax Journey References
OtherOffers/Offer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/PaxJourneyRef/ PaxJourneyRefID	1..N	List of PaxJourney ReferenceID(s)
OtherOffers/Offer/OfferItem/Service/PaxRefID	1..N	List of Pax Reference ID(s)
OtherOffers/Offer/OfferItem/Service/ServiceID	1	Service ID
OtherOffers/Offer/OwnerCode	1	Owner code
OtherOffers/Offer/PenaltyRefID		Penalty RefID(s)
OtherOffers/Offer/PTC_OfferParameters/	1..N	Section to inform if Pax types are priced as requested.
OtherOffers/Offer/PTC_OfferParameters/PaxRefID	1..N	Pax RefID(s)
OtherOffers/Offer/PTC_OfferParameters/PTC_PricedCode	1	Priced Pax code
OtherOffers/Offer/PTC_OfferParameters/PTC_RequestedCode	1	Requested Pax code
PricedOffer/	1	Inbound Offer
PricedOffer/BaggageAssociations/	1..N	Baggage associations details of an offer
PricedOffer/BaggageAssociations/BaggageAllowanceRefID	1..N	Reference ID of baggage associations
PricedOffer/BaggageAssociations/OfferFlightAssociations/	1	Flight Segments
PricedOffer/BaggageAssociations/OfferFlightAssociations/PaxSegmentReferences/	1	Segment details
PricedOffer/BaggageAssociations/OfferFlightAssociations/PaxSegmentReferences/PaxSegmentRefID	1..N	Reference ID of segment
PricedOffer/BaggageAssociations/PaxRefID	1..N	ID of Pax reference
PricedOffer/JourneyOverview/	1	Journey Overview
PricedOffer/JourneyOverview/JourneyPriceClass/	1..N	Price class details of journey
PricedOffer/JourneyOverview/JourneyPriceClass/PaxJourneyRefID	1	Reference ID of Pax journey
PricedOffer/JourneyOverview/JourneyPriceClass/PriceClassRefID	1	Reference ID of price class
PricedOffer/OfferID	1	ID of offer
PricedOffer/OfferItem/	1	Offer item details
PricedOffer/OfferItem/FareDetail/	1..N	Fare details for every passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/	1..N	Fare details for every segment of a passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/NegotiatedCode	1	Fare information (70J for public or 758 for private)
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions	1..N	Cancel restrictions for every segment of a passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/AllowedModificationInd	1	Flags if cancellation is allowed
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/DescText	1	Cancellation rule description
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/Fee	1	Penalty Fee details
PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/Fee/Amount	1	Amount of penalty

PricedOffer/OfferItem/FareDetail/FareComponent/CancelRestrictions/JourneyStageCode	1	Stage Codes (Ex: After Departure, Before Departure etc..)
PricedOffer/OfferItem/FareDetail/FareComponent/ChangeRestrictions	1..N	Change restrictions for every segment of a passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/AllowedModificationInd	1	Flags if change is allowed
PricedOffer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/DescText	1	Change rule description
PricedOffer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/Fee	1	Penalty Fee details
PricedOffer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/Fee/Amount	1	Amount of penalty
PricedOffer/OfferItem/FareDetail/FareComponent/ChangeRestrictions/JourneyStageCode	1	Stage Codes (Ex: After Departure, Before Departure etc..)
PricedOffer/OfferItem/FareDetail/FareComponent/PaxSegmentRefID	1..N	Reference ID of Pax segment
PricedOffer/OfferItem/FareDetail/FareComponent/Price/	1	Price details of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/EquivAmount	1	Equivalent amount of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/EquivAmount[CurCode]	1	Cur code of equivalent amount of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/	1	Tax details of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/TotalTaxAmount	1	Total tax of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/TotalAmount	1	Total amount of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/Price/TotalAmount[CurCode]	1	Cur code of total amount of a segment for a single passenger type
PricedOffer/OfferItem/FareDetail/FareComponent/RBD/	1	RBD details
PricedOffer/OfferItem/FareDetail/FareComponent/RBD/RBD_Code	1	RBD code
PricedOffer/OfferItem/FareDetail/PaxRefID	1..N	ID of Pax reference
PricedOffer/OfferItem/FareDetail/Price/	1	Price of sum of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/EquivAmount	1	Equivalent amount of price of sum of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/EquivAmount[CurCode]	1	Cur code of equivalent amount of price of sum of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/	1	Tax details of sum of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/	1..N	Tax breakdown
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/Amount	1	Amount of specified tax
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/TaxCode	1	Code of specified tax
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/TaxName	1	Name of specified tax
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/Amount	1	Total tax of sum of all segments of a single Pax type
PricedOffer/OfferItem/FareDetail/Price/TaxSummary/Tax/Amount[CurCode]	1	Cur code of tax amount of sum of all segments of a single Pax type

PricedOffer/OfferItem/OfferItemID	1	PricedOffer/OfferID + "-1"
PricedOffer/OfferItem/Price/	1	Price details of the ticket
PricedOffer/OfferItem/Price/EquivAmount	1	Equivalent amount of the ticket
PricedOffer/OfferItem/Price/EquivAmount[CurCode]	1	Cur code of the price of the ticket
PricedOffer/OfferItem/Price/TaxSummary/	1	Tax summary of the price of the ticket
PricedOffer/OfferItem/Price/TaxSummary/TotalTaxAmount	1	Tax amount of the price of the ticket
PricedOffer/OfferItem/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Cur code of tax amount of the price of the ticket
PricedOffer/OfferItem/Price/TotalAmount	1	Price of the ticket
PricedOffer/OfferItem/Price/TotalAmount[CurCode]	1	Cur code of the price of the ticket
PricedOffer/OfferItem/Service/	1..N	Service details of offer item
PricedOffer/OfferItem/Service/OfferServiceAssociation/	1	Service association details
PricedOffer/OfferItem/Service/OfferServiceAssociation/PaxJourneyRef/	1	Pax Journey References
PricedOffer/OfferItem/Service/OfferServiceAssociation/PaxJourneyRef/PaxJourneyRefID	1..N	List of PaxJourney ReferenceID(s)
PricedOffer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/	1	Service definition references
PricedOffer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/	1	Flight Association Details
PricedOffer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/PaxJourneyRef/	1	Pax Journey References
PricedOffer/OfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/OfferFlightAssociations/PaxJourneyRef/ PaxJourneyRefID	1..N	List of PaxJourney ReferenceID(s)
PricedOffer/OfferItem/Service/PaxRefID	1..N	List of Pax Reference ID(s)
PricedOffer/OfferItem/Service/ServiceID	1	Service ID
PricedOffer/OwnerCode	1	Owner code

Special Considerations

1. Offers under OtherOffer section are the upsell offers of the selected preference.
2. Offer under PricedOffer section contains the price of the flight(s) that are contained in the requested offer.
3. Offers under OtherOffer section and offer under PricedOffer section contain detailed fare rules and tax breakdowns.
4. Each offer under OtherOffer section and offer under PricedOffer section will be considered and stored as a priced offer which will be an input for order-create method.
5. If the prior shop-bestprice query was for reshop purposes then ResponseParameters/ReasonCode should be set as "112" as it is in the shop request. Otherwise SHOPPING_OFFER_NOT_FOUND error is returned. If ResponseParameters/ReasonCode is set as 112 in the request, to get the offers for reshop purpose, all offers will be received with all price information removed.

ERRORS

Code	Error Key	Description
NDC-4191	SHOPPING_OFFER_NOT_FOUND	Shop offer not found (does not exist, expired, or consumed).
NDC-4076	EMPTY_OFFER_REF_ID	OfferRefID can not be empty.
NDC-4111	UNMATCHED_OFFER_ITEM_REF_ID	OfferItemRefID is not identical with OfferRefID.
NDC-4079	EMPTY_OFFER_ITEM_REF_ID	OfferItemRefID can not be empty.
NDC-4193	INVALID_OFFER_REF_ID	Offer Ref ID is not valid.
NDC-4112	UNMATCHED_PAX_REF_ID	Pax ID is not found.
NDC-4113	MISSING_PAX_REF_ID	One or more Pax IDs are missing.
NDC-4084	EMPTY_PAX_ID	One or more Pax IDs are empty.
NDC-4080	EMPTY_PAX_REF_LIST	There are no Pax IDs.
NDC-4081	MULTIPLE_REFERENCE_IDENTICAL_PAX	Pax IDs can not be the same.

NDC-4077	EMPTY_OWNER_CODE	Owner code must be entered.
NDC-4194	EMPTY_PRICED_OFFER	PricedOffer section must be sent.
NDC-4160	EMPTY_SELECTED_OFFER_LIST	SelectedOfferList section must be sent.

3.4. LTT Monitoring

For TK NDC APIs, LTT (Look-to-Ticket) ratios will be continuously monitored. Based on the agreed-upon expected/maximum LTTs for Offer Flow 1 and Offer Flow 2; for each flow utilized, two levels of alarms will be produced and a notice will be sent to integrators through e-mail addresses present in TK Agency Management Platform.

There are currently two levels of alarms, ALERT and WARNING.

For ALERTs an e-mail similar to below will be sent:

Subject: Look-to-Ticket Alert threshold exceeded

Body:

Look-to-Ticket Alert threshold exceeded for 12345678, AgencyABC | ENV:live | ENDPOINT:Shop

Event Date/Time	Environment	Shopping Endpoint	Accumulation Period(Hours)	Alert Threshold	Observed Value	Number of Looks	Number of Ticketed Orders
19-02-2024 15:25	live	Shop	24	10	11	11	1

For WARNINGs an e-mail similar to below will be sent:

Subject: Look-to-Ticket Warning threshold exceeded

Body:

Look-to-Ticket Warning threshold exceeded for 12345678, AgencyABC | ENV:live | ENDPOINT:Shop

Your access to Shop may be blocked if over-consumption continues.

Event Date/Time	Environment	Shopping Endpoint	Accumulation Period (Hours)	Warning Threshold	Observed Value	Number of Looks	Number of Ticketed Orders
19-02-2024 15:25	live	Shop	24	20	21	21	1

Event Date/Time:
The time at which threshold excess has been detected.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Environment:
The environment where the excess is detected. test, live

Shopping Endpoint:
The shopping endpoint for which the calculation is performed. Possible values are shop and shop-bestprice

Accumulation Period (Hours):
Number of hours taken in the account for the calculation. Current setup has 3 different calculation periods; 24hrs (daily), 168hrs (weekly), 720hrs (monthly).

Warning Threshold:
The threshold value exceeding of which triggers an alert.

Observed Value:
Observed LTT count for the given “Shopping Endpoint” and “Accumulation Period”.

Number of Looks:
Number of looks observed for the given “Accumulation Period”.

Number of Ticketed Orders:
Number of orders ticketed through order-pay for the given “Accumulation Period”.

The LTT will be calculated based on the below formula for transactions processed within the “Accumulation Period”.,

$$\frac{\text{Number of requests received on "Shopping Endpoint"}}{\text{(for orders created through offers of "Shopping Endpoint")}}$$
$$\text{Number of orders paid} - \text{Number of orders voided}$$

75dab313-8eba-49d6-b5ee-d105b8169fdb

CONFIDENTIAL & RESTRICTED

4. Order API


4.1. Booking API

4.1.1. order-create

Overview

Purpose of order-create is to create an NDC order based on a selected PricedOffer and provided passenger details in accordance with the selected PricedOffer.

Operation Name	order-create
Operation URL	$NDCAPI_BASEURL$/order-create
NDC message input	IATA_OrderCreateRQ
NDC message output	IATA_OrderViewRS
Main function	Creates an NDC Order based on selected offers and passenger information.
Main inputs	A price-quoted air offer that includes the selected itinerary, contact info and profile details of passengers for which order will be created.
Main outputs	Itinerary and passenger details of the created order with fare information.
Prerequisites	A PricedOffer generated through a call to price-detail
To be followed by	order-pay if directly proceeding to payment order-reserve if NDC order is intended to be reserved flight-quote if NDC order does not include a fare or price guarantee time limit is expired

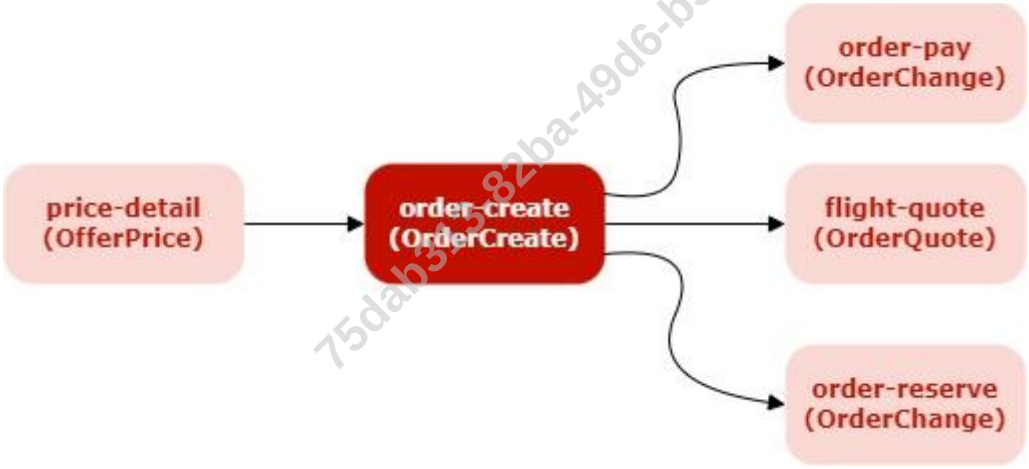

Limitations

1. Creation of NDC Orders through specific flight specification is not supported, order can be created only by referencing a previously generated NDC Offer.
2. All limitations for the Offer generation applies as only generated NDC offer can be converted to an order.
3. Payment is not accepted within order-create context, for payment order-pay can be used.
4. Held booking (reservation only) is not supported within the context of order-create, for reservation of orders, order-reserve can be used.
5. Group bookings are not supported.
6. Loyalty redemptions are not supported.

Supported Functionalities

1. Loyalty numbers can be provided as part of order creation process.

Input Parameters

Parameter	Description	Mandatory/ Repetition (#)	Type/ Example
/CreateOrder/		YES / 1	Complex
/CreateOrder/ AcceptSelectedQuotedOfferList/		YES / 1	Complex
/CreateOrder/ AcceptSelectedQuotedOfferList/ SelectedPricedOffer/α	Details in reference with a previously generated PricedOffer returned in an OfferPriceRS	YES / 1	Complex
α/OfferRefID	RefID of the PricedOffer	YES / 1	String / 01AD..
α/OwnerCode	OwnerCode of the Offer	YES / 1	String / TK
α/SelectedOfferItem/	One expected for each PricedOffer/OfferItem	YES / 1	Complex
α/SelectedOfferItem/OfferItemRefID	RefID of the selected offer item	YES / 1	String / AB08..
α/SelectedOfferItem/PaxRefID	RefIDs of **all** PAXes present in the original PricedOffer/OfferItem is expected.	YES / 1..N	String / Pax1
DataLists/	All passenger and contact information	YES / 1	Complex
DataLists/ContactInfoList/		YES / 1	Complex
DataLists/ContactInfoList/ContactInfo/β		YES / 1..N	Complex
β/ContactInfoID	An ID which can be referenced within PaxList	YES / 1	String / CNTINFO
β/EmailAddress/		NO / 0..N	Complex
β/EmailAddress/EmailAddressText	Email address of the contact person	YES / 1	String / ab@c.com
β/Individual/		YES / 1	Complex
β/Individual/GivenName	Name of the contact person	YES / 1	String / Ali
β/Individual/Surname	Surname of the contact person Should not include any spaces	YES / 1	String / Can
β/Phone/	Phone number of the contact person	YES / 1..N	Complex
β/Phone/AreaCodeNumber	Area code for the phone	NO / 0..1	Integer / 532
β/Phone/ContactTypeText	M = Mobile Phone B = Business H = Home or Hotel T = Travel Agent	YES / 1	String / 7
β/Phone/CountryDialingCode	Country code for the phone	YES / 1	Integer / 90
β/Phone/ExtensionNumber	Extension number (will be sent if ContactTypeText differ from M)	NO / 0..1	Integer / 1212
β/Phone/PhoneNumber	Phone number	YES / 1	Integer / 1113434
β/PostalAddress/	Address details	YES / 1..N	Complex
β/PostalAddress/ContactTypeText	Type of the address	NO / 0..1	String / A,R or D
β/PostalAddress/CountryCode	Country code of the contact person	YES / 1	String / TR
β/PostalAddress/StreetText	Street information in the postal address Will be processed only if “ContactTypeText” = “D” or “R”	NO / 0..1	ComplexString/ Cumhuriyet or 51. St.
β/PostalAddress/CityName	Name of city information in the postal address	NO /0..1	String/Istanbul

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Parameter	Description	Mandatory/ Repetition (#)	Type/ Example
	Will be processed only if “ContactTypeText” = “D” or “R”		
β/PostalAddress/CountrySubDivisionName	Region information in the postal address Will be processed only if “ContactTypeText” = “D” or “R”	NO / 0..1	String/Anadolu or Marmara
β/PostalAddress/PostalCode	Postal code in the postal address Will be processed only if “ContactTypeText” = “D” or “R”	NO / 0..1	Integer/34843
β/OtherAddress	Company details	NO / 0..1	Complex
β/OtherAddress/ContactTypeText	Company Name	YES / 1	String /THY
β/OtherAddress/OtherAddressText	Tax Number	YES / 1	String / 12345
DataLists/PaxList/	List of Passengers	YES / 1	Complex
DataLists/PaxList/Pax/	One Pax/ for each expected for each distinct **α/**SelectedOfferItem/PaxRefID	YES / 1..N	Complex
DataLists/PaxList/Pax/PaxID	Distinct id in **α/**SelectedOfferItem/PaxRefID	YES / 1	String / Pax1
DataLists/PaxList/Pax/PaxRefID	Used to indicate the ref id of any infant associated with this PAX	NO / 0..1	String / Pax3
DataLists/PaxList/Pax/PTC	Type of the Pax, can be any supported NDC Pax Type (i.e. NDC_PAX_TYPES [ndcPaxCode]) Must be same as the type PricedOffer is generated for.	YES / 1	String / ADT
DataLists/PaxList/Pax/ContactInfoRefID	Must be same as **β/**ContactInfoID, if this value is provided for a PAX, that PAX is the contact person. This parameter can be provided for at most one passenger.	NO / 0..1	String / Pax1_CNT
DataLists/PaxList/Pax/IdentityDoc/δ		NO / 0..1	
δ/CitizenshipCountryCode	Citizenship country of the passenger	NO / 0..1	String / TR
δ/ExpiryDate	Expiry date of the document	NO / 0..1	Date / 2025-02-15
δ/IdentityDocID	National ID number for National IDs, passport number for passports.	YES / 1	String / AO112324
δ/IdentityDocTypeCode	Only two values accepted, PT for passport,709 for National ID, according to “PADIS 7365 Processing indicator, coded”. 709 can be used only for citizens of Türkiye	YES / 1	String / PT or 709
δ/IssueDate	Issue date of identityDoc	NO / 0..1	Date / 2018-02-15
δ/IssuingCountryCode	Issuing country for the identityDoc	NO / 0..1	String / TR
δ/ResidenceCountryCode	Residence country of the passenger	NO / 0..1	String / TR
δ/Surname	Surname of the owner of the identity doc, this surname must match **θ/**Surname	YES / 1	String / YILMAZ
DataLists/PaxList/Pax/Individual/θ		YES / 1	
θ/Birthdate	Birthdate of the passenger	YES / 1	Date / 2012-10-11

CONFIDENTIAL & RESTRICTED

Parameter	Description	Mandatory/ Repetition (#)	Type/ Example
θ/GenderCode	Gender code of the Pax according to "PADIS Codeset 6353", Can either be M: Male, F: Female	YES / 1	String / M or F
θ/GivenName	Name of the passenger	YES / 1	String / Ali
θ/Surname	Surname of the passenger	YES / 1	String / Can
θ/TitleName	Title of the passenger, possible values MS : Female passenger, not specifying marriage status MRS : Married woman of age 12+ MR : Male of age 12+ MSTR : Male of ages 0-12 MISS : Female of ages 0-12	YES / 1	String / MS
DataLists/PaxList/Pax/LoyaltyProgramAccount/AccountNumber	Loyalty account number for the passenger Nine digits number expected	NO / 0..1	Integer / 123456789
DataLists/PaxList/Pax/LoyaltyProgramAccount/LoyaltyProgram/ProgramCode	Program prefix of the loyalty number	NO / 0..1	String / TK
DataLists/PaxList/Pax/LoyaltyProgramAccount/LoyaltyProgram/Carrier/AirlineDesigCode	Airline code of the owner of the loyalty program	NO / 0..1	String / TK
ResponseParameters/LangUsage/LangUsageText	Always expected to be "ContactInfoLangCode" If this field is not provided, SMS contact language will be assumed to be EN (English)	NO / 0..1	String / ContactInfoLangCode
ResponseParameters/LangUsage/LangCode	Language code (according to ISO 639-1) for possible email/SMS notifications to be sent to the DataLists/ContactInfoList/ContactInfo/Phone	NO / 0..1	String / TR

Output Parameters

In response to the OrderCreateRQ, order-create returns an OrderViewRS with the applicable fields described in 0 Output Parameters for order-retrieve.

Special Considerations

1. After a successful order-create operation, a short PaymentTimelimitDateTime (default of **15 minutes**) is given. For direct payment flows, the order is expected to be paid for within that time frame.
2. If during order creation non-TK flight segments were rejected or could not be confirmed, the following errors are returned respectively and order creation is not completed.
   NON_TK_SEGMENT_REJECTED
   NON_TK_SEGMENT_NOT_CONFIRMED
3. The OrderViewRS will include PriceGuaranteeTimeLimitDateTime later than now (default of **15 minutes**). The order can be carried to order-pay with the quoted price until the returned PriceGuaranteeTimeLimitDateTime.
4. STRICTLY_ONE_SELECTED_PRICED_OFFER_REQUIRED error is returned if more than one SelectedPricedOffer is received or no SelectedPricedOffer object was sent.
5. INVALID_OWNER_CODE error is returned if for any ~/SelectedPricedOffer/OwnerCode is not TK.
6. UNAUTHORIZED_OFFER error is returned if the referenced offer was not generated for the client making the request.
7. There must be exactly one SelectedOfferItem for each PricedOffer/OfferItem where OfferItemRefID = OfferItemID:
   a. MISSING_OFFER_ITEM_REF_ID error is returned if some PricedOffer/OfferItem not found in SelectedOfferItem.
   b. UNMATCHED_OFFER_ITEM_REF_ID error is returned if some SelectedOfferItem not found in PricedOffer/OfferItem.

8. STRICTLY_ONE_SELECTED_PRICED_OFFER_ITEM_ REQUIRED error is returned if more than one SelectedOfferItem is received or no SelectedOfferItem object is sent.
9. At least one mobile phone and one email are mandatory. If one of them or both are not sent in OrderCreateRQ/../ContactInfo, AT_LEAST_ONE_MOBILEPHONE_ONE_EMAIL_REQUIRED error is returned.
10. ACCOMPANIED_PASSENGER_MUST_BE_INFANT error is returned if PaxType of any DataLists/PaxList/Pax/PaxRefID is not of type infant.
11. MORE_THAN_ONE_ADULT_ACCOMPANY_THE_SAME_INFANT error is returned if more than one adult passenger indicated to be associated with the same infant passenger.
12. For text fields being incorporated into the order, only characters in English alphabet are accepted.
13. Name + Surname for the passengers shall not exceed 48 characters.
14. Min of two characters are expected for Name and Surname fields.
15. CHD pax age must be between 2-11 **on first flight date**, in return flight could be ADT
16. INF pax age must be between 0-1 on all flight dates, inlcuding return flights
17. A ContactInfo can contain a minimum of 1 and a maximum of 3 PostalAddress object. Each PostalAddress under the same ContactInfo must have a unique ContactTypeText value.
18. Note: ContactTypeText=Null (Null means ContactTypeText is not provided) is considered equivalent to ContactTypeText=A.
19. PostalAddress/ContactTypeText=R is used for “Residence address” and PostalAddress/ContactTypeText=D is used for “Accomadation address”.
    If multiple PostalAddress objects have the same ContactTypeText, AT_MOST_ONE_POSTALADDRESS_FOR_EACH_CONTACT_TYPE error will return.
20. Generic DOCA entry (ContactTypeText=R or ContactTypeText=D without any passenger relate) is not allowed. Otherwise, CONTACTINFOREFID_PSGR_RELATE_IS_MANDATORY error will return.

ERRORS

Code	Error Key	Description
NDC-1080	STRICTLY_ONE_SELECTED_PRICED_OFFER_REQUIRED	Only one priced offer is expected.
NDC-1001	PRICED_OFFER_NOT_FOUND	Offer could not be found or offer time limit has expired.
NDC-1006	MISSING_OFFER_ITEM_REF_ID	OfferItems in referenced objects do not match with OfferItems provided in the request.
NDC-1007	OFFER_ITEMS_DO_NOT_MATCH	OfferItems in referenced objects do not match with OfferItems provided in the request.
NDC-1008	PASSENGER_REFS_DO_NOT_MATCH	PAXes in referenced object do not match with PAXes provided in the request.
NDC-1009	UNREFERENCED_PASSENGER	PAXes in referenced object do not match with PAXes provided in the request.
NDC-1010	INVALID_EMAIL_ADDRESS	E-mail address is not of correct format.
NDC-1344	INVALID_PAX_TYPE	Invalid Pax type encountered.
NDC-1345	MORE_INFANTS_THAN_ADULTS	Number of infants cannot exceed number of adults.
NDC-1347	BIRTHDATE_MANDATORY_FOR_INFANT_CHILD	Birthdate is mandatory for passengers of type infant and children.
NDC-1348	INVALID_AGE_FOR_PAX_TYPE	Invalid age is provided for some passenger types.
NDC-1349	INVALID_AGE_FOR_UNACC_CHILD	Age range not valid for unaccompanied child (7-12).
NDC-1350	MIN_AGE_17_FOR_STUDENT_ADD_INFANT	Student age must be at least 17 to be associated with an infant.
NDC-1351	NO_POSSIBLE_PASSENGER_TO_ASSIGN_INFANT	No passenger can be found to assign infant.
NDC-1352	NAME_SURNAME_TITLE_MAX_LIMIT_EXCEEDED	Max of 48 characters exceeded for name + surname + title.
NDC-1353	NAME_SURNAME_TOO_SHORT	Min of two characters required for name and surname.

NDC-1354	INVALID_NATIONAL_ID	National identity number is not valid.
NDC-1355	MOBILE_PHONE_NUMBER_NOT_VALID	Invalid mobile phone number.
NDC-1356	INVALID_LOYALTY_NUMBER	Loyalty number is not valid.
NDC-1357	LOYALTY_NUMBER_COULD_NOT_BE_VERIFIED	Loyalty number could not be verified.
NDC-1361	OFFER_HAS_BECOME_INVALID	Offer cannot be converted to an order because offer availability has changed.
NDC-1358	FARE_NOT_FOUND	No fare found for requested operation.
NDC-1362	PAXTYPE_NOT_VALID_FOR_NON_TK_FLIGHTS	Some Pax types provided not valid for non-tk flights.
NDC-1363	NO_SUFFICIENT_TIME_BETWEEN_CONNECTIONS	No sufficient time between connecting flights.
NDC-1364	PRICING_INCONSISTENT_ITINERARY_TIMES	Inconsistent itinerary time encountered during pricing.
NDC-1365	PRICING_CONDITIONS_NOT_MET	Pricing cannot be done due to conditions.
NDC-1366	UNAUTHORIZED_OFFER	Not authorized for the selected offer.
NDC-1367	SPECIFIED_PASSENGER_CAN_NOT_BE_CONTACT_PERSON	Specified passenger cannot be contact person.
NDC-1368	INVALID_OWNER_CODE	Ownercode is not valid.
NDC-1371	ACCOMPANIED_PASSENGER_MUST_BE_INFANT	Accompanied passenger must be an infant.
NDC-1372	NOT_VALID_TITLE	Title of the passenger is not valid.
NDC-1374	MORE_THAN_ONE_ADULT_ACCOMPANY_THE_SAME_INFANT	More than one adult passenger cannot accompany the same infant passenger.
NDC-1375	NO_OPERATION_FOR_SELECTED_FLIGHT	Some flights could not be selected as there is no operation for given flight.
NDC-1376	INVALID_PHONE_NUMBER	Phone number is not valid.
NDC-1378	SPECIFIED_PAX_TYPE_IS_WRONG_FOR_SELECTED_AIRLINE	Specified passenger is wrong for selected airline.
NDC-1422	NON_TK_SEGMENT_REJECTED	Non-TK segments have been rejected.
NDC-1423	NON_TK_SEGMENT_NOT_CONFIRMED	Non-TK segments could not be confirmed.
NDC-1424	ONLY_ENGLISH_ALPHABET_LETTERS_EXPECTED	Only English alphabet letters are allowed.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1133	AT_LEAST_ONE_MOBILEPHONE_ONE_EMAIL_REQUIRED	At least one mobile phone and one email are required.
NDC-1098	$CONTACTINFOREFID_PSGR_RELATE_IS_MANDATORY$	ContactInfo should be passenger related if it includes DOCA entries.
NDC-1099	$AT_MOST_ONE_POSTALADDRESS_FOR_EACH_CONTACT_TYPE$	At most one PostalAddress can be provided for each contact type.

OTHER ERRORS

Code	Error Key	Description
NDC-4074	EMPTY_CREATE_ORDER	CreateOrder cannot be empty.
NDC-4076	EMPTY_OFFER_REF_ID	OfferRefID cannot be empty.
NDC-4077	EMPTY_OWNER_CODE	OwnerCode cannot be empty.
NDC-4078	EMPTY_SELECTED_OFFER_ITEM_LIST	SelectedOfferItem cannot be empty.
NDC-4079	EMPTY_OFFER_ITEM_REF_ID	OfferItemRefID cannot be empty.
NDC-4080	EMPTY_PAX_REF_LIST	PaxRef list cannot be empty.
NDC-4081	MULTIPLE_REFERENCE_IDENTICAL_PAX	Same Pax cannot be referenced more than once.
NDC-4082	EMPTY_DATALIST	Datalist cannot be empty.
NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.
NDC-4084	EMPTY_PAX_ID	PaxID cannot be empty.
NDC-4085	EMPTY_PTC	PTC cannot be empty.

NDC-4086	EMPTY_IDENTITY_DOC_LIST	IdentityDocList cannot be empty.
NDC-4087	AT_MOST_ONE_IDENTITY_DOC_ALLOWED	At most one IdentityDoc required per passenger.
NDC-4088	EMPTY_IDENTITY_DOC_ID	IdentityDocID cannot be empty.
NDC-4089	EMPTY_IDENTITY_DOC_TYPE_CODE	IdentityDocTypeCode cannot be empty.
NDC-4090	INVALID_IDENTITY_DOC_TYPE_CODE	Invalid IdenditydocTypeCode
NDC-4091	EMPTY_SURNAME	Surname cannot be empty.
NDC-4092	INVALID_PASSENGER_INDIVIDUAL	Individual does not contain all required sub parameters.
NDC-4093	EMPTY_INDIVIDUAL_DATA	Individual subdata cannot be empty.
NDC-4036	INDIVIDUAL_EMPTY_NAME	Individual name cannot be empty.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Individual surname cannot be empty.
NDC-4094	EMPTY_ACCOUNT_NUMBER	AccountNumber cannot be empty.
NDC-4095	EMPTY_LOYALTY_PROGRAM	LoyaltyProgram cannot be empty.
NDC-4096	EMPTY_CARRIER	Carries cannot be empty.
NDC-4097	EMPTY_AIRLINE_DESIG_CODE	AirlineDesigCode cannot be empty.
NDC-4098	EMPTY_PROGRAM_CODE	ProgramCode cannot be empty.
NDC-4034	EMPTY_CONTACT_INFO	ContactInfo cannot be empty.
NDC-4099	EMPTY_CONTACT_INFO_ID	ContactInfoID cannot be empty.
NDC-4035	EMPTY_EMAIL_ADDRESS	EmailAddress cannot be empty.
NDC-4100	EMPTY_INDIVIDUAL	Individual cannot be empty.
NDC-4101	EMPTY_PHONE_LIST	PhoneList cannot be empty.
NDC-4102	EMPTY_AREA_CODE_NUMBER	AreaCodeNumber cannot be empty.
NDC-4115	EMPTY_CONTACT_TYPE_TEXT	ContactType text cannot be empty.
NDC-4103	INVALID_CONTACT_TYPE	ContactType is not of valid type.
NDC-4104	EMPTY_COUNTRY_DIALING_CODE	CountryDialingCode cannot be empty.
NDC-4105	EMPTY_PHONE_NUMBER	PhoneNumber cannot be empty.
NDC-4106	EMPTY_POSTAL_ADDRESS	PostalAddress cannot be empty.
NDC-4107	EMPTY_COUNTRY_CODE	CountryCode cannot be empty.
NDC-4108	UNMATCHED_IDENTITY_DOC_SURNAME	IdentityDoc surname does not match.
NDC-4109	MULTIPLE_CONTACT_INFO_REFERENCE	ContactInfoRef cannot be multiple.
NDC-4110	MISSING_CONTACT_INFO_REFERENCE	ContactInfoRef is expected.
NDC-4021	PRICED_OFFER_ALREADY_ORDERED	Selected priced offer is already consumed.
NDC-4111	UNMATCHED_OFFER_ITEM_REF_ID	OfferItemRef cannot be found in Offer.
NDC-4112	UNMATCHED_PAX_REF_ID	PaxRefID cannot be found in Offer.
NDC-4113	MISSING_PAX_REF_ID	PaxRefID is required.
NDC-4114	UNMATCHED_PTC	PTC cannot be found in offer.
NDC-4115	EMPTY_CONTACT_TYPE_TEXT	If the contact type text field is not entered, an error is received.
NDC-4296	EMPTY_ATYPE_POSTAL_ADRESS	If a type A postal address is not entered, an error is received.
NDC-4297	AT_MOST_3_POSTAL_ADDRESS_ALLOWED	A maximum of 3 postal addresses can be entered into a single contact information object.
NDC-4298	AT_MOST_ONE_ATYPE_POSTAL_ADDRESS_ALLOWED	A maximum of 1 type A mail address can be entered in a single contact information object.

NDC-4305	EMPTY_CONTACTTYPETEXT	OtherAddress/ContactTypeText cannot be empty.
NDC-4306	EMPTY_OTHERADDRESSTEXT	OtherAddress/OtherAddressText cannot be empty.

WARNINGS

No Warnings.

75dab313-82ba-49d6-b5ee-d105b8469fdb

4.1.2. flight-quote

Overview

Purpose of flight-quote is to perform fare quotation of the flight order items within the order. In most cases, fare quotation for flight order items is performed within order-create context. Flight-quote is required before payment only if

1. The created order has turned into a held order through order-reserve which updates the PriceGuaranteeTimelimitDateTime for all flight order items and fares must be re-calculated in case that price time limit has already been over.
2. The created order does not have fares for flight order items due to the fact that there exist not-yet-confirmed flight segments.

A call to flight-quote is expected to be followed by an immediate (within the timeframe of PriceGuaranteeTimelimitDateTime) order-pay request.

Within the response of flight-quote, fare details are provided and fare details of related flight order items within the NDC order are also updated.

Operation Name	flight-quote
Operation URL	$NDCAPI_BASEURL$/flight-quote
NDC message input	IATA_OrderQuoteRQ
NDC message output	IATA_OrderReshopRS
Main function	Performs fare quotation for flight order items to carry them to payment
Main inputs	Order to be quoted
Main outputs	Order with updated price guarantee time limit
Prerequisites	An active unpaid NDC order
To be followed by	order-pay



Limitations

1. Orders can be flight-quoted only before order is paid.

Supported Functionalities

1. Quotation with an account code is supported.

Input Parameters

Fields under IATA_OrderQuoteRQ/Payload/ expected to be provided in flight-quote request are:

Parameter	Description	Mandatory/ Repetition (#)	Type / Example
RepricedOrder/	Order details	YES / 1	Complex
RepricedOrder/OrderID	OrderID of the Order for which flight order items to be quoted	YES / 1	String / AD32DEFR

RepricedOrder/OwnerCode	OwnerCode of the owner of the Order	YES / 1	String / TK
PaxList/	Pax information	YES / 1	Complex
PaxList/PaxID	Not processed, required only per xsd	YES / 1	String / Pax1
PaxList/Individual/Surname	Surname of any Pax in the Order	YES / 1	String / YILMAZ
OrderCriteria/ProgramCriteria/ ProgramOwner/Carrier/AirlineDesigCode	Provided if account code is to be used	NO / 1	String / TK
OrderCriteria/ProgramCriteria/ ProgramAccount/AccountID		NO / 1	String / CCC123324

Output Parameters

In response to the OrderQuoteRQ, flight-quote returns an OrderReshopRS with price details (if exists) of the original flight order item(s) and their new up-to-date price details.
Fields under IATA_OrderReshopRS/Response/ to be returned are:

Parameter	#	Description
Order/	1	Order details
Order/CreationDateTime	1	CreationDateTime of NDC Order
Order/OrderID	1	OrderID of the Order
Order/OwnerCode	1	OwnerCode of the owner of the Order, Ex: TK
Order/StatusCode	1	StatusCode of the Order
ReshopResults/	1	ReshopResults details
ReshopResults/RepricedOffer/	1	Details of the repricing of the flights
ReshopResults/RepricedOffer/OfferRefID	1	OfferID of the PricedOffer used to create the original flight order items. Client is not expected to make use of this info. Provided only because mandatory within 21.3
ReshopResults/RepricedOffer/OwnerCode	1	OwnerCode of the owner of the PricedFlightOffer
ReshopResults/RepricedOffer/RepricedOfferItem $^{\alpha}$	1..N	Repeated for each (requoted) flight order items (1 per PAX)
α/PaymentTimeLimit/	1	Same payment time limit as the original order item will be returned for the updated prices.
α/PaymentTimeLimit/PaymentTimeLimitDate	1	
α/PaymentTimeLimit/PaymentTimeLimitDate/ PaymentTimeLimitDateTime	1	
α/PriceGuaranteeTimeLimitDateTime	1	The latest time the given price details are valid for payment.
α/FareDetail/	1	New price details for the passenger within the original order item
α/FareDetail/AccountCode	0..1	Account code if provided in the input
α/FareDetail/FareComponent $^{\pi}$	1..N	Complex type to fare detail
π/PaxSegmentRefID	1..N	Segment reference id of the associated segment.
π/PriceClassRefID	1	Reference id of the applicable price class.
α/FareDetail/TourCode	0..1	Tour code information
α/FareDetail/PaxRefID	1	RefID of the passenger this price applies to
α/FareDetail/Price $^{\theta}$	1	Price breakdown for one passenger
θ/EquivAmount	1	Equivalent amount for the base fare
θ/EquivAmount[CurrCode]	1	Equivalent currency code
θ/TaxSummary/	1	Breakdown of tax amounts
θ/TaxSummary/Tax/	1..N	One Tax section for each distinct TaxCode
θ/TaxSummary/Tax/Amount	1	Amount for the Tax
θ/TaxSummary/Tax/Amount[CurrCode]	1	Currency of the Tax

θ/TaxSummary/Tax/TaxCode	1	Code of the Tax
θ/Price/TaxSummary/Tax/TaxName	1	Name of the Tax
θ/Price/TaxSummary/TotalTaxAmount	1	Total tax amount over all TaxCodes
θ/Price/TaxSummary/TotalTaxAmount[CurrCode]	1	Currency of the Taxes
θ/Price/TotalAmount	1	Sum of EquivAmount + TotalTaxAmount
θ/Price/TotalAmount[Curr]	1	Currency for the TotalPrice
α/TotalPrice/		TotalPrice per ReshopResults/RepricedOffer/RepricedOfferItem
α/TotalPrice/TotalAmount	1	θ/Price/TotalAmount as there is only one FareDetail
α/TotalPrice/TotalAmount[Curr]	1	Same as θ/Price/TotalAmount[Curr]
α/OriginalOrderItem/	1	Details of the original order item
α/OriginalOrderItem/OrderItemRefID	1	ID of the original order item
α/OriginalOrderItem/FareDetail/	0..1	Complex type to provide price details for original order item. Constructed only if there was fare in original order item.
α/OriginalOrderItem/FareDetail/AccountCode	0..1	Account code of the original order item if exists ../OrderItem/FareDetail/AccountCode
α/OriginalOrderItem/FareDetail/FareComponent[β]	1..N	Complex type to fare detail
β/PaxSegmentRefID	1..N	Segment reference id of the associated segment.
β/PriceClassRefID	1	Reference id of the applicable price class.
α/OriginalOrderItem/FareDetail/TourCode	0..1	Tour code of the original order item if exists
α/OriginalOrderItem/FareDetail/PaxRefID	1	RefID of the passenger this price applies to in original order item
α/OriginalOrderItem/FareDetail/Price [μ]	1	Price breakdown for the Pax in the original order item
μ/EquivAmount	1	Equivalent amount for the base fare
μ/EquivAmount[CurrCode]	1	Equivalent currency code
μ/TaxSummary/	1	Breakdown of tax amounts
μ/TaxSummary/Tax/	1..N	One Tax section for each distinct TaxCode
μ/TaxSummary/Tax/Amount	1	Amount for the Tax
μ/TaxSummary/Tax/Amount[CurrCode]	1	Currency of the Tax
μ/TaxSummary/Tax/TaxCode	1	Code of the Tax
μ/TaxSummary/Tax/TaxName	1	Name of the Tax
μ/TaxSummary/TotalTaxAmount	1	Total tax amount over all TaxCodes
μ/TaxSummary/TotalTaxAmount[CurCode]	1	Client specific CurrencyCode
μ/TotalAmount	1	Sum of EquivAmount + TotalTaxAmount
μ/TotalAmount[Curr]	1	Currency for the TotalPrice
α/OriginalOrderItem/TotalPrice/	0..1	Complex object to provide total price for original order item Constructed only if there was fare in original order item. If no fare available for the original order item null object will be returned as <TotalPrice/>
α/OriginalOrderItem/TotalPrice/TotalAmount	0..1	Same as μ/TotalAmount
α/OriginalOrderItem/TotalPrice/TotalAmount[Curr]	0..1	Same as μ/TotalAmount[Curr]
ReshopResults/RepricedOffer/TotalPrice [δ]	1	Total updated price details for ReshopResults/RepricedOffer calculated over all ReshopResults/RepricedOffer/RepricedOfferItem Summation of all values within one or more ReshopResults/RepricedOffer/RepricedOfferItem/FareDetail/Price [μ]
δ/EquivAmount	1	
δ/EquivAmount[CurrCode]	1	
δ/TaxSummary/	1	
δ/TaxSummary/Tax/	1	
δ/TaxSummary/Tax/Amount	1	

δ/TaxSummary/Tax/Amount[CurrCode]	1
δ/TaxSummary/Tax/TaxCode	1
δ/TaxSummary/Tax/TaxName	1
δ/TaxSummary/TotalTaxAmount	1
δ/TaxSummary/TotalTaxAmount[CurrCode]	1
δ/TotalAmount	1
δ/TotalAmount[Curr]	1

Special Considerations

1. Price quotation with account code is supported whether or not the order (also the PricedOffer) has an account code associated with it. If the order was created by using a PricedOffer having an account code but no account code is provided as part of flight-quote request ORDER_WITH_ACCOUNTID_QUOTED_WITHOUT_ACCOUNTID_WARNING is returned. If the order has an account code associated with it, but within flight-quote different account code is provided, then ORDER_WITH_ACCOUNTID_QUOTED_WITH_DIFFERENT_ACCOUNTID_WARNING is returned.

2. Clients may choose to store the account code used during offer generation or get it from OrderViewRS returned to them (/IATA_OrderViewRS/Response/Order/OrderItem/FareDetail/AccountCode)

3. In case there is already a fare in the order, the new price details could be the same as the original flight order items.

4. Up-to-date fare details returned under RepricedOfferItem for each flight order item are also used to update the price details of flight order items within the order. The definitive amount to be paid that is expected to be passed onto order-pay must match with the price information returned within flight-quote.

5. Although an offer is generated as part of the flight-quote response, the generated offer id is not expected to be provided as part of a related order-pay request, instead reference to the flight order items will be sufficient (as flight order item price details are also updated as per 4).

6. ORDER_WITH_ACCOUNTID_QUOTED_WITHOUT_ACCOUNTID_WARNING is returned if an account code was provided during order-create but no account code was provided during flight-quote.

7. ORDER_WITH_ACCOUNTID_QUOTED_WITH_DIFFERENT_ACCOUNTID_WARNING is returned if an account code was provided during order-create but a different account code was provided during flight-quote.

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-1121	ONLY_CREATED_OR_RESERVED_ORDER_CAN_BE_QUOTED	Flight quote is allowed for orders in created or reserved state.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-1122	CONTAINS_NON_FLYABLE_SEGMENTS	Flight segment status not suitable for the operation.
NDC-1361	OFFER_HAS_BECOME_INVALID	The selected offer is not available. Please submit a new AirShopping request.
NDC-1358	FARE_NOT_FOUND	No fare found for requested operation.
NDC-1362	PAXTYPE_NOT_VALID_FOR_NON_TK_FLIGHTS	Some Pax types provided not valid for non-tk flights.
NDC-1363	NO_SUFFICIENT_TIME_BETWEEN_CONNECTIONS	No sufficient time between connecting flights.
NDC-1364	PRICING_INCONSISTENT_ITINERARY_TIMES	Inconsistent itinerary time encountered during pricing.
NDC-1365	PRICING_CONDITIONS_NOT_MET	Pricing cannot be done due to conditions.
NDC-4058	NO_FLIGHT_ORDER_ITEM_FOUND	No flight order items exist.
NDC-1368	INVALID_OWNER_CODE	Ownercode is not valid.

NDC-1204	$ORDER_IS_COMPLETED$	Order is completed. No further action can be taken on the order other than retrieval.
NDC-4999	$ORDER_IS_LOCKED_BY_ANOTHER_OPERATION$	Order is locked by another operation.
NDC-1427	$INCOMPATIBLE_ITIN_FARE_PORTS$	Incompatible itinerary for fare ports
NDC-1428	$INVALID_ACCOUNT_CODE$	Invalid account code
NDC-1429	$FARE_SYSTEM_NETWORK_ERROR$	Fare system network error
NDC-1430	$INVALID_SCHEDULE_DATA$	Invalid schedule data
NDC-1431	$INVALID_MODIFIER$	Invalid modifier
NDC-1432	$NO_ITINERARY_EXISTED$	No itinerary existed
NDC-1433	$UNABLE_TO_GET_FARE$	Unable to get fare
NDC-1434	$NO_FLIGHT_WITH_THIS_DATE$	No flight with this date
NDC-1435	PMW_SYSTEM_ERROR	PMW system error
NDC-1436	$INVALID_SEGMENT_NUMBER$	Invalid segment number
NDC-1437	$PRICING_SYSTEM_ERROR$	Pricing system error
NDC-1438	$PMW_SYSTEM_IS_BUSY$	PMW system is busy
NDC-1439	$DISCONTINUOUS_ITINERARY$	Discontinuous itinerary
NDC-1440	$INVALID_FARE_TOTAL_ITEM$	Invalid fare total item
NDC-1441	$PMW_TEMPORARILY_UNAVAILABLE$	PMW temporarily unavailable
NDC-1442	$INVALID_TAX_TOTAL$	Invalid tax total
NDC-1443	$INVALID_SEGMENT_STATES$	Invalid segment states
NDC-1453	$AIRPORT_OR_CITY_CODE_NOT_SUPPORTED_FOR_PRICING$	The airport code or city code is not supported for pricing.

OTHER ERRORS

Code	Error Key	Description
NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.
NDC-4084	EMPTY_PAX_ID	PaxID cannot be empty.
NDC-4093	EMPTY_INDIVIDUAL_DATA	Individual subdata cannot be empty.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Individual surname cannot be empty.
NDC-4118	EMPTY_PAYLOAD	Payload cannot be empty.
NDC-4119	EMPTY_REPRICED_ORDER	Repriced order cannot be empty.
NDC-4040	REPRICED_ORDER_EMPTY_ORDER_ID	Repriced order id must be provided.
NDC-4120	REPRICED_ORDER_EMPTY_OWNER_CODE	Owner code must be provided.

WARNINGS

Code	Warning Key	Description
NDC-1223	ORDER_WITH_ACCOUNTID_QUOTED_WITHOUT_ACCOUNTID_WARNING	Order with an account code is quoted without an account code.
NDC-1224	ORDER_WITH_ACCOUNTID_QUOTED_WITH_DIFFERENT_ACCOUNTID_WARNING	Order with an account code is quoted with a different account code.

4.1.3. order-reserve

Overview

The function of order-reserve is to reserve(hold) an unpaid NDC order by extending payment time limits of flight order items and returning an OrderViewRS with updated time limits.

A call to order-reserve is expected to be followed by a flight-quote & order-pay within the frame of provided payment time limit.


Within the response of a successful order-reserve operation, below objects will be returned for each flight order item.

1. OrderViewRS/Response/Order/OrderItem/PriceGuaranteeTimelimitDateTime as **the end of fare quotation day** indicating that this order can be paid directly through order-pay.

2. OrderViewRS/Response/Order/OrderItem/PriceGuaranteeTimelimitDateTime as **NOW (zero)** indicating that price time limit has already been over and a new flight-quote is expected to be called before this order can be paid through order-pay. In this case orderView response will include the warning message of NDC-8001/FLIGHT_QUOTE_BEFORE_PAYMENT_IS_REQUIRED_WARNING.

3. OrderViewRS/Response/Order/OrderItem/PaymentTimeLimitDateTime with a **possibly extended value** indicating the updated latest time for this order to be paid through order-pay.

Operation Name	order-reserve
Operation URL	$NDCAPI_BASEURL$/order-reserve
NDC message input	IATA_OrderChangeRQ
NDC message output	IATA_OrderViewRS
Main function	Reserves the NDC order for pay-later use case
Main inputs	Order to be reserved
Main outputs	Order with updated time limit information
Prerequisites	An active unpaid NDC order
To be followed by	flight-quote → order-pay

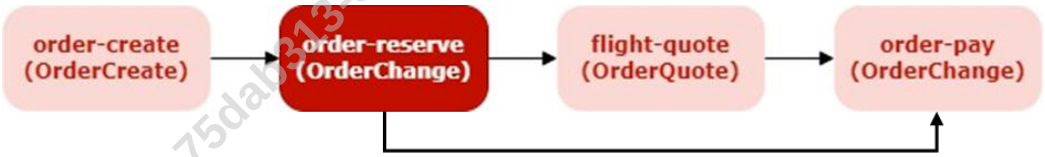

Limitations

1. It may not be possible to get extended payment time limit for all orders based on business rules, in such cases RESERVATION_CANNOT_BE_FULFILLED error is returned. In such cases, the flow can continue as a direct pay.
2. An NDC order can be reserved only once, consecutive attempts would receive the ORDER_CAN_BE_RESERVED_ONCE error.

Supported Functionalities

1. Unpaid NDC orders can be reserved through order-reserve.

Input Parameters

Fields under IATA_OrderChangeRQ/Request expected to be provided in order-reserve request are:

Parameter	Description	Mandatory/ Repetition (#)	Type/ Example
/Order/	Order details	YES / 1	Complex
/Order/OrderID	OrderID of the Order to be reserved	YES / 1	String / ORD123R
/Order/OwnerCode	OwnerCode of the owner of the Order	YES / 1	String / TK
/OrderChangeParameters/	Mandatory field	YES / 1	Complex
/OrderChangeParameters/ReasonCode	According to 21.3 ATSB Codeset: "CHR Reason for change codes for Order change" 104 (Payment time limit expiry) is expected	YES / 1	String / 104
/DataLists/PaxList/Pax/	Pax details of any Pax in order	YES / 1	Complex
/DataLists/PaxList/Pax/Individual/Surname	Surname of any Pax in the Order	YES / 1	String / YILMAZ
/DataLists/PaxList/Pax/PaxID	Not processed, required only per xsd	YES / 1	String / Pax1

Output Parameters

In response to the OrderChangeRQ, order-reserve returns an OrderViewRS with the applicable fields described in 0 Output Parameters for order-retrieve which will include below parameters for each flight order item.

Parameter	#	Description
OrderViewRS/Response/Order/OrderItem/PaymentTimeLimitDateTime	1	Updated payment time limit
OrderViewRS/Response/Order/OrderItem/PriceGuaranteeTimelimitDateTime	1	The latest time the given price details are valid for payment.

Returned OrderViewRS will include all usual fields to reflect the latest version of the order.

Special Considerations

1. Reserving an NDC order updates the PriceGuaranteeTimelimitDateTime for all flight order items. A flight-quote will be expected for new price details to be set for the order before it can be paid for if price time limit has already been over.

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4057	ORDER_STATUS_IS_NOT_SUITABLE	Order is not in a valid state for this operation.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Provided passenger surname does not match with the records.
NDC-4061	PAID_ORDER_CANNOT_BE_RESERVED	Paid order cannot be reserved.
NDC-4062	ORDER_CAN_BE_RESERVED_ONCE	Order can be reserved only once.
NDC-4063	CANCELLED_ORDER_CANNOT_BE_RESERVED	Cancelled order cannot be reserved.
NDC-2053	ORDER_RESERVE_CREATERESERVATION_ERRO R	Reservation cannot be performed.
NDC-4058	NO_FLIGHT_ORDER_ITEM_FOUND	No flight order items exist.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.

OTHER ERRORS

Code	Error Key	Description

NDC-4038	EMPTY_ORDER_ID	Order id must be provided.
NDC-4077	EMPTY_OWNER_CODE	OwnerCode cannot be empty.
NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.
NDC-4084	EMPTY_PAX_ID	PaxID cannot be empty.
NDC-4093	EMPTY_INDIVIDUAL_DATA	Individual subdata cannot be empty.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Individual surname cannot be empty.
NDC-4117	REASONCODE_MUST_BE_PROVIDED_WITH_VALUE_104	Reasoncode must be provided with value 104.

WARNINGS

Code	Warning Key	Description
NDC-8001	FLIGHT_QUOTE_BEFORE_PAYMENT_IS_REQUIRED_WARNING	Flight-quote is required before payment. *

***To be returned for all successful order-reserve responses. As flight-quote before payment is required for all orders successfully reserved.


75dab313-82ba-49d6-b5ee-d105b8469fdb

4.1.4. order-pay

Overview

The purpose of this method is to perform payment for flights and/or chargeable ancillary services.

Operation Name	order-pay
Operation URL	$NDCAPI_BASEURL$/order-pay
NDC message input	IATA_OrderChangeRQ
NDC message output	IATA_OrderViewRS
Main function	Processes payment for NDC flight order items and quoted ancillary offer items
Main inputs	Order info, order items to be paid for, offer items to be paid for
Main outputs	Order information with payment details
Prerequisites	An active unpaid NDC order
To be followed by	Can be followed by (not exclusive) order-retrieve, order-cancel, order-reshop

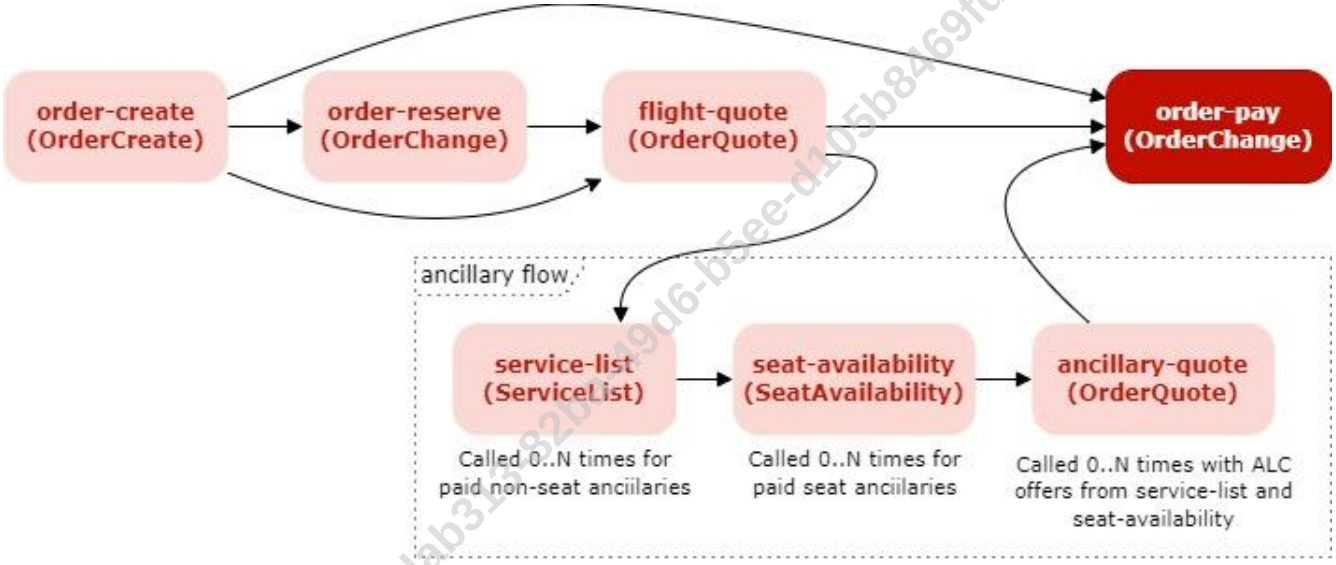

The order-pay method has three main contexts:

1- Payment for flight order items.

2- Payment for flight order items together with quoted ancillary offer items.

3- Payment for ancillary offer items.

Limitations

1. Pax based payment is not supported for flight payments, all outstanding flight order items must be paid together.
2. Split payment (payment with multiple payment method) is not supported.
3. For ancillary offer items to be paid separately flight order items must have already been paid for.

Supported Functionalities

1. Flight order items can be paid alone or together with quoted ancillary offer items.
2. Ancillary offer items can be paid separately or together with flight order items.
3. Payments with cash (BSP), credit and EasyPay.
4. Multiple calls can be made to pay for different sets of ancillary offer items at different times.
5. Payments with UATP (Universal Air Travel Plan) credit card is supported for non-BSP agencies.

6. Automatic offload capability can be provided when purchasing the BUP (Business Upgrade) ancillary offer item on a check-in eco-cabin flight.

Input Parameters

Fields under IATA_OrderChangeRQ/Request expected to be provided in order-pay request are:

Parameter	Description	Mandatory/ Repetition (#)	Type/ Example
/Order	Order details	YES / 1	
/Order/OrderID	OrderID of the Order to be paid for	YES / 1	String / AD234B
/Order/OwnerCode	OwnerCode of the order owner, always TK	YES / 1	String / TK
/DataLists/PaxList/Pax/	Pax details of any Pax in the order	YES / 1	Complex
/DataLists/PaxList/Pax/Individual/Surname	Surname of any Pax in the order	YES / 1	String / YILMAZ
/DataLists/PaxList/Pax/PaxID	Not processed, required only per xsd	YES / 1	String / Pax1
/PaymentFunctions	Object to indicate services being paid for	YES / 1	Complex
/PaymentFunctions/OrderAssociation	Association of order items to be paid for, needed if paying for flight order items	NO / 0..N	Complex
/PaymentFunctions/OrderAssociation/ OrderRefID	RefID of the Order that OrderItemRefIDs belong to	YES / 1	String / AD234B
/PaymentFunctions/OrderAssociation/ OrderItemRefID	RefID of the OrderItem(s) to be paid. **If not provided, payment for all unpaid OrderItems assumed**.	NO / 0..N	String / ADF34RF
/PaymentFunctions/OfferAssociation/	Association for OfferItems to be paid for, needed if paying for ancillaries.	NO / 0..N	Complex
/PaymentFunctions/OfferAssociation/ OfferRefID	RefID of the Offer that OfferItemRefIDs belong to. Must be an id of a quoted ancillary offer returned by ancillary-quote.	YES / 1	String / OFIT234B
/PaymentFunctions/OfferAssociation/ OfferItemRefID	RefID of OfferItem(s) to be paid. **If not provided, payment for all OfferItems under the OfferRefID assumed**.	NO / 0..N	String / OFF34RF
/PaymentFunctions/PaymentProcessingDetails/ Amount	Amount to be paid for. Must be equal to the total amount due for all flight order items and/or quoted ancillary offer items.	YES / 1	Float / 1245.65
/PaymentFunctions/PaymentProcessingDetails/ Amount[CurCode]	Currency of the payment Must be the eligible seller currency	YES / 1	String / TRY
/PaymentFunctions/PaymentProcessingDetails/ PaymentMethod/	Any payment method supported	YES / 1	Complex
/PaymentFunctions/PaymentProcessingDetails/ PaymentMethod/SettlementPlan	For cash payments, always expected as: <SettlementPlan> <PaymentTypeCode>CA</PaymentTypeCode> </SettlementPlan>	NO / 1	Complex
/PaymentFunctions/PaymentProcessingDetails/ PaymentMethod/SettlementPlan/PaymentTypeCode		NO / 1	String / CA
/PaymentFunctions/PaymentMethodCriteria	Used only for creditCard transactios.	YES / 1	Complex
/PaymentFunctions/PaymentMethodCriteria/PaymentTypeCode	"CC" for Costumer Credit Card and "AC" for agent's predefined credit card.	YES / 1	String / CC
/PaymentFunctions/PaymentProcessingDetails/Payer	Used only for credit card transactions. Includes credit card holder information	YES / 1	Complex

75dab313-8200-4d6c-b5ce-d4d5d3e63fdb

/PaymentFunctions/PaymentProcessingDetails/Payer/PayerName/IndividualName/GivenName	Given name of card holder	YES / 1	String /AHMET
/PaymentFunctions/PaymentProcessingDetails/Payer/PayerName/IndividualName/Surname	Surname of card holder	YES / 1	String /YILMAZ
/PaymentFunctions/PaymentProcessingDetails/Payer/PayerEmailAddress/EmailAddressText	E-mail address of card holder	YES / 1	String /ABC@CC.COM
/PaymentFunctions/PaymentProcessingDetails/Payer/PayerPhoneNumber/PhoneNumber	Phone number of card holder	YES / 1	String /905462193961
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard	Used only for credit card transactions	YES / 1	Complex
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardBrandCode	Credit Card brand information. It should be reverence in the PADIS (PAYB Payment Brand, Coded). Example: “VI” for Visa card.	NO / 1	String /VI
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress	Card holder address details.	YES / 1	Complex
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/CityName	The name, expressed as text, of the city, town or village.	YES / 1	String / ISTANBUL
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/CountryCode	ISO Country Code (can be extended by bilateral agreement in case of exceptions, e.g. Kosovo). Examples: US, FR.	YES / 1	String / DE
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/CountryName	The name, expressed as text, of the country.	YES / 1	String / GERMANY
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/CountrySubDivisionName	The name, expressed as text, of the sub-division of a country. Billing contact state code, two-character long ISO code required for North America. Remaining Region and Provinces around the world may use free form field. Example “Cambridgeshire”	YES / 1	String / HE
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/PostalCode	Postal code	YES / 1	String / 01067
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/StreetText	Street name and number.	YES / 0..2	String / Main Street, 100 Main Street
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardIssuingCountryCode	The country where the card issuing bank is located	NO/1	String/ TR
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardNumber	The card number indicated on the payment card.	YES / 1	String
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardSecurityCode	3-digit number printed on the signature panel on the back of the card and following the last four digits of the Primary Account Number (PAN). For American Express, 4 digits located on the	NO / 1	String

	front of the card, above the card number on the right-hand side. Visa - CVV2, MasterCard - CVC2, American Express - CID, Discover - CMID, Union Pay - CVN2, JCB - CAV2. In credit card payment flows, this field is optional. Payment with UATP cards is supported for Non-BSP agencies currently. The absence or omission of this field will not result in transaction decline for UATP cards.		
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/ExpirationDate	The last month of validity in the format of MM/YY Example: 01/30	YES / 1	String / 01/30
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/SecurePaymentVersion2	This section shall be delivered if the payment channel is mail or telephone order.	NO / 1	Complex
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/SecurePaymentVersion2/PaymentTrxChannelCode	"MO" for mail order and "TO" for telephone order.	YES / 1	String
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/IATA_EasyPay	For EasyPay payments, always expected as: <cns:IATA_EasyPay> <cns:AccountNumber>2235292275975502</cns:AccountNumber> <cns:ExpirationDate>0325</cns:ExpirationDate> </cns:IATA_EasyPay>	NO / 1	String

Output Parameters

In response to the OrderChangeRQ, order-pay returns an OrderViewRS with up to date payment information after successful payment process as described in 0 Output Parameters for order-retrieve.

Special Considerations

1. For payments of flights and ancillaries within the same request, flight payment is performed first and if payment process unexpectedly fails for the ancillaries, the flight payment is not reversed. NON-FLIGHT-OFFERITEMS-FAILED-WARNING is returned and payment for ancillaries can be retried with another order-pay call.

2. ANCILLARIES_CANNOT_BE_PAID_BEFORE_FLIGHTS error is returned if the request indicates paying for only ancillaries (i.e. /PaymentFunctions/OfferAssociation/ provided, /PaymentFunctions/OrderAssociation/ not provided), but flight order items has not been paid yet.

3. ALL_FLIGHT_ORDER_ITEMS_MUST_BE_PAID_TOGETHER error is returned if all flight order items were not provided in the input at /PaymentFunctions/OrderAssociation/OrderItemRefID.

4. If OrderRefID is provided but no OrderItemRefID is provided in /PaymentFunctions/OrderAssociation/, then all unpaid flight order items are assumed to be paid for.

5. Ancillary offers generated in both service-list response (ServiceListRS) and ancillary-quote response (OrderReshopRS) can be brought to payment through order-pay within the request under /PaymentFunctions/OfferAssociation/OfferRefID.

6. There can be multiple OfferAssociation for quoted ALC offers originating from different OrderQuoteRQ/OrderReshopRS (ancillary-quote) or from different ServiceListRQ/ServiceListRS (service-list).

7. Although unexpected, if the calculation of the final total price for any reason exceeds the summation of amounts to be paid for flight order items and/or ancillary quoted offer items as specified in the input, CALCULATED_AMOUNT_EXCEEDS_THE_PROVIDED_AMOUNT error is returned and payment is not processed. This is a measure to protect against processing payments that happen to be higher than what was offered/quoted.

8. PAYMENT_PROCESSED_BUT_NOT_FULFILLED_WARNING is returned in another rarely expected case where payment is processed for an ancillary offer item, but the accountable document (EMD) for the service could not be created.

9. OFFER_AND_OFFERITEM_NOT_MATCH error is returned if offer item id provided in the input does not belong to offer id provided in the input.

10. NOT_AUTHORIZED_FOR_PAYMENT error is returned if no authorized payment configuration is found for the agency in TK Agency Management System.

11. OPERATION_UNFINALIZED error is returned if no answer backend system during the timeout period if the operation did not finalized. After a short while when order-retrieve is done the result will be reflected in OrderViewRS

12. TICKETNUMBERS_COULD_NOT_BE_DISPLAYED_WARNING warning message is returned if all ticketNumbers can not be display, then order-retrieve must be call.

13. When a ticket coupon issued from the Economy Class cabin has a status of check-in, and a BUP ancillary offer item is subsequently requested for the flight associated with that checked-in coupon in this order, an automatic internal offload process is triggered.
    a. The ticket-coupon status for the relevant flight has moved from Checked-in to Airport, meaning the offload process was carried out successfully.



```
            </IssuingCarrier>
        </IssueInfo>
        <PaxRefID>PAX_1</PaxRefID>
        <ReferencedOrder>
            <OrderID>WL7EP5</OrderID>
            <OrderItem>
                <OrderItemRefID>FL_P1</OrderItemRefID>
                <OwnerCode>TK</OwnerCode>
            </OrderItem>
            <OwnerCode>TK</OwnerCode>
        </ReferencedOrder>
        <Ticket>
            <Coupon>
                <BaggageAllowanceRefID>FBA1</BaggageAllowanceRefID>
                <CouponNumber>1</CouponNumber>
                <CouponStatusCode>AIRPORT</CouponStatusCode>
                <FareBasisCode>Y</FareBasisCode>
                <SoldAirlineInfo>
                    <PaxSegmentRefID>SEG_1</PaxSegmentRefID>
                </SoldAirlineInfo>
            </Coupon>
            <ExchReissueInd>false</ExchReissueInd>
            <PrimaryDocInd>true</PrimaryDocInd>
            <ReportingTypeCode>BSP</ReportingTypeCode>
            <TicketDocTypeCode>T</TicketDocTypeCode>
            <TicketNumber>2352530966240</TicketNumber>
        </Ticket>
    </TicketDocInfo>
```

i. In the order-pay response, a new Order Item object is observed to be returned for BUP within the Order object.

ii. After offload, when the Business Upgrade operation is successful, the order-pay response will return a new order item object containing the new seat information provided by the system, as shown below:



```
</OrderItem>
<OrderItem>
    <AirlineTaxonomy>
        <TaxonomyFeature>
            <CodesetCode>ANCILLARY_NONCHARGEABLE</CodesetCode>
            <CodesetNameCode>TK_Codeset</CodesetNameCode>
            <ValueText>Services/Items for ancillaries that are non-chargeable</ValueText>
        </TaxonomyFeature>
    </AirlineTaxonomy>
    <OrderItemID>PAX_1_SEG_1_RQST</OrderItemID>
    <OwnerCode>TK</OwnerCode>
    <Service>
        <DeliveryStatusCode>READY TO PROCEED</DeliveryStatusCode>
        <OrderServiceAssociation>
            <SeatOnLeg>
                <Seat>
                    <ColumnID>A</ColumnID>
                    <RowNumber>26</RowNumber>
                </Seat>
                <SeatAssignmentAssociations>
                    <PaxSegmentRef>
                        <PaxSegmentRefID>SEG_1</PaxSegmentRefID>
                    </PaxSegmentRef>
                </SeatAssignmentAssociations>
            </SeatOnLeg>
        </OrderServiceAssociation>
        <PaxRefID>PAX_1</PaxRefID>
        <ServiceID>SPC_SVC_1</ServiceID>
        <StatusCode>CONFIRMED</StatusCode>
    </Service>
    <StatusCode>ACTIVE</StatusCode>
</OrderItem>
```

b. If automatic offload cannot be performed, BUP_NOT_ALLOWED_CHECKIN_STATUS error is returned.

14. The remaining time to departure is validated against a parameter. If the ticket coupon status of a flight order item is in ‘checked-in’ status and the time to departure is less than x {120} minutes, the system returns the DEPARTURE_TIME_TOO_SOON_FOR_OFFLOAD error when a BUP ancillary offer item purchase is attempted.

15. The offload operation is successful; however, if the process is interrupted due to any issue at the step of EMD document generation for the BUP ancillary offer item, it will return two error objects. The first error object will contain the error related to the specific issue encountered, and the second error object will return the COUPON_STATUS_CHANGED_FROM_CHECKIN_TO_AIRPORT error. (*This is to notify that the ticket coupon status has been updated through this order-pay request; however, an EMD could not be generated)*

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-1501	ANCILLARIES_CANNOT_BE_PAID_BEFORE_FLIGHTS	Ancillaries can only be paid together with flights, or after flights are paid for.
NDC-1502	INVALID_ORDERID_IN_PAYMENT_FUNCTIONS	OrderID does not match the reference.
NDC-1123	QUOTED_ANCILLARY_OFFER_NOT_FOUND	Ancillary offer is not found.
NDC-1505	CURRENCY_MISMATCH	The currencies identified for offers/orders do not match.

NDC-1506	TOTAL_AMOUNT_DO_NOT_MATCH	Amount to be paid does not match with the amount for specified offeritems/orderitems.
NDC-1507	ONLY_ONE_SEAT_REQUEST_EXPECTED_PER_PAX_SEGMENT	Maximum of one seat request is expected per Pax per Segment.
NDC-1508	ONLY_ONE_PAYMENT_FUNCTION_EXPECTED	Exactly one PaymentFunction is required.
NDC-1509	ALL-NON-FLIGHT-OFFERITEMS-FAILED	PRICING of offers failed for all non-flight offer items.
NDC-1512	PAYMENT_PROCESSED_BUT_UNEXPECTED_ERROR_OCCURED	Unexpected error occurred after payment is successfully processed. order-retrieve would be called to get latest order view.
NDC-1513	INVALID_PAYMENT_METHOD	Not authorized for the requested payment method according to AgencyPortal.
NDC-1517	INVALID_CURRENCY	Not authorized for the requested currency according to AgencyPortal.
NDC-1514	INCONSISTENT_ACCOUNT_CODE	Multiple different account codes provided/identified.
NDC-2015	PREPAYMENT_BACKEND_ERROR	Unable to process prepayment due to unknown error in prepayment services.
NDC-2014	PREPAYMENT_BACKEND_CALL_ERROR	Unable to access to external prepayment services.
NDC-2041	PURCHASE_ORDER_BACKEND_ERROR	Unable to process payment due to unknown error in payment services.
NDC-2042	PURCHASE_ORDER_BACKEND_CALL_ERROR	Unable to access to external payment services.
NDC-1515	IATACODE_REQUIRED_FOR_BSP	For BSP/ARC transactions, caller must have IATA code defined within TK AgencyPortal.
NDC-1516	CALCULATED_AMOUNT_EXCEEDS_THE_PROVIDED_AMOUNT	The total payment amount calculated to be received exceeds the total offer amounts provided during offer generation.
NDC-1518	ORDER_ITEM_ALREADY_PAID	Order item already paid.
NDC-1519	ORDER_ITEM_ID_MUST_BE_FLIGHT	Order item must be flight.
NDC-1520	ORDER_ITEM_ID_NOT_EXIST_IN_ORDER	Order item ID does not exist in order.
NDC-1521	SELECTED_ORDER_ITEM_DOES_NOT_HAVE_PRICE_INFO	Selected order item does not have price info.
NDC-1203	ALL_FLIGHT_ORDER_ITEMS_MUST_BE_PAID_TOGETHER	All unpaid flight order items must be provided.
NDC-2041	PURCHASE_ORDER_BACKEND_ERROR	There is a system error in purchasing process.
NDC-1002	CHECK_PAYMENT_METHOD_DETAILS	Payment error stemming from payment method details in terms of insufficient limit, wrong card number, closed for internet use etc.
NDC-1504	FLIGHT_PRICE_IS_EXPIRED	Price time limit has been expired for payment.
NDC-1003	ORDER_NOT_COMPLETED_DUE_TO_ERROR_IN_PETC_AVIH	Since there is an error in creation PETC-AVIH ancillary, order purchase process cannot be completed.
NDC-1005	INCONSISTENT_FARE_DETAILS	The fare sent in request does not match with the order price.
NDC-1011	MISSING_PAX_RELATED_INFO	There is a missing information related to a passenger on the Order in terms of infant connection detail.
NDC-1012	PAYMENT_FRAUD_SUSPICION	Cut off the credit card transaction in case of fraud suspicion.
NDC-1013	INFANT_MUST_BE_ACCOMPANIED_BY_ADULT	If there is an infant who is not connected to an adult on the Order.
NDC-1201	ORDER_RETRIEVE_EDF_ERROR	If order information cannot be retrieved from ticketing open system.
NDC-1202	ORDER_RETRIEVE_EDF_CALL_ERROR	If backend system faces connection problem with ticketing open system while retrieving order details.
NDC-1014	SEAT_ALREADY_OCCUPIED	Already occupied seat is requested.

NDC-2013	SEAT_SELECTION_BACKEND_ERROR	There is an error in source system during assigning requested seat.
NDC-1015	IMPROPER_FLIGHT_SEGMENT	Flight segment is not proper to select seat in terms of delivery status or requested segment index is not available on the Order.
NDC-1016	PAX_ALREADY_HAS_SEAT	If passenger already has a paid chargeable seat on the order.
NDC-4010	INVALID_SEAT_REQUEST	If request has inconsistent values with the Order in terms of wrong Pax index or wrong seat number etc.
NDC-1017	PAX_WITH_PETC_RESTRICTED_SEAT	If the requested seat is allocated for a passenger who has PET.
NDC-4058	NO_FLIGHT_ORDER_ITEM_FOUND	No flight order items exist.
NDC-1019	UNAVAILABLE_PAX_FOR_SEATSELECTION	If seat request is made for unavailable passenger in terms of Infant.
NDC-4060	PASSENGER_SURNAME_MISMATCH	If the surname of the order which is used for seat selection doesn't match with the one sent in request.
NDC-1020	MISSING_PHONE_OR_MAIL	Contact info for passenger or payment details is not available or missing.
NDC-1021	INVALID_ORDER_ID	Provided OrderID is not valid.
NDC-1022	MISSING_PAYER_CONTACT_INFO	Missing contact info of the payer for credit card transaction in terms of e-mail, phone or address.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-1522	ORDER_NOT_SUITABLE_FOR_FLIGHT_PAYMENT	Order is not in expected state for payment of flight order items.
NDC-1524	NOT_AUTHORIZED_FOR_PAYMENT	Agency profile does not include payment eligibility.
NDC-4168	PASSENGER_RESTRICTED_AISLE_SEAT	Restricted aisle seat for the passengers.
NDC-4169	PASSENGER_RESTRICTED_CENTER_SEAT	Restricted center seat for the passengers.
NDC-4170	PASSENGER_WITH_INFANT_RESTRICTED_SEAT	Restricted seat for the passengers with infants.
NDC-4171	PASSENGER_RESTRICTED_EXIT_SEAT	Restricted exit seat for the passengers.
NDC-4172	PASSENGER_INFANT_RESTRICTED_EXIT_SEAT	Restricted exit seat for the passengers with infants.
NDC-4173	PASSENGER_RESTRICTED_LEGROOM_SEAT	Restricted legroom seat for the passengers.
NDC-1122	CONTAINS_NON_FLYABLE_SEGMENTS	Flight segment status not suitable for the operation.
NDC-1339	INVALID_SEGMENT_STATUS	Segment status is not suitable for the operation.
NDC-1530	PURCHASE_BASKET_TEMPORARY_ERROR	Try again.
NDC-4004	INVALID_FARE_DATA	Invalid or missing fare data
NDC-1531	INVALID_CHARACTER	Invalid character.
NDC-4154	MAX_ONE_ANCILLARY_TYPE_ALLOWED_FOR_EACH_PAXSEGMENT	For each Pax maximum one ancillary type allowed per segment.
NDC-1532	FLIGHT_TIME_NOT_SUITABLE	Flight time is not suitable for this operation.
NDC-1533	SEGMENT_NOT_SUITABLE	This operation is not allowed for the flight segment.
NDC-1534	INVALID_TICKET_COUPON_STATUS	Invalid ticket coupon status.
NDC-1535	TICKET_NOT_SUITABLE	Ticket is not suitable for this operation.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1541	OFFER_AND_OFFERITEM_NOT_MATCH	Offer and offeritem does not match.
NDC-1542	ORDER_MUST_BE_QUOTED_FOR_THIS_OPERATION	Order must be quoted for this operation.
NDC-1064	INCONSISTENT_REBOOK_PAYMENT_METHOD	Next payment type does not match with the payment type of original first ticket.
NDC-1065	UNSUCCESSFUL_PAYMENT_DUE_TO_UNDEFINED_CREDIT_CARD	Payment cannot be made with a credit card that is not defined in the Agency Portal
NDC-1066	SEG_CONTINUITY	Seg is continuous.

NDC-1067	PASSENGER_ALREADY_CHECK_IN	Passanger has already checked in
NDC-1068	MORE_THAN_ONE_IATA_KWD	There exists more than one IATA kwd.
NDC-1069	NOT_ACCEPTED_PLEASE_ ENTER_AGAIN	It's not accepted, please enter it again.
NDC-1070	DUPLICATE_SEAT_NUMBER	There is a duplicate seat number.
NDC-1071	PLEASE_ENTER_FQTR_FOR_REDEMPTION_CLASSES	Please enter FQTR for redemption classes.
NDC-1072	MEMBERSHIP_INFO_NOT_MATCH	Member information and Miles&Smiles information do not match
NDC-1073	ORDER_IS_ALREADY_PAID	Order is already paid. The latest status is reflected on the order
NDC-1074	OPERATION_UNFINALIZED	The operation is ongoing
NDC-1075	INSUFFICIENT_TICKET_OR_EMD_STOCK	Insufficient Ticket or EMD stock.
NDC-1076	INSUFFICENT_CREDIT_CARD_LIMIT	Insufficient credit card limit.
NDC-1077	CREDIT_CARD_CLOSED_FOR_INTERNET_USE	Credit card closed for internet using.
NDC-1078	CREDIT_CARD_CVC_EXCEPTION	Credit card cvc exception.
NDC-1079	CREDIT_CARD_EXPIRE_DATE_EXCEPTION	Credit card expire date exception
NDC-1082	CREDIT_CARD_INFO_MISSING_OR_INCORRECT	Credit Card information missing or incorrect.
NDC-1085	INCONSISTENT_LOCAL_CURRENCY	Local Currency Definition is inconsistent.
NDC-1086	SALES_OFFICE_NOT_ALLOWED_FOR_TICKETING	Ticketing is not permitted by the sales office.
NDC-1087	EMD_CREATE_FOR_OFFLINE_OFFICE_ERROR	EMD cannot be performed for the selected exit point and ssr.
NDC-1088	INVALID_PAYER_INFO_ ONLY_ENGLISH_ALPHABET_LETTERS_EXPECTED	Givenname or surname of the card holder has invalid character.
NDC-1089	MERCHANT_RECORD_CANNOT_BE_RETRIEVED_PAYMENT_SYSTEM	Merchant record can not be retrieved. Missing Payment Configuration.
NDC-1090	INVALID_SEGMENT_STATUS_FOR_TICKETING	Invalid segment status for ticketing.
NDC-1091	NOT_ABLE_TO_GET_LOCAL_CURRENCY_BY_SOR CODE	Not able to get local currency by Sor Code.
NDC-1092	EASYPAY_PAYMENT_METHOD_IS_TEMPORARY_ UNAVAILABLE	The EasyPay Payment Method is temporary unavailable.
NDC-1093	NO_RESPONSE_FROM_BANK	No response from bank. Please try again later.
NDC-1094	OFFER_REF_ID_OR_OWNER_CODE_CAN_NOT_BE_EMPTY	The OwnerCode or OfferRefID fields in the Offer Association object are mandatory fields and can not be empty values. If no EMD purchase is to be made, the OfferAssociation object should not be sent at all in the order-pay request.
NDC-1095	INCONSISTENT_PAYMENT_FARE	The ticketing process was interrupted and could not be completed.
NDC-1145	PAYMENT_GATEWAY_CREDIT_CARD_UNDEFINED_BANK_ERROR	Payment errors resulting from issues with payment method details, including examples such as exceeding the limit, incorrect card number, or internet usage etc. being blocked.
NDC-1418	DEPARTURE_TIME_TOO_SOON_FOR_OFFLOAD	Checked-in tickets do not have sufficient time for off-loading.
NDC-4495	BUP_NOT_ALLOWED_CHECKIN_STATUS	Business Upgrade Process Couldn't Be Completed Because Of The Coupon Status.
NDC-8190	COUPON_STATUS_CHANGED_FROM_CHECKIN_TO_AIRPORT	The coupon status has been changed from check-in to airport. The previous check-in is no longer valid and passengers are required to complete check-in again at the airport.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

OTHER ERRORS

Code	Error Key	Description
NDC-4121	EMPTY_AMOUNT_INFO	Amount must be provided.
NDC-4122	EMPTY_DATA_LIST	Datalist must be provided.
NDC-4093	EMPTY_INDIVIDUAL_DATA	Individual subdata cannot be empty.
NDC-4123	EMPTY_SETTLEMENT_PLAN_INFO	SettlementPlan must be provided.
NDC-4038	EMPTY_ORDER_ID	Order id must be provided.
NDC-4124	EMPTY_ORDER_ID_REF	Order ref id must be provided.
NDC-4125	EMPTY_ORDER_ITEM_REF_LIST	At least one flight order item must be provided.
NDC-4126	EMPTY_ORDER_OR_OFFER_ASSOCIATION	Neither offer association nor order association is found.
NDC-4077	EMPTY_OWNER_CODE	OwnerCode cannot be empty.
NDC-4084	EMPTY_PAX_ID	PaxID cannot be empty.
NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.
NDC-4127	EMPTY_PAYMENT_AMOUNT	Amount cannot be empty.
NDC-4128	EMPTY_PAYMENT_BRAND_CODE	Payment brand code must be provided.
NDC-4129	EMPTY_PAYMENT_CURRENCY	Currency must be provided.
NDC-4130	EMPTY_PAYMENT_FUNCTION	Payment function must be provided
NDC-4131	EMPTY_PAYMENT_METHOD	Payment method cannot be empty.
NDC-4132	EMPTY_PAYMENT_PROCESSING_DETAILS	Payment processing details cannot be empty.
NDC-4133	EMPTY_PAYMENT_REQUEST	Request cannot be empty.
NDC-4134	EMPTY_PAYMENT_TYPE_CODE	Payment type code must be provided.
NDC-4302	EMPTY_ACCOUNT_NUMBER_FOR_EASYPAY	AccountNumber is mandatory field. Please enter the 16 digit EasyPay account number.

WARNINGS

Code	Warning Key	Description
NDC-8015	NON-FLIGHT-OFFERITEMS-FAILED-WARNING	Payment processing failed for ancillary offer item.
NDC-8016	PAYMENT_PROCESSED_BUT_NOT_FULFILLED_WARNING	Payment is completed for some ancillary offer items, but related documents could not be issued.
NDC-8039	TICKETNUMBERS_COULD_NOT_BE_DISPLAYED_WARNING	TicketNumber(s) cannot display now. Please send order-retrieve request to get information about all tickets.

75dab313-8200-49d6-[illegible]

CONFIDENTIAL & RESTRICTED

4.1.5. order-retrieve

Overview

The purpose of this method is to retrieve up-to-date details of an NDC order in the form of an OrderViewRS.

Operation Name	order-retrieve
Operation URL	$NDCAPI_BASEURL$/order-retrieve
NDC message input	IATA_OrderRetrieveRQ
NDC message output	IATA_OrderViewRS
Main function	Constructs up to date view of the specified order
Main inputs	Criteria to search for orders
Main outputs	OrderViewRS with up-to-date information
Prerequisites	An existing NDC order
To be followed by	Can be followed by several order-related methods depending on the state of the order

Limitations

1. Only the order items which are created by the same agency can be retrieved.

Supported Functionalities

1. Paid, unpaid, cancelled and exchanged orders can be retrieved.
2. Document details for accountable documents (if exists) provided.

Input Parameters

Fields under IATA_OrderRetrieveRQ/Request/OrderValidationFilterCriteria expected to be provided in order-retrieve request are:

Parameter	Explanation	Mandatory/ Repetition(#)	Type/ Example
OrderFilterCriteria/	Must be provided if order is intended to be retrieved by OrderID	NO / 0..1	Complex
OrderFilterCriteria/OrderID		YES / 1	String / ORD123R
OrderFilterCriteria/OwnerCode		YES / 1	String / TK
BookingRefFilterCriteria	Must be provided if order is intended to be retrieved by PNR number	NO / 0..1	Complex
BookingRefFilterCriteria/BookingID		YES / 1	String / ADF43R
DocFilterCriteria	Must be provided if order is intended to be retrieved by ticket/EMD number	NO / 0..1	Complex
DocFilterCriteria/DocNumber		YES / 1	Integer (13 digits) / 2351232332123
PaxFilterCriteria/Individual/Surname	Surname of any of the passengers in the order	YES / 1	String / CAN

Output Parameters

In response to the OrderRetrieveRQ, order-retrieve returns an OrderViewRS with up-to-date order information. The fields returned in the response will vary subject to the current state of the order as detailed in this section.

I. Passenger&Contact Information

The fields described in this section is applicable to both unpaid and paid orders.

Following objects returned under IATA_OrderViewRS/Response/DataLists

Parameter	#	Description
/ContactInfoList/ContactInfo/β	1	Details for contact information
β/ContactInfoID	1	Unique id for the contact

β/EmailAddress/EmailAddressText	1	e-mail address
β/Phone	1..N	Phone details
β/Phone/PhoneNumber	1	Phone number
β/Phone/ContactTypeText	1	“M” for mobile phone; “O” otherwise
/PaxList/Pax/δ	1..N	One Pax object returned for each passenger in the order
δ/Birthdate	0..1	Birthdate
δ/ContactInfoRefID	0..1	PaxRefID of a PAX if contact person is among the passengers traveling
δ/LoyaltyProgramAccount/	0..1	Loyalty Account
δ/LoyaltyProgramAccount/AccountNumber	1	Account number for the loyalty program
δ/LoyaltyProgramAccount/LoyaltyProgram/Carrier/AirlineDesigCode	1	Airline code for the loyalty program
δ/LoyaltyProgramAccount/LoyaltyProgram/ProgramCode	1	Airline code for the loyalty program
δ/LoyaltyProgramAccount/TierCode	1	Tier code for the loyalty account
δ/LoyaltyProgramAccount/TierName	1	Tier name for the loyalty account
δ/IdentityDoc/α	0..1	Identity document details
α/IdentityDocID	1	Unique id for identity doc
α/IdentityDocTypeCode	1	709 for Turkish National ID, PT for passport
α/Surname	1	Surname of the associated passenger
/PaxList/Pax/Individual/Birthdate	0..1	Birthdate
/PaxList/Pax/Individual/GenderCode	0..1	Gender
/PaxList/Pax/Individual/GivenName	1	Name
/PaxList/Pax/Individual/Surname	1	Surname
/PaxList/Pax/Individual/TitleName	1	Title
/PaxList/Pax/PaxID	1	Unique id for passenger
/PaxList/Pax/PaxRefID	0..1	If non-INFANT passenger has an INFANT associated with it, the PaxRefID of that INFANT is provided here.
/PaxList/Pax/PTC	1	Passenger type code
/PaxList/Pax/LangUsage	0..1	Language preference of the Pax for contact
/PaxList/Pax/LangUsage/LangCode	1	2 chars language code.

75dab313-82ba-49f6-b585-d105bb409db

II. Flight Related Information

The fields described in this section is applicable to both unpaid and paid orders.

Following objects returned under IATA_OrderViewRS/Response/DataLists

- DatedMarketingSegmentList/
- DatedOperatingLegList
- DatedOperatingSegmentList/
- OriginDestList/
- PaxJourneyList/
- PaxSegmentList/

Parameter	#	Description

/DatedMarketingSegmentList/DatedMarketingSegment/α	1..N	One such object will be returned for each marketing flight segment.
α/Arrival/AircraftScheduledDateTime	1	Arrival datetime.
α/Arrival/IATA_LocationCode	1	Arrival location code.
α/Arrival/StationName	1	Arrival station name.
α/Arrival/TerminalName		Terminal information which is flight arrival at the airport.
α/CarrierDesigCode	1	Carrier designator code.
α/CarrierName	1	Name of the carrier.
α/DatedMarketingSegmentId	1	Unique id for the marketing segment
α/DatedOperatingSegmentRefId	1	Reference DatedOperatingSegmentId of the operating segment
α/Dep/AircraftScheduledDateTime	1	Departure datetime.
α/Dep/IATA_LocationCode	1	Departure location code.
α/Dep/StationName	1	Departure station name
α/Dep/TerminalName	0..1	Terminal information which is flight departure at the airport.
α/MarketingCarrierFlightNumberText	1	Flight number.
/DatedOperatingLegList/DatedOperatingLeg$^{\Omega}$	0..N	Leg details included in the flight segment.
Ω/Arrival/AircraftScheduledDateTime	1	Arrival datetime of the leg
Ω/Arrival/IATA_LocationCode	1	Arrival location code.
Ω/Arrival/StationName	1	Arrival station name.
Ω/CarrierAircraftType/CarrierAircraftTypeCode	0..1	Aircraft type code information of the flight.
Ω/CarrierAircraftType/	0..1	Aircraft type details of the flight.
Ω/DatedOperatingLegID	1	Unique id for the marketing segment
Ω/Dep/AircraftScheduledDateTime	1	Departure datetime.
Ω/Dep/IATA_LocationCode	1	Departure location code.
Ω/Dep/StationName	1	Departure station name
Ω/IATA_AircraftType/IATA_AircraftTypeCode	0..1	Aircraft type code information of the flight.
/DatedOperatingSegmentList/DatedOperatingSegment/β	1	One such object will be returned for each operating flight segment.
β/CarrierDesigCode	1	Carrier designator code.
β/CarrierName	1	Name of the carrier.
β/DatedOperatingSegmentId	1	Unique id for the operating segment.
β/Duration	0..1	Flight duration of the segment in the format of P0Y0M0DT3H0M
β/OperatingCarrierFlightNumberText	1	Flight number.
/OriginDestList/OriginDest	1..N	One such object will be returned for each flight (with one or more segments).
/OriginDestList/OriginDest/DestCode	1	Destination location code.
/OriginDestList/OriginDest/OriginCode	1	Origin location code.
/OriginDestList/OriginDest/PaxJourneyRefID	1	Refid of PaxJourneyID associated with this OriginDest.
/PaxJourneyList/PaxJourney/	1..N	One such object will be returned for each bound of every flight.
/PaxJourneyList/PaxJourney/PaxJourneyID	1	Unique id for the journey.

/PaxJourneyList/PaxJourney/PaxSegmentRefID	1..N	Reference(s) to the segment(s) that constitutes the journey.
/PaxSegmentList/PaxSegment/	1..N	Created one for each /DatedMarketingSegmentList/DatedMarketingSegment
/PaxSegmentList/PaxSegment/CabinTypeAssociationChoice/SegmentCabinType/CabinTypeCode	1	Cabin type code for the segment. 2: Business Cabin 3: Economy Cabin
/PaxSegmentList/PaxSegment/CabinTypeAssociationChoice/SegmentCabinType/CabinTypeName	1	Cabin type name related to cabin type code as Economy or Business.
/PaxSegmentList/PaxSegment/DatedMarketingSegmentRefId	1	Reference to the associated DatedMarketingSegmentId
/PaxSegmentList/PaxSegment/MarketingCarrierRBD_Code	1	Marketing Carrier RBD, booking class.
/PaxSegmentList/PaxSegment/PaxSegmentID	1	SEG_+ (index of corresponding DatedMarketingSegmentId, ex: SEG_M_0 → SEG_0)

III. PriceClass Information

Following objects returned under IATA_OrderViewRS/Response/DataLists/PriceClassList

Parameter	#	Mapping
/PriceClass	0..N	Constructed to include additional fare information (if available) applicable to one or more flight bounds
/PriceClass/CabinType/CabinTypeCode	1	Code of cabin: 3 for Economy, 2 for Business
/PriceClass/CabinType/CabinTypeName	1	Name given to a cabin: Economy or Business
/PriceClass/Code	0..1	Brand code of the fare if available
/PriceClass/FareBasisCode	0..1	Code of fare basis if available
/PriceClass/Name	1	Name of the brand returned under /PriceClass/Code Or “NO_BRAND” if the PriceClass is for a non-branded flight bound
/PriceClass/PriceClassID	1	Unique ID for the price class

IV. Free Baggage and Extra Baggage (for applicable ancillaries) Information

Among the fields described in this section, fields related to Free Baggage and Cabin Baggage are applicable to both unpaid and paid orders, the fields related to the Extra Baggage is applicable for only paid orders.

Following objects returned under IATA_OrderViewRS/Response/DataLists

Parameter	#	Description
/BaggageAllowance/	1..N	One returned for each distinct baggage details.
/BaggageAllowance/ApplicablePartyText	1	Default value of “Party”.
/BaggageAllowance/BaggageAllowanceID	1	Unique id for the allowance.
/BaggageAllowance/TypeCode	1	Default value of "Checked" for extra baggage and free baggage allowance, and “CarryOn” for cabin baggage.
/BaggageAllowance/WeightAllowance	0..1	Returned if the baggage is weight-based or if the baggage is for cabin allowance in order to give maximum weight.
/BaggageAllowance/WeightAllowance/MaximumWeightMeasure	1	Maximum weight amount.
/BaggageAllowance/WeightAllowance/WeightUnitOfMeasurement	1	Weight unit, i.e. KGM.
/BaggageAllowance/PieceAllowance	0..1	Returned if the allowance is piece-based or the baggage is for cabin allowance in order to give maximum piece.

/BaggageAllowance/PieceAllowance/ TotalQty	1	Maximum piece allowance.
/ServiceDefinitionList/ServiceDefinition/α	1..N	One ServiceDefinition will be returned for each BaggageAllowance object
α/Desc/DescText	0..1	Not returned for free baggage, description returned for paid baggage
α/Name	1	Default value of "Checked" for extra baggage and free baggage allowance, and “CarryOn” for cabin baggage.
α/OwnerCode	1	Default value of TK
α/ServiceDefinitionAssociation/ BaggageAllowanceRef/BaggageAllowanceRefID	1	/BaggageAllowance/BaggageAllowanceID
α/ServiceDefinitionID	1	UniqueID for the service definition (to be referenced in /OrderItem/Service)

V. Order Items for flights

The fields described in this section is applicable to both unpaid and paid orders.

Following objects returned under IATA_OrderViewRS/Response/Order

Parameter	#	Description
/OrderItem/	1..N	One flight OrderItem is returned for each passenger including exchanged ones.
/OrderItem/AirlineTaxonomy	1	Taxonomy details
/OrderItem/AirlineTaxonomy/Taxonomy Feature/	1	
/OrderItem/AirlineTaxonomy/Taxonomy Feature/CodesetCode	1	for chargeable seats; ANCILLARY_CHARGEABLE for non-chargeable seats; ANCILLARY_NONCHARGEABLE for special services; SPECIAL_NEED for flights; FLIGHT
/OrderItem/AirlineTaxonomy/Taxonomy Feature/ CodesetNameCode	1	Name Code of Codeset, Always TK_Codeset (custom TK code set)
/OrderItem/AirlineTaxonomy/Taxonomy Feature/ValueText	1	Description of codeset code ANCILLARY_CHARGEABLE: Services/Items for ancillaries that are chargeable ANCILLARY_NONCHARGEABLE: Services/Items for ancillaries that are non-chargeable SPECIAL_NEED: Services/Items for special needs FLIGHT: Services/Items for flight
/OrderItem/OrderItemID	1	Unique id for the order item.
/OrderItem/OwnerCode	1	Default value of “TK”
/OrderItem/PaymentTimeLimitDateTime	0..1	Latest time for the order to be paid for. **Not returned for paid order.**

75dab313-821a-4f06-b5ee-d105b8469fdb

/OrderItem/ PriceGuaranteeTimeLimitDateTime	0..1	Latest time the order is expected to be paid with the provided price. Current or past time indicates that there is no price or the price provided is not guaranteed. **Not returned for paid order.**
/OrderItem/FareDetail/$^{\alpha}$	1	Fare detail for the specific order item.
α/AccountCode	0..1	Account code associated with the order, if it exists.
α/PaxRefID	1	RefID of the PAX this OrderItem is constructed for.
α/FareComponent	0..N	Returned for flight order items if order is i- paid or ii- unpaid but has a fare
α/FareComponent/PaxSegmentRefID	1..N	Segment reference id of the associated segment.
α/FareComponent/PriceClassRefID	1	Reference id of the applicable price class.
/OrderItem/Price$^{\beta}$	1	Returned for flight order items if order is i- paid or ii- unpaid but has a fare.
β/EquivAmount	1	Equivalent amount.
β/EquivAmount/@CurCode	1	Client specific CurrencyCode
β/TaxSummary/Tax/	0..N	Tax details.
β/TaxSummary/Tax/Amount	1	Tax amount.
β/TaxSummary/Tax/Amount/@CurCode	1	Client specific CurrencyCode
β/TaxSummary/Tax/TaxCode	1	Tax code.
β/TaxSummary/Tax/TaxName	1	Tax name.
β/TaxSummary/TotalTaxAmount	1	Total tax amount (i.e. ∑ α/Price/TaxSummary/Tax/Amount)
β/TaxSummary/TotalTaxAmount[CurCode]	1	Client specific CurrencyCode
β/TotalAmount	1	Total amount (equivalent + total taxes)
β/TotalAmount[CurCode]	1	Client specific CurrencyCode
/OrderItem/PriceDifferential/$^{\Omega}$	0..1	Details for additional cost if the order item is created as a result of rebook of paid order and refunded amount if the orderItem is refunded.
$^{\Omega}$ /DifferentialTypeCode	1	AddCol: If there is an additional cost for rebook transaction of paid order. Refund: If the order item is refunded AddColAndRefund: If the new order item which is generated with an additional cost as a result of rebook is refunded.
$^{\Omega}$/DiffPrice/FareDetail	1..2	Created one for additional cost and/or refunded amount details.
$^{\Omega}$/DiffPrice/FareDetail/Price/BaseAmount	0..1	Additional or refunded base amount. There will be minus sign at the beginning of the amount if the base fare is refunded.
$^{\Omega}$/DiffPrice/FareDetail/Price/BaseAmount[CurCode]	1	Currency code of base amount
$^{\Omega}$/DiffPrice/FareDetail/Price/DueToAirlineAmount	0..1	Created if additional cost occurs at the end of paid order rebook. It gives total additional cost amount which is paid by the passenger.
$^{\Omega}$/DiffPrice/FareDetail/Price/DueByAirlineAmount	0..1	Created if the order item is refunded. It gives total refunded amount which is paid back to the passenger.
$^{\Omega}$/DiffPrice/FareDetail/Price/TaxSummary	1	Additional tax details as a result of paid order's rebook or refunded tax details will be given under this section.

Ω/DiffPrice/FareDetail/Price/TaxSummary/Tax	0..1	Created one for each tax code.
Ω/DiffPrice/FareDetail/Price/TaxSummary/Tax/Amount	1	Tax amount. There will be minus sign at the beginning of the amount if the tax is refunded.
Ω/DiffPrice/FareDetail/Price/TaxSummary/Tax/Amount[Currency]	1	Currency code of tax amount.
Ω/DiffPrice/FareDetail/Price/TaxSummary/Tax/TaxCode	1	Tax code
Ω/DiffPrice/FareDetail/Price/TaxSummary/Tax/TaxName	1	Tax name related to the tax code
Ω/DiffPrice/FareDetail/Price/TaxSummary/TotalTaxAmount	1	Total tax amount. There will be minus sign at the beginning of the amount if the tax is refunded.
Ω/DiffPrice/FareDetail/Price/TaxSummary/TotalTaxAmount[CurCode]	1	Currency code of total tax amount.
Ω/DiffPrice/FareDetail/Price/TotalAmount	1	Total amount including base and total tax amount. There will be minus sign at the beginning of the amount if the amount belongs to refund transaction.
Ω/DiffPrice/FareDetail/Price/TotalAmount[Currency]	1	Currency code of total amount
Ω/NewPrice/Price/TotalAmount	1	Netting amount for the order item.
Ω/NewPrice/Price/TotalAmount[Currency]	1	Currency code of netting amount.
/OrderItem/Service/δ	2..N	Details of services related to this flight orderitem.
δ/BookingRef/	0..2	Used to provide PNR and Ticket Number.
δ/BookingRef/BookingID	1	Associated booking reference (PNR) or Ticket number.
δ/BookingRef/BookingRefTypeCode	1	"P" for PNR, “5” for Document number (Ticket)
δ/DeliveryStatusCode	0..1	Returned to indicate delivery status of segment. Created as "CONFIRMED" after order-create and updated according to PADIS ”Delivery Service Status, Coded.”. DeliveryStatusCode is not provided for exchanged order items. DeliveryStatusCode can take below values;

READY TO PROCEED	The service has already been purchased and can be used.
READY TO DELIVER	The service has already been purchased and checked in by the passenger to be used.
DELIVERED	The service has already been used.

75dab313-82b6-4906-b5ee-d105f8469fdb

		REQUESTED: The service has been added to the order but not purchased or confirmed yet. REMOVED: The service has been refunded or voided. SUSPENDED: The service has been suspended. EXPIRED: The service has been closed. UNABLE TO DELIVER: The service has been cancelled and cannot be used. IN PROGRESS: The service has been added to the order and pending confirmation. CONFIRMED: The service has been confirmed but not purchased yet.
δ/OrderServiceAssociation/PaxSegmentRef/θ	0..1	Returned for Services not requiring a ServiceDefinition
θ/PaxSegmentRefID	1	Related PaxSegmentID for the service.
δ/OrderServiceAssociation/ ServiceDefinitionRef/μ	0..1	Returned for Services requiring a ServiceDefinition
μ/OrderFlightAssociations/PaxSegmentRef/ PaxSegmentRefID	1	Corresponding PaxSegmentID for the service.
μ/ServiceDefinitionRefID	1	Corresponding ServiceDefinitionID for the service
δ/PaxRefID	1	PaxID of the Pax associated with the order item.
δ/ServiceID	1	Unique ID for the service.
δ/ServiceRefID	1	Indicates linked segment service in case of schedule change.
δ/StatusCode	1	"Ordered Service Status, Coded" according to PADIS CONFIRMED: Service can be used or has already been used. TRANSFERRED: This service has been exchanged to a new service in a new orderItem and no more action can be taken for this one CANCELLED: This service has been cancelled and no more action can be taken for this one. WAITLISTED: The new service added to the orderItem as a result of schedule change and pending for confirmation.

/OrderItem/StatusCode	1	"OPENED" after order creation, updated according to PADIS "Ordered Item Status, Coded" afterwards

VI. Order Items for Non-Chargeable Services

The fields described in this section is applicable to both unpaid and paid orders.

Following objects returned under IATA_OrderViewRS/Response if there exist at least one non-chargeable order item.

Parameter	#	Description
/DataLists/ServiceDefinitionList/ServiceDefinition/$^{\alpha}$	1..N	One ServiceDefinition for each distinct **non-seat** Service No ServiceDefinition for free of charge seat services.
α/Name	1	Internal SSR code for the specific service.
α/OwnerCode	1	Owner of the corresponding flight segment:
α/ServiceCode	1	Category of the service (meal, baggage etc.)
α/ServiceDefinitionID	1	Internal SSR code for the specific service, same as α/Name
Order/OrderItem/$^{\beta}$	1..N	One OrderItem will be returned for each non-chargeable ancillary (including free of charge seats)
β/OrderItemID	1	A unique id to identify this order item
β/OwnerCode	1	Owner of the OrderItem, always TK
β/Service/	1	Service details
β/Service/DescText	0..1	Text related with the service if it exists
β/Service/OrderServiceAssociation/$^{\theta}$	1	
θ/SeatOnLeg/	0..1	Will return if the order item is a Seat order item
θ/SeatOnLeg/Seat/	1	Seat details
θ/SeatOnLeg/Seat/ColumnID	1	ColumnID of the seat
θ/SeatOnLeg/Seat/RowNumber	1	RowNumber of the seat
θ/SeatOnLeg/SeatAssignmentAssociations/	1	PaxSegment details for the seat
θ/SeatOnLeg/SeatAssignmentAssociations/PaxSegmentRef/	1	
θ/SeatOnLeg/SeatAssignmentAssociations/PaxSegmentRef/PaxSegmentRefID	1	Segment ID corresponding to the seat
θ/ServiceDefinitionRef/	0..1	Will return if the order item is a non-Seat order item
θ/ServiceDefinitionRef/ServiceDefinitionRefID	1	ID of ServiceDefinition
β/Service/PaxRefID	1	RefID of the PAX this service is created for
β/Service/ServiceID	1	Unique ID for the service
β/Service/Status	1	Service status according to PADIS "Ordered Service Status, Coded."

CONFIRMED	Service can be used or has alread
TRANSFERRED	This service has been exchanged
CANCELLED	This service has been cancelled a

VII. Order Items for Ancillaries

The fields described in this section is applicable to only paid orders. Please note that, ancillary order items may exist in an OrderViewRS only after they are paid for.

Objects to be constructed under IATA_OrderViewRS/Response/Order

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Parameter	#	Description
/OrderItem	1..N	One ancillary orderitem is returned for each pax/service-based ancillary or paxsegment-based ancillary.
/OrderItem/OrderItemID	1	Unique id for the order item.
/OrderItem/OwnerCode	1	Default value of “TK”
/OrderItem/FareDetail/α	1	Fare detail of the ancillary order item.
α/AccountCode	0..1	Account code associated with the order item, if it exists.
α/PaxRefID	1	RefID of the PAX this OrderItem is constructed for.
α/FareComponent	0..N	Fare detail
α/FareComponent/PaxSegmentRefID	1..N	Segment reference id of the associated segment.
/OrderItem/Price/ β	1	Price detail for the ancillary order item.
β/EquivAmount	1	Equivalent amount.
β/EquivAmount/@CurCode	1	Client specific CurrencyCode
β/TaxSummary/Tax/	0..N	Tax details.
β/TaxSummary/Tax/Amount	1	Tax amount.
β/TaxSummary/Tax/Amount/@CurCode	1	Client specific CurrencyCode
β/TaxSummary/Tax/TaxCode	1	Tax code.
β/TaxSummary/Tax/TaxName	1	Tax name.
β/TaxSummary/TotalTaxAmount	1	Total tax amount (i.e. ∑ α/Price/TaxSummary/Tax/Amount)
β/TaxSummary/TotalTaxAmount[CurCode]	1	Client specific CurrencyCode
β/TotalAmount	1	Total amount (equivalent + total taxes)
β/TotalAmount[CurCode]	1	Client specific CurrencyCode
/OrderItem/Service/δ	1..N	Service details for this ancillary order item
δ/BookingRef	1..2	Used to provide PNR and EMD Number.
δ/BookingRef/BookingID	1	Associated booking reference (PNR) or EMD number.
δ/BookingRef/BookingRefTypeCode	1	"P" for PNR, “5” for Document number (EMD)
δ/DeliveryStatusCode	1	Returned according to PADIS ”Delivery Service Status, Coded.”
δ/OrderServiceAssociation/ ServiceDefinitionRef/	0..1	Will return if the order item **is not** a Seat order item
δ/OrderServiceAssociation/ ServiceDefinitionRef/ /OrderFlightAssociations/PaxSegmentRef/ PaxSegmentRefID	1	Related PaxSegmentID.
δ/OrderServiceAssociation/ ServiceDefinitionRef/ServiceDefinitionRefID	1	Reference to the ServiceDefinition related with this ancillary.
δ/OrderServiceAssociation/SeatOnLeg/	0..1	Will return if the order item **is** a Seat order item
δ/OrderServiceAssociation/SeatOnLeg/Seat/μ	1	Seat info
μ/ColumnID	1	ColumnID of the seat this ancillary orderitem is created for.
μ/RowNumber	1	RowNumber of the seat this ancillary orderitem is created for.
δ/OrderServiceAssociation/ SeatOnLeg/SeatAssignmentAssociations/PaxSegment Ref/PaxSegmentRefID	1	Related PaxSegmentID.
δ/PaxRefID	1	Reference Pax this ancillary is associated with.
δ/ServiceID	1	A unique id for the service.
δ/StatusCode	1	According to PADIS “Ordered Service Status, Coded”. CONFIRMED: Service can be used or has already been used.

75dab313-82ba-4906-b0a6-d105bd469fd9

CONFIDENTIAL & RESTRICTED

		TRANSFERRED: This service has been exchanged to a new service in a new orderItem and no more action can be taken for this one CANCELLED: This service has been cancelled and no more action can be taken for this one. WAITLISTED: The new service added to the orderItem as a result of schedule change and pending for confirmation.
/OrderItem/StatusCode	1	Order item status according to PADIS "Ordered Item Status, Coded"

VIII. Order Details

The fields described in this section is applicable to both unpaid and paid orders.

Following objects returned under IATA_OrderViewRS/Response/Order

Parameter	#	Description
/OrderID	1	Unique ID to identify and refer to the newly generated NDC order.
/CreationDateTime	1	The datetime when the order is created
/OwnerCode	1	Owner of the order, TK
/StatusCode	1	"ACTIVE" after order creation, updated according to PADIS "Ordered Status, Coded" afterwards
/TotalPrice/	0..1	Total price details for all chargeable order items.
/TotalPrice/EquivAmount	1	Total equivalent amount for **all chargeable OrderItems**
/TotalPrice/EquivAmount/@CurCode	1	Client specific CurrencyCode
/TotalPrice/TaxSummary/TotalTaxAmount	1	Total tax amount for **all chargeable OrderItems**
/TotalPrice/TaxSummary/TotalTaxAmount/@CurCode	1	Client specific CurrencyCode
/TotalPrice/TotalAmount	1	Total amount for **all chargeable OrderItems**
/TotalPrice/TotalAmount[CurCode]	1	Client specific CurrencyCode

Note: TotalPrice is provided for unpaid orders only if there is a fare associated with the order.

IX. Payment Info for Flights and Ancillaries

The fields described in this section is applicable to only paid orders.

Following objects returned under IATA_OrderViewRS/

Parameter	#	Description
PaymentFunctions	1	Created one for each paid order item (ancillary or flight)
/OrderAssociation/OrderItemRefID	1	ID of the related order item for this payment
/OrderAssociation/OrderRefID	1	ID of the order this payment is associated with
/PaymentProcessingSummary/Amount	1	Payment amount
/PaymentProcessingSummary/Amount[CurCode]	1	Same as β/TotalAmount[CurCode]
/PaymentProcessingSummary/PaymentCommitmentDateTime	0..1	Date and time information for payment commitment.
/PaymentProcessingSummary/PaymentID	1	Internal paymentID returned only for all BSP and all CC transactions

/PaymentProcessingSummary/PaymentProcessingSummaryPaymentMethod/SettlementPlan/PaymentTypeCode	1	Will be returned as “CA” for cash payments.
/PaymentProcessingSummary/PaymentStatusCode	1	SUCCESSFUL : If the purchase is completed successfully FAILED: If the payment or issuing process can not be completed successfully. PENDING: If the payment details are requested but payment has not done yet.
/PaymentProcessingSummary/PaymentProcessingSummaryPaymentMethod/ IATA_EasyPay	1	Will be returned as: <IATA_EasyPay> <ApprovalCode> {Authorization result Approval code} </ApprovalCode> <IATA_EasyPayEncryptedData> <EncryptedAccountNumber CharacterSetCode=”{Tokenized EasyPay Account number}”</EncryptedAccountNumber> </IATA_EasyPayEncryptedData> </IATA_EasyPay> Please note that the order-pay or order-rebook response for the EasyPay payment method is expected to be decrypted by the clients by reverse engineering the EncryptedAccountNumber value (account number information that is clearly visible if this text is made as byte array to string with utf-8).

X. TicketDocInfo For Paid Flights and Paid Ancillaries

The fields described in this section is applicable to only paid orders.

Following objects returned under IATA_OrderViewRS/Response

Parameter	#	Description
/TicketDocInfo/ α	0..N	Created one for each paid order item (ancillary or flight)
α/BookingRef/	1	Booking reference
α/BookingRef/BookingID	1	ID of the associated PNR
α/BookingRef/BookingRefTypeCode	1	"P" for PNR
/BookletQty	1	Number of booklets issued for a given ticket/ document set.
α/Commission/Amount	0..1	Amount of commission if applicable
α/EndorsementText	0..1	Endorsement text if available
α/FareDetail/	0..1	Detail of the fare associated
α/FareDetail/AccountCode	0..1	Account code if applicable
α/FareDetail/FareCalculationInfo/AddlInfoText	1	Fare calculation text
α/FareDetail/FareCalculationInfo/PricingCodeText	1	Fare calculation price code
α/FareDetail/Price/BaseAmount	1	Filed amount excluding taxes
α/FareDetail/Price/BaseAmount[CurCode]	1	CurrencyCode of the filed amount
α/FareDetail/Price/EquivAmount	1	Equivalent amount in client specific currency
α/FareDetail/Price/EquivAmount[CurCode]	1	Client specific CurrencyCode
α/FareDetail/Price/TaxSummary/Tax	0..N	Created one for each distinct TaxCode in the document
α/FareDetail/Price/TaxSummary/Tax/Amount	1	Tax amount
α/FareDetail/Price/TaxSummary/Tax/ QualifierCode	0..1	Provided only for the new documents created as a result of exchange/reissue. Code of “701” is for already paid taxes.
α/FareDetail/Price/TaxSummary/Tax/TaxCode	1	Code of the tax

α/FareDetail/Price/TaxSummary/Tax/TaxName	1	Descriptive name of the Tax
α/FareDetail/Price/TotalAmount	1	Total of equivalent + sum of all Taxes
α/FareDetail/Price/TotalAmount[CurCode]	1	Client specific CurrencyCode
α/FareDetail/StatisticalCodeText	1	"I" for international "D" for domestic
α/IssueInfo	1	Details of the point of the sale information.
α/IssueInfo/IATA_LocationCode	1	City code of the sale point.
α/IssueInfo/IssueDate	1	Issue date of the document in Zulu date.
α/IssueInfo/IssueTime	1	Issue time of the document in Zulu time.
α/IssueInfo/IssuingCarrier/AirlineDesigCode	1	Issuing airline two-chars code. TK for Turkish Airlines
α/OriginalIssueInfo	1	Details of the original ticket.
α/OriginalIssueInfo/IATA_LocationCode	1	City code of the sale point.
α/OriginalIssueInfo/IssueDate	1	Issue date of the document in Zulu date.
α/OriginalIssueInfo/IssuingCarrier/AirlineDesigCode	1	Issuing airline three-chars code. "235" for Turkish Airlines
α/OriginalIssueInfo/TicketNumber	1	Original ticket number.
α/OriginalIssueInfo/TravelAgency/AgencyID	1	IATA Validator Code of Agency
α/OriginalIssueInfo/TravelAgency/IATA_Number	1	IATA Validator Code of Agency
α/OriginalIssueInfo/TravelAgency/PseudoCityID	1	3-Chars Pseudo City Code which is given by the airline to the agency.
α/PaxRefID	1	PaxID of the Pax associated with the document.
α/ReferencedOrder/OrderID	1	OrderID of the associated Order
α/ReferencedOrder/OrderItem/OrderItemRefID	1	OrderItemID of the associated OrderItem
α/ReferencedOrder/OrderItem/OwnerCode	1	Owner of the OrderItem, TK
α/ReferencedOrder/OwnerCode	1	Owner of the Order, TK
α/Ticket/	1..4	Created one for each document
α/Ticket/ConnectedDocNumber	1	Ticket number associated with the EMD and the exchanged previous ticket number related to the new ticket.
α/Ticket/Coupon/	1..4	Created one for each segment
α/Ticket/Coupon/BaggageAllowanceRefID	0..1	Reference to the BaggageAllowance if applicable
α/Ticket/Coupon/CouponNumber	1	Coupon reference number
α/Ticket/Coupon/CouponStatusCode	1	Text description of coupon (flight) status. The values are as below; AIRPORT CHECKED-IN FLOWN LIFTED OPEN EXCHANGED REFUND SUSPENDED VOID CLOSED UNAVAILABLE
α/Ticket/Coupon/FareBasisCode	1	Fare basis code
α/Ticket/Coupon/SoldAirlineInfo/PaxSegmentRefID	0..1	Related segment ID of the coupon
α/Ticket/Coupon/InvolIndCode	0..1	Involuntary indicator
α/Ticket/Coupon/RFISC	1	Returned only for ancillaries (EMDs); RFISC of the ancillary
α/Ticket/Coupon/RFISC_Desc	1	Returned only for ancillaries (EMDs); description text for RFISC

75dab313-82ba-49d6-8ec0-01bfc8109fdb

α/Ticket/Coupon/ValueAmount	0..1	Returned only for ancillaries (EMDs); Portion of Equivalent amount applicable to this coupon
α/Ticket/Coupon/ValueAmount[CurCode]	0..1	Client specific CurrencyCode
α/ExchReissueInd	1	If the ticket is a new one which is created as a result of reissue transaction then this value will be “true”, otherwise “false”
α/Ticket/PrimaryDocInd	1	Returned true for no conjunction case or for the primary ticket of the conjunction.
α/Ticket/ReportingTypeCode	1	“BSP”, “ARC”, or “Airline”
α/Ticket/TicketDocTypeCode	1	“T” for ticket, “J” for EMD-A, and “Y” for EMD-S
α/Ticket/TicketNumber	1	Number for the document

XI. EXST (Extra Seat) Details

This section describes the additional OrderViewRS objects returned when an order includes EXST. EXST information is represented through ServiceDefinition objects under DataLists and Service objects under the related flight OrderItem. The ServiceDefinitionID created for EXST must be referenced by the corresponding Service object in the OrderItem.

a. ServiceDefinition in the DataLists for EXST

For an order containing EXST, a separate ServiceDefinition object must be returned in DataLists for each distinct EXST quantity used in the order.

The following objects are returned under /IATA_OrderViewRS/Response/DataLists/ServiceDefinitionList/

Parameter	#	Description
ServiceDefinition/α	0..N	A separate ServiceDefinition object must be returned for each distinct EXST quantity used in the order
α/BookingInstructions /SpecialService/Qty	1	Quantity of EXST
α/Desc/DescText	1	Default value: "Extra Seat"
α/Name	1	Default value: "EXST"
α/OwnerCode	1	Default value: "TK"
α/ServiceDefinitionID	1	The ServiceDefinitionID should be generated according to the EXST quantity, such as SVC_EXS1 for Qty=1 and SVC_EXS2 for Qty=2. **EXS is used as the ID prefix for EXST service definitions* This value is referenced by ServiceDefinitionRefID under the related OrderItem/Service object: /IATA_OrderViewRS/Response/Order/OrderItem/Service/OrderServiceAssociation/ServiceDefinitionRef/ServiceDefinitionRefID

b. Service in the Flight Order Items for EXST

For each passenger with EXST, a separate Service object must be returned under the flight OrderItem for each applicable segment.

If the same passenger has EXST on multiple segments, each segment must have its own Service object referencing the same ServiceDefinitionID that represents the EXST quantity.

The following objects are returned under IATA_OrderViewRS/Response/Order/OrderItem/

Parameter	#	Description
/Service/δ	1..N	A separate Service object must be returned for each applicable segment of each passenger with EXST
δ/DescText	1	Default value: "EXST"
δ/OrderServiceAssociation/ServiceDefinitionRef/μ	1	Returned for the EXST services for a ServiceDefinition
μ/OrderFlightAssociations/PaxSegmentRef/ PaxSegmentRefID	1	Corresponding PaxSegmentID for the service like "SEG_1"

μ/ServiceDefinitionRefID	1	Corresponding ServiceDefinitionID for the EXST service like "SVC_EXS1"
δ/PaxRefID	1	PaxID of the Pax associated with the order item like "PAX_1"
δ/ServiceID	1	Generated as "FL_SVC_" followed by an incremental number for each new Service in the Order, such as "FL_SVC_4" The number may vary depending on the existing services in the Order
δ/StatusCode	1	Status of the ordered service according to PADIS. For confirmed EXST services, the value is expected to be "CONFIRMED"

Special Considerations

1. order-retrieve accepts orderid or PNR number as a retrieve criterion, however currently they are identical.
2. Exactly one filter criterion is expected as part of order-retrieve request.
3. There are three types of OrderItems that can be returned within an OrderViewRS:
   3.1. Flight OrderItem: One will be constructed for all flights for each passenger in the itinerary. May be present in the OrderViewRS as a paid or unpaid item.
   3.2. Ancillary OrderItem: One will be constructed for each quoted ancillary offer item that is paid through order-pay. May be present in the OrderViewRS only as a paid item.
   3.3. Non-Chargeable Service OrderItem: One will be constructed for each special need or non-chargeable seat service applicable to a Passenger-Segment. Maybe present in the OrderViewRS before or after any chargeable services are paid for.
4. For paid orders that have been previously rebooked or refunded, OrderItems for the old flights will still be present in OrderViewRS. Active order items vs. refunded/rebooked order items can be distinguished based on the value of /IATA_OrderViewRS/Response/Order/OrderItem/StatusCode which can either be ACTIVE or CANCELLED (rebooked or refunded):
5. Under rare circumstances, the OrderViewRS may include the below warning; indicating further flight details are not returned within the OrderViewRS.

Code	Key	Description
NDC-8000	EXTRA_FLIGHT_DETAILS_NOT_PROVIDED_WARNING	Extra flight details (duration, aircraft type, terminal and leg info) not provided due to performance considerations or technical problem.

In such cases, the following fields will not be present within the OrderViewRS:

Field Name	Path
Aircraft Type	/IATA_OrderViewRS/Response/DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/CarrierAircraftTypeCode
Aircraft Type	/IATA_OrderViewRS/Response/DataLists/DatedOperatingLegList/DatedOperatingLeg/IATA_AircraftType/IATA_AircraftTypeCode
Aircraft Type Name	/IATA_OrderViewRS/Response/DataLists/DatedOperatingLegList/DatedOperatingLeg/CarrierAircraftType/CarrierAircraftTypeName
Flight Duration	/IATA_OrderViewRS/Response/DataLists/DatedOperatingSegmentList/DatedOperatingSegment/Duration
Arrival Point Terminal Name	/IATA_OrderViewRS/Response/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Arrival/TerminalName
Departure Point Terminal Name	/IATA_OrderViewRS/Response/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/Dep/TerminalName

6. Schedule Change Display (including flight cancellations)

6.1. If a schedule change occurs for a paid/unpaid order and the change requires special processing for the order, then the following warning will be returned in the OrderViewRS for that order.

Code	Key	Description
NDC-8007	PENDING_SCHEDULE_CHANGE_WARNING	There exist schedule changes for the itinerary within the order that have not been finalized yet.

6.2. If a schedule change occurs for a paid/unpaid order that is triggered by a flight cancellation within operational window (less than 72 hours to the departure time of the effected flight) then the following warning will be returned in the OrderViewRS for that order.

Code	Key	Description
NDC-8008	FLIGHT_CANCELLATION_WITHIN_OPERATIONAL_PERIOD_WARNING	There exist flight cancellation(s) within operational window within the order.

6.3. If a schedule change occurs for a paid/unpaid order that is triggered by a flight cancellation within operational window (less than 72 hours to the departure time of the effected flight) then the following warning will be returned in the OrderViewRS for that order.

Code	Key	Description
NDC-8008	FLIGHT_CANCELLATION_WITHIN_OPERATIONAL_PERIOD_WARNING	There exist flight cancellation(s) within operational window within the order.

6.4. Combination of above three cases can be present within an OrderViewRS.

6.4.1. For cases 16.2 and 16.3 (schedule changes), OrderViewRS will contain information about the segments that are cancelled and, if it exists, segments proposed instead of those cancelled segments.

6.4.2. "A segment that is cancelled without proposed segment(s)" can be observed in OrderViewRS within a Service for the flights as shown below.

```
<Service>
  <AirlineTaxonomy>
    <TaxonomyFeature>
      <CodesetCode>FLIGHT</CodesetCode>
      <CodesetNameCode>TK_Codeset</CodesetNameCode>
      <ValueText>Services/Items for flight</ValueText>
    </TaxonomyFeature>
  </AirlineTaxonomy>
  <BookingRef>
    <BookingID>2352230365583</BookingID>
    <BookingRefTypeCode>5</BookingRefTypeCode>
  </BookingRef>
  <BookingRef>
    <BookingID>WFUGI2</BookingID>
    <BookingRefTypeCode>P</BookingRefTypeCode>
  </BookingRef>
  <DeliveryStatusCode>UNABLE TO DELIVER</DeliveryStatusCode>
  <OrderServiceAssociation>
    <PaxSegmentRef>
      <PaxSegmentRefID>SEG_1</PaxSegmentRefID>
    </PaxSegmentRef>
  </OrderServiceAssociation>
  <PaxRefID>PAX_1</PaxRefID>
  <ServiceID>FL_SVC_1</ServiceID>
  <StatusCode>CANCELLED</StatusCode>
</Service>
```

Where,

- CodesetNameCode="TK_Codeset" and CodesetCode="FLIGHT" indicates, this is service for a flight.
- PaxSegmentRef indicates the effected segment.
- And DeliveryStatusCode="UNABLE TO DELIVER" and StatusCode="CANCELLED" means the related segment(s) are cancelled.

6.4.3. "A segment that is cancelled with proposed segment(s)" can be observed in OrderViewRS within a Service for the flights as shown below.

```
<Service>
  <AirlineTaxonomy>
    <TaxonomyFeature>
      <CodesetCode>FLIGHT</CodesetCode>
      <CodesetNameCode>TK_Codeset</CodesetNameCode>
```

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

```
        <ValueText>Services/Items for flight</ValueText>
      </TaxonomyFeature>
    </AirlineTaxonomy>
    <BookingRef>
      <BookingID>2352230365583</BookingID>
      <BookingRefTypeCode>5</BookingRefTypeCode>
    </BookingRef>
    <BookingRef>
      <BookingID>WFUGI2</BookingID>
      <BookingRefTypeCode>P</BookingRefTypeCode>
    </BookingRef>
    <DeliveryStatusCode>UNABLE TO DELIVER</DeliveryStatusCode>
    <OrderServiceAssociation>
      <PaxSegmentRef>
        <PaxSegmentRefID>SEG_1</PaxSegmentRefID>
      </PaxSegmentRef>
    </OrderServiceAssociation>
    <PaxRefID>PAX_1</PaxRefID>
    <ServiceID>FL_SVC_1</ServiceID>
    <ServiceRefID>FL_SVC_7</ServiceRefID>
    <StatusCode>CANCELLED</StatusCode>
</Service>
```

Where,

- CodesetNameCode=”TK_Codeset” and CodesetCode=”FLIGHT” indicates, this is service for a flight.
- PaxSegmentRef indicates the effected segment.
- DeliveryStatusCode=”UNABLE TO DELIVER” and StatusCode=”CANCELLED” means the related segment(s) are cancelled.
- And ServiceRefID indicates the flight Service that includes references to the proposed segments as the sample below:

```
<Service>
    <AirlineTaxonomy>
      <TaxonomyFeature>
        <CodesetCode>FLIGHT</CodesetCode>
        <CodesetNameCode>TK_Codeset</CodesetNameCode>
        <ValueText>Services/Items for flight</ValueText>
      </TaxonomyFeature>
    </AirlineTaxonomy>
    <BookingRef>
      <BookingID>V58GBS</BookingID>
      <BookingRefTypeCode>P</BookingRefTypeCode>
    </BookingRef>
    <DeliveryStatusCode>IN PROGRESS</DeliveryStatusCode>
    <OrderServiceAssociation>
      <PaxSegmentRef>
        <PaxSegmentRefID>SEG_2</PaxSegmentRefID>
      </PaxSegmentRef>
    </OrderServiceAssociation>
    <PaxRefID>PAX_1</PaxRefID>
    <ServiceID>FL_SVC_7</ServiceID>
    <StatusCode>WAITLISTED</StatusCode>
</Service>
```

Where,

- CodesetNameCode=”TK_Codeset” and CodesetCode=”FLIGHT” indicates, this is service for a flight.
- DeliveryStatusCode=”IN PROGRESS” and StatusCode=”WAITLISTED” means the related segment(s) are proposed (pending).
- PaxSegmentRef indicates the details of the proposed segments. The details of the proposed segments can be found in DataLists using this reference.

CONFIDENTIAL & RESTRICTED

7. For documents issued outside of NDCAPI ecosystem, relevant information will still be provided under below objects with the exception that, no information regarding the pricing of the document will be provided.
   /IATA_OrderViewRS/Response/Order/OrderItem
   /IATA_OrderViewRS/Response/TicketDocInfo

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	No order found with the specified criteria
NDC-4060	PASSENGER_SURNAME_MISMATCH	Specified surname does not match with the records
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.

OTHER ERRORS

Code	Error Key	Description
NDC-4135	STRICTLY_ONE_ORDER_RETRIEVE_CRITERIA_ALLOWED	Strictly one order-retrieve criteria allowed.
NDC-4038	EMPTY_ORDER_ID	Order id must be provided.
NDC-4077	EMPTY_OWNER_CODE	OwnerCode cannot be empty.
NDC-4136	EMPTY_BOOKING_ID	Booking id cannot be empty.
NDC-4097	EMPTY_AIRLINE_DESIG_CODE	AirlineDesigCode cannot be empty.
NDC-4137	EMPTY_DOC_NUMBER	Doc number cannot be empty.
NDC-4138	INVALID_DOC_NUMBER	Invalid doc number.
NDC-4139	EMPTY_PAX_FILTER_CRITERIA	Pax filter criteria must be provided.
NDC-4100	EMPTY_INDIVIDUAL	Individual cannot be empty.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Surname must be provided.

WARNINGS

Code	Warning Key	Description
NDC-8001	FLIGHT_QUOTE_BEFORE_PAYMENT_IS_REQUIRED_WARNING	Flight-quote is required before payment.
NDC-8017	ORDER_IS_COMPLETED_WARNING	No more action can be taken for the related order. All items of the order whether delivered or cancelled.
NDC-8018	ORDER_IS_CANCELLED_WARNING	No more action can be taken for the related order. All items of the order are cancelled.
NDC-8019	PAYMENT_TIMELIMIT_CHANGED_WARNING	Order cannot be used. A new one must be created.
NDC-8007	PENDING_SCHEDULE_CHANGE_WARNING	There exist schedule changes for the itinerary within the order that have not been finalized yet.
NDC-8008	FLIGHT_CANCELLATION_WITHIN_OPERATIONAL_PERIOD_WARNING	There exist flight cancellation(s) within operational window within the order.
NDC-8008	FLIGHT_CANCELLATION_WITHIN_OPERATIONAL_PERIOD_WARNING	There exist flight cancellation(s) within operational window within the order.
NDC-1456	THE_SURNAME_USED_ORDER_RETRIEVE_REQUEST_IS_NOT_IN_ORDER	The surname used in the order-retrieve request is not in the order. If you want to continue the new process, please use the surname for order validation that the order has included.

4.2. Servicing API

4.2.1. order-infoupdate

Overview

Purpose of order-infoupdate is to add contact information, frequent flyer number, passport information and identity information or delete contact information and frequent flyer number or to update contact information, frequent flyer number, passport information and identity information.

order-infoupdate can be utilized for three different contexts; info_add, info_delete and info_update. Context will be identified as per:


info_add: The information in the /IATA_OrderChangeRQ/Request/DataLists/PaxList/Pax object are added if /IATA_OrderChangeRQ/Request/DataLists/PaxList/Pax/PaxID is equal to /IATA_OrderChangeRQ/Request/ChangeOrderChoice/UpdatePax/New/PaxRefID.

info_delete: The information in the /IATA_OrderChangeRQ/Request/DataLists/PaxList/Pax object are deleted if /IATA_OrderChangeRQ/Request/DataLists/PaxList/Pax/PaxID is equal to /IATA_OrderChangeRQ/Request/ChangeOrderChoice/UpdatePax/Current/PaxRefID.

info_update: Update function occurs when info_add and info_delete are used for same information type in a single order-infoupdate request.

Within the response of order-infoupdate, updated NDC order details will be returned within an OrderViewRS

Operation Name	order-infoupdate
Operation URL	$NDCAPI_BASEURL$/order-infoupdate
NDC message input	IATA_OrderChangeRQ
NDC message output	IATA_OrderViewRS
Main function	Adds or deletes contact info, FFID and identity doc info.
Main inputs	An active NDC order and passenger information such as contact information, FFID and identity document information which are requested to be added or deleted.
Main outputs	Order details with newly added (or deleted) information.
Prerequisites	An active NDC order
To be followed by	none

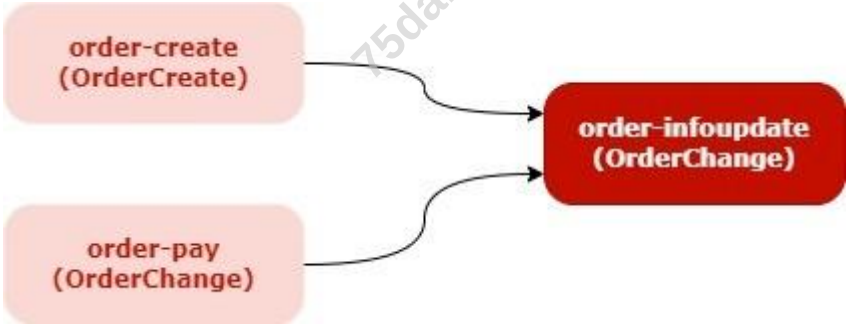

Limitations

1. Cancellation for passport or identity information is not supported. The context info_add will work as update when it is used for passport and/or identity information.
2. Update of name, surname, gender and birthdate is not supported.
3. Can be used for only one passenger at a time. For different passengers, need multiple requests.

Supported Functionalities

1. Adding new contact information, frequent flyer number, passport and identity information
2. Deleting contact information and frequent flyer number
3. Updating contact information, frequent flyer number, passport details and identity information are supported.

4. Adding language preference for email and phone is supported.
5. Generic contact information processing is supported.

Input Parameters

Fields under IATA_OrderChangeRQ/Request to be used are:

Parameter	Explanation	Mandatory/ Repetition(#)	Type/ Example
ChangeOrderChoice/		YES / 1	Complex
ChangeOrderChoice/UpdatePax/		YES / 1	Complex
ChangeOrderChoice/UpdatePax/Current/	Info of current passenger	YES / 1	Complex
ChangeOrderChoice/UpdatePax/Current/PaxRefID	Pax ID of current passenger	YES / 1	String / PAX_1
ChangeOrderChoice/UpdatePax/New/	Info of new passenger	NO / 0..1	Complex
ChangeOrderChoice/UpdatePax/New/PaxRefID	Pax ID of new passenger	YES / 1	String / PAX_01
DataLists/	All passenger and contact information	YES / 1	Complex
DataLists/ContactInfoList/	Contact info list	NO / 0..1	Complex
DataLists/ContactInfoList/ContactInfo/α	Contact info details	YES /1..N	Complex
α/ContactInfoID	An ID which can be referenced within PaxList	YES / 1	String / CNTINFO
α/EmailAddress/	Email address details	NO / 0..N	Complex
α/EmailAddress/ContactTypeText	Contact type of email address	YES / 1	String / E
α/EmailAddress/EmailAddressText	Email address of the contact person	YES / 1	String / ab@c.com
α/Phone/	Phone number details	NO / 0..N	
α/Phone/AreaCodeNumber	Area code for the phone	NO / 0..1	Integer / 532
α/Phone/ContactTypeText	Contact type of phone number	YES / 1	String / M
α/Phone/CountryDialingCode	Country code for the phone	NO / 0..1	Integer / 90
α/Phone/ExtensionNumber	Extension number (will be sent if ContactTypeText differ from M)	NO / 0..1	Integer / 1212
α/Phone/PhoneNumber	Phone number	YES / 1	Integer / 1113434
α/PostalAddress/	Postal address details	NO / 0..N	Complex
α/PostalAddress/ContactTypeText	Contact type of postal address	YES / 1	
α/PostalAddress/CountryCode	Country code of the contact person	YES / 1	String / TR
α/PostalAddress/**StreetText**	Street information in the postal address. It is required for ContaxtTypeText “D” or “R”; otherwise, it is not processed.	NO / 0..1	String/Cumhuriyet or 51. St.
α/PostalAddress/**CityName**	Name of city information in the postal address It is required for ContaxtTypeText “D” or “R”; otherwise, it is not processed.	NO / 0..1	String/Istanbul
α/PostalAddress/**CountrySubDivisionName**	Region information in the postal address It is required for ContaxtTypeText “D” or “R”; otherwise, it is not processed.	NO / 0..1	String/Anadolu or Marmara
α/PostalAddress/**PostalCode**	Postal code in the postal address It is required for ContaxtTypeText “D” or “R”; otherwise, it is not processed.	NO / 0..1	Integer/34843
α/OtherAddress	Company details	NO / 0..1	Complex

75dab313-8f08-49db-bee-0105b8f69fdb

α/OtherAddress/ContactTypeText	Company Name	YES / 1	String /THY
α/OtherAddress/OtherAddressText	Tax Number	YES / 1	String / 12345
DataLists/PaxList/	Pax List	YES / 1	Complex
DataLists/PaxList/Pax/β	Pax details	YES / 1..N	Complex
β/ContactInfoRefID	Must be same as α /ContactInfoID, if these values are provided for a PAX, that contact information is pax-related. This parameter can be provided for at most one passenger.	NO / 0..1	String / Pax1_CNT
β/IdentityDoc/	Identity document details	NO / 0..1	Complex
β/IdentityDoc/CitizenshipCountryCode	Citizenship country of the passenger	NO / 0..1	String / TR
β/IdentityDoc/ExpiryDate	Expiry date of the document	NO / 0..1	Date / 2025-02-15
β/IdentityDoc/IdentityDocID	National ID number for National IDs, passport number for passports.	YES / 1	String / AO112324
β/IdentityDoc/IdentityDocTypeCode	Only two values accepted, PT for passport,709 for National ID, according to “PADIS 7365 Processing indicator, coded”. 709 can be used only for citizens of Türkiye	YES / 1	String / PT or 709
β/IdentityDoc/IssueDate	Issue date of identityDoc	NO / 0..1	Date / 2018-02-15
β/IdentityDoc/IssuingCountryCode	Issuing country for the identityDoc	NO / 0..1	String / TR
β/IdentityDoc/ResidenceCountryCode	Residence country of the passenger	NO / 0..1	String / TR
β/IdentityDoc/Surname	Surname of the passenger	YES / 1	String / Ersoy
β/IdentityDoc/Birthdate	Birthdate of the passenger (mandatory for passport)	NO / 0..1	Date / 2012-10-11
β/IdentityDoc/GenderCode	Gender code of the pax according to “PADIS Codeset 6353”, Can either be M: Male, F: Female (mandatory for passport)	NO / 0..1	String / M or F
β/IdentityDoc/GivenName	Name of the passenger	YES / 1	String / Ali
β/IdentityDoc/TitleName	Title of the passenger, possible values MS: Female passenger, not specifying marriage status MRS: Married woman of age 12+ MR: Male of age 12+ MSTR: Male of ages 0-12 MISS: Female of ages 0-12	YES / 1	String / MS
β/Individual/	Passenger details	YES / 1	Complex
β/Individual/Surname	Surname of the passenger	YES / 1	String / Can
β/LangUsage/	Language preference details	NO / 0..1	Complex
β/LangUsage/LangCode	Language preference of contact type	YES / 1	String / EN
β/LoyaltyProgramAccount/	Loyalty program account details	NO / 0..1	Complex
β/LoyaltyProgramAccount/AccountNumber	Membership number	YES / 1	Integer /1234567
β/LoyaltyProgramAccount/LoyaltyProgram/	Loyalty program details	YES / 1	Complex
β/LoyaltyProgramAccount/LoyaltyProgram/Carrier/	Carrier code of the program	YES / 1	Complex

β/LoyaltyProgramAccount/LoyaltyProgram/Carrier/AirlineDesigCode	Always TK	YES / 1	String / TK
β/LoyaltyProgramAccount/LoyaltyProgram/ProgramCode	Prefix of membership number	YES / 1	String / TK
β/PaxID	ID of the passenger (always PAX_0 for a non-passenger related info)	YES / 1	String / PAX_1
Order/	Order details	YES /1	Complex
Order/OrderID	ID of Order	YES /1	String / AB7HR5
Order/OwnerCode	Always TK	YES /1	String / TK

Output Parameters

In response to the OrderChangeRQ, order-infoupdate returns an OrderViewRS with the applicable fields described in 0 Output Parameters for order-retrieve.

Special Considerations

1. If it will be used for a non-passenger related contact information, then IATA_OrderChangeRQ/Request//ChangeOrderChoice/UpdatePax/Current/PaxRefID should be sent as PAX_0 which cannot be an ID of any passenger.
2. ContactTypeText must be the one of the NDC Code from CONTACT_TYPE_TEXT_CODE table:

DESCRIPTION	NDC Code
Travel Agent phone	T
Business phone	B
Home phone	H
Address (home or hotel)	A
Mobile Phone	M
E-mail address	E
Residence address	D
Accomadation Address	R

3. If ContactTypeText in request is not found in CONTACT_INFO_TYPE_SSRCODE[NDC Code], $INVALID_CONTACT_TYPE$ error will return.

4. Since there is no option to delete identity document details; if /IATA_OrderChangeRQ/Request/DataLists/PaxList/Pax/IdentityDoc/ will sent where /IATA_OrderChangeRQ/Request/DataLists/PaxList/Pax/PaxID **=** /IATA_OrderChangeRQ/Request/ChangeOrderChoice/UpdatePax/Current/PaxRefID in OrderChangeRQ then IDENTITY_INFORMATION_CANNOT_BE_DELETED error will return.

5. It can be success for some actions in request whereas failure for the others. In this case, $CONTACT_OR_LOYALTY_PROGRAM_INFO_NOT_CHANGED_WARNING$, $PASSPORT_INFO_NOT_CHANGED_WARNING$ and $IDENTITY_INFO_NOT_CHANGED_WARNING$ will be returned to inform which one is fail, respectively.

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	**Order not found.**
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.

75dab313-82ba-49d6-b5ee-d105f8469fdb

NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-1010	INVALID_EMAIL_ADDRESS	E-mail address is not of correct format.
NDC-1310	INVALID_REASON_CODE	Reason Code is not valid.
NDC-1368	INVALID_OWNER_CODE	Owner Code is not valid.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-1311	IDENTITY_INFORMATION_CANNOT_BE_DELETED	Identity information cannot be deleted.
NDC-1357	LOYALTY_NUMBER_COULD_NOT_BE_VERIFIED	Loyalty number could not be verified.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1118	NOT_ABLE_TO_ENTER_SSR	Ancillary could not be added.
NDC-4190	SSR_IS_VALID_FOR_INTERNATIONAL_FLIGHT	Service is valid only for international flights.

OTHER ERRORS

Code	Error Key	Description
NDC-4038	$EMPTY_ORDER_ID$	Order id must be provided.
NDC-4077	$EMPTY_OWNER_CODE$	OwnerCode cannot be empty.
NDC-4082	$EMPTY_DATALIST$	Datalist cannot be empty.
NDC-4083	$EMPTY_PAX_LIST$	PaxList cannot be empty.
NDC-4084	$EMPTY_PAX_ID$	PaxID cannot be empty.
NDC-4093	$EMPTY_INDIVIDUAL_DATA$	Individual subdata cannot be empty.
NDC-4037	$INDIVIDUAL_EMPTY_SURNAME$	Individual surname cannot be empty.
NDC-4086	$EMPTY_IDENTITY_DOC_LIST$	IdentityDocList cannot be empty.
NDC-4088	$EMPTY_IDENTITY_DOC_ID$	IdentityDocID cannot be empty.
NDC-4089	$EMPTY_IDENTITY_DOC_TYPE_CODE$	IdentityDocTypeCode cannot be empty.
NDC-4090	$INVALID_IDENTITY_DOC_TYPE_CODE$	Invalid IdendityDocTypeCode
NDC-4091	$EMPTY_SURNAME$	Surname cannot be empty.
NDC-4094	$EMPTY_ACCOUNT_NUMBER$	AccountNumber cannot be empty.
NDC-4095	$EMPTY_LOYALTY_PROGRAM$	LoyaltyProgram cannot be empty.
NDC-4096	$EMPTY_CARRIER$	Carries cannot be empty.
NDC-4097	$EMPTY_AIRLINE_DESIG_CODE$	AirlineDesigCode cannot be empty.
NDC-4098	$EMPTY_PROGRAM_CODE$	ProgramCode cannot be empty.
NDC-4034	$EMPTY_CONTACT_INFO$	ContactInfo cannot be empty.
NDC-4099	$EMPTY_CONTACT_INFO_ID$	ContactInfoID cannot be empty.
NDC-4035	$EMPTY_EMAIL_ADDRESS$	EmailAddress cannot be empty.
NDC-4115	$EMPTY_CONTACT_TYPE_TEXT$	ContactType text cannot be empty.
NDC-4102	$EMPTY_AREA_CODE_NUMBER$	AreaCodeNumber cannot be empty.
NDC-4104	$EMPTY_COUNTRY_DIALING_CODE$	CountryDialingCode cannot be empty.
NDC-4103	$INVALID_CONTACT_TYPE$	ContactType is not of valid type.
NDC-4105	$EMPTY_PHONE_NUMBER$	PhoneNumber cannot be empty.
NDC-4106	$EMPTY_POSTAL_ADDRESS$	PostalAddress cannot be empty.
NDC-4109	$MULTIPLE_CONTACT_INFO_REFERENCE$	ContactInfoRef cannot be multiple.
NDC-4100	$EMPTY_INDIVIDUAL$	Individual cannot be empty.
NDC-4226	$EMPTY_BIRTHDATE$	Birthdate cannot be empty.
NDC-4227	$EMPTY_GENDER_CODE$	GenderCode cannot be empty.

7cdab513-820a-49d6-b5ee-110cb3d0f0db

NDC-4234	$EMPTY_UPDATEPAX$	Empty UpdatePax.
NDC-4235	$EMPTY_UPDATEPAX_CURRENT$	Empty UpdatePax Current.
NDC-4233	$PAX_ID_NOT_FOUND$	PaxID is not found in Order.
NDC-4241	$EMPTY_CITY_NAME$	CityName cannot be empty.
NDC-4107	$EMPTY_COUNTRY_CODE$	CountryCode cannot be empty.
NDC-4208	$EMPTY_STREET_TEXT$	StreetText cannot be empty when ContactTypeText is equal "D"
NDC-4209	$EMPTY_COUNTRYSUBDIVISIONNAME$	CountrySubDivisonName cannot be empty when ContactTypeText is equal "D"
NDC-4229	$EMPTY_POSTALCODE$	PostalCode cannot be empty when ContactTypeText is equal "D"
NDC-4305	EMPTY_CONTACTTYPETEXT	OtherAddress/ContactTypeText cannot be empty.
NDC-4306	EMPTY_OTHERADDRESSTEXT	OtherAddress/OtherAddressText cannot be empty.

WARNINGS

Code	Warning Key	Description
NDC-8010	$CONTACT_OR_LOYALTY_PROGRAM_INFO_NOT_CHANGED_WARNING$	Contact and loyalty program information are not changed.
NDC-8011	$PASSPORT_INFO_NOT_CHANGED_WARNING$	Passport information is not changed.
NDC-8012	$IDENTITY_INFO_NOT_CHANGED_WARNING$	Identity information is not changed.

75da8315-82ba-49d6-b5ee-[illegible]05b8469fdb

4.2.2. order-split

Overview

Purpose of order-split is to split an order by two groups of passengers in the original order. As a result, one updated (a smaller number of passengers) and one new order will be present. The purpose of order-split is to allow performing operations resulting in itinerary change on only some of the passengers, which is not possible otherwise.

Within the response of order-split, details of the child order are returned.

Operation Name	order-split
Operation URL	$AGENCY_BASEURL$/order-split
NDC message input	IATA_OrderChangeRQ
NDC message output	IATA_OrderViewRS
Main function	Splitting an order by two groups of passengers
Main inputs	OrderID Passengers to be moved to the new order
Main outputs	A new order for passengers to be separated from the main order (Current order also updated to reflect the changes in passenger list)
Prerequisites	An active order
To be followed by	Any method allowed for an active order

Limitations

1. A generic (non-passenger-related) contact information (e-mail, telephone number) for the original order, or passenger-related contact information (e-mail, telephone number) for at least one passenger staying in the original order and one passenger to be moved to the new order is required for split to succeed.
2. Infant and child passengers and associated adult passengers can not be separated from one another.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Supported Functionalities

1. Paid order can be split.
2. Unpaid (reserved) order can be split.

Input Parameters

Fields under /IATA_OrderChangeRQ/Request/ expected to be provided in order-split request are:

Parameter	Description	Mandatory/ Repetition (#)	Type / Example
DataLists/	Datalist to provide Pax details	YES / 1	Complex
DataLists/PaxList/	Pax details to be moved to the **new** order	YES / 1	Complex
DataLists/PaxList/Pax/	Pax details of Paxes to be split	YES / 1	Complex
DataLists/PaxList/Pax/Individual/GivenName	Name of the passenger	YES / 1	String / Ali
DataLists/PaxList/Pax/Individual/Surname	Surname of the passenger	YES / 1	String / Can
DataLists/PaxList/Pax/PaxID	ID of the PAX to be split as present in the order	YES / 1	String / PAX_1
Order/	Order details	YES / 1	Complex
Order/OrderID	Id of the order to be split	YES / 1	String / DRE55D
Order/OwnerCode	Owner of the order	YES / 1	String / TK
OrderChangeParameters/	Mandatory	YES / 1	Complex
OrderChangeParameters/ReasonCode	Expected as “SPLIT” for order-split	YES / 1	String / SPLIT

Output Parameters

In response to the OrderChangeRQ, order-split will return an OrderViewRS for the child order. The fields returned within the OrderViewRS for the child order will be mostly the same as the original order. Values for some important fields are highlighted below under IATA_OrderViewRS/Response/ to be returned are:

Field	Value
DataLists/PaxList	Will be populated with the details of the passengers requested to be put in a **new** order.
Order/OrderID	A new ID is generated for the newly created order.
Order/OriginalOrderID	ID of the original(parent) order will be provided.
Order/OrderVersionNumber	1 will be returned as order is just created.
Order/OrderItem[i]/PriceGuaranteeTimeLimitDateTime	The latest time the given price details are valid for payment.
Order/OrderItem[i]/PaymentTimeLimitDateTime	Applicable only for unpaid order, value will be the same as the original order.

Special Considerations

1. OrderViewRS in response to order-split will include details of the newly constructed child order. Operations on the original order can also be performed as can be done before the split.
2. Within the OrderViewRS of the original order, there will not be any indicators for child orders descending from the original order, however; for child orders, parent orderid will be returned under /IATA_OrderViewRS/Response/Order/OriginalOrderID.
3. For unpaid orders, repricing through flight-quote is required for both original and child order to be carried to payment. For this reason, within the OrderViewRS responded to an order-split request AFTER_SPLIT_FLIGHT_QUOTE_REQUIRED_FOR_PAYMENT_WARNING is returned.
4. ORDER_STATUS_IS_NOT_SUITABLE error will be returned for unpaid orders that are not reserved.
5. Both original and child order must have at least one adult passenger, otherwise CANNOT_SPLIT_ORDER_WITHOUT_ADULT error will be returned.

ERRORS

Code	Error Key	Description

75dab313-8266-4906-b5ec-d105b8469fdb

CONFIDENTIAL & RESTRICTED

NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-4057	ORDER_STATUS_IS_NOT_SUITABLE	Order is not in a valid state for this operation.
NDC-4210	SPLIT_REASON_EXPECTED	Split reason is expected.
NDC-4112	UNMATCHED_PAX_REF_ID	Pax ID is not found.
NDC-2224	PASSENGER_NAME_MISMATCH	Passenger name mismatch.
NDC-4213	CANNOT_SPLIT_ORDER_WITHOUT_ADULT	Order cannot be split without adult.
NDC-4214	INFANT_AND_RELATED_ADULT_CANNOT_BE_SEPERATED	Infant and related adult cannot be separated.
NDC-1341	ORDER_CREATED_BY_ANOTHER_ENTITY	Order is created by another entity.
NDC-1359	PASSENGER_RECORD_RETRIEVAL_ERROR	Passenger record could not be retrieved.
NDC-4215	INFANT_CANNOT_BE_SPLIT_SEPERATELY	Infant cannot be split separately.
NDC-1540	NOT_ALL_PAX_ID_IN_THE_ORDER_SHOULD_BE_GIVEN	Not all pax id in the order should be given.
NDC-4084	EMPTY_PAX_ID	One or more pax IDs are empty.
NDC-4036	INDIVIDUAL_EMPTY_NAME	Name must be provided.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Surname must be provided.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-4228	EMAIL_MOBILE_CONTACT_MANDATORY	Email and mobile contact are mandatory.

OTHER ERRORS

Code	Error Key	Description
NDC-4122	EMPTY_DATA_LIST	Datalist must be provided.
NDC-4083	EMPTY_PAX_LIST	Passenger type must be entered.
NDC-4093	EMPTY_INDIVIDUAL_DATA	Individual subdata cannot be empty.
NDC-4159	EMPTY_ORDER	ExistingOrder must be provided.
NDC-4038	EMPTY_ORDER_ID	Order id must be provided.
NDC-4077	EMPTY_OWNER_CODE	Owner code must be entered.
NDC-4223	ORDER_SPLIT_BACKEND_CALL_ERROR	Unable to access to external services.
NDC-4224	ORDER_SPLIT_BACKEND_ERROR	Unable to split due to backend error.
NDC-4057	ORDER_STATUS_IS_NOT_SUITABLE	Order is not in a valid state for this operation.
NDC-4112	UNMATCHED_PAX_REF_ID	Pax ID is not found.
NDC-1202	ORDER_RETRIEVE_EDF_CALL_ERROR	If backend system faces connection problem with ticketing open system while retrieving order details.
NDC-1201	ORDER_RETRIEVE_RRD_ERROR	If order information cannot be retrieved from ticketing open system.
NDC-2226	REPOSITORY_SYSTEM_ERROR	Repository system error.

WARNINGS


Code	Warning Key	Description
NDC-4212	AFTER_SPLIT_FLIGHT_QUOTE_REQUIRED_FOR_PAYMENT_WARNING	After split, flight quote is required for payment.

4.2.3. service-addremove

Overview

The function of service-addremove is to add/remove special needs or non-chargeable seats to/from an active order.

Operation Name	service-addremove
Operation URL	$NDCAPI_BASEURL$/service-addremove
NDC message input	IATA_OrderChangeRQ
NDC message output	IATA_OrderViewRS
Main function	Adds/removes non-chargeable services to/from the Order.
Main inputs	OrderID, Non-chargeable services (Special Needs and Eligible Non-chargeable Seats) to be added to the Order as an OrderItem or removed from the Order.
Main outputs	Order with new ancillary-OrderItems or with deleted ancillary-OrderItems
Prerequisites	An active unpaid or paid NDC order
To be followed by	none

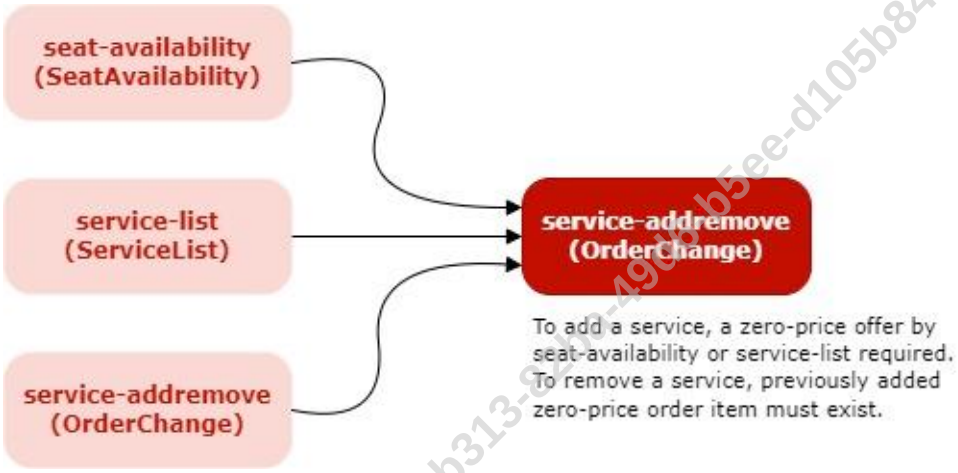

Limitations

1. service-addremove works for only non-chargeable seat or special needs offers that have zero price associated with them.

Supported Functionalities

1. Zero-price offer items can be added to, zero-price order items can be removed from both paid and unpaid NDC orders.

Input Parameters

Fields under IATA_OrderChangeRQ/Request/ expected to be provided in service-addremove request are given for the add and remove contexts below:

I. Add zero-price services (offer items)

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
DataList/	Data list	YES / 1	Complex
DataList/PaxList/	Pax information	YES / 1	Complex
DataList/PaxList/Pax/		YES / 1	Complex
DataList/PaxList/Pax/Individual/	Pax details	YES / 1	Complex

DataList/PaxList/Pax/Individual/Surname	Surname of any Pax in the Order	YES / 1	String / AYDIN
DataList/PaxList/Pax/PaxID	Not processed, required only per xsd	YES / 1	String / PAX_1
ChangeOrderChoice/AcceptSelectedQuotedOfferList/	One AcceptSelectedQuotedOfferList expected	YES / 1	Complex
ChangeOrderChoice/AcceptSelectedQuotedOfferList/SelectedPricedOffer/$^{\alpha}$	Max of two expected: One for non-seat services, one for seat ancillaries to be added (offer list)	YES / 1..N	Complex
α/OfferRefID	OfferID of the Offer for special needs/seat offers to be added	YES / 1	String / AB12CD34
α/OwnerCode	OwnerCode of the owner of the Offer	YES / 1	String / TK
α/SelectedOfferItem	One SelectedOfferItem section for each OfferItem to be added	YES / 1..N	Complex
α/SelectedOfferItem/OfferItemRefID	ID of the selected offer item	YES / 1	String / ABC1234
α/SelectedOfferItem/PaxRefID	RefID of the passenger this offer is requested for	YES / 1	String / Pax_1
Order/	Original Order details	YES / 1	Complex
Order/OrderID	Id of the original Order	YES / 1	String / AA11BB22CC
Order/OwnerCode	OwnerCode of the owner of the Order	YES / 1	String / TK

II. Remove zero-price services (order items)

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
DataList/	Data list	YES / 1	Complex
DataList/PaxList/	Pax information	YES / 1	Complex
DataList/PaxList/Pax/		YES / 1	Complex
DataList/PaxList/Pax/Individual/	Pax details	YES / 1	Complex
DataList/PaxList/Pax/Individual/Surname	Surname of any Pax in the Order	YES / 1	String / AYDIN
DataList/PaxList/Pax/PaxID	Not processed, required only per xsd	YES / 1	String / PAX_1
ChangeOrderChoice/CancelUnpaidOrder/$^{\beta}$	List of OrderItems to be removed	YES / 1	Complex
β/OrderRefID	ID of original Order	YES / 1	String / AB12CD34
β/OwnerCode	OwnerCode of the owner of the Order	YES / 1	String / TK
β/SelectedOrderItem/	Details of OrderItems to be removed	YES / 1..N	Complex
β/SelectedOrderItem/OrderItemRefID	ID of order item to be removed from the order	YES / 1	String / ABC1234
Order/	Original Order details	YES / 1	Complex
Order/OrderID	ID of the original Order	YES / 1	String / AA11BB22CC
Order/OwnerCode	OwnerCode of the owner of the Order	YES / 1	String / TK

Output Parameters

In response to the OrderChangeRQ, service-addremove returns an OrderViewRS with the applicable fields (added/removed OrderItem(s) details reflected) as described in 0 Output Parameters for order-retrieve.

Special Considerations

1. Special needs or non-chargeable seats added to an order through service-addremove will be returned within OrderViewRS as an order item at IATA_OrderViewRS/Response/Order/OrderItem with no FareDetail/ or Price/ within.

2. For non-chargeable seat selection, update of selected seat is possible by simply making a new service-addremove call with the desired seat information. There is no need to remove previously selected seat for a pax-segment, if multiple seat selection is triggered through service-addremove calls for the same pax-segment, the latest will be applied to the order.
3. The service-addremove service should be requested for all seats for the passengers with EXST at the same time. Partially selection is not supported. For a passenger with an EXST, if the number of selected seats is not equal to the number of EXST+1, $WRONG_SEAT_COUNT$ error will return.

ERRORS

Code	Error Key	Description
NDC-4018	ORDER_NOT_FOUND	Order not found.
NDC-4058	NO_FLIGHT_ORDER_ITEM_FOUND	No flight order items exist.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-4023	SEAT_OFFER_NOT_FOUND	Seat offer not found.
NDC-4024	SERVICE_OFFER_NOT_FOUND	Service offer not found.
NDC-4111	UNMATCHED_OFFER_ITEM_REF_ID	OfferItemRef cannot be found in Offer.
NDC-4112	UNMATCHED_PAX_REF_ID	PaxRefID cannot be found.
NDC-1025	SELECTED_SEAT_IS_MANDATORY_FOR_SEAT_OFFERS	SelectedSeat must be provided.
NDC-4151	SEAT_NOT_ELIGIBLE_FOR_OFFER_ITEM	Selected seat is not eligible for the offer.
NDC-4154	MAX_ONE_ANCILLARY_TYPE_ALLOWED_FOR_EACH_PAXSEGMENT	For each Pax maximum one ancillary type allowed per segment.
NDC-4056	CHARGABLE_OFFER_ITEM_NOT_ALLOWED	Chargeable offer items cannot be used at this method
NDC-1028	OFFER_ORDER_ID_NOT_MATCHED	The Offer and Order must be generated from the same priced offer.
NDC-1029	ORDERITEM_NOT_FOUND	Order item not found.
NDC-1030	ORDER_AND_ORDERITEM_NOT_MATCH	Order and OrderItem not matched.
NDC-1031	ORDERITEM_NOT_NONCHARGEABLE	OrderItem is not non-chargeable.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-4168	PASSENGER_RESTRICTED_AISLE_SEAT	Restricted aisle seat for the passengers.
NDC-4169	PASSENGER_RESTRICTED_CENTER_SEAT	Restricted center seat for the passengers.
NDC-4170	PASSENGER_WITH_INFANT_RESTRICTED_SEAT	Restricted seat for the passengers with infants.
NDC-4171	PASSENGER_RESTRICTED_EXIT_SEAT	Restricted exit seat for the passengers.
NDC-4172	PASSENGER_INFANT_RESTRICTED_EXIT_SEAT	Restricted exit seat for the passengers with infants.
NDC-4173	PASSENGER_RESTRICTED_LEGROOM_SEAT	Restricted legroom seat for the passengers.
NDC-4190	SSR_IS_VALID_FOR_INTERNATIONAL_FLIGHT	Service is valid only for international flights.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1117	SSR_CANNOT_BE_ADDED	SSR cannot be added with NDC.
NDC-1118	NOT_ABLE_TO_ENTER_SSR	Ancillary could not be added.
NDC-1209	$OFFER_AND_ORDER_NOT_MATCH$	There is a mismatch in the LoyatyProgram or adult-infant relation between the Offer and the Order.
NDC-8079	HANDLE_CANCELLED/PROPOSED_SEGMENTS_FIRST	Cancelled/proposed segments need to be handled before proceeding with other actions.
NDC-1461	WRONG_SEAT_COUNT	

OTHER ERRORS

Code	Error Key	Description
NDC-4038	EMPTY_ORDER_ID	Order id must be provided.
NDC-4082	EMPTY_DATALIST	Datalist cannot be empty.

NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.
NDC-4084	EMPTY_PAX_ID	PaxID cannot be empty.
NDC-4093	EMPTY_INDIVIDUAL_DATA	Individual subdata cannot be empty.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Surname must be provided.
NDC-4174	EMPTY_OFFER_ID	OfferID cannot be empty.
NDC-1032	NOT_ACCEPTABLE_OFFER_ID	Offer ID format is not acceptable.

WARNINGS

No Warnings.

4.2.4. order-reshop

Overview

Purpose of order-reshop is to create an offer for refunding all active flight order items within the order or perform pre-validation for VOID operation. It can be used for only paid NDC orders.

Two different contexts for order-reshop operation; refund_paid_order or validate_void is inferred as per below:

refund_paid_order context is inferred, if /IATA_OrderReshopRQ/Request/UpdateOrder/CancelOrderRef is present in the request but /IATA_OrderReshopRQ/Request/ResponseParameters/ReasonCode = VALIDATE_VOID is not present in the request.

validate_void context is inferred, if both /IATA_OrderReshopRQ/Request/UpdateOrder/CancelOrderRef and /IATA_OrderReshopRQ/Request/ResponseParameters/ReasonCode = VALIDATE_VOID is present in the request.

For validate_void context, a call to order-reshop may be followed by an order-cancel request with void context. Within the response of order-reshop, possible penalty amount and refund amount will be provided.

For refund_paid_order context, a call to order-reshop is expected to be followed by an order-cancel request with refund context if the end user accepts the offer for the refund. The follow-up order-cancel request must be made within the timeframe of OfferExpirationTimelimitDateTime returned in response. Within the response of order-reshop, possible penalty amount and refund amount will be provided.

Operation Name	order-reshop
Operation URL	$NDCAPI_BASEURL$/order-reshop
NDC message input	IATA_OrderReshopRQ
NDC message output	IATA_OrderReshopRS
Main function	Performs refund fare quotation for paid flight order items to be cancelled OR void eligibility pre-validation
Main inputs	Order to be refunded or pre-validated for void
Main outputs	An offer for the refund of all active paid flight order items or void pre-validation result
Prerequisites	An active paid NDC order
To be followed by	order-cancel



Limitations

1. Refund of paid ancillary order items is not supported.
2. Refund offer can be generated only for a paid order.
3. Refund for only some of the passengers in the order is not supported. This can be achieved by first splitting the order through order-split.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Supported Functionalities

1. Refund offer generation for refund of paid flight order items.
2. Passenger based penalty and refund amounts are provided.
    a. Passenger based CIP Lounge penalty and refund amounts are provided.

Input Parameters

Fields under IATA_OrderReshopRQ/Request/ expected to be provided in order-reshop request are:

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
ContactInfoList/	Contact information list	YES / 1	Complex
ContactInfoList/ContactInfo	Contact information	YES / 1	Complex
ContactInfoList/ContactInfo/ContactInfoID	Required as per xsd only, can always send CNT	YES / 1	String / CNT
ContactInfoList/ContactInfo/Individual	Individual	YES / 1	Complex
ContactInfoList/ContactInfo/Individual/Surname	Surname of any of the passengers on the order	YES / 1	String / SMITH
OrderRefID	Order to be processed	YES / 1	String / AD34FT
UpdateOrder/	Update request details	YES / 1	Complex
UpdateOrder/CancelOrderRef/	Provided to indicate refund_paid_order	YES / 1	Complex
UpdateOrder/CancelOrderRef/OrderRefID	Order to be refunded, must be same as /IATA_OrderReshopRQ/Request/OrderRefID	YES / 1	String / AD34FT
ResponseParameters/ReasonCode	"VALIDATE_VOID" expected for validate_void	NO / 0..1	String

Output Parameters

For refund_paid_order context, in response to the OrderReshopRQ, order-reshop returns an OrderReshopRS with a refund offer including refund and penalty amounts for each passenger if the refund offer is accepted and the order is to be cancelled (refunded).

Fields under IATA_OrderReshopRS/Response/ to be returned for refund_paid_order context are:

Parameter	#	Explanation
DataLists/	0..1	Returned only if any info needed to be provided in DataLists
DataLists/PaxList/	1	Pax list
DataLists/PaxList/Pax/	1..N	Pax detail
DataLists/PaxList/Pax/Individual/GivenName	1	Name of the passenger
DataLists/PaxList/Pax/Individual/Surname	1	Surname of the passenger
DataLists/PaxList/Pax/PaxID	1	ID of the passenger
DataLists/PaxList/Pax/PTC	1	Type of the passenger
DataLists/PenaltyList/	0..1	List of penalties
DataLists/PenaltyList/Penalty/	1..N	Penalty
DataLists/PenaltyList/Penalty/DescText	1..99	Description of the applicable penalty. If there is a CIP Lounge Penalty then, this field value will be set "**CIP_Lounge**"in refund process.
DataLists/PenaltyList/Penalty/PenaltyID	1	An id unique within message to identify this penalty
DataLists/PenaltyList/Penalty/Price/	1	Price
DataLists/PenaltyList/Penalty/Price/TotalAmount	1	Total amount for the penalty
DataLists/PenaltyList/Penalty/Price/TotalAmount[CurCode]	1	Currency for the penalty
DataLists/PenaltyList/Penalty/TypeCode/	1	For what operation this penalty is for For refund, "Cancellation" is returned

CONFIDENTIAL & RESTRICTED

Order/	1	Order details
Order/OrderID	1	OrderID of the Order
Order/OwnerCode	1	Owner of the order
ReshopResults/NoChangeInd/NoChangeInd/	0..1	Constructed with value “true” only for validate_void context.
ReshopResults/ReshopOffers/Offer/	0..1	Only constructed for refund_paid_order context. A single offer is constructed for refund operation.
ReshopResults/ReshopOffers/Offer/OfferID	1	A unique id across messages to identify this offer, this id is expected to be provided in order-cancel if client is willing to accept the offer through.
ReshopResults/ReshopOffers/Offer/OfferID/ OfferExpirationTimeLimitDateTime		The validity end datetime for the offer. This offer can be consumed in order-cancel until this time limit expired.
ReshopResults/ReshopOffers/Offer/OfferID/OwnerCode	1	Owner of the offer
ReshopResults/ReshopOffers/Offer/DeletedOrderItem/ α	1..N	Returned one for each order item **to be deleted**
α/ExistingOrderItem/	1	Existing order item
α/ExistingOrderItem/OrderItemRefID	1	Ref id of the order item **to be deleted**
α/OfferItemID	1	A unique id for the offer item for deletion of this order item
α/PriceDifferential/	1	Pricing details of potential deletion of this order item
α/PriceDifferential/DifferentialTypeCode	1	Type of differential, For refund operation, “Refund” is returned
α/PriceDifferential/DiffPrice	1	Details of the differential price
α/PriceDifferential/DiffPrice/FareDetail/	1	Fare detail for the diff price
α/PriceDifferential/DiffPrice/FareDetail/PaxRefID	1..N	PaxRefIDs of applicable Paxes
α/PriceDifferential/DiffPrice/FareDetail/PenaltyRefID	0..1	Ref to a penalty if this deletion pertains a non-zero penalty
α/PriceDifferential/DiffPrice/FareDetail/Price/ β	1	Price details Refund amounts denoted with negative amounts.
β/BaseAmount	1	Base amount due as negative value, Ex: -109.76
β/BaseAmount[CurCode]	1	Currency of the base amount
β/DueByAirlineAmount	1	Absolute amount due by airline, this will be negative of β/TotalAmount
β/DueByAirlineAmount[CurCode]	1	Currency for the amount due
β/TaxSummary/	1	Summary of taxes to be refunded
β/TaxSummary/Tax	1..N	Tax details
β/TaxSummary/Tax/Amount	1	Tax amount as negative value
β/TaxSummary/Tax/Amount[CurCode]	1	Currency for the amount
β/TaxSummary/Tax/TaxCode	1	Code of the tax
β/TaxSummary/Tax/TaxName	1	Name of the tax
β/TotalAmount	1	Total amount due as negative value, Ex: -245.76
β/TotalAmount[CurCode]	1	Currency for the total amount
α/PriceDifferential/OldPrice/	1	Old price details
α/PriceDifferential/OldPrice/FareDetail/	1	Fare details for the old price
α/PriceDifferential/OldPrice/FareDetail/PaxRefID	1	PaxRefIDs of applicable Paxes
α/PriceDifferential/OldPrice/FareDetail/Price/ δ	1	Price details of the original flight order item
δ/TotalAmount	1	TotalAmount for original flight order item
δ/TotalAmount[CurCode]	1	Currency for the total amount
α/PriceDifferential/NewPrice/	1	Calculated new price details

α/PriceDifferential/NewPrice/FareDetail/	1	Fare detail
α/PriceDifferential/NewPrice/FareDetail/PaxRefID	1	PaxRefIDs of applicable Paxes
α/PriceDifferential/NewPrice/FareDetail/Price/ μ	1	Price details of the new price.
μ/TotalAmount	1	Always 0.00
μ/TotalAmount[CurCode]	1	β/TotalAmount[CurCode]

Fields under IATA_OrderReshoprRS/Response/ to be returned for validate_void context are as below for successful pre-validation:

Parameter	#	Explanation
Order/	1	Order details
Order/OrderID	1	OrderID of the Order
Order/OwnerCode	1	Owner of the order
ReshopResults/NoChangeInd/NoChangeInd	1	Returned true to indicate no change
Warning/Code	1	NDC-8028 warning will be returned to indicate void pre-validation was successful

Special Considerations

1. Refund of paid ancillary order items are not supported by the API. If order-reshop is called for an order with paid non-flight order items, REFUND_PAID_ACTIVE_ANCILLARY_ORDER_ITEMS_FOUND_WARNING is returned within a successful response. Some, but not all, non-flight paid order items may be refundable through non-NDC TK channels.
2. INCONSISTENT_PAX_COUNT_ENCOUNTERED error is returned if number of passengers in NDC records do not match with the same in underlying systems.
3. INCONSISTENT_TICKETNO_ENCOUNTERED error is returned if ticket numbers in NDC records do not match with the same in underlying systems.
4. For validate_void context,
   a. If void validation fails, an appropriate error will be returned.
   b. If void pre-validation is successful, an OrderReshopRS similar to below will be returned:

```
<Response>
  <cns:Order>
    <cns:OrderID>ABCDEF</cns:OrderID>
    <cns:OwnerCode>TK</cns:OwnerCode>
  </cns:Order>
  <cns:ReshopResults>
    <cns:NoChangeInd>
      <cns:NoChangeInd>true</cns:NoChangeInd>
    </cns:NoChangeInd>
  </cns:ReshopResults>
  <cns:Warning>
    <cns:Code>NDC-8028</cns:Code>
    <cns:DescText>Prevalidation for void on the order was successful.</cns:DescText>
    <cns:LangCode>EN</cns:LangCode>
    <cns:StatusText>ORDER_VOID_PREVALIDATION_SUCCESS_WARNING</cns:StatusText>
  </cns:Warning>
</Response>
```

5. DataLists/PenaltyList/Penalty/Price/TotalAmount provided in the output is always rounded up to the nearest integer. However, when the refund is actually processed, the amount charged for the penalty will be based on the filed amount with a precision of 2 floating point digits. For this reason, the actual payment amount processed for the penalty can be slightly lower than what is returned in the response.
6. As refund of ancillaries are not currently supported through NDCAPI, refund offers generated in response to order-reshop (refund_paid_order) includes refund calculations only for flights (flight OrderItems).
7. For non refundable situations, the following are business rule errors:

Description	Detailed Description	NDC Error Message Code:
NON_REFUNDABLE_PORT_EXIST	Tickets who have nonrefundable ports are not accepted.	NDC-1419
PNR_UPGRADED	Upgraded tickets are not accepted.	NDC-1420
AWARD_GJET_NOT_ALLOWED	GJET award tickets are not accepted.	NDC-1425
COUPON_STATUS_NOT_AVAILABLE_FOR_REFUND	Operation cannot be performed since coupon status not available.	NDC-1407
NOSHOW_TICKETS_CANNOT_BE_REFUNDED	Noshow tickets cannot be refunded.	NDC-1130
ORDERID_ALREADY_REFUNDED	Orderid should not be refunded.	NDC-1426

8. If a Business Cabin package is purchased, the CIP Lounge service is granted to the passenger as a direct entitlement.
   a. If the passenger uses the CIP Lounge service and requests a voluntary refund for the related coupon before departure, a CIP Lounge penalty fee must be applied. This will be shown in the example section below in the order-reshop Response:

```
<ns2:Response>
    <DataLists>
        <PaxList>
            <Pax>
                <Individual>
                    <GivenName>TEDA</GivenName>
                    <Surname>ASHA</Surname>
                </Individual>
                <PaxID>PAX_1</PaxID>
                <PTC>ADT</PTC>
            </Pax>
        </PaxList>
        <PenaltyList>
            <Penalty>
                <DescText>CIP_Lounge</DescText>
                <PenaltyID>PN_1</PenaltyID>
                <Price>
                    <TotalAmount CurCode="TRY">2300.00</TotalAmount>
                </Price>
                <TypeCode>Cancellation</TypeCode>
            </Penalty>
        </PenaltyList>
    </DataLists>
    <Order>
...
```

   b. CIP_LOUNGE_APPLIED_WARNING warning is returned in the Order Reshop service response when a CIP Lounge penalty is applied.

```
<Warning>
    <Code>NDC-8165</Code>
    <DescText>CIP Lounge Fee will be applied because of Refund rules. The
passenger has been used CIP Lounge service but didn't attend the flight
```

```
voluntarily. This fee will be applied as a penalty to your
ticket.</DescText>
    <LangCode>EN</LangCode>
    <StatusText>CIP_LOUNGE_APPLIED_WARNING</StatusText>
</Warning>
```

Involuntary Servicing

For refund_paid_order context, the input/output or message flow does not change if the order is subject to involuntary servicing. If the order is subject to involuntary servicing due to a schedule change (including cancellations), then the OrderViewRS for that order will contain the below warning.

Code	Key	Description
NDC-8006	INVOLUNTARY_SITUATION_OCCURED_WARNING	Involuntary situation occurred in the order which needs to be changed or refunded

There are some cases of involuntary situations (Emergency State for a specific airport or region, etc.) for which there are no indications in OrderViewRS about the involuntary situation. But refund offer in all voluntary and involuntary cases will be constructed according to the pricing rules. If, for example, pricing rules allow full refund due to an involuntary situation, a refund offer with full refund will be constructed.

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-1403	NO_SUITABLE_ORDER_ITEMS_TO_REFUND	No paid flight order items found in the order.
NDC-1404	INCONSISTENT_PAX_COUNT_ENCOUNTERED	Passenger count in the order does not match with the count in the records.
NDC-1405	UNPAID_ORDER_NOT_SUITABLE_FOR_REFUND_OR_VOID	Only paid orders can be refunded/voided.
NDC-1406	INCONSISTENT_TICKETNO_ENCOUNTERED	Ticket numbers in the order does not match with the records.
NDC-1335	INCONSISTENT_ORDERID	Order id does not match with the reference.
NDC-1407	COUPON_STATUS_NOT_AVAILABLE_FOR_REFUND	Operation cannot be performed since coupon status not available.
NDC-1339	INVALID_SEGMENT_STATUS	Segment status is not suitable for the operation.
NDC-1359	PASSENGER_RECORD_RETRIEVAL_ERROR	Passenger record could not be retrieved.
NDC-1402	UNAUTHORIZED_ORDER	Not authorized to perform operation on this order.
NDC-1360	MANUALLY_PROCESSED_TICKET_ERROR	Operation cannot be completed due to manual processing of ticket(s).
NDC-1408	TICKET_CANNOT_BE_REFUNDED_AUTOMATICALLY	Tickets associated with the order cannot be refunded automatically.
NDC-4175	EMPTY_CANCEL_ORDER_REF	CancelOrderRef must be provided.
NDC-1130	NOSHOW_TICKETS_CANNOT_BE_REFUNDED	No-show tickets cannot be refunded.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1411	ORDER_RESHOP_INVALID_REASON_CODE	ReasonCode not valid for this operation.
NDC-1412	NO_SUITABLE_ORDER_ITEMS_TO_VOID	No paid flight order items found in the order.

NDC-1343	ORDER_NOT_SUITABLE_FOR_VOID	Order is not suitable for void operation.
NDC-1341	ORDER_CREATED_BY_ANOTHER_ENTITY	Order is created by another entity.
NDC-1410	MAXIMUM_ALLOWED_TIME_FOR_VOID_HAS_PASSED	Maximum allowed time for VOID after ticketing has passed.
NDC-1413	REBOOKED_ORDER_CANNOT_BE_CANCELLED	Previously re-booked order cannot be cancelled.
NDC-1419	NON_REFUNDABLE_PORT_EXIST	Tickets who have nonrefundable ports are not accepted.
NDC-1420	PNR_UPGRADED	Upgraded tickets are not accepted.
NDC-1425	AWARD_GJET_NOT_ALLOWED	GJET award tickets are not accepted.
NDC-1426	ORDERID_ALREADY_REFUNDED	Orderid should not be refunded.
NDC-1418	DEPARTURE_TIME_TOO_SOON_FOR_OFFLOAD	It is not enough time for offloading reissue or refund requests for tickets with checked-in status.
NDC-1545	INCONSISTENT_COUPON_STATUS_AFTER_OFFLOAD	Offload transaction was found to be inconsistent with the coupon status although the offload transaction was made
NDC-1546	OFFLOAD_OPERATION_HAS_FAILED	Some or all offload operations failed.
NDC-1547	OFFLOAD_NOT_PERMITTED	Offload could not be done due to business rules.

OTHER ERRORS

Code	Error Key	Description
NDC-4201	EMPTY_UPDATE_ORDER	UpdateOrder cannot be empty.
NDC-4202	EMPTY_CONTACT_INFO_LIST	ContactInfoList cannot be empty.
NDC-4203	STRICTLY_ONE_CONTACT_INFO_REQUIRED	Strictly one contact info is expected.
NDC-4204	EMPTY_ORDER_REF_ID	OrderRefId cannot be empty.
NDC-4099	$EMPTY_CONTACT_INFO_ID$	ContactInfoID cannot be empty.
NDC-4100	$EMPTY_INDIVIDUAL$	Individual cannot be empty.
NDC-4037	$INDIVIDUAL_EMPTY_SURNAME$	Surname must be provided.

WARNINGS

Code	Warning Key	Description
NDC-8023	REFUND_PAID_ACTIVE_ANCILLARY_ORDER_ITEMS_FOUND_WARNING	Paid and active ancillary order items in the order will not be automatically refunded if order is refunded. Call center or sales offices can be contacted for resolution.
NDC-8028	ORDER_VOID_PREVALIDATION_SUCCESS_WARNING	Prevalidation for void on the order was successful.
NDC-1417	CHECKEDIN_PASSENGERS_OFFLOADED_WARNING	All checkedIn passengers have been Offloaded.
NDC-8165	CIP_LOUNGE_APPLIED_WARNING	CIP Lounge Fee will be applied because of Refund rules. The passenger has been used CIP Lounge service but didn't attend the flight voluntarily. This fee will be applied as a penalty to your ticket.

4.2.5. order-cancel

Overview

Purpose of order-cancel is to cancel a paid or unpaid NDC order.



Order-cancel can be utilized for three different contexts; cancel_unpaid_order, refund_paid_order, and void_paid_order. Context will be identified as per:

cancel_unpaid_order, if /IATA_OrderChangeRQ/Request/ChangeOrderChoice/CancelUnpaidOrder is present in the request.

refund_paid_order, if /IATA_OrderChangeRQ/Request/ChangeOrderChoice/AcceptCancelledOffer is present in the request.

void_paid_order, if IATA_OrderChangeRQ/Request/OrderChangeParameters/ReasonCode = VOID is present in the request.

The prerequisites and call flow for each context is provided below:

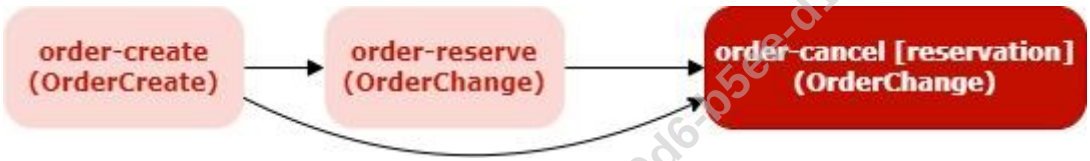Context	Prerequisites
cancel_unpaid_order	An active but not-yet-paid order.
	
refund_paid_order	An active and paid order. A refund offer received through an order-reshop request.
	
void_paid_order	An active and paid order. Sales report not yet finalized for the tickets produced.
	

Within the response of order-cancel, updated NDC order details will be returned within an OrderViewRS.

Operation Name	order-cancel
Operation URL	$NDCAPI_BASEURL$/order-cancel
NDC message input	IATA_OrderChangeRQ
NDC message output	IATA_OrderViewRS
Main function	Depending on the context; performs cancellation of the order as a refund, void, or reservation cancellation.
Main inputs	OrderID for void_paid_order and cancel_unpaid_order contexts OrderID and a reshop refund offerid for refund_paid_order context
Main outputs	Up to date view of the NDC order after cancellation is performed
Prerequisites	An active NDC order

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

To be followed by	possibly order-retrieve

Limitations

1. Refund of paid ancillary order items is not supported.
2. Cancellation for only some of the passengers in the order is not supported. This can be achieved by first splitting the order through order-split.
3. Re-booked orders cannot be voided.

Supported Functionalities

1. Cancellation of unpaid order, cancellation of paid order as a refund, cancellation of paid order as a void (only first issue).
2. Void of paid ancillary order items are supported.
3. Refund of rebooked orders is supported.

Input Parameters

Fields under IATA_OrderChangeRQ/Request/ expected to be provided in order-cancel request are:

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
ChangeOrderChoice/	Change order choice	NO / 0..1	Complex
ChangeOrderChoice/CancelUnpaidOrder/	Expected for cancel_unpaid_order intention	NO / 0..1	Complex
ChangeOrderChoice/CancelUnpaidOrder/OrderRefID	RefID of an unpaid order to be cancelled	YES / 1	String / DRE55D
ChangeOrderChoice/CancelUnpaidOrder/OwnerCode	Ownercode of the order	YES / 1	String / TK
ChangeOrderChoice/AcceptCancelledOffer/	Expected for refund_paid_order intention	NO / 0..1	Complex
ChangeOrderChoice/AcceptCancelledOffer/OfferID	A unique id of a refund offer	YES / 1	String / Refund_Offer_S3EBAZ_assa sa-de-fref
ChangeOrderChoice/AcceptCancelledOffer/OwnerCode	Ownercode of the offer	YES / 1	String / TK
OrderChangeParameters/	Expected for void_paid_order intention	NO / 0..1	Complex
OrderChangeParameters/ReasonCode	Expected as “VOID” for void_paid_order intention	YES / 1	String / VOID
DataLists/PaxList/Pax/	Pax details of any Pax in order	YES / 1	Complex
DataLists/PaxList/Pax/Individual/Surname	Surname of any Pax in the Order	YES / 1	String / CAN
DataLists/PaxList/Pax/PaxID	Not processed, required only per xsd	YES / 1	String / Pax1
Order/	Order details	YES / 1	Complex
Order/OrderID	Id of the order to be cancelled	YES / 1	String / DRE55D
Order/OwnerCode	Owner of the order	YES / 1	String / TK

Output Parameters

In response to the OrderChangeRQ, order-cancel returns an OrderViewRS with the applicable fields described in 0 Output Parameters for order-retrieve which will include below parameters under /IATA_OrderViewRS/Response for order items that are cancelled through this operation.

Parameter	Value
/Order/OrderItem/StatusCode	CANCELLED
/Order/OrderItem/Service/DeliveryStatusCode	REMOVED

CONFIDENTIAL & RESTRICTED

/Order/OrderItem/Service/StatusCode	CANCELLED
/Order/StatusCode	CLOSED, if all sub OrderItems are CANCELLED OPEN, otherwise
/TicketDocInfo/Ticket/Coupon/CouponStatusCode	VOID, if related OrderItem was cancelled through void REFUNDED, if related orderitem was cancelled through refund

Special Considerations

1. Void operation is only possible until the sales report for the related accountable documents (tickets and emds) are authorized. This normally takes place after midnight according to the time zone the client is configured in TK AgencyPortal system. However, under certain circumstances, the sales report may be authorized earlier after which void would not be possible for orders with such accountable documents. In the best case, the maximum allowed time for void operation is 18 hours after an accountable document is issued.
2. Under some rare circumstances, void and refund may succeed for some order items whereas fail for some other order items. In this case, the warnings of VOID_PAID_ORDER_PARTIALLY_FAILED_WARNING and REFUND_PAID_ORDER_PARTIALLY_FAILED_WARNING will be returned, respectively. What order items has failed can be inferred from the OrderItem/StatusCode field for each OrderItem.
3. OPERATION_UNFINALIZED error is returned if no answer backend system during the timeout period if the operation did not finalized

ERRORS

Code	Error Key	Description
NDC-4018	ORDER_NOT_FOUND	Order not found.
NDC-1335	INCONSISTENT_ORDERID	Order id does not match with the reference.
NDC-1336	NO_VOIDABLE_ORDERITEM_FOUND	No order items are suitable for void.
NDC-1334	$NO_REFUNDABLE_ORDERITEM_FOUND$	No order items are suitable for refund.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-1337	ORDER_IS_NOT_UNPAID	Order is not unpaid.
NDC-1369	RESHOP_OFFER_NOT_FOUND	Reshop offer does not exist or expired.
NDC-1370	RESHOP_OFFER_DOES_NOT_BELONG_TO_ORDER	Provided reshop offer does not belong to the reference order.
NDC-1339	INVALID_SEGMENT_STATUS	Segment status is not suitable for the operation.
NDC-4058	NO_FLIGHT_ORDER_ITEM_FOUND	No flight order items exist.
NDC-1341	ORDER_CREATED_BY_ANOTHER_ENTITY	Order is created by another entity.
NDC-1342	ORDER_IS_PAID	Order is paid.
NDC-1343	ORDER_NOT_SUITABLE_FOR_VOID	Order is not suitable for void operation.
NDC-1359	PASSENGER_RECORD_RETRIEVAL_ERROR	Passenger record could not be retrieved.
NDC-1360	MANUALLY_PROCESSED_TICKET_ERROR	Operation cannot be completed due to manual processing of ticket(s).
NDC-1204	ORDER_IS _COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-1409	REFUND_OR_VOID_OR_RESVCANCEL_EXPECTED_EXCLUSIVELY	Exclusively one of i-CancelUnpaidOrder or ii-AcceptCancelledOffer or iii-ReasonCode = VOID is expected in the input.
NDC-1410	MAXIMUM_ALLOWED_TIME_FOR_VOID_HAS_PASSED	Maximum allowed time for VOID after ticketing has passed.
NDC-1405	ORDER_NOT_SUITABLE_FOR_REFUND	Only paid orders can be refunded.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1413	REBOOKED_ORDER_CANNOT_BE_CANCELLED	Previously re-booked order cannot be cancelled.
NDC-1074	OPERATION_UNFINALIZED	The operation is ongoing

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

OTHER ERRORS

Code	Error Key	Description
NDC-4122	EMPTY_DATA_LIST	Datalist must be provided.
NDC-4094	$EMPTY_ACCOUNT_NUMBER$	AccountNumber cannot be empty.
NDC-4097	$EMPTY_AIRLINE_DESIG_CODE$	AirlineDesigCode cannot be empty.
NDC-4096	$EMPTY_CARRIER$	Carries cannot be empty.
NDC-4095	$EMPTY_LOYALTY_PROGRAM$	LoyaltyProgram cannot be empty.
NDC-4174	$EMPTY_OFFER_ID$	OfferID cannot be empty.
NDC-4159	$EMPTY_ORDER$	ExistingOrder must be provided.
NDC-4038	$EMPTY_ORDER_ID$	Order id must be provided.
NDC-4204	$EMPTY_ORDER_REF_ID$	OrderRefId cannot be empty.
NDC-4077	$EMPTY_OWNER_CODE$	Owner code must be entered.
NDC-4084	$EMPTY_PAX_ID$	One or more pax IDs are empty.
NDC-4083	$EMPTY_PAX_LIST$	Passenger type must be entered.
NDC-4098	$EMPTY_PROGRAM_CODE$	ProgramCode cannot be empty.
NDC-4037	$INDIVIDUAL_EMPTY_SURNAME$	Surname must be provided.
NDC-1368	$INVALID_OWNER_CODE$	Owner Code is not valid.

WARNINGS

Code	Warning Key	Description
NDC-8024	VOID_PAID_ORDER_PARTIALLY_FAILED_WARNING	Void operation was successful for some accountable documents, but failed for some others.
NDC-8025	REFUND_PAID_ORDER_PARTIALLY_FAILED_WARNING	Refund operation was successful for some accountable documents, but failed for some others.
NDC-8026	EMDS_NOT_REFUNDED_WARNING	EMDs for non-flight chargeable order items not refunded.

75dab313-82ba-49d6-b5ee-0905b9d65ad8

CONFIDENTIAL & RESTRICTED

4.2.6. rebook-quote

Overview

Purpose of rebook-quote is to generate offers for potential itinerary changes within the order. There is no dedicated reshopping functionality for itinerary changes where intended changes are taken in the input and offers are generated based on combinability rules and price difference. For that reason, regular shopping methods provided in Offer API will be utilized with special reshop intention (ResponseParameters/ReasonCode = 112) to get reshop options that can be used within rebook-quote.

rebook-quote can be utilized for two different contexts; validate_rebook and rebook.



Purpose of validate_rebook is to verify rebookability of the order,

Purpose of rebook context is to generate actual rebook offers that can be carried onto order-rebook.

Context will be identified as per:

- validate_rebook, if /IATA_OrderQuoteRQ/Payload/ResponseParameters/ReasonCode = VALIDATE_REBOOK is present in the request.
- rebook, otherwise.

The call flow for the two contexts are provided below:

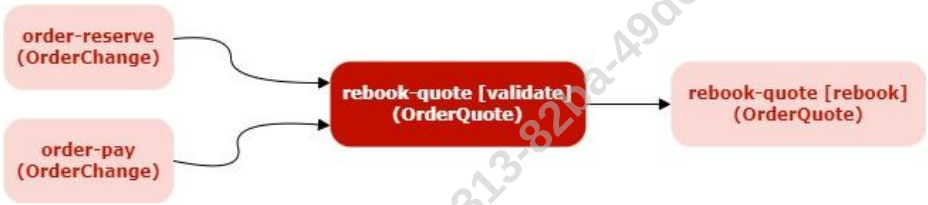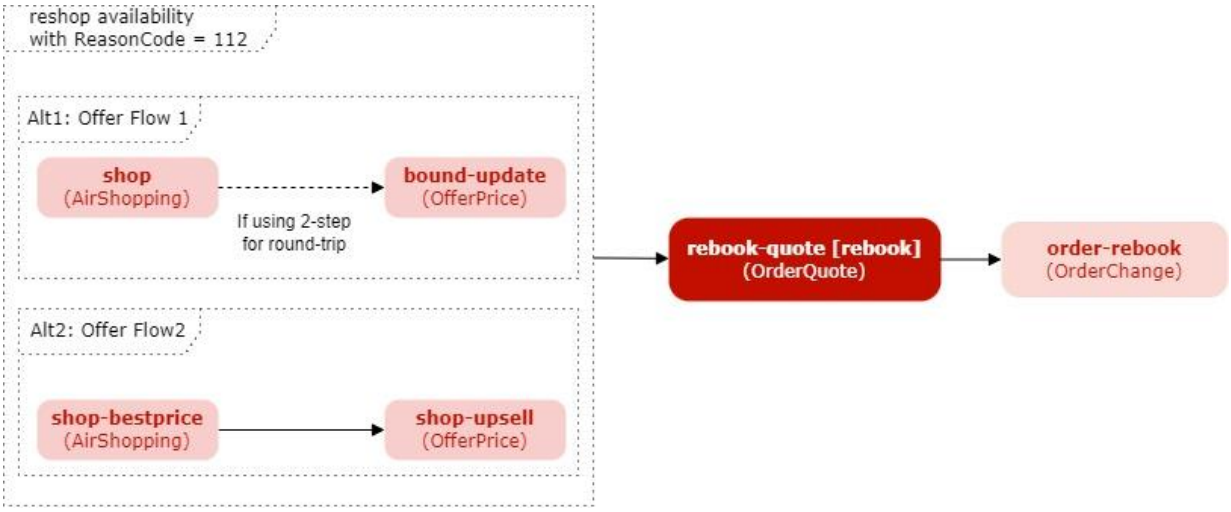Context	Prerequisites
validate_rebook	- An active order.
	
rebook	- An active order. - One or **more** ReshopOffers produced through shop or shop-upsell where ResponseParameters/ReasonCode is set to 112.
	

75dab313-821a-49d6-45ee-d105b849fdb

Within the response of rebook-quote,

1. For validate_rebook context
   1.1. if validation fails; ERROR will be returned
   1.2. if validations succeed, ORDER_ REBOOK_PREVALIDATION_SUCCESS_WARNING will be returned along with an OrderReshopRS with an empty body.
2. For rebook context,
   2.1. A rebook offer will be returned within OrderReshopRS which can be carried onto order-rebook.

Operation Name	rebook-quote
Operation URL	$NDCAPI_BASEURL$/rebook-quote
NDC message input	IATA_OrderQuoteRQ
NDC message output	IATA_OrderReshopRS
Main function	Pre-validation of rebookability or Perform fare quotation based on given flight change requests
Main inputs	OrderID for validate_rebook context OrderID and ReshopOffer refids for rebook context
Main outputs	Validation result or a rebook offer
Prerequisites	For rebook context - one or more ReshopOffers produced through shop or shop-upsell where ResponseParameters/ReasonCode is set to 112.
To be followed by	rebook-quote or order-rebook

In this section ReshopOffer refers to the shop offers generated by shop and shop-upsell methods that are triggered with ResponseParameters/ReasonCode set to 112.

Limitations

1. For rebook, non-TK flights are not supported to be added (they can be removed) to the order. This is guaranteed by shop and shop-upsell methods, which do not return any ReshopOffer with non-TK segments when called with ResponseParameters/ReasonCode = 112
2. The itinerary-to-be must be in alignment with combinability and fare rules, otherwise errors similar to FARE_NOT_FOUND will be encountered.
3. Itinerary changes cannot be performed for only some passengers in the order. All passengers must be included.

Supported Functionalities

2. Pre-validation for rebookability.
3. Rebooking of unpaid order that will remain unpaid.
4. Rebooking of unpaid order with payment details so that payment due is also processed.
5. Rebooking of unused paid orders.
6. Rebooking of partially used paid orders.
7. Multiple ReshopOffers generated through shop and shop-upsell can be provided as an input to rebook-quote. However, combinability and fare rules will decide whether an actual rebook offer can be generated for the final itinerary-to-be.

Input Parameters

Fields under /IATA_OrderQuoteRQ/Payload expected to be provided in rebook-quote request are:

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
ContactInfoList/	Contact information list	YES / 1	Complex
ContactInfoList/ContactInfo	Contact information	YES / 1	Complex
ContactInfoList/ContactInfo/ContactInfoID	Required as per xsd only, can always send CNT	YES / 1	String / CNT
ContactInfoList/ContactInfo/Individual	Individual	YES / 1	Complex

ContactInfoList/ContactInfo/ Individual/Surname	Surname of any of the passengers on the order	YES / 1	String / SMITH
ResponseParameters/ReasonCode	Expected the value of VALIDATE_REBOOK if purpose is rebook validation check.	NO / 0..1	VALIDATE_REBOOK
ExistingOrder/	Details about the existing order	YES / 1	Complex
ExistingOrder/OrderID	Id of the order to be processed	YES / 1	String / AD34FT
ExistingOrder/OwnerCode	Ownercode of owner of the order	YES / 1	String / TK
ExistingOrder/AffectedOrderItem/ α	Must be provided if **removal of flights** requested. If it is provided, it should be repeated for all flight order items in the order.	NO / 0..N	Complex
α/OrderItemRefID	Reference to the orderitems whose services are to be deleted.	YES / 1	String / FL_P1
α/RetainServiceID	Used to indicate segments **not to be removed**	NO / 0..N	String / SVC_12
SelectedOffers/	Must be provided if **addition of flights** requested. One SelectedOffers is expected for each ReshopOffer to be used.	NO / 0..N	Complex
SelectedOffers/OfferRefID	Reference ID of the ReshopOffer	YES / 1	String / 76D8292B-R0B0F0B1F1
SelectedOffers/OwnerCode	Ownercode of the owner of the offer	YES / 1	String / TK
SelectedOffers/SelectedOfferItem/ β	One such object expected for all OfferItems in the reference ReshopOffer	YES / 1..N	Complex
β/OfferItemRefID	Reference ID of the ReshopOffer/OfferItem	YES / 1	String / 76D8292B-R0B0F0B1F1-1
β/PaxRefID	Reference to one or more Paxes this OfferItem is applicable for as indicated in ReshopOffer/OfferItem/FareDetail/PaxRefID	YES / 1..N	PAX_1

Output Parameters

For validate_rebook context

- either an OrderReshopRS with REBOOK_NOT_PERMITTED_DUE_TO_FARE_RULE error is returned.
- or an OrderReshopRS similar to below will be returned indicating that pre-validation was successful.

```
<?xml version="1.0" encoding="UTF-8"?>
<IATA_OrderReshopRS xmlns="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersMessage"
xmlns:cns="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersCommonTypes"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <Response>
    <cns:Order>
      <cns:OrderID>DFR34R</cns:OrderID>
      <cns:OwnerCode>TK</cns:OwnerCode>
    </cns:Order>
    <cns:ReshopResults>
      <cns:NoChangeInd>
        <cns:NoChangeInd>true</cns:NoChangeInd>
      </cns:NoChangeInd>
    </cns:ReshopResults>
    <cns:Warning>
      <cns:Code>NDC-8020</cns:Code>
      <cns:DescText>Primary prevalidation for rebooking of the order was successful.</cns:DescText>
      <cns:LangCode>EN</cns:LangCode>
```

```
        <cns:StatusText>ORDER_REBOOK_PREVALIDATION_SUCCESS_WARNING</cns:StatusText>
      </cns:Warning>
    </Response>
</IATA_OrderReshopRS>
```

Next sections will summarize fields to be returned within IATA_OrderReshopRS/ for rebook context.

I. Passenger Information

Fields to be returned under /IATA_OrderReshopRS/Response/DataLists/

Parameter	#	Explanation
/PaxList/Pax/	1..N	One Pax object returned for each passenger in the order
/PaxList/Pax/Individual/GivenName	1	Name
/PaxList/Pax/Individual/Surname	1	Surname
/PaxList/Pax/PaxID	1	Unique id for passenger
/PaxList/Pax/PaxRefID	0..1	If non-INFANT passenger has an INFANT associated with it, the PaxRefID of that INFANT is provided here.
/PaxList/Pax/PTC	1	Passenger type code

II. FlightDetails Information

Fields to be returned under /IATA_OrderReshopRS/Response/DataLists/

Parameter	#	Explanation
/DatedMarketingSegmentList/DatedMarketingSegment/$^{\alpha}$	0..N	One such object will be returned for each marketing flight segment.
α/Arrival/AircraftScheduledDateTime	1	Arrival datetime.
α/Arrival/IATA_LocationCode	1	Arrival location code.
α/Arrival/StationName	1	Arrival station name.
α/CarrierDesigCode	1	Carrier designator code.
α/CarrierName	1	Name of the carrier.
α/DatedMarketingSegmentId	1	Unique id for the marketing segment.
α/DatedOperatingSegmentRefId	1	Reference DatedOperatingSegmentId of the operating segment.
α/Dep/AircraftScheduledDateTime	1	Departure datetime.
α/Dep/IATA_LocationCode	1	Departure location code.
α/Dep/StationName	1	Departure station name.
α/MarketingCarrierFlightNumberText	1	Flight number.
/DatedOperatingSegmentList/DatedOperatingSegment/$^{\beta}$	1..N	One such object will be returned for each operating flight segment.
β/CarrierDesigCode	1	Carrier designator code.
β/CarrierName	1	Name of the carrier.
β/DatedOperatingSegmentId	1	Unique id for the operating segment.
β/OperatingCarrierFlightNumberText	1	Flight number.
/OriginDestList/OriginDest	1..N	One such object will be returned for each flight (with one or more segments).
/OriginDestList/OriginDest/DestCode	1	Destination location code.
/OriginDestList/OriginDest/OriginCode	1	Origin location code.
/OriginDestList/OriginDest/OriginDestID	1	ID for the OriginDest
/OriginDestList/OriginDest/PaxJourneyRefID	1	Refid of PaxJourneyID associated with this OriginDest.
/PaxJourneyList/PaxJourney/	1..N	One such object will be returned for each bound of every flight.

/PaxJourneyList/PaxJourney/PaxJourneyID	1	Unique id for the journey.
/PaxJourneyList/PaxJourney/PaxSegmentRefID	1..N	Reference(s) to the segment(s) that constitutes the journey.
/PaxSegmentList/PaxSegment/	1..N	Created one for each /DatedMarketingSegmentList/DatedMarketingSegment
/PaxSegmentList/PaxSegment/DatedMarketingSegmentRefId	1	Reference to the associated DatedMarketingSegmentId
/PaxSegmentList/PaxSegment/MarketingCarrierRBD_Code	1	Marketing Carrier RBD, booking class.
/PaxSegmentList/PaxSegment/PaxSegmentID	1	SEG_+ (index of corresponding DatedMarketingSegmentId, ex: SEG_M_0 → SEG_0)

III. Free Baggage Information

Fields to be returned under /IATA_OrderReshopRS/Response/DataLists/BaggageAllowanceList/

Parameter	#	Explanation
/BaggageAllowance	1..N	One returned for each distinct baggage details.
/BaggageAllowance/ApplicablePartyText	1	Default value of “Party”.
/BaggageAllowance/BaggageAllowanceID	1	Unique id for the allowance.
/BaggageAllowance/TypeCode	1	Default value of "Checked" for extra baggage and free baggage allowance, and “CarryOn” for cabin baggage.
/BaggageAllowance/WeightAllowance	0..1	Returned if the baggage is weight-based or if the baggage is for cabin allowance in order to give maximum weight.
/BaggageAllowance/WeightAllowance/ MaximumWeightMeasure	1	Maximum weight amount for one piece.
/BaggageAllowance/WeightAllowance/TotalMaximumWeightMeasure	1	Total weight measure which is purchased by passenger or which is free allowance depending on fare brand.
/BaggageAllowance/WeightAllowance/ WeightUnitOfMeasurement	1	Weight unit, i.e. KGM.
/BaggageAllowance/PieceAllowance	0..1	Returned if the allowance is piece-based or the baggage is for cabin allowance in order to give maximum piece.
/BaggageAllowance/PieceAllowance/TotalQty	1	Maximum piece allowance.

One /DataLists/ServiceDefinitionList/ServiceDefinition/ will be returned for each …/BaggageAllowance/

Fields to be returned under DataLists/ServiceDefinitionList/ServiceDefinition/

Parameter	#	Explanation
/Name	1	Default value of "Checked" for extra baggage and free baggage allowance, and “CarryOn” for cabin baggage.
/OwnerCode	1	Default value of TK
/ServiceDefinitionAssociation/ BaggageAllowanceRef/ BaggageAllowanceRefID	1	Referenced /BaggageAllowance/BaggageAllowanceID
/ServiceDefinitionID	1	UniqueID for the service definition (to be referenced in ReshopResults/ReshopOffers/Offer/AddedOfferItem/)

IV. PriceClass Information

Fields to be returned under /IATA_OrderReshopRS/Response/DataLists/PriceClassList/

Parameter	#	Explanation

/PriceClass	0..N	Constructed to include additional fare information (if available) applicable to one or more flight bounds
/PriceClass/CabinType/CabinTypeCode	1	Code of cabin: 3 for Economy, 2 for Business
/PriceClass/CabinType/CabinTypeName	1	Name given to a cabin: Economy or Business
/PriceClass/Code	0..1	Brand code of the fare if available
/PriceClass/FareBasisCode	0..1	Code of fare basis if available
/PriceClass/Name	1	Name of the brand returned under /PriceClass/Code Or "NO_BRAND" if the PriceClass is for a non-branded flight bound
/PriceClass/PriceClassID	1	Unique ID for the price class

V. Penalty Information

Fields to be returned under /IATA_OrderReshopRS/Response/DataLists/PenaltyList/

Parameter	#	Explanation
/Penalty	0..N	One Penalty object will be constructed for each distinct penalty applicable to /IATA_OrderReshopRS/Response/ReshopResults/ReshopOffers/Offer/AddedOfferItem/ReshopPrice/PriceDifferential/DiffPrice/FareDetail/PenaltyRefID
/Penalty/TypeCode	1	Always *Change* will be returned
/Penalty/PenaltyID	1	Unique id for the penalty
/Penalty/NetInd	1	Always false as it is always collected from passenger
/Penalty/Price/TotalAmount	1	Amount
/Penalty/Price/TotalAmount/@CurCode	1	Currency Code

VI. OfferItems For Flights

Fields to be returned under /IATA_OrderReshopRS/Response/

Parameter	#	Explanation
Order/	1	Order details.
Order/OrderID	1	ID of the Order
Order/OwnerCode	1	Owner of the Order
Order/OrderVersionNumber	1	Version number of the order
ReshopResults/ReshopOffers/Offer/	1	A single offer for will be constructed
ReshopResults/ReshopOffers/Offer/OfferID	1	A unique id across messages to identify this offer, this id is expected to be provided if client is willing to proceed with the offer through rebook-quote. This will be referred as RebookOffer.
ReshopResults/ReshopOffers/Offer/OwnerCode	1	Owner of the Offer
ReshopResults/ReshopOffers/Offer/OfferExpirationTimeLimitDateTime		Latest time this RebookOffer can be consumed
ReshopResults/ReshopOffers/Offer/AddedOfferItem/ α	1..N	Constructed one for each PAX in the order Each one of them corresponds to a flight offer item
α/OfferItemID	1	A unique id for the offer item
α/ReshopPrice/PriceDifferential	1	Offer item specific price and fare detail
α/ReshopPrice/PriceDifferential/DifferentialTypeCode	1	*add_col* = IF (β/Price/DueToAirlineAmount > 0) *residual* = IF (β/Price/DueByAirlineAmount > 0) This field is defined as an enum in the xsd, One of the below values will be returned *AddCol*, if *(add_col && !residual)* *EvenExchange*, *if (!add_col && !residual)*

		Residual, (!add_col && residual) *AddColAndResidual, (add_col && residual)*
α/ReshopPrice/PriceDifferential/NewPrice/	1	Sent as empty <NewPrice/> only because it is mandatory per xsd, no need to be processed
α/ReshopPrice/PriceDifferential/DiffPrice/	1	Object to indicate amounts due and residuals
α/ReshopPrice/PriceDifferential/DiffPrice/FareDetail/ β	1	Fare difference detail for a specific Pax
β/PaxRefID	1	The paxid this faredetail is constructed for, i.e. PAX_**N**
β/PenaltyRefID	0..1	Will be constructed if there is any penalty applicable for this PAX that references to ../DataLists/Penalty/PenaltyID
β/AccountCode	0..1	Returned if account code was used to calculate the new fare
β/Price	1	Price detail per PAX
β/Price/EquivAmount	1	0.00 will be returned if no additional payment is required payment amount due will be returned otherwise.
β/Price/EquivAmount/@CurCode	1	Currency Code for the payment
β/Price/TaxSummary/Tax/	0..N	Created one for each Tax that needs to be paid
β/Price/TaxSummary/Tax/Amount	1	Amount
β/Price/TaxSummary/Tax/Amount/@CurCode	1	Currency Code
β/Price/TaxSummary/Tax/TaxCode	1	Code for the Tax
β/Price/TaxSummary/Tax/TaxName	1	Name of the Tax
β/Price/TaxSummary/TotalTaxAmount	1	Sum of all taxes for this PAX.
β/Price/TaxSummary/TotalTaxAmount/@CurCode	1	Currency Code
β/Price/TotalAmount	1	Total amount (TotalTaxAmount + EquivAmount) for this PAX
β/Price/TotalAmount/@CurCode	1	Currency Code
β/FareComponent	1	Created one for each PaxJourney provided in /DataLists/
β/FareComponent/PaxSegmentRefID	1..N	PaxSegmentIDs in the related PaxJourney
β/FareComponent/PriceClassRefID	1	Reference to the PriceClass applicable for this FareComponent
β/Price/Fee	0..1	This object will be returned if there is any residual amount for this passenger.
β/Price/Fee/DescText	1	RESIDUAL to indicate there is residual amount
β/Price/Fee/Amount	1	Amount will be returned as a negative number as it is due by Airline.
β/Price/Fee/Amount/@CurCode	1	Currency Code
β/Price/DueByAirlineAmount	1	Amount due by Airline, 0.00 if no amount is due by Airline.
β/Price/DueByAirlineAmount/@CurCode	1	Currency Code
β/Price/DueToAirlineAmount	1	Amount due to Airline, 0.00 if no amount is due to Airline.
β/Price/DueToAirlineAmount/@CurCode	1	Currency Code
α/Service	1..N	One will be constructed for each PaxJourney with specific baggage allowance for this specific Pax
α/Service/ServiceID	1	"RS_FL_SVC_"1 (incremented for each new Service in the Offer)
α/Service/PaxRefID	1	Same as β/PaxRefID
α/Service/OfferServiceAssociation/ServiceDefinitionRef/ δ	1..N	Constructed to provide baggage allowance info
δ/ServiceDefinitionRefID	1	Reference Baggage ServiceDefinitionID
δ/OfferFlightAssociations/PaxSegmentReferences/PaxSegmentRefID	1..N	Reference PaxSegmentIDs

75dab313-825a-40d6-b5e6-9105b8...

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Special Considerations

1. For rebook operations that requires selection of new flights, the preliminary step for rebook-quote is to get ReshopOffers by calling one of shopping methods with ReasonCode=112. Below table provides examples for types of shopping calls required for different types of desired operations.

Original Itinerary Type	Desired Operation	ReshopOffer Required
Round-Trip, One-Way, Multi-City	Cancellation of one or more flights with no new flights	No ReshopOffer required
Round-Trip	Change of flights for only one flight	1 One-Way ReshopOffer
Round-Trip	Change of flights for both flights	1 Round-Trip ReshopOffer
Round-Trip	Cancel one flight, update the other	1 One-Way ReshopOffer
One-Way	Change of flight	1 One-Way ReshopOffer
One-Way, Round-Trip	Addition of N flights	N One-Way ReshopOffers
Multi-City	Change of all flights	1 Multi-City ReshopOffer
Multi-City	Change of some (N) flights	N One-Way ReshopOffers

2. Since flight changes are only possible for all passengers in the order, the ReshopOffers used as an input to rebook-quote must be offers generated for the same type and number of passengers as in the order. Otherwise, ORDER_AND_RESHOP_OFFER_PAX_TYPES_DO_NOT_MATCH error would be returned.
3. For new flights to be added to the order; based on the pricing rules the booking class quoted could be different than they are in ReshopOffers.
4. rebook-quote operation supports only removal of flights based on journeys which means Segments constituting a PaxJourney cannot be separated. PAX_SEGMENTS_UNDER_SAME_JOURNEY_CANNOT_BE_SEPARATED error is returned if such request is received.
5. When a journey is removed from an order, all flight and non-flight order items and/or services related with that journey will be removed from the order.
6. Although removal of flights is performed journey-based, IATA XSDs does not support PaxJourney references as an input in OrderQuoteRQ. Deletion is expected to be Service-based and services that are requested to be retained are expected at /IATA_OrderQuoteRQ/Payload/ExistingOrder/AffectedOrderItem/RetainServiceID indicating all else to be deleted. So, to request removal of a journey from an order, all services that are related to the segments that are **not** part of the journeys to be removed must be provided within RetainServiceID.

   EXAMPLE:
   Consider an NDC order having a /IATA_OrderViewRS/Response/DataLists/PaxJourneyList as below:

```
<ns0:PaxJourneyList>
  <ns0:PaxJourney>
    <ns0:PaxJourneyID>PJ_1</ns0:PaxJourneyID>
    <ns0:PaxSegmentRefID>SEG_1</ns0:PaxSegmentRefID>
    <ns0:PaxSegmentRefID>SEG_2</ns0:PaxSegmentRefID>
  </ns0:PaxJourney>
  <ns0:PaxJourney>
    <ns0:PaxJourneyID>PJ_2</ns0:PaxJourneyID>
    <ns0:PaxSegmentRefID>SEG_3</ns0:PaxSegmentRefID>
    <ns0:PaxSegmentRefID>SEG_4</ns0:PaxSegmentRefID>
  </ns0:PaxJourney>
</ns0:PaxJourneyList>
```

   Assume, order has two passengers, Pax1 and Pax2 for which below flight order items and services are found in OrderViewRS

~/OrderItem/ OrderItemID	~/OrderItem/Service /PaxRefID	~/OrderItem/Service /ServiceID	~/OrderItem/Service/OrderServiceAssociation/ PaxSegmentRef/PaxSegmentRefID
FL_P1	PAX_1	FL_SVC_1	SEG_1
FL_P1	PAX_1	FL_SVC_2	SEG_1
FL_P1	PAX_1	FL_SVC_3	SEG_2

CONFIDENTIAL & RESTRICTED

FL_P1	PAX_1	FL_SVC_4	SEG_2
FL_P1	PAX_1	FL_SVC_5	SEG_3
FL_P1	PAX_1	FL_SVC_6	SEG_3
FL_P1	PAX_1	FL_SVC_7	SEG_4
FL_P1	PAX_1	FL_SVC_8	SEG_4
FL_P2	PAX_2	FL_SVC_9	SEG_1
FL_P2	PAX_2	FL_SVC_10	SEG_1
FL_P2	PAX_2	FL_SVC_11	SEG_2
FL_P2	PAX_2	FL_SVC_12	SEG_2
FL_P2	PAX_2	FL_SVC_13	SEG_3
FL_P2	PAX_2	FL_SVC_14	SEG_3
FL_P2	PAX_2	FL_SVC_15	SEG_4
FL_P2	PAX_2	FL_SVC_16	SEG_4

If it is intended to remove PJ_1 (segments SEG_1, SEG_2), meaning segments related to PJ_2 (SEG_3, SEG_4) will be retained, the following DeleteOrderItem objects would be expected in the OrderReshopRQ.

```
<AffectedOrderItem>
  <OrderItemRefID>FL_P1</OrderItemRefID>
  <RetainServiceID>FL_SVC_5</RetainServiceID>
  <RetainServiceID>FL_SVC_6</RetainServiceID>
  <RetainServiceID>FL_SVC_7</RetainServiceID>
  <RetainServiceID>FL_SVC_8</RetainServiceID>
</AffectedOrderItem>
<AffectedOrderItem>
  <OrderItemRefID>FL_P2</OrderItemRefID>
  <RetainServiceID>FL_SVC_13</RetainServiceID>
  <RetainServiceID>FL_SVC_14</RetainServiceID>
  <RetainServiceID>FL_SVC_15</RetainServiceID>
  <RetainServiceID>FL_SVC_16</RetainServiceID>
</AffectedOrderItem >
```

7. REBOOK_QUOTE_PAID_ANCILLARY_ORDER_ITEMS_FOUND_WARNING warning is returned if for any journey to be cancelled there exists paid ancillary order items.
8. NON_FLIGHT_ORDERITEMS_FOUND error is returned if any of the referenced OrderItemRefID's are not of type flight order items.
9. INACTIVE_ORDERITEMS_FOUND error is returned if any of the referenced flight order items are not active flight order items.
10. Exactly one AffectedOrderItem/ must be provided for each (pax) active flight order item in the order where ~/OrderItem/OrderItemID is equal to AffectedOrderItem/OrderItemRefID, otherwise ORDER_ITEM_REFS_MUST_EXACTLY_MATCH_WITH_FLIGHT_ORDER_ITEMS error is returned.
11. If any of the ~/AffectedOrderItem/RetainServiceID does not belong to the order item referenced in the same object under ~/AffectedOrderItem/OrderItemRefID, then SERVICE_ID_DOES_NOT_BELONG_TO_ORDER_ITEM error is returned.
12. If a flight segment (say SEG_1) is indicated to be retained by providing a reference to a ~/OrderItem/Service/ServiceID where /Service/OrderServiceAssociation/PaxSegmentRef/PaxSegmentRefID = SEG_1, then all Services (for all OrderItems) associated with SEG_1 must be provided in relevant ~/AffectedOrderItem/RetainServiceID objects. Otherwise, INCONSISTENT_RETAIN_REQUEST_FOR_SEGMENT error is returned.
13. Validate context is meant for preliminary check on rebookability of the order, actual rebook can only be performed if the new itinerary is allowed by fare, combinability etc. rules.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

14. For some regions (origin & destinations) TK utilizes branded fares whereas for some regions non-branded fares. For non-branded origin & destinations, fare families are utilized. In offer responses, whether a fare is branded or non-branded can be understood by processing the /IATA_***RS/Response/DataLists/PriceClassList/PriceClass/Code associated with the fare based on the below table.

Codes for branded fares	BF CL LG FL BL
Codes for non-branded fares	BB BS BX PS RS FX

If a flight for which a branded fare is applicable, rebook-quote would fail due to pricing error if a journey in the selected ReshopOffer has a brand code BrandCode-TO (PriceClass/Code) that replaces a journey in the original order with a brand code BrandCode-FROM that is not present for that specific BrandCode-TO in below table.

BrandCode-FROM	BrandCode-TO
BF	BF
BL	BL
CL*	CL BF BL
FL	FL BF BL
LG	LG BF BL
GN	GN BF BL

* CL is a mostly restrictive brand with no reissue rights with an exception: “Reissue for flights with CL brand is only permitted from TR to Middle East Region and from Middle East Region to TR”.

In order to eliminate such pricing errors, the NDC clients are expected to filter out ReshopOffers having a BrandCode that is not allowed based on the above table. To give simple example if a flight with BrandCode “CL” is intended to be replaced by a flight in a ReshopOffer (generated with ReasonCode=112), then all offers in the ReshopOffer that is not associated with BrandCodes CL, JR, BF, or BL must be eliminated among the results.

While replacing flights associated with non-branded fares (codes BB BS BX PS RS FX) no such filtering is expected.

15. Note that, while BrandCodes for branded fares are available within an OrderViewRS after order is created (in /IATA_OrderViewRS/Response/DataLists/PriceClassList/PriceClass/Code), BrandCode information for non-branded fares are not provided within an OrderViewRS after the order is created. PriceClass/Name is returned as “NO_BRAND” to indicate this. DataLists/PenaltyList/Penalty/Price/TotalAmount provided in the output is always rounded up to the nearest integer. However, when the reissue is actually processed, the amount charged for the penalty will be based on the filed amount with a precision of 2 floating point digits. For this reason, the actual payment amount processed for the penalty can be slightly lower than what is returned in the response.

75dab0f2-e21a-4f06-b5ee-d105b8469fdb

CONFIDENTIAL & RESTRICTED

16. Schedule Change Handling (including flight cancellations)

16.1. If a schedule change occurs for a paid order and the change makes the order subject to Involuntary Servicing; then the following warning will be returned in the OrderViewRS for that order.

Code	Key	Description
NDC-8006	INVOLUNTARY_SITUATION_OCCURED_WARNING	Involuntary situation occurred in the order which needs to be changed or refunded

For rebook context, the message flow does not change if the order is subject to Involuntary Servicing.

There are some cases of involuntary situations (Emergency State for a specific airport or region, etc.) for which there are no indications in OrderViewRS about the involuntary situation. But rebook offer in all voluntary and involuntary cases will be constructed according to the pricing rules. If, for example, pricing rules allow free-of-charge exchange of a flight due to an involuntary situation, a rebook offer with no additional cost will be constructed for a request to replace that flight.

16.2. If a schedule change occurs for a paid/unpaid order and the change requires special processing for the order, then the following warning will be returned in the OrderViewRS for that order.

Code	Key	Description
NDC-8007	PENDING_SCHEDULE_CHANGE_WARNING	There exist schedule changes for the itinerary within the order that have not been finalized yet.

16.3. If a schedule change occurs for a paid/unpaid order that is triggered by a flight cancellation within operational window (less than 72 hours to the departure time of the effected flight) then the following warning will be returned in the OrderViewRS for that order.

Code	Key	Description
NDC-8008	FLIGHT_CANCELLATION_WITHIN_OPERATIONAL_PERIOD_WARNING	There exist flight cancellation(s) within operational window within the order.

a. Combination of above three cases can be present within an OrderViewRS.

b. For cases 16.2 and 16.3 (schedule changes), OrderViewRS will contain information about the segments that are cancelled and, if it exists, segments proposed instead of those cancelled segments.

c. “A segment that is cancelled without proposed segment(s)” can be observed in OrderViewRS within a Service for the flights as shown below.

```
<Service>
  <AirlineTaxonomy>
    <TaxonomyFeature>
      <CodesetCode>FLIGHT</CodesetCode>
      <CodesetNameCode>TK_Codeset</CodesetNameCode>
      <ValueText>Services/Items for flight</ValueText>
    </TaxonomyFeature>
  </AirlineTaxonomy>
  <BookingRef>
    <BookingID>2352230365583</BookingID>
    <BookingRefTypeCode>5</BookingRefTypeCode>
  </BookingRef>
  <BookingRef>
    <BookingID>WFUGI2</BookingID>
    <BookingRefTypeCode>P</BookingRefTypeCode>
  </BookingRef>
  <DeliveryStatusCode>UNABLE TO DELIVER</DeliveryStatusCode>
  <OrderServiceAssociation>
    <PaxSegmentRef>
      <PaxSegmentRefID>SEG_1</PaxSegmentRefID>
    </PaxSegmentRef>
```

```
  </OrderServiceAssociation>
  <PaxRefID>PAX_1</PaxRefID>
  <ServiceID>FL_SVC_1</ServiceID>
  <StatusCode>CANCELLED</StatusCode>
</Service>
```

Where,

- CodesetNameCode="TK_Codeset" and CodesetCode="FLIGHT" indicates, this is service for a flight.
- PaxSegmentRef indicates the effected segment.
- And DeliveryStatusCode="UNABLE TO DELIVER" and StatusCode="CANCELLED" means the related segment(s) are cancelled.

d. "A segment that is cancelled with proposed segment(s)" can be observed in OrderViewRS within a Service for the flights as shown below.

```
<Service>
  <AirlineTaxonomy>
    <TaxonomyFeature>
      <CodesetCode>FLIGHT</CodesetCode>
      <CodesetNameCode>TK_Codeset</CodesetNameCode>
      <ValueText>Services/Items for flight</ValueText>
    </TaxonomyFeature>
  </AirlineTaxonomy>
  <BookingRef>
    <BookingID>2352230365583</BookingID>
    <BookingRefTypeCode>5</BookingRefTypeCode>
  </BookingRef>
  <BookingRef>
    <BookingID>WFUGI2</BookingID>
    <BookingRefTypeCode>P</BookingRefTypeCode>
  </BookingRef>
  <DeliveryStatusCode>UNABLE TO DELIVER</DeliveryStatusCode>
  <OrderServiceAssociation>
    <PaxSegmentRef>
      <PaxSegmentRefID>SEG_1</PaxSegmentRefID>
    </PaxSegmentRef>
  </OrderServiceAssociation>
  <PaxRefID>PAX_1</PaxRefID>
  <ServiceID>FL_SVC_1</ServiceID>
  <ServiceRefID>FL_SVC_7</ServiceRefID>
  <StatusCode>CANCELLED</StatusCode>
</Service>
```

75da[illegible]-b5ee-d105b8469fdb

Where,

- CodesetNameCode="TK_Codeset" and CodesetCode="FLIGHT" indicates, this is service for a flight.
- PaxSegmentRef indicates the effected segment.
- DeliveryStatusCode="UNABLE TO DELIVER" and StatusCode="CANCELLED" means the related segment(s) are cancelled.
- And ServiceRefID indicates the flight Service that includes references to the proposed segments as the sample below:

```
<Service>
  <AirlineTaxonomy>
    <TaxonomyFeature>
      <CodesetCode>FLIGHT</CodesetCode>
      <CodesetNameCode>TK_Codeset</CodesetNameCode>
      <ValueText>Services/Items for flight</ValueText>
    </TaxonomyFeature>
  </AirlineTaxonomy>
  <BookingRef>
    <BookingID>V58GBS</BookingID>
    <BookingRefTypeCode>P</BookingRefTypeCode>
  </BookingRef>
```

```
    <DeliveryStatusCode>IN PROGRESS</DeliveryStatusCode>
    <OrderServiceAssociation>
      <PaxSegmentRef>
        <PaxSegmentRefID>SEG_2</PaxSegmentRefID>
      </PaxSegmentRef>
    </OrderServiceAssociation>
    <PaxRefID>PAX_1</PaxRefID>
    <ServiceID>FL_SVC_7</ServiceID>
    <StatusCode>WAITLISTED</StatusCode>
  </Service>
```

Where,

- CodesetNameCode="TK_Codeset" and CodesetCode="FLIGHT" indicates, this is service for a flight.
- DeliveryStatusCode="IN PROGRESS" and StatusCode="WAITLISTED" means the related segment(s) are proposed (pending).
- PaxSegmentRef indicates the details of the proposed segments. The details of the proposed segments can be found in DataLists using this reference.

e. In a rebook-quote request, services can not be provided under RetainServiceID if they are associated with any of the cancelled segments. If they are specified to be retained, CANCELLED_SEGMENTS_CANNOT_BE_RETAINED error is returned.

f. If a cancelled segment has proposed segments associated to it, the client has the option of accepting the proposed segment. This can be done by constructing a rebook-quote request where all Services related to all segments are specified to be retained except for the cancelled segments.

g. Proposed segments can be rejected by not specifying any Services related to the proposed segments. And new flights can be added by providing ReshopOffer within SelectedOffers similar to usual rebook-quote.

h. Note that, as a business rule, schedule changes of less than 16 minutes are automatically confirmed by the TK reservation system. Hence there is no need to proceed with rebook flow for such cases.

i. If an order is unpaid and there exists pending schedule changes within the order (NDC-8007 WARNING), then the order cannot be paid until either the changes are confirmed or cancelled segments are removed through a rebook flow.

ERRORS

Code	Error Key	Description
NDC-4038	EMPTY_ORDER_ID	Order id must be provided.
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-1380	REBOOK_QUOTE_INVALID_REQUEST	OrderItem/OfferItem or VALIDATE_REBOOK reason expected.
NDC-1381	CANCELLING_ALL_FLIGHTS_NOT_SUPPORTED	Cancelling all flights without adding new flights is not supported by this operation.
NDC-1382	ORDER_NOT_SUITABLE_FOR_REBOOKING	Rebooking validation failed, order is not suitable for rebooking.
NDC-1383	ORDER_ITEM_REFS_MUST_EXACTLY_MATCH_WITH_FLIGHT_ORDER_ITEMS	All flight order items are expected to be provided in the input exactly once for deletion of flights.
NDC-1384	SERVICE_ID_DOES_NOT_BELONG_TO_ORDER_ITEM	Specified service does not belong to the specified order item.
NDC-1385	INCONSISTENT_RETAIN_REQUEST_FOR_SEGMENT	Inconsistent retain/delete request for the same segment.
NDC-1386	PAX_SEGMENTS_UNDER_SAME_JOURNEY_CANNOT_BE_SEPARATED	Segments under the same journey can be removed or deleted together.

NDC-4197	UNMATCHED_OFFER_REF_ID	Some of SelectedOffers does not matched with agency and order.
NDC-1388	MULTIPLE_RESHOP_FLIGHT_OFFERS_WITH_SAME_ID	Same flight reshop offer id is provided multiple times.
NDC-1389	ORDER_AND_RESHOP_OFFER_PAX_TYPES_DO_NOT_MATCH	PaxTypes in the order does not match with PaxTypes found in the reshop offer.
NDC-1390	SELECTED_AND_RESHOP_OFFER_ITEMS_NOT_MATCH	Selected offer item id and/or related pax ids do not match with the offer item in the specified reshop offer.
NDC-1391	MAX_FLIGHT_SEGMENT_EXCEEDED	Number of total flight segments would exceed the maximum number of flight segments allowed.
NDC-1392	PASSENGER_IDENTITY_NUMBER_IS_EMPTY	Passenger identity number required for this operation is missing.
NDC-1339	INVALID_SEGMENT_STATUS	Segment status is not suitable for the operation.
NDC-1393	COUPONS_SHOULD_NOT_BE_IN_CHECKIN_BOARDED	Operation not supported due to segments in Checkin/Boarded.
NDC-1394	INVALID_PASSENGER_TYPE_FOR_REBOOK	Some passenger types are not valid for rebooking.
NDC-1395	REBOOK_NOT_PERMITTED_DUE_TO_FARE_RULE	Rebook not permitted due to fare rules.
NDC-1360	MANUALLY_PROCESSED_TICKET_ERROR	Operation cannot be completed due to manual processing of ticket(s).
NDC-1361	OFFER_HAS_BECOME_INVALID	The selected offer is not available. Please submit a new AirShopping request.
NDC-1358	FARE_NOT_FOUND	No fare found for requested operation.
NDC-1396	DATE_OF_NEW_ADDED_FLIGHT_OVERLAP_WITH_CURRENT_FLIGHT	Date of flight to be added overlaps with date of current flight.
NDC-1397	REBOOKING_NOT_PERMITTED	Rebooking is not permitted.
NDC-1398	AGE_OF_INFANT_GREATER_THAN_TWO	Age of infant is greater than two.
NDC-1399	REISSUE_TIME_DIFFERENCE_BETWEEN_FLIGHTS_INVALID	Time difference between flights is not valid.
NDC-1400	REROUTING_NOT_PERMITTED	Rerouting is not permitted.
NDC-1401	MAX_REISSUE_APPLIABLE_PERIOD_BEFORE_DEPARTURE_PASSED	Maximum reissue applicable period before departure has passed.
NDC-1379	NO_ITINERARY_CHANGE_EXISTS	Rebook quotation does not include any changes
NDC-1205	INACTIVE_ORDERITEMS_FOUND	Order item(s) identified to be inactive.
NDC-1206	NON_FLIGHT_ORDERITEMS_FOUND	Order item(s) identified not to be for flights.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1207	TICKET_CONTROL_DENIED_FOR_NON_TK_SEGMENT	Ticket control is denied by other airline.
NDC-1414	CANCELLED_SEGMENTS_CANNOT_BE_RETAINED	Cancelled segments cannot be retained.
NDC-1451	PURE_DOMESTIC_TO_INTERNATIONAL_NOT_ALLOWED	Reissue from pure domestic to international is not allowed.
NDC-1452	PURE_INTERNATIONAL_TO_DOMESTIC_NOT_ALLOWED	Reissue from pure international to domestic is not allowed.
NDC-1415	OFFLOAD_PARAMETER_MUST_BE_SEND	Internal error occurred while processing OFFLOAD segment(s).
NDC-1545	INCONSISTENT_COUPON_STATUS_AFTER_OFFLOAD	Offload transaction was found to be inconsistent with the coupon status although the offload transaction was made
NDC-1546	OFFLOAD_OPERATION_HAS_FAILED	Some or all offload operations failed.
NDC-1547	OFFLOAD_NOT_PERMITTED	Offload could not be done due to business rules.
NDC-1418	DEPARTURE_TIME_TOO_SOON_FOR_OFFLOAD	It is not enough time for offloading reissue or refund requests for tickets with checked-in status.

NDC-1451	$PURE_DOMESTIC_TO_INTERNATIONAL_NOT_ALLOWED$	Reissue from pure domestic to international is not allowed.
NDC-1452	$PURE_INTERNATIONAL_TO_DOMESTIC_NOT_ALLOWED$	Reissue from pure international to domestic is not allowed.

OTHER ERRORS

Code	Error Key	Description
NDC-4191	SHOPPING_OFFER_NOT_FOUND	Shop offer not found (does not exist, expired, or consumed).
NDC-4198	REBOOK_QUOTE_VALIDATION_BACKEND_CALL_ERROR	Unable to access rebook quote validation backend system.
NDC-4199	REBOOK_QUOTE_VALIDATION_BACKEND_ERROR	Unable to validate order for rebook quotation due to backend error.
NDC-4216	REBOOK_QUOTE_BY_REISSUE_ITINERARY_UPDATE_BACKEND_CALL_ERROR	Unable to access to rebook quote backend system.
NDC-4217	REBOOK_QUOTE_BY_REISSUE_ITINERARY_UPDATE_BACKEND_ERROR	Unable to rebook quote due to backend error.
NDC-4218	REBOOK_QUOTE_BACKEND_REISSUE_ITINERARY_UPDATE_REQUEST_CONVERSION_ERROR	An unexpected error occurred at backend request.
NDC-4219	REBOOK_QUOTE_BACKEND_REISSUE_ITINERARY_UPDATE_RESPONSE_CONVERSION_ERROR	An unexpected error occurred at backend response.
NDC-4118	EMPTY_PAYLOAD	Payload cannot be empty.
NDC-4220	EMPTY_EXISTING_ORDER	ExistingOrder must be provided.
NDC-4202	EMPTY_CONTACT_INFO_LIST	ContactInfoList cannot be empty.
NDC-4203	STRICTLY_ONE_CONTACT_INFO_REQUIRED	Strictly one contact info is expected.
NDC-4077	EMPTY_OWNER_CODE	Owner code must be entered.
NDC-1368	INVALID_OWNER_CODE	Owner Code is not valid.
NDC-4221	EMPTY_ORDER_ITEM_REF_ID	OrderItemRefID cannot be empty.
NDC-4099	EMPTY_CONTACT_INFO_ID	ContactInfoID cannot be empty.
NDC-4100	EMPTY_INDIVIDUAL	Individual cannot be empty.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Surname must be provided.
NDC-4076	EMPTY_OFFER_REF_ID	OfferRefID can not be empty.
NDC-4078	EMPTY_SELECTED_OFFER_ITEM_LIST	SelectedOfferItem cannot be empty.
NDC-4079	EMPTY_OFFER_ITEM_REF_ID	OfferItemRefID can not be empty.
NDC-4080	EMPTY_PAX_REF_LIST	There are no pax IDs.
NDC-4081	MULTIPLE_REFERENCE_IDENTICAL_PAX	Pax IDs can not be the same.
NDC-4064	EMPTY_PAX_REF_ID	PaxRefID must be provided.
NDC-4222	EMPTY_REASON_CODE	ReasonCode cannot be empty.

WARNINGS

Code	Warning Key	Description
NDC-8020	ORDER_REBOOK_PREVALIDATION_SUCCESS_WARNING	Primary prevalidation for rebooking of the order was successful.
NDC-8021	REBOOK_QUOTE_PAID_ANCILLARY_ORDER_ITEMS_FOUND_WARNING	Paid ancillary order items in the order will not be automatically refunded or transferred to the new order items if associated flight segments are removed or altered. Call center or sales offices can be contacted for resolution.
NDC-8022	REBOOK_QUOTE_REFUND_AS_EMDRSD_WARNING	EMDRSD will be produced for refund amounts if proceeded with rebooking using this offer.
NDC-1416	PASSENGERS_OFFLOAD_REQUIRED_WARNING	For all passengers must be offload required.


NDC-1417	CHECKEDIN_PASSENGERS_OFFLOADED_WARNING	All checkedIn passengers have been Offloaded.
NDC-8099	THIS_WILL_BE_A_VOLUNTARY_REBOOK_WARNING	This will be a voluntary rebook even if an involuntary situation occurs. Since the rebook is not in the involuntary window.

75dab313-82ba-49d6-b5ee-d105b8469fdb

4.2.7. order-rebook

Overview

Purpose of order-rebook is to perform itinerary change operations on an order based on a RebookOffer generated through rebook-quote.



Within the response of order-rebook, an OrderViewRS will be returned reflecting the changes.

Operation Name	order-rebook
Operation URL	$NDCAPI_BASEURL$/order-rebook
NDC message input	IATA_OrderChangeRQ
NDC message output	IATA_OrderViewRS
Main function	Processes and commits changes to the itinerary in the order
Main inputs	OrderID RebookOffer PaymentFunctions if payment is due
Main outputs	Update view of the order
Prerequisites	An active RebookOffer
To be followed by	Any methods applicable

Limitations

1. As a RebookOffer generated through rebook-quote is required to be provided as an input to order-rebook, all limitations of rebook-quote also apply to order-rebook.

Supported Functionalities

1. Rebooking of unpaid order that will remain unpaid.
2. Rebooking of unpaid order with payment details so that payment due is also processed.
3. Rebooking of unused paid orders.
4. Rebooking of partially used paid orders.

Input Parameters

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
ChangeOrderChoice/AcceptSelectedQuotedOfferList/SelectedPricedOffer/ α	Reference info for a previously generated RebookOffer	1	Complex
α/OfferRefID	RefID of a RebookOffer returned in response to a rebook-quote request	1	String / ITN_UPDATE_OFFER_34RDF2_d
α/OwnerCode	Owner code of the owner of the offer	1	String / TK
α/SelectedOfferItem/	Expected one for each AddedOfferItem in the RebookOffer	1..N	Complex
α/SelectedOfferItem/OfferItemRefID	ID of the referenced OfferItem in RebookOffer	1	String / RS_FL_P1
α/SelectedOfferItem/PaxRefID	ID of the Pax the offer is applicable for	1..N	String / PAX_1
α/TotalOfferPriceAmount	Amount for the total offer price, expected only if payment is due.	0..1	Float / 1234.56
α/TotalOfferPriceAmount/@CurCode	Currency code of the total offer price	1	String / TRY

75da8315-92ba-9916-b5ee-d105b84f69fdb

PaymentFunctions/PaymentProcessingDetails/ β	Payment processing details, expected only if payment is due.	0..1	Complex
β/Amount	Amount for the total offer price.	1	Float / 1234.56
β/Amount/@CurCode	Currency code of the payment amount	1	String / TRY
β/PaymentMethod/	Any payment method supported	YES / 1	Complex
β/PaymentMethod/SettlementPlan	For cash payments, always expected as: <SettlementPlan> <PaymentTypeCode>CA</PaymentTypeCode> </SettlementPlan>	YES / 1	Complex
β/PaymentMethod/SettlementPlan/PaymentTypeCode		YES / 1	String / CA
DataLists/PaxList/Pax	To provide surname of any passenger	1	Complex
DataLists/PaxList/Pax/Individual/Surname	Surname of any passenger in the order	1	String / CAN
DataLists/PaxList/Pax/PaxID	ID of the passenger whose surname is provided	1	String / PAX_1
/PaymentFunctions/PaymentMethodCriteria	Used only for creditCard transactios.	YES / 1	Complex
/PaymentFunctions/PaymentMethodCriteria/PaymentTypeCode	“CC” for Costumer Credit Card and “AC” for agent’s predefined credit card.	YES / 1	String / CC
/PaymentFunctions/PaymentProcessingDetails/Payer	Used only for credit card transactions. Includes credit card holder information	YES / 1	Complex
/PaymentFunctions/PaymentProcessingDetails/Payer/PayerName/IndividualName/GivenName	Given name of card holder	YES / 1	String /AHMET
/PaymentFunctions/PaymentProcessingDetails/Payer/PayerName/IndividualName/Surname	Surname of card holder	YES / 1	String /YILMAZ
/PaymentFunctions/PaymentProcessingDetails/Payer/PayerEmailAddress/EmailAddressText	E-mail address of card holder	YES / 1	String /ABC@CC.COM
/PaymentFunctions/PaymentProcessingDetails/Payer/PayerPhoneNumber/PhoneNumber	Phone number of card holder	YES / 1	String /905462193961
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard	Used only for credit card transactions	YES / 1	Complex
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardBrandCode	Credit Card brand information. It should be reverence in the PADIS (PAYB Payment Brand, Coded). Example: “VI” for Visa card.	NO / 1	String /VI
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress	Card holder address details.	YES / 1	Complex
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/CityName	The name, expressed as text, of the city, town or village.	YES / 1	String / ISTANBUL
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/CountryCode	ISO Country Code (can be extended by bilateral agreement in case of exceptions, e.g. Kosovo). Examples: US, FR.	YES / 1	String / DE
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/CountryName	The name, expressed as text, of the country.	YES / 1	String / GERMANY
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/Car	The name, expressed as text, of the sub-division of a country. Billing contact state code, two-character long ISO code required for North	YES / 1	String / HE

5cbb313-8210-49d6-b5ee-d1051840fdb

dholderAddress/CountrySubDivisionName	America. Remaining Region and Provinces around the world may use free form field. Example “Cambridgeshire”		
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/PostalCode	Postal code	YES / 1	String / 01067
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardholderAddress/StreetText	Street name and number.	YES / 0..2	String / Main Street, 100 Main Street
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardNumber	The card number indicated on the payment card.	YES / 1	String
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/CardSecurityCode	3-digit number printed on the signature panel on the back of the card and following the last four digits of the Primary Account Number (PAN). For American Express, 4 digits located on the front of the card, above the card number on the right-hand side. Visa - CVV2, MasterCard - CVC2, American Express - CID, Discover - CMID, Union Pay - CVN2, JCB - CAV2.	YES / 1	String
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/ExpirationDate	The last month of validity in the format of MM/YY Example: 01/30	YES / 1	String / 01/30
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/SecurePaymentVersion2	This section shall be delivered if the payment channel is mail or telephone order.	YES / 1	Complex
/PaymentFunctions/PaymentProcessingDetails/PaymentMethod/PaymentCard/SecurePaymentVersion2/PaymentTrxChannelCode	“MO” for mail order and “TO” for telephone order.	YES / 1	String
Order/	Order details	YES /1	Complex
Order/OrderID	ID of Order	YES /1	String / AB7HR5
Order/OwnerCode	Always TK	YES /1	String / TK

75dab313-82ba-490c-b3ec-d1f0024635db

Output Parameters

In response to the OrderChangeRQ, order-rebook returns an OrderViewRS with the applicable fields described in 0 Output Parameters for order-retrieve.

Special Considerations

1. Every rebook offer generated through rebook-quote can be utilized in order-rebook function at most once. REBOOK_OFFER_ALREADY_CONSUMED error is returned if previously claimed rebook offer is provided as an input to order-rebook.
2. OPERATION_UNFINALIZED error is returned if no answer backend system during the timeout period if the operation did not finalized

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.

NDC-1080	STRICTLY_ONE_SELECTED_PRICED_OFFER_REQUIRED	Only one pieced offer is expected.
NDC-4077	EMPTY_OWNER_CODE	Owner Code must be entered.
NDC-1368	INVALID_OWNER_CODE	Owner Code is not valid.
NDC-1046	REBOOK_OFFER_NOT_FOUND	OfferRefID does not exist or expired.
NDC-1047	REBOOK_OFFER_DOES_NOT_BELONG_TO_ORDER	OfferRefID does not belong the order.
NDC-1048	OFFER_ITEM_REFID_NOT_FOUND	OfferItemRefID is not identical with OfferItemID.
NDC-1049	PAX_REF_ID_DOES_NOT_MATCH	PaxRefID does not match with the offer item in the specified reshop offer.
NDC-1050	MISSING_OFFER_ITEM_REFID	Offer item id missing or does not match with the offer item in the specified reshop offer.
NDC-1051	EMPTY_PAYMENT_PROCESSING_DETAILS	Payment processing details must be provided.
NDC-1052	EMPTY_PAYMENT_AMOUNT	Payment amount must be provided.
NDC-1053	EMPTY_PAYMENT_CURRENCY	Currency must be provided.
NDC-1054	EMPTY_PAYMENT_METHOD	Payment method must be provided.
NDC-1505	CURRENCY_MISMATCH	The currencies identified for offers/orders do not match.
NDC-1517	INVALID_CURRENCY	Not authorized for the requested currency according to AgencyPortal.
NDC-1515	IATACODE_REQUIRED_FOR_BSP	For BSP/ARC transactions, caller must have IATA code defined within TK AgencyPortal.
NDC-1513	INVALID_PAYMENT_METHOD	Not authorized for the requested payment method according to AgencyPortal.
NDC-1055	REBOOK_PAYMENT_AMOUNT_DO_NOT_MATCH	Amount does not match with the amount for the specified rebook price.
NDC-1512	PAYMENT_PROCESSED_BUT_UNEXPECTED_ERROR_OCCURED	Unexpected error occurred after payment is successfully processed. order-retrieve would be called to get latest order view.
NDC-1056	REBOOK_PERFORMED_BUT_UNEXPECTED_ERROR_OCCURED	Unexpected error occurred after rebook is successfully performed.
NDC-1058	PAYMENT_FUNCTIONS_REQUIRED	Payment Functions must be provided.
NDC-1059	PAYMENT_FUNCTIONS_NOT_EXPECTED	No need to use the Payment Functions.
NDC-1502	INVALID_ORDERID_IN_PAYMENT_FUNCTIONS	OrderID does not match the reference.
NDC-1524	NOT_AUTHORIZED_FOR_PAYMENT	Agency profile does not include payment eligibility.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1062	REBOOK_OFFER_ALREADY_CONSUMED	Rebook offer has already been consumed.
NDC-1064	INCONSISTENT_REBOOK_PAYMENT_METHOD	Next payment type does not match with the payment type of original first ticket.
NDC-1065	UNSUCCESSFUL_PAYMENT_DUE_TO_UNDEFINED_CREDIT_CARD	Payment can not be made with a credit card that is not defined in the Agency Portal.
NDC-4284	EMPTY_PAYER_INFO	Payer Info object cannot be empty for credit card payments.
NDC-1208	SEGMENT_STATUS_NOT_SUITABLE_FOR_THE_OPERATION	Segment status is not suitable for this operation.
NDC-1074	OPERATION_UNFINALIZED	The operation is ongoing
NDC-1536	CONFIRMATION_IS_DONE_ALL_RIGHTS_REMAIN_VALID	Confirmation is done and all rights remain. Please retrieve the Order to see the latest change.

OTHER ERRORS

WARNINGS

Code	Warning Key	Description

NDC-1057	REBOOK_RESIDUAL_EMD_NOT_REFUNDED_WARNING	Residual EMD produced in return of a refund amount is not automatically refunded.
NDC-8009	REBOOK_PERFORMED_WITH_REVALIDATION_WARNING	New ticket number is not created for the changes.

75dab313-82ba-49d6-b5ee-d105b8469fdb

4.2.8. order-refund-delete

Overview

Purpose of order-refund-delete is to cancel and delete a refund transaction, allowing agencies to reverse previously processed refunds.

The prerequisites and call flow for each context is provided below:

Context	Prerequisites
refund_paid_order	An active and paid order. At least one ticket coupon in the order must be in REFUND status

1)	order-pay (OrderChange) → order-reshop (OrderReshop) → order-cancel [refund] (OrderChange) → order-refund-delete (OrderChange)
2)	order-pay (OrderChange) → rebook-quote [rebook] (OrderQuote) → order-rebook (OrderChange) → order-reshop (OrderReshop) → order-cancel [refund] (OrderChange) → order-refund-delete (OrderChange)

Within the response of order-refund-delete, an OrderViewRS will be returned reflecting the changes.

Operation Name	order-refund-delete
Operation URL	$NDCAPI_BASEURL$/reorder/**order-refund-delete**
NDC message input	IATA_OrderChangeRQ
NDC message output	IATA_OrderViewRS
Main function	Reverses refunded ticket status to OPEN/AIRPORT and updates order status to PAID.
Main inputs	OrderID ReasonCode
Main outputs	Success: Refund reversal successful. Ticket status updated to OPEN/AIRPORT and order status updated to PAID. Error: Refund reversal failed. [Error message]
Prerequisites	A cancelled order internal status and refunded status of the coupon (s) over the ticket(s).
To be followed by	Any methods applicable

Limitations

1. Refund deletion for ancillary order items is not supported.
2. Only order-based refund deletions will be processed.
3. In case of partial refund deletion, subsequent processes are out of scope.
4. After a successful refund delete response, only reissue, refund, and void operations are allowed for subsequent actions.
5. Refund deletion is not allowed if day-end sales report is closed.
   i. Note: If in the refund process response, PaymentStatusCode=PENDING and the orderItem related to the refunded ticket has a service/DeliveryStatusCode=REMOVED HOLD VALUE and the order/

StatusCode=OPENED, this refund process has not been completed yet, it means it is in the provisioning process. In this case, the refund process can be deleted.

Supported Functionalities

1. Deletion of refund of rebooked or issued orders is supported.

Input Parameters

Fields under /IATA_OrderChangeRQ/Request/ to be used in the **order-refund-delete** request are:

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
DataLists/PaxList/Pax/	Pax details of any Pax in order	YES / 1	Complex
DataLists/PaxList/Pax/Individual/Surname	Surname of any passenger in the Order	YES / 1	String / CAN
DataLists/PaxList/Pax/PaxID	ID of the passenger whose surname is provided	YES / 1	String / PAX_1
Order/	Order details	YES / 1	Complex
Order/OrderID	Id of the order to be cancelled	YES / 1	String / DRE55D
Order/OwnerCode	Owner of the order	YES / 1	String / TK
OrderChangeParameters/	Expected for refund_delete_order intention,	NO / 0..1	Complex
OrderChangeParameters/ReasonCode	**Expected:** "**REFUND_DELETE**" for refund_delete_order intention	YES /1	String / REFUND_DELETE

Output Parameters

In response to the OrderChangeRQ, order-refund-delete returns an OrderViewRS with the applicable fields described in 0 Output Parameters for order-retrieve which will include below parameters under /IATA_OrderViewRS/Response for order items that are deleted-refund through this operation.

Parameter	Value
/Order/OrderItem/StatusCode	ACTIVE (is expected)
/Order/OrderItem/Service/DeliveryStatusCode	READY TO PROCEED (is expected) Note: Returned to indicate delivery status of segment. Created as "CONFIRMED" after order-create and updated according to PADIS "Delivery Service Status, Coded.". DeliveryStatusCode is not provided for exchanged order items. DeliveryStatusCode can take below values; READY TO PROCEED — The service has already been purchased and can be used. READY TO DELIVER — The service has already been purchased and checked in by the

	passenger to be used.
DELIVERED	The service has already been used.
REQUESTED	The service has been added to the order but not purchased or confirmed yet.
REMOVED	The service has been refunded or voided.
SUSPENDED	The service has been suspended.
EXPIRED	The service has been closed.
UNABLE TO DELIVER	The service has been cancelled and cannot be used.
IN PROGRESS	The service has been added to the order and pending confirmation.
CONFIRMED	The service has been confirmed but not purchased yet.

/Order/OrderItem/Service/StatusCode	According to PADIS "Ordered Service Status, Coded". CONFIRMED: Service can be used or has already been used. TRANSFERRED: This service has been exchanged to a new service in a new orderItem and no more action can be taken for this one CANCELLED: This service has been cancelled and no more action can be taken for this one. WAITLISTED: The new service added to the orderItem as a result of schedule change and pending for confirmation.
/Order/StatusCode	OPENED (is expected)
/TicketDocInfo/Ticket/Coupon/CouponStatusCode	"OPEN" OR "AIRPORT" (is expected)

Special Considerations

1. Refund-delete operation is only possible after refund provisioning process and until the sales report for the related accountable documents (for now only tickets) are authorized. This normally takes place after midnight according to the time zone the client is configured in TK AgencyPortal system. However, under certain circumstances, the

sales report may be authorized earlier after which refund-delete would not be possible for orders with such accountable documents.

2. Under some rare circumstances, refund delete may succeed for some order items whereas fail for some other order items. In this case, the warning REFUND_DELETE_PARTIALLY_PERFORMED_WARNING will be returned, respectively. What order items has failed can be inferred from the OrderItem/StatusCode field for each OrderItem.
3. PNR_HAS_NO_ITINERARY_WARNING will be returned that segments are deleted in the refund delete process and that the process should be continued by adding new segments.
4. OPERATION_UNFINALIZED error is returned if no answer backend system during the timeout period if the operation did not finalized

ERRORS

Code	Error	Description
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-8138	ORDER_ALREADY_COMPLETED	Order has already completed. No further action can be taken on the order other than retrieval.
NDC-8139	REASON_CODE_REQUIRED	Reason code is required to delete the refund transaction.
NDC-8142	ORDER_CHANGE_PARAMETERS_REQUIRED	OrderChangeParameters object is mandatory in the request.
NDC-8143	NO_REFUNDED_ITEM_TO_DELETE	The flight order item's associated ticket coupon statuses are not refunded or the order has not been cancelled.
NDC-8144	ORDER_REFUNDED_BY_ANOTHER_CHANNEL	The refund transaction has been processed via an another channel.
NDC-8177	HANDLE_PARTIAL_REFUND_DELETE_BEFORE_CONTINUE	The order's refund has been partially deleted. Please handle it before continuing. To support, you can send an e-mail: tkconnectsupport@thy.com or contact via Agency Portal Issue Tracking Panel: https://tkagency.thy.com/management/issue-panel
NDC-8176	HANDLE_NO_ITIN_BEFORE_CONTINUE	No itinerary existed. Please handle it before continue.

OTHER ERRORS

Code	Error	Description
NDC-4077	EMPTY_OWNER_CODE	Owner Code must be entered.
NDC-1368	INVALID_OWNER_CODE	Owner Code is not valid.
NDC-8140	INVALID_REASON_CODE_TO_REFUND_DELETE	The value of Reason Code should be REFUND_DELETE in the request.
NDC-8141	EMPTY_REASON_CODE_TO_REFUND_DELETE	The value of Reason Code can not be empty.
NDC-8145	REFUND_DELETE_PROCESSED_BUT_UNEXPECTED_ERROR_OCCURED	Unexpected error occurred after refund delete is successfully processed. order-retrieve would be called to get latest order view.

NDC-1074	OPERATION_UNFINALIZED	The operation is ongoing

WARNINGS

Code	Warning Key	Description
NDC-8110	REFUND_DELETE_PARTIALLY_PERFORMED_WARNING	The refund deletion could not be automatically processed for all the tickets related to the flight order items submitted in the order. Processing was only successful for some tickets that were eligible for refund deletion. To support, you can send an e-mail: tkconnectsupport@thy.com or contact via Agency Portal Issue Tracking Panel: https://tkagency.thy.com/management/issue-panel
NDC-8093	PNR_HAS_NO_ITINERARY_WARNING	All flights have been removed from PNR.

4.2.9. addinfant-quote

Overview


Purpose of addinfant-quote is to generate offers for infant addition to the order

There are two contexts for this method:

validate_addinfant context will be assumed if above objects are not provided and below object is provided:
/IATA_OrderQuoteRQ/Payload/ResponseParameters/ReasonCode = VALIDATE_INFANTADDITION


quote_addinfant context will be assumed if the below parameters are present in the
/IATA_OrderQuoteRQ/Payload/PaxList – used for details of infant

The call flows for both contexts are provided below:

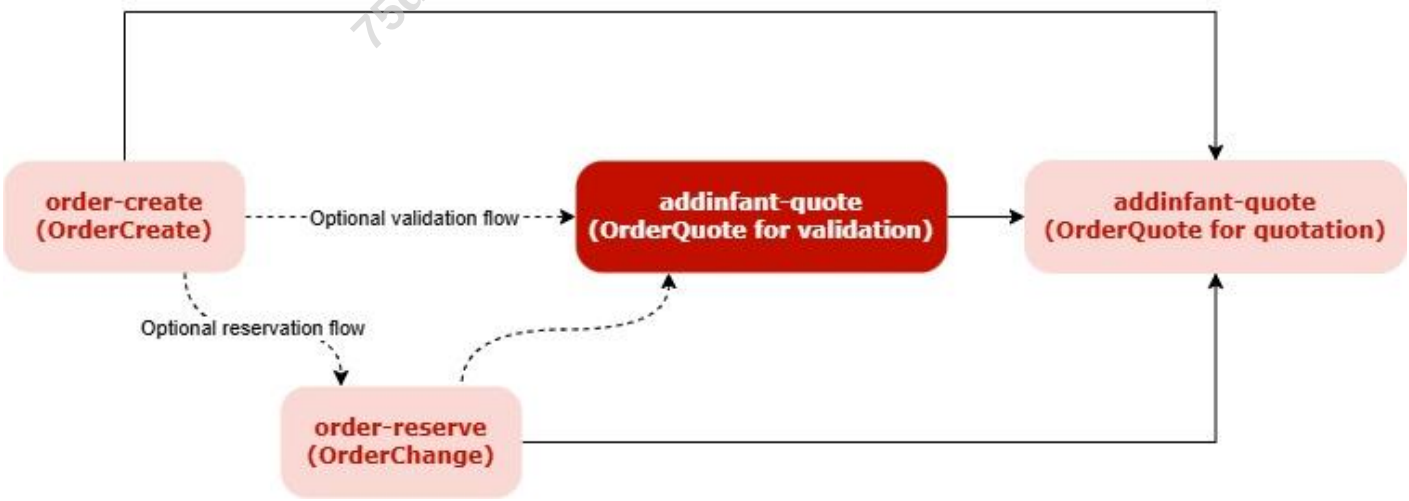Context	Prerequisites
validate_addinfant	- An active order.
	
quote-addinfant	- An active order. - Infant details

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

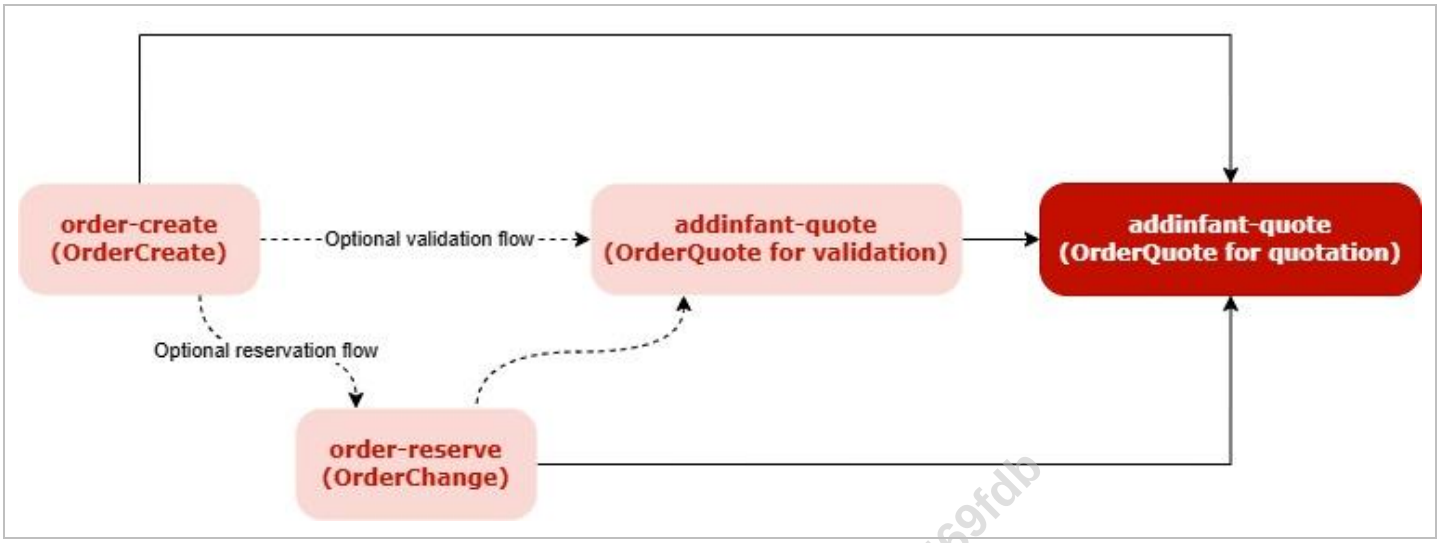

Within the response of rebook-quote,

3. For validate_rebook context
   3.1. if validation fails; ERROR will be returned
   3.2. if validations succeed, INFANT_ADDITION_PREVALIDATION_SUCCESS_WARNING will be returned along with an OrderReshopRS with an empty body. Description of the warning include tha maximum number of the addible infant.
4. For quote_addinfant context,
   4.1. An addinfant offer (infantAdditionQuotedOffer) and suitable payment methods will be returned within OrderReshopRS which can be carried onto order-addinfant.

Operation Name	addinfant-quote
Operation URL	$NDCAPI_BASEURL$/ addinfant-quote
NDC message input	IATA_OrderQuoteRQ
NDC message output	IATA_OrderReshopRS
Main function	Allows adding an infant passenger to an existing paid or unpaid order.
Main inputs	OrderID for validate_addinfant context OrderID and infant passenger details for quote_addinfant context
Main outputs	Validation result or an offer (infantAdditionQuotedOffer) to add infant passenger
Prerequisites	An active OrderID that include at least one adult who can accompany to an infant
To be followed by	addinfant-quote or order- addinfant

Limitations

1. If none of the below parameters exists in the input:
   OrderQuoteRQ/Payload/ResponseParameters/ReasonCode=VALIDATE_INFANTADDITION
   /IATA_OrderQuoteRQ/Payload/PaxList
   $INVALID_REQUEST$ error is returned

2. If both of the below parameters exists in the input:
   OrderQuoteRQ/Payload/ResponseParameters/ReasonCode=VALIDATE_INFANTADDITION
   /IATA_OrderQuoteRQ/Payload/PaxList
   $RESPONSEPARAMETERS_AND_PAXLIST_CANNOT_BE_CALLED_TOGETHER$ error is returned.

CONFIDENTIAL & RESTRICTED

3. If ../Pax/PTC is not belong an infant $ONLY_INFANT_PASSENGERS_CAN_BE_ADDED$ error is returned.

4. If requested infants are bigger than or equal to 2 years old during the departure date of the first flights in journeys, $AGE_OF_INFANT_GREATER_THAN_TWO$ error will return. Infants should be less than 2 years during the departure of any journey.

Supported Functionalities

8. Pre-validation if an infant is addible.
9. Addition infant to existing unpaid order, provided there is at least one adult passenger in the order.
10. Addition infant to existing paid order, provided there is at least one adult passenger in the order.
11. A specific infant passenger type can be added to a specific adult passenger type (e.g., an adult with paxCode=IT_ADULT and ndcType=IT can be paired with an infant with paxCode=IT_INFANT and ndcType=ITF)

Input Parameters

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
ContactInfoList/	Contact information list	YES / 1	Complex
ContactInfoList/ContactInfo	Contact information	YES / 1	Complex
ContactInfoList/ContactInfo/ContactInfoID	Required as per xsd only, can always send CNT	YES / 1	String / CNT
ContactInfoList/ContactInfo/Individual	Individual	YES / 1	Complex
ContactInfoList/ContactInfo/ Individual/Surname	Surname of any of the passengers on the order	YES / 1	String / SMITH
ResponseParameters/ReasonCode	Expected the value of VALIDATE_ADDINFANT if purpose is addition of infant validation check.	NO / 0..1	String / VALIDATE_ADDINFANT
ExistingOrder/	Details about the existing order	YES / 1	Complex
ExistingOrder/OrderID	Id of the order to be processed	YES / 1	String / AD34FT
ExistingOrder/OwnerCode	Ownercode of owner of the order	YES / 1	String / TK
PaxList/	List of Passengers	YES / 1	Complex
PaxList/Pax/	One for each infant will be added	YES / 1..N	Complex
PaxList/Pax/PaxID	ID of the infant	YES / 1	String / Pax1
PaxList/Pax/PTC	Type of the infant passenger, can be any supported NDC Pax Type	YES / 1	String / INF
DataLists/PaxList/Pax/Individual/**θ**		YES / 1	
θ/Birthdate	Birthdate of the infant	YES / 1	Date / 2012-10-11
θ/GenderCode	Gender code of the infant according to “PADIS Codeset 6353”, Can either be M: Male, F: Female	YES / 1	String / M or F
θ/GivenName	Name of the infant	YES / 1	String / Ali
θ/Surname	Surname of the infant	YES / 1	String / Can
θ/TitleName	Title of the infant, possible values MSTR : Male of ages 0-12 MISS : Female of ages 0-12	YES / 1	String / MSTR

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Output Parameters

Parameter	#	Explanation
DataLists	1	Details of the flights, passengers, services etc.
DataLists/BaggageAllowanceList	1	
DataLists/ContactInfoList	1	
DataLists/DatedMarketingSegmentList	1	
DataLists/DatedOperatingLegList	1	
DataLists/DatedOperatingSegmentList	1	
DataLists/OriginDestList	1	
DataLists/PaxJourneyList	1	
DataLists/PaxList	1	
DataLists/PaxSegmentList	1	
DataLists/PriceClassList	1	
DataLists/ServiceDefinitionList	1	
Order	1	Order details
Order/OrderID	1	ID of the Order
Order/OrderVersionNumber	1	Version of the Order
Order/OwnerCode	1	Owner code of the Order
ReshopResults	1	
ReshopResults/ReshopOffers	1	Offer Details
ReshopResults/ReshopOffers/Offer/$^{\alpha}$	1	
α/ AddedOfferItem	1..N	
α/ AddedOfferItem/OfferItemID	1	Unique ID of the OfferItem
α/ AddedOfferItem/ReshopPrice	1	Price details
α/ AddedOfferItem/ReshopPrice/PriceAndFareDetails	1	
α/ AddedOfferItem/ReshopPrice/PriceAndFareDetails/Price /$^{\beta}$	0..1	Do not return if its unpaid Order
β/BaseAmount	1	Price details
β/BaseAmount[CurCode]	1	
β/EquivAmount	1	
β/EquivAmount [CurCode]	1	
β/TaxSummary	1	Tax details
β/TaxSummary/Tax/	0..N	
β/TaxSummary/Tax/Amount	1	
β/TaxSummary/Tax/Amount/@CurCode	1	
β/TaxSummary/Tax/TaxCode	1	
β/TaxSummary/Tax/TaxName	1	
β/TaxSummary/TotalTaxAmount	1	
β/TaxSummary/TotalTaxAmount/@CurCode	1	
α/ AddedOfferItem/Service	1..N	Service details
α/ AddedOfferItem/Service/OfferServiceAssociation/	1	
α/AddedOfferItem/Service/OfferServiceAssociation/ServiceDefinitionRef/ $^{\delta}$	1..N	
δ/ServiceDefinitionRefID	1	

CONFIDENTIAL & RESTRICTED

δ/OfferFlightAssociations/	1	
δ/OfferFlightAssociations/PaxSegmentReferences	1	
δ/OfferFlightAssociations/PaxSegmentReferences/PaxSegmentRefID	1..N	
δ/ServiceDefinitionRefID	1	
α/AddedOfferItem/Service/PaxRefID	1	
α/AddedOfferItem/Service/ServiceID	1	
α/OfferExpirationTimeLimitDateTime	1	Offer details
α/OfferID	1	
α/OwnerCode	1	Owner code of the offer

Special Considerations

1. If requested infants and adults in the Order are not the same type, infant pax type can be change with a matched one. If they are match, continue with the requested PTC.

2. If there is no matching infant type, continue with the requested infant type and return $ADULT_AND_INFANT_ARE_NOT_SAME_TYPE$ warning.

3. If one matching infant type can be found, continue with matching infant type and return $INFANT_TYPE_IS_CHANGED_ACCORDING_TO_ADULT$ warning.

ERRORS

Code	Error	Description
NDC-1156	INVALID_REQUEST	PaxList or valid reason code is expected.
NDC-1149	RESPONSEPARAMETERS_AND_PAXLIST_CANNOT_BE_CALLED_TOGETHER	ResponseParameteres and PaxList cannot be called together.
NDC-1152	INVALID_REASONCODE	ReasonCode is not valid.
NDC-1150	ONLY_INFANT_PASSENGERS_CAN_BE_ADDED	Only infant pax types are allowed.
NDC-1151	ORDER_NOT_SUITABLE_FOR_INFANT_ADDITION	Order is not suitable for infant addition.

OTHER ERRORS

Code	Error Key	Description
NDC-4038	EMPTY_ORDER_ID	Order id must be provided.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-1033	ORDER_NOT_FOUND	Order not found.

WARNINGS


Code	Warning Key	Description
NDC-8111	INFANT_ADDITION_PREVALIDATION_SUCCESS_WARNING	Infant addition prevalidation is success.
NDC-8112	INFANTADDITION_FARE_UNCALCULATED_FOR_UNPAID_ORDER	Infant fare cannot be calculated for unpaid order. Addition can be completed without calculation.

4.2.10. order-addinfant


Overview

Purpose of order-addinfant is to add infant operations on a paid or unpaid order based on an infantAdditionQuotedOffer generated through addinfant-quote.

Context	Prerequisites
addinfant_unpaid_order	An active but not-yet-paid order. An addition infant offer received through an addinfant-quote request.

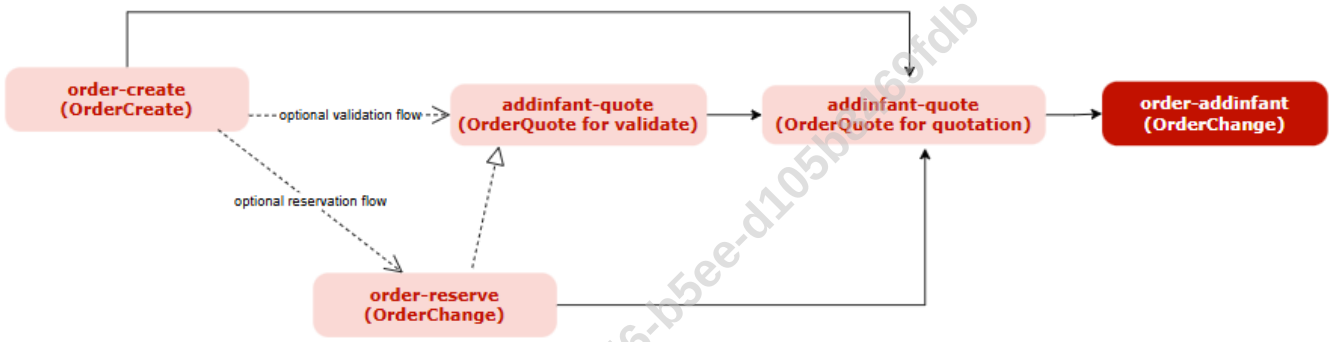

addinfant_paid_order	An active and paid order. An addition infant offer received through an addinfant-quote request.

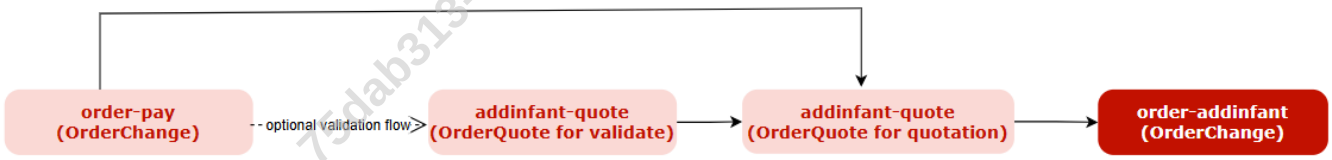

Within the response of order-addinfant, an OrderViewRS will be returned reflecting the changes.

Operation Name	Order-addinfant
Operation URL	$NDCAPI_BASEURL$/reorder/**order-addinfant**
NDC message input	IATA_OrderChangeRQ
NDC message output	IATA_OrderViewRS
Main function	Allows adding an infant passenger to an existing paid or unpaid order.
Main inputs	OrderID One quote infant Offer generated by addinfant-quote method PaymentFunctions if payment is due (especially, to add infant to a paid order)
Main outputs	The view of the order after the infant passenger adds to the current order
Prerequisites	An active infantAdditionQuotedOffer
To be followed by	Any methods applicable

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Limitations

1. As an infantAdditionQuotedOffer generated through addinfant-quote is required to be provided as input to order-addinfant, all limitations of addinfant-quote also apply to order-addinfant.

2. One infant can be assigned to one adult at most.

Supported Functionalities

1. Add infant to existing unpaid order, provided there is at least one adult passenger in the order.

2. Add infant to existing paid order, provided there is at least one adult passenger in the order.

3. A specific infant passenger type can be added to a specific adult passenger type (e.g., an adult with paxCode=IT_ADULT and ndcType=IT can be paired with an infant with paxCode=IT_INFANT and ndcType=ITF)

Input Parameters

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
ChangeOrderChoice/AcceptSelectedQuotedOfferList/SelectedPricedOffer/ α	Reference info for a previously generated InfantAdditionQuotedOffer	1	Complex
α/OfferRefID	RefID of a InfantAdditionQuotedOffer returned in response to a addInfant-quote request	1	String / INF_P59D774DFAC8A4A0DAB3D56C5718BDA53
α/OwnerCode	Owner code of the owner of the offer	1	String / TK
α/SelectedOfferItem/	Expected one for each AddedOfferItem in the infantAdditionOffer	1..N	Complex
α/SelectedOfferItem/OfferItemRefID	ID of the referenced OfferItem in InfantAdditionQuotedOfferItemId	1	String / INF_P2
α/SelectedOfferItem/PaxRefID	ID of the Pax the offer is applicable for	1..N	String / PAX_2
α/TotalOfferPriceAmount	Amount for the total offer price, expected only if payment is due.	0..1	Float / 1234.56
α/TotalOfferPriceAmount/@CurCode	Currency code of the total offer price	1	String / TRY
PaymentFunctions/PaymentProcessingDetails/ β	Payment processing details, expected only if payment is due to add the infant (s) to **an paid_active_order**	0..1	Complex
β/Amount	Amount for the total offer price.	1	Float / 1234.56
β/Amount/@CurCode	Currency code of the payment amount	1	String / TRY
β/PaymentMethod/	Any payment method supported	YES / 1	Complex
β/PaymentMethod/SettlementPlan	The existing payment methods rules are valid here as well. For cash payments, always expected as: <SettlementPlan> <PaymentTypeCode>CA</PaymentTypeCode> </SettlementPlan>	YES / 1	Complex
β/PaymentMethod/SettlementPlan/PaymentTypeCode		YES / 1	String / CA
DataLists/PaxList/Pax	To provide surname of any passenger	1	Complex

CONFIDENTIAL & RESTRICTED

DataLists/PaxList/Pax/Individual/Surname	Surname of any passenger in the order	1	String / CAN
DataLists/PaxList/Pax/PaxID	ID of the passenger whose surname is provided	1	String / PAX_1

Output Parameters

In response to the OrderChangeRQ, order-rebook returns an OrderViewRS with the applicable fields described in 0 Output Parameters for order-retrieve.

Special Considerations

1. The service can be used after order-create or order-reserve method to add the infant to an unpaid order.
2. The service can be used after order-pay method to add the infant to a paid order.
3. The infant passenger fare must be paid using one of the payment methods returned in the response of the addinfant-quote method. Otherwise, the following error is returned: INVALID_PAYMENT_METHOD. For example, if the order items have been paid in cash and later a baby passenger is to be added to that order, the baby's fare must also be paid in cash. If it is paid with a virtual POS, the same error (INVALID_PAYMENT_METHOD) is returned.
4. Every InfantAdditionQuotedOffer generated through addinfant-quote can be utilized in order-addinfant function at most once. INFANT_ADDITION_OFFER_ALREADY_CONSUMED error is returned if previously claimed InfantAdditionQuotedOffer is provided as an input to order-addinfant.
5. OPERATION_UNFINALIZED error is returned if no answer backend system during the timeout period if the operation did not finalized

ERRORS

Code	Error	Description
NDC-1033	$ORDER_NOT_FOUND$	Order not found.
NDC-4060	$PASSENGER_SURNAME_MISMATCH$	Surname provided does not match.
NDC-4073	$ORDER_IS_CANCELLED$	Order is cancelled.
NDC-1204	$ORDER_IS_COMPLETED$	Order is completed. No further action can be taken on the order other than retrieval.
NDC-1080	$STRICTLY_ONE_SELECTED_PRICED_OFFER_REQUIRED$	Only one pieced offer is expected.
NDC-4077	$EMPTY_OWNER_CODE$	Owner Code must be entered.
NDC-1368	$INVALID_OWNER_CODE$	Owner Code is not valid.
NDC-8151	$INFANT_ADDITION_OFFER_NOT_FOUND$	OfferRefID does not exist or expired.
NDC-8150	$INFANT_ADDITION_OFFER_DOES_NOT_BELONG_TO_ORDER$	OfferRefID does not belong the order.
NDC-1048	$OFFER_ITEM_REFID_NOT_FOUND$	OfferItemRefID is not identical with OfferItemID.
NDC-1049	$PAX_REF_ID_DOES_NOT_MATCH$	PaxRefID does not match with the offeritem in the specified reshop offer.

OTHER ERRORS

Code	Error Key	Description
NDC-4094	$EMPTY_ACCOUNT_NUMBER$	AccountNumber cannot be empty.
NDC-4097	$EMPTY_AIRLINE_DESIG_CODE$	AirlineDesigCode cannot be empty.
NDC-4096	$EMPTY_CARRIER$	Carries cannot be empty.
NDC-4095	$EMPTY_LOYALTY_PROGRAM$	LoyaltyProgram cannot be empty.
NDC-4174	$EMPTY_OFFER_ID$	OfferID cannot be empty.
NDC-4159	$EMPTY_ORDER$	ExistingOrder must be provided.
NDC-4038	$EMPTY_ORDER_ID$	Order id must be provided.
NDC-4204	$EMPTY_ORDER_REF_ID$	OrderRefId cannot be empty.
NDC-4077	$EMPTY_OWNER_CODE$	Owner code must be entered.
NDC-4084	$EMPTY_PAX_ID$	One or more pax IDs are empty.
NDC-4083	$EMPTY_PAX_LIST$	Passenger type must be entered.
NDC-4098	$EMPTY_PROGRAM_CODE$	ProgramCode cannot be empty.
NDC-4037	$INDIVIDUAL_EMPTY_SURNAME$	Surname must be provided.
NDC-1368	$INVALID_OWNER_CODE$	Owner Code is not valid.

WARNINGS

Code	Warning Key	Description

75dab313-82ba-49d6-b5ee-d105b8469d0

4.3. Ancillary API

4.3.1. preorder-exst


Overview

The purpose of preorder-exst service is generate extra seat offers. Based on the number of remaining available seats in the selected priced offer, extra seat offers are created in a way that total number of occupied seats (seat-occupying passengers + extra seats) does not exceed 9. Multiple extra seat offers may be seleceted, allowing seat occupation up to maximum of 9 seats.

An extra seat can be added to the order by requesting both the priced offer and the extra seat offer together in the order-create service.

Operation Name	preorder-exst
Operation URL	$NDCAPI_BASEURL$/ancillary/preorder-exst
NDC message input	IATA_SeatAvailabilityRQ
NDC message output	IATA_SeatAvailabilityRS
Main function	Performs extra seat offers for specific pax-segment
Main inputs	OfferID, SegmentID and PaxID
Main outputs	Extra seat offers
Prerequisites	An active NDC priced offer
To be followed by	order-create

75dab313-82ba-49d6-b5ee-d10db8469fdb

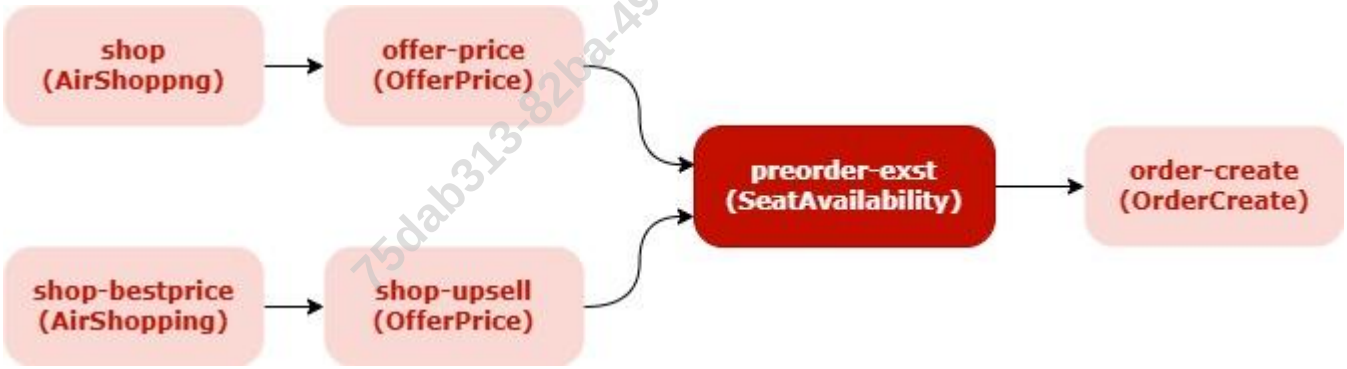

Limitations

1. EXST offers are generated based on the number of remaining available seats, provided that the total number of occupied seats does not exceed 9.

2. If not all the segments in the Priced offer are not referenced in OfferItem/PaxSegmentRefID, then $ SEGMENT_REFS_DO_NOT_MATCH$ error is returned. Extra seat should be requested for all segments at the same time.

Supported Functionalities

1. Extra seat can be requested for NDC offers.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Input Parameters

Fields under IATA_SeatAvailabilityRQ/Request/ expected to be provided in preorder-exst request for order context are:

Parameter	Explanation	Mandatory/ Occurrence(#)	Type / Example
SeatAvailCoreRequest/OfferRequest/Offer/ β	Request details	YES / 1	Complex
β/OfferID	OfferID for which seat offers to be created	YES / 1	String / AD32DEFR
β/OwnerCode	OwnerCode of the owner of the Offer	YES / 1	String / TK
β/OfferItem/α	OfferItem details	YES / 1	Complex
α/OfferItemID	OfferItemID for which seat to be selected	YES / 1	String / ABC123
α/OwnerCode	OwnerCode of the owner of the OfferItem	YES / 1	String / TK
α/PaxRefID	RefID of the PAX which extra seat is requested for	YES / 1..N	String / PAX_1
α/PaxSegmentRefID	RefID of the Segment which extra seat is requested for	YES / 1..N	String / SEG_1

Output Parameters

In response to the SeatAvailabilityRQ, preorder-exst will return a SeatAvailabilityRS with seat map and seat offers.

Fields under IATA_SeatAvailabilityRS/Response/ to be returned are:

Parameter	#	Explanation
ALaCarteOffer/	1	Offer details
ALaCarteOffer/OfferExpirationTimeLimitDateTime	1	Same as PricedOffer
ALaCarteOffer/OfferID	1	A unique ID of Offer
ALaCarteOffer/OwnerCode	1	OwnerCode of owner of Offer
ALaCarteOffer/OfferItem/α	1..N	OfferItem details
α/AirlineTaxonomy/	1	Taxonomy details
α/AirlineTaxonomy/TaxonomyFeature/	1	Taxonomy details
α/AirlineTaxonomy/TaxonomyFeature/CodesetCode	1	**For extra seats:** EXTRA_SEAT
α/AirlineTaxonomy/TaxonomyFeature/ CodesetNameCode	1	Name Code of Codeset, Always TK_Codeset (custom TK code set)
α/AirlineTaxonomy/TaxonomyFeature/ ValueText	1	Description of codeset
α/Eligibility/	1	Pax-segment details
α/Eligibility/OfferFlightAssociations/β	1	Segment details will be given in this object
β/PaxSegmentReferences/	1	References to applicable PaxSegments
β/PaxSegmentReferences/PaxSegmentRefID	1..N	ID of segment this offer item is applicable for
α/Eligibility/PaxRefID	1	The Ref ID of the pax this offer item is applicable for
α/OfferItemID	1	A unique ID of OfferItem
α/Service/	1	Service details
α/Service/ServiceDefinitionRefID	1	Reference to additional service details providing more information about the seat, such as “Standard Middle Seat”
α/Service/ServiceID	1	ID of service
α/UnitPrice/	1	Price details

CONFIDENTIAL & RESTRICTED

α/UnitPrice/EquivAmount	1	Base amount
α/UnitPrice/TaxSummary/	1	Tax details
α/UnitPrice/TaxSummary/Tax/**ε**	1	
ε/Amount	1	Amount of tax
ε/Amount[CurrCode]	1	Currency of tax
ε/TaxCode	1	Code of tax
ε/TaxName	1	Name of tax
α/UnitPrice/TotalAmount	1	Price of OfferItem **per applicable passenger**
DataLists/	1	Provides details for the offer items
DataLists/DatedMarketingSegmentList/DatedMarketingSegment/**λ**	0..N	Segments and passenger details
λ/Arrival/AircraftScheduledDateTime	1	
λ/Arrival/IATA_LocationCode	1	
λ/Arrival/StationName	1	
λ/CarrierDesigCode	1	
λ/CarrierName	1	
λ/DatedMarketingSegmentId	1	
λ/DatedOperatingSegmentRefId	1	
λ/Dep/AircraftScheduledDateTime	1	
λ/Dep/IATA_LocationCode	1	
λ/Dep/StationName	1	
λ/MarketingCarrierFlightNumberText	1	
DataLists/DatedOperatingSegmentList/DatedOperatingSegment/**π**	1	
π/CarrierDesigCode	1	
π/CarrierName	1	
π/DatedOperatingSegmentId	1	
DataLists/PaxList/Pax/ **σ**	1..N	
σ/PaxID	1	
σ/PaxRefID	0..1	
σ/PaxList/Pax/PTC	1	
DataLists/ServiceDefinitionList/	1	List of service definitions referenced within OfferItems
DataLists/ServiceDefinitionList/ServiceDefinition/**θ**	1..N	Definitions of the services
θ/BookingInstructions/	1	
θ/BookingInstructions SpecialService/	1	
θ/BookingInstructions/SpecialService/Qty	1	Number of extra seat
θ/Desc/	1	Description
θ/Desc/ DescText	1	Description of service
θ/Name	1	Name of service
θ/OwnerCode	1	OwnerCode of owner of service
θ/ServiceDefinitionID	1	A unique ID of service definition
SeatMap/	1	List of cabins and the seats
SeatMap/CabinType/	1	Cabin details
SeatMap/CabinType/CabinTypeCode	1	Code of cabin: 3 for Economy, 2 for Business
SeatMap/CabinType/CabinTypeName	1	Name given to a cabin: Economy or Business

75dab313-82ba-49d6-b5ee-d105b8469fdb

Special Considerations

1. If more than one OfferItem is received or no OfferItem object is sent, then $MORE_THAN_ONE_OFFER_ITEM$ and $EMPTY_OFFER_ITEM_LIST$ errors are returned, relatively.
2. If any passenger in the OfferItem/PaxRefID is not present in PricedOffer, then $UNMATCHED_PAX_REF_ID$ error is returned. It's not necessary to send all the passenger IDs in the PricedOffer.
3. OfferItem/PaxSegmentRefID must include all PaxSegmentRefID's present in the original PricedOffer.If any segment in the PricedOffer is not referenced in OfferItem/PaxSegmentRefID, then $UNMATCHED_PAX_SEGMENT_REF_ID$ error is returned.
4. If not all the segments in the Priced offer are not referenced in OfferItem/PaxSegmentRefID, then $SEGMENT_REFS_DO_NOT_MATCH$ error is returned.
5. If any passenger in the OfferItem/PaxRefID is not present in PricedOffer, then $UNMATCHED_PAX_REF_ID$ error is returned. It's not necessary to send all the passenger IDs in the PricedOffer.
6. A maximum of 9 seats can be held in a single Order. This means that the total number of seated passengers in the priced-offer (which are non-infant) plus number of total extra seats must not exceed 9.
7. Maximum addible extra seat number will be returned in the response as a description of MAXIMUM_NUMBER_OF_EXTRA_SEAT_WARNING warning.

ERRORS

Code	Error Key	Description
NDC-1146	SEGMENT_REFS_DO_NOT_MATCH	SegmentRefIDs should match with the Offer.
NDC-1147	NO_AVAILABLE_SEAT_FOR_EXTRA	Available seat for extra seat is not found.
NDC-1080	STRICTLY_ONE_SELECTED_PRICED_OFFER_REQUIRED	Only one priced offer is expected.
NDC-1024	ONLY_AIRLINE_TK_ALLOWED	Ownercode is not valid.
NDC-1368	INVALID_OWNER_CODE	Owner Code is not valid.
NDC-1001	PRICED_OFFER_NOT_FOUND	Offer could not be found or offer time limit has expired.
NDC-1366	UNAUTHORIZED_OFFER	Not authorized for the selected offer.
NDC-4018	MORE_THAN_ONE_OFFER_ITEM	There is more than one offer item.
NDC-1125	UNMATCHED_PAX_SEGMENT_REF_ID	PaxSegmentRefID does not match.
NDC-4112	UNMATCHED_PAX_REF_ID	Pax ID is not found.
NDC-4304	EMPTY_OFFER_ITEM_LIST	

WARNINGS

Code	Warning	Description
NDC-8092	MAXIMUM_NUMBER_OF_EXTRA_SEAT_WARNING	A maximum of the specified number of extra seat(s) can be selected.

4.3.2. seat-availability


Overview

Purpose of seat-availability is to retrieve the seat map with applicable pricing for a flight segment within a specific order. As a response, one ancillary offer item is returned for each distinct price point and seat type for available seats. For actual selection of specific seats there are two possible flows to follow, in the order context

For order context:

1. Non-chargeable seat offers would be carried over to service-addremove to perform the seat selection with no payment.
2. Chargeable seat offers provided within SeatAvailabilityRS would first be carried over to ancillary-quote, then the resulting quoted ancillary offers can be paid through order-pay after which the selection of the seats will be completed.

Operation Name	seat-availability
Operation URL	$NDCAPI_BASEURL$/seat-availability
NDC message input	IATA_SeatAvailabilityRQ
NDC message output	IATA_SeatAvailabilityRS
Main function	Constructs priced seat offers for one specific segment
Main inputs	OrderID, SegmentID and PaxID for which seat map will be returned
Main outputs	Priced seat offers
Prerequisites	An active unpaid or paid NDC order
To be followed by	service-addremove or ancillary-quote+order-pay

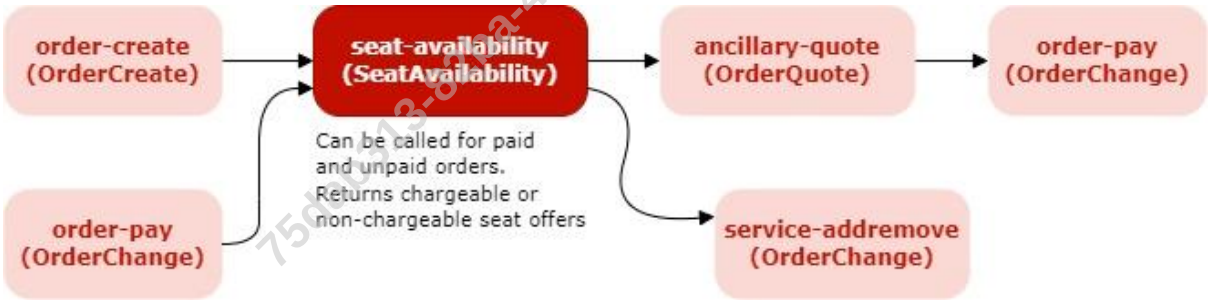

Limitations

1. One seat-availability request is expected for each segment in the order, multiple separate requests can be sent if seat map for more than one segment is needed.
2. Seat map is available only for TK segments. Seat map for non-TK segments is not supported.
3. The adault-infant relation referenced in the offer phase must be the same in the order phase. (For offer context)
4. The loyalty account information sent in the offer phase must be the same in the order phase. (For offer context)
5. Exit seats are suitable for passengers between the ages of 16 to 65.

Supported Functionalities

1. Seat map can be requested for paid, unpaid, or rebooked NDC orders or NDC offers.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

Input Parameters

Fields under IATA_SeatAvailabilityRQ/Request/ expected to be provided in seat-availability request for order context are:

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
Pax/ **θ**	Pax information	YES / 1	Complex
θ/Individual/	Pax details	YES / 1	Complex
θ/Individual/Surname	Surname of any Pax in the Order	YES / 1	String / AYDIN
θ/PaxID	Not processed, required only per xsd	YES / 1	String / PAX_1
SeatAvailCoreRequestOrderRequest/Order/**α**	Request details	YES / 1	Complex
α/OrderID	OrderID for which seat offers to be created	YES / 1	String / AD32DEFR
α/OwnerCode	OwnerCode of the owner of the Order	YES / 1	String / TK
α/OrderItem/**δ**	OrderItem details	YES / 1..N	Complex
δ/OrderItemID	OrderItemID for which seat offers to be created	YES / 1	String / ABC123
δ/OwnerCode	OwnerCode of the owner of the OrderItem	YES / 1	String / TK
δ/PaxRefID	RefID of the PAX for which seat map is requested	YES / 1	String / PAX_1
δ/PaxSegmentRefID	RefID of the Segment for which seat map is requested	YES / 1	String / SEG_1

Output Parameters

In response to the SeatAvailabilityRQ, seat-availability will return a SeatAvailabilityRS with seat map and seat offers.

Fields under IATA_SeatAvailabilityRS/Response/ to be returned are:

Parameter	#	Explanation
ALaCarteOffer/	1	Offer details
ALaCarteOffer/OfferID	1	A unique ID of Offer
ALaCarteOffer/OwnerCode	1	OwnerCode of owner of Offer
ALaCarteOffer/OfferItem/**α**	1..N	OfferItem details
α/AirlineTaxonomy/	1	Taxonomy details
α/AirlineTaxonomy/TaxonomyFeature/	1	
α/AirlineTaxonomy/TaxonomyFeature/CodesetCode	1	**For chargeable seats:** ANCILLARY_CHARGEABLE **For non-chargeable seats:** ANCILLARY_NONCHARGEABLE
α/AirlineTaxonomy/TaxonomyFeature/CodesetNameCode	1	Name Code of Codeset, Always TK_Codeset (custom TK code set)
α/AirlineTaxonomy/TaxonomyFeature/ValueText	1	Description of codeset code; ANCILLARY_CHARGEABLE: Services/Items for ancillaries that are chargeable ANCILLARY_NONCHARGEABLE: Services/Items for ancillaries that are non-chargeable

75da-333-82ba-49d6-b5ee-d10db869fdb

α/Eligibility/	1	Pax-segment details
α/Eligibility/OfferFlightAssociations/β	1	Segment details will be given in this object
β/PaxSegmentReferences/	1	References to applicable PaxSegments
β/PaxSegmentReferences/PaxSegmentRefID	1	ID of segment this offer item is applicable for
α/Eligibility/PaxRefID	1..N	The Ref ID of the Paxes this offer item is applicable for
α/OfferItemID	1	A unique ID of OfferItem
α/Service/	1	Service details
α/Service/ServiceDefinitionRefID	1	Reference to additional service details providing more information about the seat, such as “Standard Middle Seat”
α/Service/ServiceID	1	ID of service
α/UnitPrice/	1	Price details
α/UnitPrice/TotalAmount	1	Price of OfferItem **per applicable passenger**
α/UnitPrice/Discount	0..1	One will be returned if there exists a discount
α/UnitPrice/Discount/PreDiscountedAmount	1	Amount before discount
α/UnitPrice/Discount/PreDiscountedAmount [CurCode]	1	Currency code of pre-discounted amount
DataLists/	1	Provides details for the offer items
DataLists/DatedMarketingSegmentList/Dated MarketingSegment/λ	0..N	Created one for each segment included in the order/offer
λ/Arrival/AircraftScheduledDateTime	1	Arrival date time for the segment
λ/Arrival/IATA_LocationCode	1	Arrival airport location code
λ/Arrival/StationName	1	Mapped name of IATA_LocationCode from the table of “AIRPORT_STATION_NAME”
λ/CarrierDesigCode	1	Carrier Design Code from the related segments carrier
λ/CarrierName	1	Mapped name of CarrierDesigCode from the table of “CARRIER_CODE_NAME”
λ/DatedMarketingSegmentId	1	DatedMarketingSegmentId from the Order’s related segment
λ/DatedOperatingSegmentRefId	1	DatedOperatingSegmentId created in latest OrderViewRS construction for related FlightSegment
λ/Dep/AircraftScheduledDateTime	1	Departure date time for the segment
λ/Dep/IATA_LocationCode	1	Departure airport location code
λ/Dep/StationName	1	Mapped name of IATA_LocationCode from the table of “AIRPORT_STATION_NAME”
λ/MarketingCarrierFlightNumberText	1	Carrier Flight Number Text from related segment in the order/offer
DataLists/DatedOperatingSegmentList/Dated OperatingSegment/π	1	Created one for each segment included in the order/offer
π/CarrierDesigCode	1	Carrier Design Code from the related segments carrier
π/CarrierName	1	Mapped name of CarrierDesigCode from the table of “CARRIER_CODE_NAME”
π/DatedOperatingSegmentId	1	DatedOperatingSegmentId created in latest OrderViewRS construction for related FlightSegment
DataLists/PaxList/Pax/σ	1..N	Create one for each pax in the order
σ/Individual/Birthdate	0..1	Related Pax’S birthdate *(It is found in the order context, not in the offer context)*
σ/Individual/GenderCode	0..1	Related Pax’s gendercode *(It is found in the order context, not in the offer context)*
σ/Individual/GivenName	0..1	Related Pax’s givenname

		(It is found in the order context, not in the offer context)
σ/Individual/Surname	0..1	Related Pax's surname *(It is found in the order context, not in the offer context)*
σ/Individual/TitleName	0..1	Related Pax's titlename *(It is found in the order context, not in the offer context)*
σ/PaxID	1	Related Pax's PaxID
σ/PaxRefID	0..1	For non-INFANT passenger that an INFANT is associated with, the PaxRefID of that INFANT is provided here
σ/PaxList/Pax/PTC	1	Type of the passenger
DataLists/SeatProfileList/	1	Seat Profile data list
DataLists SeatProfileList/SeatProfile/μ	1..N	Profile consisting of a set of seat characteristics
μ/SeatCharacteristicCode	1..N	Characteristic of a seat, Ex: A=Aisle
μ/SeatProfileID	1	Unique ID of seat profile This ID will be referenced within each Seat for which the related characteristics are applicable
DataLists/ServiceDefinitionList/	1	List of service definitions referenced within OfferItems
DataLists/ServiceDefinitionList/ServiceDefinition/θ	1..N	Definitions of the services
θ/Desc/	1	Description
θ/Desc/DescText	1	Description of service, Ex: Seat Normal Middle
θ/Name	1	Name of service, Ex: SEAT_NORMAL_MIDDLE
θ/OwnerCode	1	OwnerCode of owner of service
θ/RFISC	1	RFISC of seat ancillary
θ/ServiceDefinitionID	1	A unique ID of service definition
Processing/	1	Layout details
Processing/Remark/	1	
Processing/Remark/RemarkText	1	Seat layout information
SeatMap/	1	List of cabins and the seats
SeatMap/CabinCompartment/	1	Aircraft compartment details Indicates which column IDs are Windows, Aisles, or Middle Seats
SeatMap/CabinCompartment/CabinComponent/γ	1..3	
γ/CabinComponentTypeCode	1	Code of the cabin component type for columns W = Windows, A for Aisle, 9 for others (Middle)
γ/ColumnID	1..N	Identifier of the column, column ids for which the type is applicable
SeatMap/CabinType/	1	Cabin details
SeatMap/CabinType/CabinTypeCode	1	Code of cabin: 3 for Economy, 2 for Business
SeatMap/CabinType/CabinTypeName	1	Name given to a cabin: Economy or Business
SeatMap/FirstRowNumber	1	First row number of the Cabin Compartment
SeatMap/LastRowNumber	1	Last row number of the Cabin Compartment
SeatMap/SeatRow/	1..N	Row of passenger seats located in the cabin
SeatMap/SeatRow/RowCharacteristicCode	1	**K** for Rows Over the Wing, **E** for Exit Row, **EG** for Over the Engine and **X** for others
SeatMap/SeatRow/RowNumber	1	Identifying a seat row
SeatMap/SeatRow/Seat/ε	1..N	Seat details
ε/ColumnID	1	Identifying a seat within a row

75dab313-82ba-4916-b2ed-d105b84691d0

ε/OccupationStatusCode	1	Information related to the availability of a specific seat according to PADIS 9865: O (Seat is occupied), F (Seat is free), Q (No seat here)
ε/OfferItemRefID	0..N	Ref ID of offer item(s) indicating which offer items are applicable for this specific seat (OfferItemRefID is not returned for seats that are not available)
ε/RowNumber	1	Row number of the seat
ε/SeatProfileRefID	1	Ref ID of seat profile providing additional information about this seat
SeatMap/PaxSegmentRefID	1	ID of the PaxSegment this seat map is constructed for

Special Considerations

8. μ/SeatCharacteristicCode will be constructed according to “PADIS 9825 Seat characteristic”:

Characteristic	PADIS Code
Non-smoking	N
Aisle	A
Middle	9
Window	W
Chargeable	CH
Non-infant	1A
Emergency Exit	E
Leg space	L
Non-medical	1B
Least Desirable	72
Non-child	IE
Bassinet	B
Preferred	O

75dab213-82ba-49d6-b5ee-d105b8469fdb

9. Processing/Remark/RemarkText is returned to facilitate graphical rendering of a seat map within User Interface Applications. This indicates how in general the seats are placed within the specific aircraft.

For example, 3-4-3 means general layout for seats in this aircraft is 3 seats on the left-wing side, three seats on the right-wing side, and 4 seats in the middle. Dash (-) denotes the aisles in the aircraft.

10. It is possible for SeatAvailabiltyRS to include different price points for the same seat for the same or different Pax types.
11. Some seats can be free of charge for some passengers but chargeable for some others.
12. For fare brands that include seat selection rights, seat-availability would return zero-price seat offers for all passengers.
13. Chargeable seat offers can be carried to payment by firstly being passed into ancillary-quote, for non-chargeable seat offers; service-addremove can be called to finalize seat selection.
IATA_SeatAvailabilityRS/Response/ALaCarteOffer/**OfferItem**/UnitPrice/TotalAmount will be greater than 0 for chargeable seat offer items. α/AirlineTaxonomy/TaxonomyFeature/CodesetCode will also indicate whether payment is required for a seat offer (ANCILLARY_NONCHARGEABLE: payment not required, ANCILLARY_CHARGEABLE: payment required).
14. Seat map is available only for TK segments. If seat map is requested for a non-TK segment, NON_TK_SEAT_SELECTION_NOT_SUPPORTED error will return.

15. For each passenger with an EXST should select exactly the number of EXST+1. According to this rule, seat-availability returns $SELECTED_SEAT_COUNT_WARNING$ warning for the passengers with EXST.

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-1124	UNMATCHED_ORDER_ITEM_ID	Order item ID does not match.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-4112	UNMATCHED_PAX_REF_ID	PaxRefID cannot be found.
NDC-1125	UNMATCHED_PAX_SEGMENT_REF_ID	PaxSegmentRefID does not match.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-2026	NO_SUITABLE_OFFER_FOUND	There is no suitable offer.
NDC-1205	INACTIVE_ORDERITEMS_FOUND	Order item(s) identified to be inactive.
NDC-1206	NON_FLIGHT_ORDERITEMS_FOUND	Order item(s) identified not to be for flights.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1115	ADVANCE_SEATING_LIMIT_REACHED_FURTHER_SEATING_AT_CHECKIN	Advance seating limit reached. Further seating at check-in.
NDC-1116	UNABLE_TO_DISPLAY_SEATMAP	Unable to display seat map.
NDC-1119	NON_TK_FLIGHT_CAN_NOT_TO_DISPLAY_SEATMAP	Seat map cannot be displayed for non-TK segments.
NDC-1120	SEAT_RESERVATION_NOT_ALLOWED_THIS_FLIGHT	Seat reservation is not allowed this segment.
NDC-1347	BIRTHDATE_MANDATORY_FOR_INFANT_CHILD	Birthdate is mandatory for passengers of type infant and children.
NDC-1300	NON_TK_SEAT_SELECTION_NOT_SUPPORTED	Non-TK seat selection not supported.
NDC-1134	UNAVAILABLE_NOW_PLEASE_TRY_AGAIN	Service is not available at the moment, please try again later.
NDC-1139	SEAT_AVAILABILITY_BACKEND_GET_SEAT_MAP_REQUEST_CONVERSION_ERROR	An unexpected error occurred at backend request conversion.
NDC-4018	MORE_THAN_ONE_OFFER_ITEM	There is more than one offer item.
NDC-1140	UNMATCHED_OFFER_ITEM_ID	Offer item ID does not match.
NDC-1141	ONE_PAX_SEGMENT_REF_ID_EXPECTED	There is more than one pax segment reference ID item.
NDC-1371	ACCOMPANIED_PASSENGER_MUST_BE_INFANT	Accompanied passenger must be an infant.
NDC-1374	MORE_THAN_ONE_ADULT_ACCOMPANY_THE_SAME_INFANT	More than one adult passenger cannot accompany the same infant passenger.
NDC-1013	INFANT_MUST_BE_ACCOMPANIED_BY_ADULT	If there is an infant who is not connected to an adult on the Order.
NDC-1460	MULTIPLE_PASSENGERS_WITH_SAME_ID	The same Pax ID cannot be used for more than one passenger.
NDC-8079	HANDLE_CANCELLED/PROPOSED_SEGMENTS_FIRST	Cancelled/proposed segments need to be handled before proceeding with other actions.

OTHER ERRORS

Code	Error Key	Description
NDC-4156	EMPTY_SEAT_AVAILABILITY_REQUEST	SeatAvailability request cannot be empty.
NDC-4157	EMPTY_SEAT_AVAILABILITY_ORDER	SeatAvailability Order cannot be empty.
NDC-4038	EMPTY_ORDER_ID	Order id must be provided.
NDC-4077	EMPTY_OWNER_CODE	OwnerCode cannot be empty.
NDC-1024	ONLY_AIRLINE_TK_ALLOWED	Ownercode is not valid.
NDC-4144	EMPTY_ORDER_ITEM_LIST	Order item list cannot be empty.
NDC-4145	EMPTY_ORDER_ITEM_ID	Order item ID must be provided.

NDC-4080	EMPTY_PAX_REF_LIST	PaxRef list cannot be empty.
NDC-4158	EMPTY_PAX_SEGMENT_REF_LIST	PaxSegmentRef list cannot be empty.
NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.
NDC-4084	EMPTY_PAX_ID	PaxID cannot be empty.
NDC-4093	EMPTY_INDIVIDUAL_DATA	Individual subdata cannot be empty.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Surname must be provided.
NDC-1368	INVALID_OWNER_CODE	Ownercode is not valid.
NDC-1345	$MORE_INFANTS_THAN_ADULTS$	Number of infants cannot exceed number of adults.
NDC-1350	$MIN_AGE_17_FOR_STUDENT_ADD_INFANT$	Student age must be at least 17 to be associated with an infant.
NDC-1351	$NO_POSSIBLE_PASSENGER_TO_ASSIGN_INFANT$	No passenger can be found to assign infant.
NDC-1373	$NOT_ABLE_TO_ASSIGN_INFANT_TO_SPECIFIED_PAX$	Specified passenger cannot be accompanying person.
NDC-1466	$INVALID_DATE$	Invalid date.

WARNINGS

Code	Error Key	Description
NDC-8115	SELECTED_SEAT_COUNT_WARNING	

75dab313-82ba-49d6-b5ee-d105b8469fdb

4.3.3. service-catalog

Overview

Purpose of service-catalog is to provide information about ancillary services and special needs.

There are three contexts that this method responds for:


1. If /IATA_ServiceListRQ/Request/ResponseParameters/ReasonCode = GENERAL_CATALOG, general_context is inferred, in this case the method returns information regarding all ancillary services and special needs supported by TK NDC APIs.
2. If /IATA_ServiceListRQ/Request/ResponseParameters/ReasonCode = ORDER_CATALOG, order_context is inferred, in this case the method returns information regarding only chargeable ancillaries that are applicable to the order id plus all special needs supported.
3. If /IATA_ServiceListRQ/Request/ResponseParameters/ReasonCode = OFFER_CATALOG, offer_context is inferred, in this case the method returns information regarding only chargeable ancillaries that are applicable to the offer id plus all special needs supported.

The purpose of the general_context is to provide a catalog to TK NDC API clients so that they know of all ancillary products and special needs supported by TK NDC API. The expected usage for general_context would be to call the method only once in every few days or so, or when TK announces an addition of a service supported by the API. This call would be followed by service-catalog → service-list → service-add-remove for special service requests to be added to the order, or by service-catalog → service-list → ancillary-quote → order-pay for adding chargeable ancillaries to the order.


The purpose of order_context or offer_context is to provide TK NDC API clients a means to list all chargeable ancillary products applicable to a specific order or the priced offer (not all chargeable ancillaries would be available for all orders or offers) and all non-chargeable special needs. In addition, for each applicable ancillary product, starting price for this order will also be provided as a description. The expected usage for order_context would be to call the method any time after order creation to facilitate the end users to view possible ancillary products. This call can be followed by calls to i-service-list (get offers for ancillaries and special needs), ii- ancillary-quote (to get quotation for specific amounts of one or more chargeable ancillaries), iii- order-pay (to pay for the quoted ancillary offers provided in response to ancillary-quote), or by i- service-list (get offers for ancillaries and special needs), ii- service-addremove (to add non-chargeable special needs) .

Operation Name	service-catalog
Operation URL	$NDCAPI_BASEURL$/service-catalog
NDC message input	IATA_ServiceListRQ
NDC message output	IATA_ServiceListRS
Main function	Construct a list of all available ancillaries or chargeable ancillaries applicable to a given order
Main inputs	OfferID or OrderID
Main outputs	A list of all available ancillaries or chargeable ancillaries applicable to a given order price (if exists) and their formatted descriptions (if any).
Prerequisites	An active NDC Priced Offer or an active unpaid or paid NDC order
To be followed by	pre-order flow: service-catalog → service-list → order-create → service-addremove or service-list → service-list → order-create → ancillary-quote → order-pay post-order flow: service-catalog → service-list → service-add-remove or service-catalog → service-list → ancillary-quote → order-pay

For post-order flow;

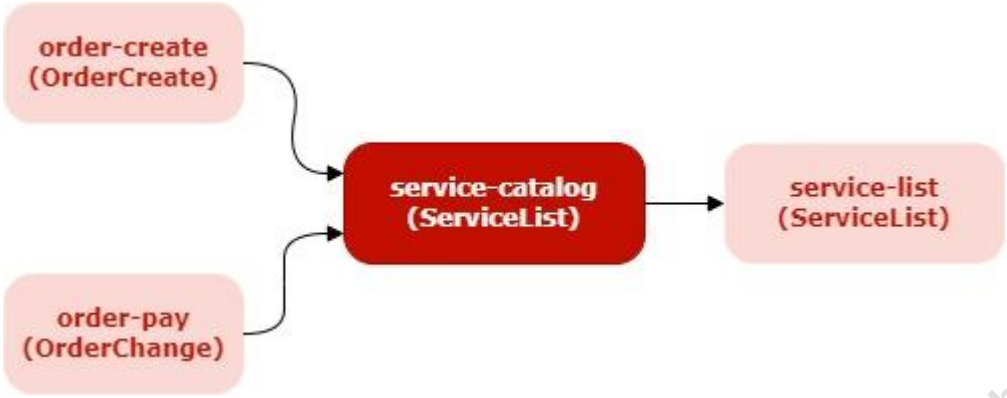

For pre-order flow;

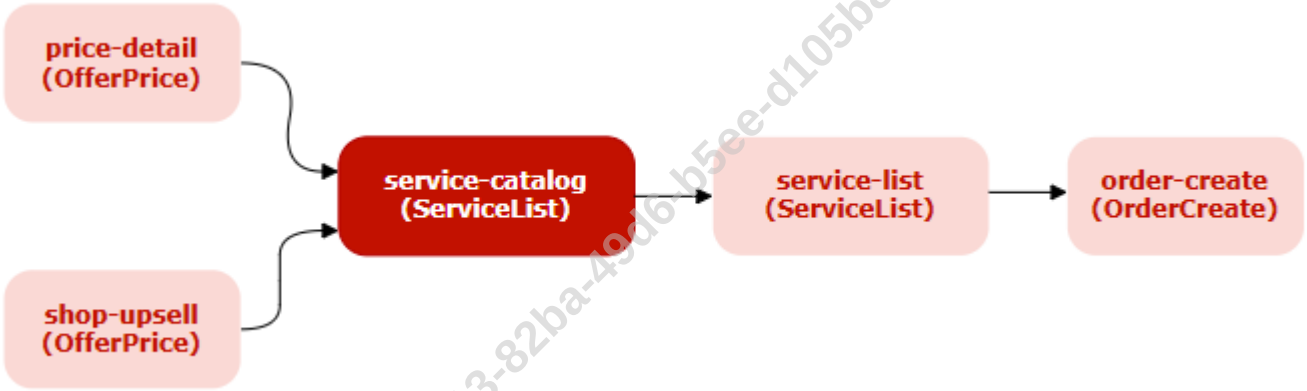

75dab313-82ba-49d6-b5ee-d105b8469fdb

Limitations

1. An active NDC Priced Offer is required for offer_context or an active NDC order is required for order_context.

Supported Functionalities

1. service-catalog can be requested in general_context without the need to provide an order id.
2. service-catalog can be requested in order_context for paid, unpaid, or rebooked NDC orders.
3. service-catalog can be requested in offer_context for priced offers.

Input Parameters

Fields under IATA_ServiceListRQ/Request/ServiceListCoreRequest/ expected to be provided in service-catalog request:

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
ResponseParameters/ReasonCode	GENERAL_CATALOG or ORDER_CATALOG or OFFER_CATALOG	YES / 1	Enum

ServiceListCoreRequest/Pax/	Pax is required for ORDER_CATALOG	NO / 0..1	Complex
ServiceListCoreRequest/Pax/Individual/	Pax details	YES / 1	Complex
ServiceListCoreRequest/Pax/Individual/Surname	Surname of one of the passengers	YES / 1	String / YILDIZ
ServiceListCoreRequest/Pax/PaxID	Not processed, required only per xsd	YES / 1	String / PAX_1
ServiceListCoreRequest/OrderRequest/	Order details If it's sent after order-create, order details will be used.	NO / 0..1	Complex
ServiceListCoreRequest/ServiceListCoreRequest/OrderRequest/Order/ α		YES / 1	Complex
α/OrderID	ID of Order Note: not processed for GENERAL_CATALOG	YES / 1	String / ABC123
α/OwnerCode	OwnerCode of the owner of Order	YES / 1	String / TK
ServiceListCoreRequest/OfferRequest/	Offer details If it's sent before order-create, offer details will be used.	NO / 0..1	Complex
ServiceListCoreRequest/OfferRequest/Offer/ β		YES / 1	Complex
β/OfferID	ID of Offer request	YES / 1	String / ABC123
β/OwnerCode	OwnerCode of the owner of Order	YES / 1	String / TK

Output Parameters

In response to a ServiceListRQ,

In general_context: service-catalog will return a ServiceListRS with service details for all available chargeable ancillaries and non-chargeable special needs supported by TK NDC API.

In order_context and offer_context: service-catalog will return a ServiceListRS with i-service details for all available chargeable ancillaries supported by TK NDC API which are applicable to the specific order, and ii-non-chargeable special needs supported by TK NDC API.

Fields under IATA_ServiceListRS/Response/DataList/ to be returned are:

Parameter	#	Explanation
BaggageAllowanceList	1	PETC/AVIH weight-dimension details
BaggageAllowanceList/BaggageAllowance/α	4	1 for PETC and 3 for AVIH (for each kind)
α/BaggageAllowanceID	1	A unique id
α/ApplicablePartyText	1	Always "Party"
α/MaximumDimensionAllowance	0..1	Only for PETC
α/MaximumDimensionAllowance/HeightMeasure	1	Default "23"
α/MaximumDimensionAllowance/LengthMeasure	1	Default "40"
α/MaximumDimensionAllowance/LengthUnitOfMeasurement	1	Always "CMT"

α/MaximumDimensionAllowance/WidthMeasure	1	Default “30”
α/TypeCode	1	Always "Checked"
α/WeightAllowance	1	
α/WeightAllowance/TotalMaximumWeightMeasure	1	For PETC, “8” For AVIH-DOG, “50” For AVIH-CAT, “20” For AVIH-BIRD, “30”
α/WeightAllowance/WeightUnitOfMeasurement	1	Always “KGM”
ServiceDefinitionList/	1	List of ServiceDefinition
ServiceDefinitionList/ServiceDefinition/α	1..N	Service details: additional information about each service
α/AirlineTaxonomy/	1	Taxonomy details of the service
α/AirlineTaxonomy/DescText	0..1	ACCEPTABLE_BREED or NOT_ACCEPTABLE_BREED
α/AirlineTaxonomy/TaxonomyCode	0..1	Species
α/AirlineTaxonomy/TaxonomyFeature/	1..N	
α/AirlineTaxonomy/TaxonomyFeature/CodesetCode	0..1	**for chargeable ancillaries;** ANCILLARY_CHARGEABLE **for special needs;** SPECIAL_NEED
α/AirlineTaxonomy/TaxonomyFeature/CodesetNameCode	0..1	Name Code of Codeset, Always TK_Codeset (custom TK code set)
α/AirlineTaxonomy/TaxonomyFeature/ValueText	1	Breed Or Description of CodesetCode ANCILLARY_CHARGEABLE: Services/Items for ancillaries that are chargeable SPECIAL_NEED: Services/Items for special needs
α/Desc/	1..2	for general_context: one Description object returned for details about the chargeable ancillaries or non-chargeable special needs for order_context, a second Description is returned to indicate starting price for a chargeable ancillary for the specified order Ex: 100 TRY
α/Desc/DescText	1	Description text or starting price text for the service
α/Name	1	Name of ancillary service
α/ServiceCode	1	ServiceCode of ancillary service
α/OwnerCode	1	OwnerCode of the owner of the service
α/RFISC	0..1	If service is ANCILLARY_CHARGEABLE then RFISC of the ancillary product; otherwise, not returned

75dab313-82ba-49d6-b5ee-d105b84c0f

α/RFIC	0..1	If service is ANCILLARY_CHARGEABLE then RFIC of the ancillary product; otherwise, not returned
α/ServiceDefinitionID	1	Unique ID of the service
α/BookingInstructions/β	0..1	If service is SPECIAL_NEED then BookingInstructions object will be returned
β/SpecialService/	1	Special service (SPECIAL_NEED) details
β/SpecialService/SpecialServiceCode	1	SpecialServiceCode of the service
β/SpecialService/FreeText	0..1	This parameter is returned if providing free text is mandatory for this service. Requests concerning this service must include free text.
α/ServiceDefinitionAssociation	0.1	Only for PETC/AVIH
α/ServiceDefinitionAssociation/BaggageAllowanceRef	1	Reference of the BaggageAllowance
α/ServiceDefinitionAssociation/BaggageAllowanceRef/BaggageAllowanceRefID	1	

Special Considerations

1. In case of order_context a second **α**/Desc/ object along with a **α**/Desc/DescText is returned for each chargeable ancillary service to indicate the starting price of that service for passengers in the specified order.
2. NO_SUITABLE_OFFER_FOUND_WARNING is returned in order_context if no suitable chargeable offers are found for the specified order. In this case, ServiceListRS will include only non-chargeable special needs supported by TK NDC API.

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-1024	ONLY_AIRLINE_TK_ALLOWED	Ownercode is not valid.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-4200	EMPTY_ REASONCODE	Reasoncode must be provided.
NDC-1523	INVALID_REASONCODE_FOR_SERVICE_CATALOG	Reasoncode must be provided as GENERAL_CATALOG or ORDER_CATALOG.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1015	IMPROPER_FLIGHT_SEGMENT	Flight segment is not proper to select seat in terms of delivery status or requested segment index is not available on the Order.
NDC-1011	MISSING_PAX_RELATED_INFO	There is a missing information related to a passenger on the Order in terms of infant connection detail.
NDC-1021	INVALID_ORDER_ID	Provided OrderID is not valid.
NDC-1001	$PRICED_OFFER_NOT_FOUND$	Offer could not be found or offer time limit has expired.
NDC-1366	$UNAUTHORIZED_OFFER$	Not authorized for the selected offer.
NDC-8079	HANDLE_CANCELLED/PROPOSED_SEGMENTS_FIRST	Cancelled/proposed segments need to be handled before proceeding with other actions.

OTHER ERRORS

Code	Error Key	Description
NDC-4140	EMPTY_SERVICE_LIST_REQUEST	ServiceListCoreRequest must be provided and cannot be empty.
NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.

NDC-4084	EMPTY_PAX_ID	PaxID cannot be empty.
NDC-4093	EMPTY_INDIVIDUAL_DATA	Individual subdata cannot be empty.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Surname must be provided.
NDC-4141	EMPTY_SERVICE_REQUEST_ORDER	Order must be provided.
NDC-4077	EMPTY_OWNER_CODE	OwnerCode cannot be empty.

WARNINGS

Code	Warning Key	Description
NDC-8003	NO_SUITABLE_OFFER_FOUND_WARNING	No suitable ancillary offers found for the specified order.
NDC-8040	$NO_MIN_FARE_FOUND_FOR_SOME_SSR$	No minimum fare found for some SSR.

75dab313-82ba-49d6-b5ee-d105b8469fdb


4.3.4. service-list

Overview

The function of service-list is to return offers for non-seat chargeable ancillary services with all possible product's prices and zero-price offers for non-chargeable special needs for a given order or offer.

Operation Name	service-list
Operation URL	$NDCAPI_BASEURL$/service-list
NDC message input	IATA_ServiceListRQ
NDC message output	IATA_ServiceListRS
Main function	Constructs ancillary offers with product-based pricing for chargeable services requested. Constructs free-of-charge offers for special needs requested.
Main inputs	OfferID or OrderID
Main outputs	AlaCarte Offer and OfferItems for ancillary products and special needs.
Prerequisites	An active NDC Priced Offer or an active unpaid or paid NDC order
To be followed by	post-order flow: service-list → service-addremove for special needs or service-list → ancillary-quote → order-pay for chargeable ancillaries

For post-order flow;

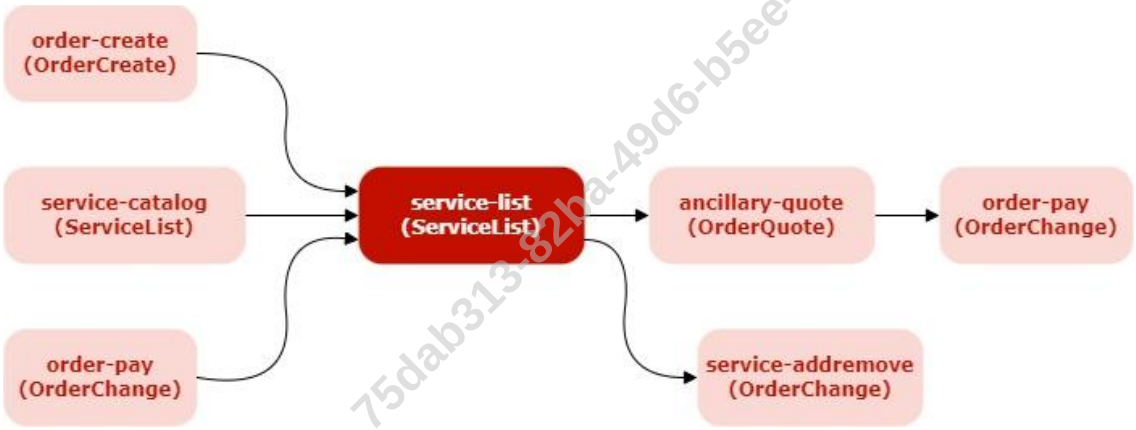

Limitations

1. An active NDC order is required to call after order-creation.

Supported Functionalities

2. Offers for ancillaries and special needs can be requested for paid and unpaid NDC orders.

Input Parameters

Fields under IATA_ServiceListRQ/Request/ expected to be provided in service-list request are:

Parameter	Explanation	Mandatory/ Repetition (#)	Type / Example
Pax/	Pax information is not mandatory if it is a pre-order call	NO / 0..N	Complex
Pax/Individual/	Pax details	YES / 1	Complex
Pax/Individual/Surname	Surname of any Pax in the Order	YES / 1	String / AYDIN

Pax/LoyaltyProgramAccount/δ	Loyalty account details	NO / 0..1	Complex
δ/AccountNumber	Loyalty account number for the passenger Nine digits number expected	YES / 1	Integer/ 123456789
δ/LoyaltyProgram	Carrier details	YES / 1	Complex
δ/LoyaltyProgram/Carrier		YES / 1	Complex
δ/LoyaltyProgram/Carrier/AirlineDesigCode	Airline code of the owner of the loyalty program	YES / 1	String / TK
δ/LoyaltyProgram/ProgramCode	Program prefix of the loyalty number	YES / 1	String / TK
Pax/PaxRefID	Used to indicate the ref id of any infant associated with this PAX	NO / 0..1	String / PAX_3
Pax/PaxID	Not processed, required only per xsd	YES / 1	String / PAX_1
OfferCriteria/	Offer details	YES / 1	Complex
OfferCriteria/ServiceCriteria/	Must be provided to get offers for chargeable services	NO / 0..1	Complex
OfferCriteria/ServiceCriteria/RFISC	RFISC of the chargeable service, among the ones provided in service-catalog	YES / 1..N	String / 0DG
OfferCriteria/SpecialNeedsCriteria/	Must be provided to get offers for non-chargeable special needs	NO / 0..1	Complex
OfferCriteria/SpecialNeedsCriteria/SpecialServiceCode	ServiceCode for the requested special need among the one provided in service-catalog	YES / 1..N	String / DEAF
OfferCriteria/SpecialNeedsCriteria/FreeText	Extra text information for the special need	NO / 0..1	String / NEED
OfferCriteria/SpecialNeedsCriteria/QTY	Weight of PETC/AVIH	NO / 0..1	String / 8
ServiceListCoreRequest/	Details of NDC Order or Offer	YES / 1	Complex
ServiceListCoreRequest/OrderRequest/α	Order details If it is sent after order creation	NO / 0..1	Complex
α/OrderID	OrderID for which ALC offers to be created	YES / 1	String / ABC123CDE
α/OwnerCode	OwnerCode of the owner of the Order	YES / 1	String / TK
α/OrderItem/	OrderItem details	YES / 1..N	Complex
α/OrderItem/OrderItemID	ID of the OrderItem	YES / 1	String / 123ABC345
α/OrderItem/OwnerCode	OwnerCode of the owner of OrderItem	YES / 1	String / TK
α/OrderItem/PaxRefID	Pax for which offers are requested	YES / 1	String / PAX_1
α/OrderItem/PaxSegmentRefID	Segment(s) for which offers are requested	YES / 1..N	String / SEG_1

75dab313-82ba-10d6-b5ee-1105b8465fdb

Output Parameters

In response to the ServiceListRQ, service-list will return a ServiceListRS with ALC Offer items with their service definitions and piece-based or kilogram-based allowance details and prices (if applicable).

Fields under IATA_ServiceListRS/Response/ to be returned are:

Parameter	#	Explanation
ALaCarteOffer/	1	Exactly one AlaCarteOffer will be produced in response.
ALaCarteOffer/OfferID	1	A unique ID for the generated ALaCarteOffer
ALaCarteOffer/OfferItem/α	1..N	One OfferItem will be returned for each unique combination of Applicable Passenger, Applicable Segments, Service Type
α/AirlineTaxonomy/	1	Taxonomy details of the service

α/AirlineTaxonomy/TaxonomyFeature/	1	
α/AirlineTaxonomy/TaxonomyFeature/CodesetCode	1	**for chargeable ancillaries;** ANCILLARY_CHARGEABLE **for special needs;** SPECIAL_NEED
α/AirlineTaxonomy/TaxonomyFeature/ CodesetNameCode	1	Name Code of Codeset, Always TK_Codeset (custom TK code set)
α/AirlineTaxonomy/TaxonomyFeature/ValueText	1	Description of CodesetCode ANCILLARY_CHARGEABLE: Services/Items for ancillaries that are chargeable SPECIAL_NEED: Services/Items for special needs
α/Eligibility/	1	Segment (if any) and pax eligibility details
α/Eligibility/OfferFlightAssociations/β	0..1	Segment details will be given in this object if service is segment-related
β/PaxSegmentReferences/	1	
β/PaxSegmentReferences/PaxSegmentRefID	1..N	ID of segment
α/Eligibility/PaxRefID	1	The Ref ID of the pax this offer item is applicable for
α/OfferItemID	1	A unique ID of OfferItem
α/Service/	1	Service details
α/Service/ServiceDefinitionRefID	1	Reference to additional service details
α/Service/ServiceID	1	ID of service
α/UnitPrice/	1	Price details
α/UnitPrice/TotalAmount	1	Total price for this offer item. Amount will be zero for SPECIAL_NEED
α/UnitPrice/TotalAmount[CurCode]	0..1	Currency code for the total amount, not returned for zero prices
α/UnitPrice/TaxSummary/δ	0..1	Tax details
δ/Tax	1..N	
δ/Tax/Amount	1	Amount of the tax
δ/Tax/Amount[CurCode]	1	Currency code of the tax
δ/Tax/TaxCode	1	Tax code
δ/TotalTaxAmount	1	Total amount of the taxes
δ/TotalTaxAmount[CurCode]	1	Currency code of the taxes
DataList/	1	Provides additional details for the offer items
DataList/BaggageAllowanceList/	0..1	Will return for piece or kilogram based OfferItems, if any
DataList/BaggageAllowanceList/BaggageAllowance/μ	1..N	Allowance details, defines quantity in terms of weight or piece
μ/ApplicablePartyText	1	Will always return “Party”
μ/BaggageAllowanceID	1	A unique id for the allowance
μ/TypeCode	1	Will always return “Checked”
μ/WeightAllowance/	0..1	If allowance unit is weight, this object is constructed
μ/WeightAllowance/MaximumWeightMeasure	1	Weight detail
μ/WeightAllowance/WeightUnitOfMeasurement	1	Unit of weight, always "KGM” is returned
μ/PieceAllowance	0..1	If allowance unit is piece, this object is constructed
μ/PieceAllowance/TotalQty	1	Quantity of the piece
μ/MaximumDimensionAllowance/	0..1	Only for petc/avih

75dab313-82ba-49d6-b3ee-1169f3169fdb

µ/MaximumDimensionAllowance/HeightMeasure	1	Height
µ/MaximumDimensionAllowance/LengthMeasure	1	Length
µ/MaximumDimensionAllowance/LengthUnitOfMeasurement	1	Always “CMT”
µ/MaximumDimensionAllowance/WidthMeasure	1	Width
DataList/ServiceDefinitionList/	1	List of service definitions referenced within OfferItems
DataList/ServiceDefinitionList/ServiceDefinition/θ	1..N	Definitions of the services
θ/AirlineTaxonomy/	0..1	Only for PETC/AVIH ServiceDefinition
θ/AirlineTaxonomy/TaxonomyCode	1	Family details
θ/AirlineTaxonomy/TaxonomyFeature	1	Species details
θ/AirlineTaxonomy/TaxonomyFeature/ValueText	0..1	Only for PETC/AVIH ServiceDefinition
θ/Desc/	1	
θ/Desc/DescText	1	Description of service
θ/Name	1	Name of the service, Ex: Extra Baggage
θ/ServiceCode	1	Ex: XBAG for Extra Baggage, SPEQ for Sports Equipment
θ/ServiceDefinitionAssociation/δ	0..1	Returned only for piece or kilogram-based services
δ/BaggageAllowanceRef	1	
δ/BaggageAllowanceRef/BaggageAllowanceRefID	1	Ref ID of baggage allowance applicable to the service
θ/OwnerCode	1	OwnerCode for the service, Ex: TK
θ/RFISC	0..1	Will return only for ANCILLARY_CHARGEABLE services Ex: 0EC for BIKE, 0DG for Extra Baggage (KG)
θ/ServiceDefinitionID	1	A unique ID of service definition

Special Considerations

1. Ancillary services and special needs requested will be assumed to be asked for all passenger-segments provided in the input. More specifically, offers will be generated for all service and special needs provided in OfferCriteria/ServiceCriteria/ and OfferCriteria/SpecialNeedsCriteria/ that are applicable for all PassengerSegments indicated by the combination of α/OrderItem/PaxRefID and α/OrderItem/PaxSegmentRefID (or β/OfferItem/PaxRefID and β/OfferItem/PaxSegmentRefID).

2. Although multiple PaxRefIDs are allowed as per XSD, each offer item will be associated with exactly one passenger as specified in IATA_ServiceListRS/Response/ALaCarteOffer/OfferItem//Eligibility/PaxRefID.

3. It is possible for some ancillary services to be requested for one PAX and one segment only, but multiple segments are present in β/PaxSegmentReferences/PaxSegmentRefID for the generated offer item. This means that the requested service can only be added for the specified segment together with some other segments. An example to this is an “Extra Baggage” service requested for ESB-IST segment of a one-way flight from ESB to JFK with a connection in IST. For such O&D’s where different segments within a flight cannot have certain products (Extra Baggage) separately; even if the request was made for one segment, an offer will be generated that is applicable for two segments.

4. UNSPECIFIED_INSTRUCTION_FOR_SPECIAL_SERVICE error is returned if OfferCriteria/SpecialNeedsCriteria/FreeText field is not provided for a special need for which text is mandatory. This mandatory information can be obtained from the service-catalog response. For special needs that require text input, IATA_ServiceListRS/Response/DataList/ServiceDefinitionList/ServiceDefinition/BookingInstructions/SpecialService/FreeText object would have been returned in response to a service-catalog request.

5. Extra Baggage services available for an itinerary may be a mixture of piece-concept (RFISC=0GO) and weight-concept (RFISC=0DG) for different flight segments. However, the client does not need to be aware of the baggage concept for flight segments in the itinerary while preparing a request for extra baggage. Whether only

0GO or only 0DG or both are requested, service-list will return offers for segments in the form of applicable baggage concept (piece or weight).
Offer is weight-based or piece-based if the related baggage allowance contains below objects, respectively.
/DataLists/BaggageAllowanceList/BaggageAllowance/WeightAllowance for weight-concept
/DataLists/BaggageAllowanceList/BaggageAllowance/PieceAllowance for piece-concept

6. In case of extra baggage inquiries, offers for not only unit-based extra baggage but also all extra baggage products offered by TK (1 KG-5 KG-10 KG-15 KG-20 KG OR 1 PC-3 PC etc.) are returned.

7. For any of the services requested within IATA_ServiceListRQ/Request/OfferCriteria, if an error is produced then no offers for any of the other services is returned.

8. NO_SUITABLE_OFFER_FOUND error is returned if no offers can be generated for any of the chargeable services requested. In this case no offers will be generated for non-chargeable services.

9. If RFISC=0BJ (BUP) is requested for an unpaid Order, $BUP_NOT_ALLOWED_FOR_UNPAID_ORDER$ error will return.

10. If RFISC=0BJ (BUP) is requested for an Order with business cabin (OrderViewRS/../DataLists/PriceClassList/PriceClass/CabinType/CabinTypeCode=2), $BUP_NOT_ALLOWED_FOR_BUSINESS_PASSENGERS$ will return.

11. If RFISC=0BT or 0BS (PETC or AVIH), following validations will be applied.

    i. If RFISC=0BT or 0BS, no other RFISC cannot be sent. Otherwise, $0BT_PETC_CAN_BE_REQUESTED_SEPARATELY$ or $0BT_PETC_CAN_BE_REQUESTED_SEPARATELY$ error will return, relatively.

    ii. 0BT and 0BS also cannot be requested together. Otherwise, $PETC_AVIH_CAN_BE_REQUESTED_SEPARATELY$ error will return.

    iii. If RFISC=0BT or 0BS (PETC or AVIH), then details should be sent under SpecialNeedsCriteria.

    iv. More than one SpecialNeedsCriteria sent, 15 will return.

    v. SpecialNeedsCriteria/SpecialServiceCode should be sent in the {family}_{species} format. Otherwise, 18 error will returned.

    vi. SpecialNeedsCriteria/FreeText should be sent in the {number}x{number}x{number} format. Otherwise, 17 error will returned.

    vii. If requested species is not acceptable breed (can be seen service-catalog response (ORDER_CATALOG and OFFER_CATALOG)), 3 error will returned.

    viii. PETC dimension cannot be reach 23X30X40CM. Otherwise, 4 error will returned.

    ix. PETC weight cannot be reach 8kg. Otherwise, 5 error will returned.

    x. AVIH weight cannot be reach 30KG for vird, 20kg for cat, 50 kg for dog. Otherwise, 6, 7, 8 errors will return, relatively.

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-1124	UNMATCHED_ORDER_ITEM_ID	Order item ID does not match.
NDC-4112	UNMATCHED_PAX_REF_ID	PaxRefID cannot be found.
NDC-1125	UNMATCHED_PAX_SEGMENT_REF_ID	PaxSegmentRefID does not match.
NDC-1126	SPECIFIED_SPECIAL_SERVICE_CHARGABLE	Special service must be non-chargeable.
NDC-1127	SPECIFIED_SERVICE_CRITERIA_NON_CHARGABLE	Service criteria must be chargeable.
NDC-1128	UNSPECIFIED_INSTRUCTION_FOR_SPECIAL_SERVICE	Text is mandatory.
NDC-2026	NO_SUITABLE_OFFER_FOUND	There is no suitable offer.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-1129	UNMATCHED_BAGGAGE_ALLOWANCE	Baggage type does not match.
NDC-1205	INACTIVE_ORDERITEMS_FOUND	Order item(s) identified to be inactive.
NDC-1206	NON_FLIGHT_ORDERITEMS_FOUND	Order item(s) identified not to be for flights.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1015	IMPROPER_FLIGHT_SEGMENT	Flight segment is not proper to select seat in terms of delivery status or requested segment index is not available on the Order.
NDC-1011	MISSING_PAX_RELATED_INFO	There is a missing information related to a passenger on the Order in terms of infant connection detail.
NDC-1021	INVALID_ORDER_ID	Provided OrderID is not valid.
NDC-4236	AN_ERROR_IS_OCCURRED_CHECK_DESCRIPTION	
NDC-1001	$PRICED_OFFER_NOT_FOUND$	Offer could not be found or offer time limit has expired.
NDC-1140	$UNMATCHED_OFFER_ITEM_ID$	Offer item ID does not match.
NDC-1366	$UNAUTHORIZED_OFFER$	Not authorized for the selected offer.
NDC-8079	HANDLE_CANCELLED/PROPOSED_SEGMENTS_FIRST	Cancelled/proposed segments need to be handled before proceeding with other actions.
NDC-4485	BUP_NOT_ALLOWED_FOR_UNPAID_ORDER	Business Upgrade (0BJ) service cannot be processed for unpaid orders.
NDC-4487	BUP_NOT_ALLOWED_FOR_BUSINESS_PASSENGERS	Passengers in Business Class cannot be upgraded.
NDC-4491	BUP_CANNOT_BE_REQUESTED_WITHOUT_ORDER	Business upgrade should be requested with an Order. Preorder business upgrade is not supported.
NDC-1471	BREED_IS_NOT_ACCEPTABLE	Choosen breed is not acceptable on flight.
NDC-1472	DIMENSIONS_SHOULD_BE_LESS_THAN_23X30X40CM	Dimensions should be less than 23X30X40CM
NDC-1473	PET_IN_CABIN_MUST_BE_LESS_THAN_8KG	Kilogram should be less than 8kg.
NDC-1474	BIRD_IN_HOLD_MUST_BE_MAX_30KG	Kilogram should be less than 30kg.
NDC-1475	CAT_IN_HOLD_MUST_BE_MAX_20KG	Kilogram should be less than 20kg.
NDC-1476	DOG_IN_HOLD_MUST_BE_MAX_50KG	Kilogram should be less than 50kg.
NDC-1477	0BT_PETC_CAN_BE_REQUESTED_SEPARATELY	Petc cannot be requested with another ancillaries.
NDC-1478	0BS_AVIH_CAN_BE_REQUESTED_SEPARATELY	Avih cannot be requested with another ancillaries.
NDC-1479	PETC_AVIH_CAN_BE_REQUESTED_SEPARATELY	Petc and Avih cannot be requested with another ancillaries.
NDC-1480	SPECIALNEEDSCRITERIA_CANNOT_BE_MULTIPLIED	One SpecialNeedsCriteria can be requested at one request.
NDC-1481	INVALID_DIMENSION_FORMAT	Dimension should be sent in {number}x{number}x{number} format.
NDC-1482	INVALID_SPECIALSERVICECODE_FORMAT	Familiy and species should be sent in {familiy}_{species} format.

CONFIDENTIAL & RESTRICTED

TURKISH AIRLINES

Turkish Airlines NDC API | Integration Document

OTHER ERRORS

Code	Error Key	Description
NDC-4140	EMPTY_SERVICE_LIST_REQUEST	ServiceListCoreRequest must be provided and cannot be empty.
NDC-4142	EMPTY_OFFER_CRITERIA	Offer criteria cannot be empty.
NDC-4143	EMPTY_SPECIAL_SERVICE_CODE	Special service code cannot be empty.
NDC-4141	EMPTY_SERVICE_REQUEST_ORDER	Order must be provided.
NDC-4038	EMPTY_ORDER_ID	Order id must be provided.
NDC-4077	EMPTY_OWNER_CODE	OwnerCode cannot be empty.
NDC-1024	ONLY_AIRLINE_TK_ALLOWED	Ownercode is not valid.
NDC-4144	EMPTY_ORDER_ITEM_LIST	Order item list cannot be empty.
NDC-4145	EMPTY_ORDER_ITEM_ID	Order item ID must be provided.
NDC-4080	EMPTY_PAX_REF_LIST	PaxRef list cannot be empty.
NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.
NDC-4084	EMPTY_PAX_ID	PaxID cannot be empty.
NDC-4093	EMPTY_INDIVIDUAL_DATA	Individual subdata cannot be empty.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Surname must be provided.
NDC-4094	$EMPTY_ACCOUNT_NUMBER$	AccountNumber cannot be empty.
NDC-4095	$EMPTY_LOYALTY_PROGRAM$	LoyaltyProgram cannot be empty.
NDC-4096	$EMPTY_CARRIER$	Carries cannot be empty.
NDC-4097	$EMPTY_AIRLINE_DESIG_CODE$	AirlineDesigCode cannot be empty.
NDC-4098	$EMPTY_PROGRAM_CODE$	ProgramCode cannot be empty.

WARNINGS

Code	Warning Key	Description
NDC-8004	SERVICE_NOT_FOUND_WARNING	RFISC or SpecialServiceCode not found.
NDC-8002	BAGGAGE_TYPE_DIFFERENT_FROM_REQUESTED_WARNING	Baggage type is different from requested.
NDC-8157	BUP_NOT_AVAILABLE_FOR_ALL_SEGMENTS_AND_PAXES	Business Upgrade Service is Not Available For All Segments and Paxes. Offers Have Been Generated Only For Eligible Segments and Paxes.
NDC-8123	BUP_SHOULD_BE_PURCHASE_FOR_ALL_PASSENGERS	Business Upgrade cannot be purchase for some of the passengers. It should be applied to all passengers on the Order.
NDC-8181	PETC_OWNERS_MUST_FLY_WITH_STANDARD_OR_PREFERRED_WINDOW_SEAT	PETC ancillary must fly with standart window or preferred window seat which is free for PETC emd's
NDC-8182	PETC_INFORMATION	The informations you applied accepted as true value, if the informations doesnt fit the PETC while you arrived airport, pet will not accepted the flight, the responsibility belongs to customer and agency.
NDC-8182	AVIH_INFORMATION	The informations you applied accepted as true value, if the informations doesnt fit the AVIH while you arrived airport, pet will not accepted the flight, the responsibility belongs to customer and agency.

CONFIDENTIAL & RESTRICTED

4.3.5. ancillary-quote

Overview

The function of ancillary-quote is to produce a quoted ancillary offer that can be carried to payment through order-pay. For piece and weight-based ancillary services ancillary-quote accepts the desired quantities, for seat ancillary ancillary-quote accepts the desired seat information (row number and column number).

Operation Name	ancillary-quote
Operation URL	$NDCAPI_BASEURL$/ancillary-quote
NDC message input	IATA_OrderQuoteRQ
NDC message output	IATA_OrderReshopRS
Main function	Performs price quotation for chargeable ancillaries. Constructs quoted ancillary offers that can be paid through order-pay.
Main inputs	OrderID, Selected ALaCarte Offers to be quoted, Seat info for seat offers, Quantity info for piece and weight-based ancillaries
Main outputs	Quoted ALaCarte Offer and Offer Items ready to be paid through order-pay
Prerequisites	An active unpaid or paid NDC order ALaCarte Offer(s) already created for the given order (through seat-availability or service-list)
To be followed by	order-pay



Limitations

1. ancillary-quote is required and works for only chargeable ancillary offers.

Supported Functionalities

1. Ancillary offers can be quoted for both paid and unpaid NDC orders.
2. Multiple ancillary offers generated through multiple service-list and/or seat-availability calls can be quoted within one ancillary-quote call.

Input Parameters

Fields under IATA_OrderQuoteRQ/Payload/ expected to be provided in ancillary-quote request are:

Parameter	Explanation	Mandatory/ Occurrence(#)	Type / Example
ExistingOrder/	Order details	YES / 1	Complex
ExistingOrder/OrderID	OrderID for which ALC offers to be quoted	YES / 1	String / AD32DEFR
ExistingOrder/OwnerCode	OwnerCode of the owner of the Order	YES / 1	String / TK
PaxList/	Pax information	YES / 1	Complex

PaxList/PaxID	Not processed, required only per xsd	YES / 1	String / Pax1
PaxList/Individual/Surname	Surname of any Pax in the Order	YES / 1	String / YILMAZ
SelectedOffers	Offers selected for quotation	YES / 1..N	Complex
SelectedOffers/OfferRefID	RefID of the selected offer returned as part of seat-availability or service-list responses	YES / 1	String / Offer123
SelectedOffers/OwnerCode	OwnerCode of the owner of the Offer	YES / 1	String TK
SelectedOffers/SelectedOfferItem/$^{\alpha}$	Selected offer item belonging to the SelectedOffer	YES / 1..N	Complex
α/OfferItemRefID	Reference ID of the offer item	YES / 1	String / Item123AB
α/PaxRefID	RefID of the PAX this offer item is requested for	YES / 1	String / Pax2
α/SelectedSeat	Required for seats to indicate seats to be selected	NO / 0..1	Complex
α/SelectedSeat/ColumnID	ColumnID of the requested seat	YES / 1	String / A
α/SelectedSeat/SeatRowNumber	RowNumber of the requested seat	YES / 1	Integer / 23
α/SelectedALaCarteOfferItem	Required for piece or weight-based offer items	NO / 0..1	Complex
α/SelectedALaCarteOfferItem/Qty	Quantity requested for the offer item not expected for PETC/AVIH	NO / 0..1	Integer / 10

Output Parameters

In response to the OrderQuoteRQ, ancillary-quote will return an OrderReshopRS with price details of the quoted offer items with their service definitions, selected seat and piece or kilogram-based allowance details.

Fields under IATA_OrderReshopRS/Response/ to be returned are:

Parameter	#	Explanation
Order/	1	Order details
Order/CreationDateTime	1	CreationDateTime of NDC Order
Order/OrderID	1	OrderID of the Order
Order/OwnerCode	1	OwnerCode of the owner of the Order, Ex: TK
Order/StatusCode	1	StatusCode of the Order
ReshopResults/	1	Reshop results details
ReshopResults/ReshopOffers/	1	Reshop offer details
ReshopResults/ReshopOffers/RequotedOffer/$^{\alpha}$	1	A single offer constructed for all requested SelectedOffers
α/OfferID	1	A unique ID for the offer that can be referenced to pay through order-pay
α/OwnerCode	1	Owner of the Offer, i.e. TK
α/OfferExpirationTimeLimitDateTime	1	The time limit until when this offer can be paid for, ex: 2023-11-17T09:30:47Z
α/AddedOfferItem/	1..N	For each distinct pax-segment-RFISC combination; one AddedOfferItem will be returned
α/AddedOfferItem/OfferItemID	1	A unique ID for the quoted offer item
α/AddedOfferItem/ReshopPrice/	1	Price detail for the added offer item
α/AddedOfferItem/ReshopPrice/PriceAndFareDetails/$^{\beta}$	1	Price detail for the added offer item
β/Price	1	Price detail for the added offer item
β/Price/Discount/	0..1	If an AccountCode exists in the corresponding offer, this object will be provided. Even if there is an ACCOUNTCODE, there may not be any discount. This object simply indicates that an

75dab313-82ba-49d6-b5e6-0105b8469fdb

		account code was provided within corresponding ancillary offer request
β/Price/Discount/DiscountContext/	1	AccountCode details
β/Price/Discount/DiscountContext/KeyText	1	Always “ACCOUNTCODE”
β/Price/Discount/DiscountContext/ValueText	1	Value of the AccountCode
β/Price/TaxSummary/δ	0..1	Tax details
δ/Tax	1..N	
δ/Tax/Amount	1	Amount of the tax
δ/Tax/Amount[CurCode]	1	Currency code of the tax
δ/Tax/TaxCode	1	Tax code
δ/TotalTaxAmount	1	Total amount of the taxes
δ/TotalTaxAmount[CurCode]	1	Currency code of the taxes
β/Price/TotalAmount	1	Total price for the added offer item
β/Price/TotalAmount[CurrCode]	1	Currency code for the price
α/AddedOfferItem/Service/	1	Additional eligibility info for the added offer item
α/AddedOfferItem/Service/OfferServiceAssociation/δ	1	Offer service association
δ/SeatAssignment/	0..1	Will return if the offer item is a Seat offer item
δ/SeatAssignment/Seat/	1	Info for the selected seat
δ/SeatAssignment/Seat/SeatAssignmentAssociations/ PaxSegmentRef/PaxSegmentRefID	1	One segment reference for the selected seat
δ/SeatAssignment/Seat/ColumnID	1	Column ID of the selected seat, Ex: C
δ/SeatAssignment/Seat/RowNumber	1	Row number of the selected seat, Ex: 23
δ/SeatAssignment/Seat/SeatCharacteristicCode	1..N	Characteristics of the seat according to “PADIS 9825 Seat characteristic”, Ex: W=Window, 1A=Non-Infant
δ/SeatAssignment/ServiceDefinitionRefID	1	Reference to additional service details for seat offer item
δ/ServiceDefinitionRef/	0..1	Will return if the offer item is a non-Seat offer item
δ/ServiceDefinitionRef/OfferFlightAssociations/ PaxSegmentReferences/PaxSegmentRefID	1..N	One or more segment references for the non-seat offer item, indicates segments this offer item is for
δ/ServiceDefinitionRef/ServiceDefinitionRefID	1	Reference to additional service details for non-seat offer item
α/AddedOfferItem/Service/PaxRefID	1	The ref id of the pax this offer item is applicable for
α/AddedOfferItem/Service/ServiceID	1	The id of the service
α/TotalPrice	1	Total price for all AddedOfferItems
α/TotalPrice/TotalAmount	1	Total amount of payment required for all quoted offer items
α/TotalPrice/TotalAmount[CurCode]	1	Currency code for the amount, Ex: TRY
DataLists/	1	Provides details for the offer items quoted
DataLists/ServiceDefinitionList/	1	List of service definitions referenced within AddedOfferItems
DataLists/ServiceDefinitionList/ServiceDefinition/θ	1..N	Definitions of the services
θ/AirlineTaxonomy/	0..1	Only if it is for PETC/AVIH
θ/AirlineTaxonomy/TaxonomyCode	1	Family
θ/AirlineTaxonomy/TaxonomyFeature	1	Species
θ/AirlineTaxonomy/TaxonomyFeature/ValueText	1	

θ/Name	1	Name of the service, Ex: Extra Baggage, Normal Middle Seat
θ/OwnerCode	1	OwnerCode for the service, Ex: TK
θ/RFISC	1	Ex: 0B5 for seats, 0EC for BIKE, 0DG for Extra Baggage (KG)
θ/ServiceDefinitionID	1	Unique id, Ex: SPEQ_BIKE_SCALABLE_QTY2, XBAG_WEIGHT_10KG_QTY10, SEAT_LEGROOM_AISLE This ID will be referenced by either δ/SeatAssignment/ServiceDefinitionRefID or δ/ServiceDefinitionRef/ServiceDefinitionRefID
θ/ServiceDefinitionAssociation/ BaggageAllowanceRef/BaggageAllowanceRefID	0..1	Returned only for piece or weight-based services to indicate the quoted amount. Ex: 2 Piece of BIKE, 5KG of XBAG
DataLists/BaggageAllowanceList/	0..1	Constructed for piece or weight-based AddedOfferItems, if any
DataLists/BaggageAllowanceList/BaggageAllowance/δ	0..N	Allowance details, defines eligible quantity in terms of weight or piece
δ/ApplicablePartyText	1	Will always return “Party”
δ/BaggageAllowanceID	1	A unique id for the allowance
δ/TypeCode	1	Will always return “Checked”
δ/WeightAllowance	0..1	If allowance unit is weight, this object is constructed
δ/WeightAllowance/MaximumWeightMeasure	1	Weight detail the quoted price is applicable for, Ex: 5
δ/WeightAllowance/WeightUnitOfMeasurement	1	Unit of weight, always "KGM” is returned
δ/PieceAllowance	0..1	If allowance unit is piece, this object is constructed
δ/TotalQty	1	Quantity of the piece the quoted price is applicable for, Ex: 2
δ/MaximumDimensionAllowance	0..1	Only if it is for PETC/AVIH
δ/MaximumDimensionAllowance/HeightMeasure	1	Height
δ/MaximumDimensionAllowance/LengthMeasure	1	Length
δ/MaximumDimensionAllowance/LengthUnitOfMeasurement	1	Always “CMT”
δ/MaximumDimensionAllowance/WidthMeasure	1	Width

Special Considerations

1. IATA_OrderReshopRS/Response/AddedOfferItem/ will be associated with only one segment for seat ancillaries and with one or more segments for non-seat ancillaries under below objects, respectively
   - IATA_OrderReshopRS/Response/AddedOfferItem/Service/OfferServiceAssociation/SeatAssignment/Seat/SeatAssignmentAssociations/PaxSegmentRef/PaxSegmentRefID
   - IATA_OrderReshopRS/Response/AddedOfferItem/Service/OfferServiceAssociation//ServiceDefinitionRef/OfferFlightAssociations/PaxSegmentReferences/PaxSegmentRefID
2. ancillary-quote is expected to be provided with only chargeable ancillary offer items within SelectedOffers/SelectedOfferItem/OfferItemRefID, non-chargeable offer items can be added to the order directly by utilizing service-addremove. If, by mistake, non-chargeable offer items are passed onto ancillary-quote, they will be ignored and NON_CHARGABLE_OFFER_ITEMS_NOT_PROCESSED_WARNING would be returned if there were at least one chargeable offer item successfully processed. If all offer items provided in the request has no price (non-chargeable) UNSELECTED_SUITABLE_OFFER_ITEM error is returned.
3. All SelectedOfferItems must include one PaxRefID who is eligible for that OfferItem (i.e. present in the original OfferItem found in the system), otherwise following possible errors are returned

EMPTY_PAX_REF_LIST; If no PaxRef provided,
STRICTLY_ONE_PAX_REF_ALLOWED; If multiple PaxRef provided,
UNMATCHED_PAX_REF_ID; if provided PaxRef does not match with the PaxRef(s) in the original OfferItem

4. Since the price of 5 x (1 KG XBAG) may not be equal to the price of 1 x (5 KG XBAG), service-list returns the prices of all the products offered by TK such as 1 KG-5 KG-10 KG-15 KG-20 KG and 1 PC- 3 PC. For the final prices of other units, calling ancillary-quote is still recomended.
   However, one can continue to ancillary-quote only with unit-based offers (1KG and 1PC). Otherwise, the "ONLY_UNIT_BASED_OFFERS_CAN_BE_QUOTED" error will return from ancillary-quote. Both offers from service-list and from ancillary-quote can be paid with order-pay.
   If one will buy 15 KG, for example, service-list returns both 1 KG and 15 KG XBAG and there are two ways to pay it:
   a. To continue to order-pay directly with 15 KG service-list offer. Ancillary-quote is not required for that case.
   b. First, to call the ancillary-quote with 1 KG service-list offer and quote it for 15 KG. Then call the order-pay with 15 KG XBAG offer generated by ancillary-quote.

   If one will buy 7 KG which is not offered by TK, ancillary-quote is a must; first, call the ancillary-quote with 1 KG service-list offer and quote it for 7 KG. Then call the order-pay with 7 KG XBAG offer generated by ancillary-quote.
5. The OfferID used in order-create and seat-availability/service-list must be the same as the pricedOfferId generated in priceDetail or shopUpsell. If they are not the same, the $OFFER_ORDER_ID_NOT_MATCHED$ error is returned.
6. If FFID number of Order and Offer or adult-infant relation of Order and Offer are not match except Order includes M&S but Offer does not, $OFFER_AND_ORDER_NOT_MATCH$ error will return.
7. If more than one PETC/AVIH offerItem is requested (serviceLisrRS/../DataLists/ServiceDefinitionList/ServiceDefinition(RFISC=0BT or 0BS), then $ONLY_ONE_PETC_ONE_AVIH_CAN_BE_REQUESTED_AT_THE_SAME_REQUEST$ error will return.
8. If a PETC/AFIV OfferItem is requested, then related SelectedOfferItem/SelectedALaCarteOfferItem/QTY is not allowed, otherwise; $QUANTITY_CAN_NOT_BE_REQUESTED_FOR_PETC_AVIH$ error will return.
9. If PETC/AVIH is not reserved for any reason, PETC_AVIH_SAVE_REQUEST_COULD_NOT_BE_GENERATED error will return.

ERRORS

Code	Error Key	Description
NDC-1033	ORDER_NOT_FOUND	Order not found.
NDC-4073	ORDER_IS_CANCELLED	Order is cancelled.
NDC-4080	EMPTY_PAX_REF_LIST	PaxRef list cannot be empty.
NDC-4146	STRICTLY_ONE_PAX_REF_ALLOWED	Only one eligible PaxRefID must be provided.
NDC-4112	UNMATCHED_PAX_REF_ID	PaxRefID cannot be found.
NDC-1034	UNSELECTED_SUITABLE_OFFER_ITEM	No chargeable offer items specified.
NDC-4147	EMPTY_SEAT_SELECTION	SelectedSeat must be provided for SeatOffers.
NDC-4148	MULTIPLE_SELECTION_IDENTICAL_PAX	Only one seat can be selected for a specific passenger and segment.
NDC-4149	MULTIPLE_SELECTION_IDENTICAL_SEAT	A specific seat in a segment can be selected for only one passenger.
NDC-4150	UNKNOWN_SELECTED_SEAT	Selected seat does not exist in the offer.
NDC-4151	SEAT_NOT_ELIGIBLE_FOR_OFFER_ITEM	Selected seat is not eligible for the offer.
NDC-4060	PASSENGER_SURNAME_MISMATCH	Surname provided does not match.
NDC-4014	OFFER_NOT_FOUND	Offer not found (does not exist, expired, or consumed).
NDC-1063	ONLY_UNIT_BASED_OFFERS_CAN_BE_QUOTED	Only unit-based offers can be quoted.
NDC-1514	INCONSISTENT_ACCOUNT_CODE	Multiple different account codes provided/identified.

NDC-4153	UNSPECIFIED_QUANTITY_FOR_BAGGAGE_SERVICE	Quantity must be specified for baggage services.
NDC-1204	ORDER_IS_COMPLETED	Order is completed. No further action can be taken on the order other than retrieval.
NDC-1035	INVALID_ALACARTE_OFFER_QUANTITY	Valid quantity value must be provided.
NDC-4168	PASSENGER_RESTRICTED_AISLE_SEAT	Restricted aisle seat for the passengers.
NDC-4169	PASSENGER_RESTRICTED_CENTER_SEAT	Restricted center seat for the passengers.
NDC-4170	PASSENGER_WITH_INFANT_RESTRICTED_SEAT	Restricted seat for the passengers with infants.
NDC-4171	PASSENGER_RESTRICTED_EXIT_SEAT	Restricted exit seat for the passengers.
NDC-4172	PASSENGER_INFANT_RESTRICTED_EXIT_SEAT	Restricted exit seat for the passengers with infants.
NDC-4173	PASSENGER_RESTRICTED_LEGROOM_SEAT	Restricted legroom seat for the passengers.
NDC-1035	INVALID_ALACARTE_OFFER_QUANTITY	Valid quantity value must be provided.
NDC-4999	ORDER_IS_LOCKED_BY_ANOTHER_OPERATION	Order is locked by another operation.
NDC-1028	$OFFER_ORDER_ID_NOT_MATCHED$	The Offer and Order must be generated from the same priced offer.
NDC-1209	$OFFER_AND_ORDER_NOT_MATCH$	There is a mismatch in the LoyaltyProgram or adult-infant relation between the Offer and the Order.
NDC-8079	HANDLE_CANCELLED/PROPOSED_SEGMENTS_FIRST	Cancelled/proposed segments need to be handled before proceeding with other actions.
NDC-1483	ONLY_ONE_PETC_ONE_AVIH_CAN_BE_REQUESTED_AT_THE_SAME_REQUEST	Only 1 petc 1 avih can be choosen per person.
NDC-1486	QUANTITY_CAN_NOT_BE_REQUESTED_FOR_PETC_AVIH	Petc and avih cannot be requested more than one for per person.
NDC-1487	PETC_AVIH_SAVE_REQUEST_COULD_NOT_BE_GENERATED	Petc and avih saving request cannot be proceed.

OTHER ERRORS

Code	Error Key	Description
NDC-4159	EMPTY_ORDER	ExistingOrder must be provided.
NDC-4038	EMPTY_ORDER_ID	Order id must be provided.
NDC-4120	EMPTY_OWNER_CODE	OwnerCode cannot be empty.
NDC-4160	EMPTY_SELECTED_OFFER_LIST	SelectedOffers must be provided.
NDC-4076	EMPTY_OFFER_REF_ID	OfferRefID cannot be empty.
NDC-1368	INVALID_OWNER_CODE	Ownercode is not valid.
NDC-4077	EMPTY_OWNER_CODE	OwnerCode cannot be empty
NDC-4079	EMPTY_OFFER_REF_ITEM_ID	OfferItemRefID cannot be empty.
NDC-4081	MULTIPLE_REFERENCE_IDENTICAL_PAX	Same pax cannot be referenced more than once
NDC-4093	EMPTY_INDIVIDUAL_DATA	Individual subdata cannot be empty.
NDC-4037	INDIVIDUAL_EMPTY_SURNAME	Surname must be provided.
NDC-4111	UNMATCHED_OFFER_ITEM_REF_ID	OfferItemRefID cannot be found in Offer.
NDC-4083	EMPTY_PAX_LIST	PaxList cannot be empty.
NDC-4165	MULTIPLE_SELECTION_IDENTICAL_OFFER	Only one offer can be quoted for the same pax.
NDC-4166	UNMATCHED_SELECTED_SEAT	Selected seat and OfferItem does not match.
NDC-4167	EMPTY_ALACARTE_OFFER_ITEM_QUANTITY	Qty must be provided for selected offer.

WARNINGS

Code	Warning Key	Description
NDC-4152	NON_CHARGEABLE_OFFER_ITEMS_NOT_PROCESSED_WARNING	Offer includes non-chargeable services.
NDC-8181	PETC_OWNERS_MUST_FLY_WITH_STANDARD_OR_PREFERRED_WINDOW_SEAT	PETC ancillary must fly with standart window or preferred window seat which is free for PETC emd's

4.4. Order Change Notification

The purpose of notification mechanism is to provide integrators with known set of airline-initiated changes that may occur on the orders created by the integrators.

4.4.1. Overview

An IATA_OrderChangeNotifRQ will be made available to the integrators for the following types of changes.

Change Type	Applicability	Description
SCHEDULE_CHANGE	PAID and UNPAID ORDER	This notification will be applicable for both paid and unpaid order. This notification will be triggered for changes to the flights with departure times The possible changes will be: • cancellation of a flight with no alternatives **OR** the applicable combination of one or more of changes below • flight-no, • departure-point, • arrival-point, • departure-time, • arrival-time
OPTION_ CHANGE	UNPAID ORDER	This notification will be triggered for the changes on PaymentTimelimitDateTime for flight order items. There are certain business rules that may result in the originally given timelimit to be updated to be sooner. In such cases this notification will be delivered.
SSR_CHANGE	PAID AND UNPAID ORDER	This notification will be triggered for changes on the status of a specific set of SSRs.

I. SCHEDULE_CHANGE

An IATA_OrderChangeNotifRQ similar to below will be constructed:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<IATA_OrderChangeNotifRQ xmlns="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersMessage"
xmlns:ns2="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersCommonTypes"
xmlns:ns3="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersCommonTypesFullyOptional"
xmlns:ns4="http://www.w3.org/2000/09/xmldsig#">
    <DistributionChain>
        <ns2:DistributionChainLink>
            <ns2:Ordinal>1</ns2:Ordinal>
            <ns2:OrgRole>Carrier</ns2:OrgRole>
            <ns2:ParticipatingOrg>
                <ns2:OrgID>TK</ns2:OrgID>
            </ns2:ParticipatingOrg>
        </ns2:DistributionChainLink>
        <ns2:DistributionChainLink>
            <ns2:Ordinal>2</ns2:Ordinal>
            <ns2:OrgRole>Seller</ns2:OrgRole>
            <ns2:ParticipatingOrg>
                <ns2:Name>Agency</ns2:Name>
                <ns2:OrgID>123456</ns2:OrgID>
            </ns2:ParticipatingOrg>
            <ns2:SalesBranch>
                <ns2:SalesBranchID>ABC</ns2:SalesBranchID>
            </ns2:SalesBranch>
        </ns2:DistributionChainLink>
```

```
    </DistributionChain>
    <Notification>
        <ChangeGroup>
            <ChangeOperationGroup>
            <!-- May be repeated if there is more than one flight cancelled (WK) -->
                <ChangeOperation>
                    <ChangeDateTime>2025-01-09T12:12:00Z</ChangeDateTime>
                    <!-- It can be 1 (Flight number change), 2 (Flight retimed), 3 (Flight cancelled), 4
(Delay) -->
                    <ChangeTypeCode>2</ChangeTypeCode>
                    <New>
                        <!-- Content is described below -->
                    </New>
                    <Old>
                        <!-- Content is described below -->
                    </Old>
                    <!-- 100 indicates "Payment Timelimit change" based on PADIS -->
                    <ReasonCode>100</ReasonCode>
                </ChangeOperation>
                <OrderVersionNumber>4</OrderVersionNumber>
            </ChangeOperationGroup>
        </ChangeGroup>
        <OrderRefID> VGRTFS </OrderRefID>
    </Notification>
    <PayloadAttributes>
        ***
    </PayloadAttributes>
   </IATA_OrderChangeNotifRQ>
```

Where details of old flights are provided under <Old> object similar to below:

```
<Old>
    <ns3:DataLists>
        <ns3:DatedMarketingSegmentList>
            <ns3:DatedMarketingSegment>
                <ns3:Arrival>
                    <ns3:AircraftScheduledDateTime>2025-01-23T17:15:00</ns3:AircraftScheduledDateTime>
                    <ns3:IATA_LocationCode>IST</ns3:IATA_LocationCode>
                    <ns3:StationName>Istanbul Airport</ns3:StationName>
                </ns3:Arrival>
                <ns3:CarrierDesigCode>TK</ns3:CarrierDesigCode>
                <ns3:CarrierName>Turkish Airlines</ns3:CarrierName>
                <ns3:DatedMarketingSegmentId>SEG_M_1</ns3:DatedMarketingSegmentId>
                <ns3:DatedOperatingSegmentRefId>SEG_O_1</ns3:DatedOperatingSegmentRefId>
                <ns3:Dep>
                    <ns3:AircraftScheduledDateTime>2025-01-23T11:50:00</ns3:AircraftScheduledDateTime>
                    <ns3:IATA_LocationCode>BRU</ns3:IATA_LocationCode>
                    <ns3:StationName>Brussels National Airport</ns3:StationName>
                </ns3:Dep>
                <ns3:MarketingCarrierFlightNumberText>1938</ns3:MarketingCarrierFlightNumberText>
            </ns3:DatedMarketingSegment>
        </ns3:DatedMarketingSegmentList>
        <ns3:DatedOperatingSegmentList>
            <ns3:DatedOperatingSegment>
                <ns3:CarrierDesigCode>TK</ns3:CarrierDesigCode>
                <ns3:CarrierName>Turkish Airlines</ns3:CarrierName>
                <ns3:DatedOperatingSegmentId>SEG_O_1</ns3:DatedOperatingSegmentId>
                <ns3:Duration>PT3H25M</ns3:Duration>
                <ns3:OperatingCarrierFlightNumberText>1938</ns3:OperatingCarrierFlightNumberText>
            </ns3:DatedOperatingSegment>
        </ns3:DatedOperatingSegmentList>
    </ns3:DataLists>
    <ns3:Order>
        <ns3:OrderID>VGRTFS</ns3:OrderID>
    </ns3:Order>
</Old>
```

And where details of new flights are provided under <New> object similar to below:

```
<New>
```

```
    <ns3:DataLists>
        <ns3:DatedMarketingSegmentList>
            <ns3:DatedMarketingSegment>
                <ns3:Arrival>
                    <ns3:AircraftScheduledDateTime>2025-01-23T18:15:00</ns3:AircraftScheduledDateTime>
                    <ns3:IATA_LocationCode>IST</ns3:IATA_LocationCode>
                    <ns3:StationName>Istanbul Airport</ns3:StationName>
                </ns3:Arrival>
                <ns3:CarrierDesigCode>TK</ns3:CarrierDesigCode>
                <ns3:CarrierName>Turkish Airlines</ns3:CarrierName>
                <ns3:DatedMarketingSegmentId>SEG_M_2</ns3:DatedMarketingSegmentId>
                <ns3:DatedOperatingSegmentRefId>SEG_O_2</ns3:DatedOperatingSegmentRefId>
                <ns3:Dep>
                    <ns3:AircraftScheduledDateTime>2025-01-23T12:40:00</ns3:AircraftScheduledDateTime>
                    <ns3:IATA_LocationCode>BRU</ns3:IATA_LocationCode>
                    <ns3:StationName>Brussels National Airport</ns3:StationName>
                </ns3:Dep>
                <ns3:MarketingCarrierFlightNumberText>1938</ns3:MarketingCarrierFlightNumberText>
            </ns3:DatedMarketingSegment>
        </ns3:DatedMarketingSegmentList>
        <ns3:DatedOperatingSegmentList>
            <ns3:DatedOperatingSegment>
                <ns3:CarrierDesigCode>TK</ns3:CarrierDesigCode>
                <ns3:CarrierName>Turkish Airlines</ns3:CarrierName>
                <ns3:DatedOperatingSegmentId>SEG_O_2</ns3:DatedOperatingSegmentId>
                <ns3:OperatingCarrierFlightNumberText>1938</ns3:OperatingCarrierFlightNumberText>
            </ns3:DatedOperatingSegment>
        </ns3:DatedOperatingSegmentList>
    </ns3:DataLists>
    <ns3:Order>
        <ns3:OrderID>VGRTFS</ns3:OrderID>
    </ns3:Order>
</New>
```

II. OPTION_CHANGE

An IATA_OrderChangeNotifRQ similar to below will be constructed:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<IATA_OrderChangeNotifRQ xmlns="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersMessage"
xmlns:ns2="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersCommonTypes"
xmlns:ns3="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersCommonTypesFullyOptional"
xmlns:ns4="http://www.w3.org/2000/09/xmldsig#">
    <DistributionChain>
        <ns2:DistributionChainLink>
            <ns2:Ordinal>1</ns2:Ordinal>
            <ns2:OrgRole>Carrier</ns2:OrgRole>
            <ns2:ParticipatingOrg>
                <ns2:OrgID>TK</ns2:OrgID>
            </ns2:ParticipatingOrg>
        </ns2:DistributionChainLink>
        <ns2:DistributionChainLink>
            <ns2:Ordinal>2</ns2:Ordinal>
            <ns2:OrgRole>Seller</ns2:OrgRole>
            <ns2:ParticipatingOrg>
                <ns2:Name>Agency</ns2:Name>
                <ns2:OrgID>123456</ns2:OrgID>
            </ns2:ParticipatingOrg>
            <ns2:SalesBranch>
                <ns2:SalesBranchID>ABC</ns2:SalesBranchID>
            </ns2:SalesBranch>
        </ns2:DistributionChainLink>
    </DistributionChain>
    <Notification>
        <ChangeGroup>
            <ChangeOperationGroup>
                <ChangeOperation>
                    <ChangeDateTime>2025-01-09T11:41:00Z</ChangeDateTime>
                    <!-- 7 and 116 indicates "Payment Timelimit change" based on PADIS -->
                    <ChangeTypeCode>7</ChangeTypeCode>
                    <New>
                        <ns3:Order>
                            <ns3:OrderID>WE42BA</ns3:OrderID>
                            <ns3:OrderItem>
```

```
                            <ns3:OrderItemID>FL_P1</ns3:OrderItemID>
                            <ns3:PaymentTimeLimitDateTime>2025-01-12T17:10:00+05:30</ns3:PaymentTimeLimitDateTime>
                        </ns3:OrderItem>
                        <ns3:OrderItem>
                            <ns3:OrderItemID>FL_P2</ns3:OrderItemID>
                            <ns3:PaymentTimeLimitDateTime>2025-01-12T17:10:00+05:30</ns3:PaymentTimeLimitDateTime>
                        </ns3:OrderItem>
                    </ns3:Order>
                </New>
                <Old>
                    <ns3:Order>
                        <ns3:OrderID>WE42BA</ns3:OrderID>
                        <ns3:OrderItem>
                            <ns3:OrderItemID>FL_P1</ns3:OrderItemID>
                            <ns3:PaymentTimeLimitDateTime>2025-01-09T17:25:00+05:30</ns3:PaymentTimeLimitDateTime>
                        </ns3:OrderItem>
                        <ns3:OrderItem>
                            <ns3:OrderItemID>FL_P2</ns3:OrderItemID>
                            <ns3:PaymentTimeLimitDateTime>2025-01-09T17:25:00+05:30</ns3:PaymentTimeLimitDateTime>
                        </ns3:OrderItem>
                    </ns3:Order>
                </Old>
                <ReasonCode>116</ReasonCode>
            </ChangeOperation>
            <OrderVersionNumber>2</OrderVersionNumber>
        </ChangeOperationGroup>
    </ChangeGroup>
    <OrderRefID>WE42BA</OrderRefID>
</Notification>
<PayloadAttributes>
    ***
</PayloadAttributes>
</IATA_OrderChangeNotifRQ>
```

III. SSR_CHANGE

An IATA_OrderChangeNotifRQ similar to below will be constructed:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<IATA_OrderChangeNotifRQ xmlns="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersMessage"
xmlns:ns2="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersCommonTypes"
xmlns:ns3="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersCommonTypesFullyOptional"
xmlns:ns4="http://www.w3.org/2000/09/xmldsig#">
    <DistributionChain>
        <ns2:DistributionChainLink>
            <ns2:Ordinal>1</ns2:Ordinal>
            <ns2:OrgRole>Carrier</ns2:OrgRole>
            <ns2:ParticipatingOrg>
                <ns2:OrgID>TK</ns2:OrgID>
            </ns2:ParticipatingOrg>
        </ns2:DistributionChainLink>
        <ns2:DistributionChainLink>
            <ns2:Ordinal>2</ns2:Ordinal>
            <ns2:OrgRole>Seller</ns2:OrgRole>
            <ns2:ParticipatingOrg>
                <ns2:Name>Agency</ns2:Name>
                <ns2:OrgID>123456</ns2:OrgID>
            </ns2:ParticipatingOrg>
            <ns2:SalesBranch>
                <ns2:SalesBranchID>ABC</ns2:SalesBranchID>
            </ns2:SalesBranch>
        </ns2:DistributionChainLink>
    </DistributionChain>
    <Notification>
        <ChangeGroup>
            <ChangeOperationGroup>
                <ChangeOperation>
                    <ChangeDateTime>2024-12-10T06:37:00Z</ChangeDateTime>
                    <!-- 6 and 116 indicates "Service status change" based on PADIS -->
                    <ChangeTypeCode>6</ChangeTypeCode>
                    <ReasonCode>116</ReasonCode>
                    <New>
                        <ns3:Order>
                            <ns3:OrderID>U84RRP</ns3:OrderID>
```

```
                        <ns3:OrderItem>
                            <ns3:OrderItemID>PAX_1_SEG_1_WCHC</ns3:OrderItemID>
                            <ns3:StatusCode>ACTIVE</ns3:StatusCode>
                        </ns3:OrderItem>
                    </ns3:Order>
                </New>
            </ChangeOperation>
            <OrderVersionNumber>4</OrderVersionNumber>
        </ChangeOperationGroup>
    </ChangeGroup>
    <OrderRefID>U84RRP</OrderRefID>
  </Notification>
  <PayloadAttributes>
      ***
  </PayloadAttributes>
</IATA_OrderChangeNotifRQ>
```

4.4.2. Integration

REST APIs provided by integrators can be used. The IATA_OrderChangeNotifRQ is sent to the provided REST endpoint. An IATA_Acknowledgement is expected in response.

Information that integrators continuing with REST API should share with TK:

1. Authentication Type: It is expected to be only **OAuth 2.0**.
2. Endpoint must be receiving NDC 21.3 IATA_OrderChangeNotifRQ and responding with an empty IATA_Acknowledgement message or with /IATA_Acknowledgement/Notification/StatusCode=200.
3. Content Type: application/xml or application/json
4. The below information must be shared with TK
   a. Endpoint URI: It is expected to be HTTPS. The SSL certificate must be signed by a global Certificate Authority (CA).
   b. Token URI
   c. Client Secret
   d. Client ID
      i. The Client ID and Client Secret must to be encrypted based on the below public key using **RSA/ECB/OAEPWITHSHA-256ANDMGF1PADDING** algorithm.
      ii. If encryption is not suitable, plaintext must be sent to the OCNPASSWORDSHARE@THY.COM

The Public Key:

```
MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAgA/HmpqEymwiKXzl7LHrtOpPDvhSiUG/N3/X2hoeHLBsMI
T92UkyIKi6tekccRCm9gdpL6RiQV3cuTjdddgywLDv3U6jJ7Gc+I8rt6/ePkMmtDQsDQdlHvIVDjTwcX7RwgKydnGZlHG/
S3UtocGWq6zPrv3nCQWHUzuzeq14Y/8sEUJ88KltyGyBK8A2kCskuaxUnB+EVqrKyCn00I+3yQ4vxuqc1ApoKpR4JLOg
2QXuFt0NGl9ED0XTrHzQMWZCZ1ONtCSJ20c2Jxyyp5RrSufwO3H4v/dOVh2qGZrj2BFpsw7qaQ3au7ANaMNwpgVR2
Wor5WEmMrvSyDybNlVetQIDAQAB
```

4.4.3. Limitations

1. For SSR_CHANGES, the old status and new status is not provided as part of the notice.

4.4.4. Supported Functionalities

1. SCHEDULE_CHANGE, OPTION_CHANGE, and SSR_CHANGE.

4.4.5. Output Parameters

Common objects to be returned under /IATA_OrderChangeNotifRQ/ :

Parameter	#	Explanation
DistributionChain/	1	Used to provide information for the parties in the distribution chain for the associated order.
DistributionChain/DistributionChainLink/ α	1..2	If direct Seller only one such object is constructed, otherwise two such objects are constructed
α/Ordinal	1	1 for Carrier, 2 for Seller, 3 for Distributor
α/OrgRole	1	Seller or Distributor or Carrier
α/ParticipatingOrg/OrgID	1	ID of the Seller or Distributor in TK systems.
α/SalesBranch/SalesBranchID	1	Sent only for Seller Pseudocitycode of the Seller in TK systems.
Notification/ChangeGroup/ChangeOperationGroup/ChangeOperation/ β	1..N	Details about the change, one or more will be constructed based on the event type and order structure
β/ChangeDateTime	1	Datetime when the change reported.
β/ChangeTypeCode	1	Type of change based on PADIS “CHT Change Types for Order change”
β/ReasonCode	1	Reason for change based on PADIS “CHR Reason for change codes for Order change”
β/New/Order/	1	Used to return “New” details for an order
β/New/Order/OrderID	1	Id of the order for which change is occurred
β/Old/	0..1	Returned only if “Old” details exist about the change
β/Old/Order/OrderID	1	Id of the order for which change is occurred

Possible values for ReasonCode and ChangeTypeCodes based on the change event:

Change Type	Explanation	ChangeTypeCode	ReasonCode
SCHEDULE_CHANGE	A flight is cancelled and an alternative is proposed	1 - Flight number change	100 – Schedule Change
	A flight time has changed	2 - Flight retimed	100 – Schedule Change
	A flight is cancelled	3 - Flight cancelled	100 – Schedule Change
	A flight is delayed	4 - Flight delayed	100 – Schedule Change
	There is a schedule change but the details are unavailable.	21 - Other	100 – Schedule Change
OPTION_CHANGE	Any changes occurred for PaymentTimelimitDateTime of order items will be reported under this category	7 – Payment Timelimit change	116 – Other
SSR_CHANGE	Any changes occurred on the status of a specific set of Special Service Requests will be reported under this category	6 – Service status change	116 – Other

I. Fields to be returned for OPTION_CHANGE

Parameter	#	Explanation
Notification/ChangeGroup/ChangeOperationGroup/ α	1	Details about the change(s)
α/ChangeOperation/ β	1	Only one is constructed

β/ChangeTypeCode	1	Return 7 – Payment Timelimit change
β/ReasonCode	1	Return 116 – Other
β/New/Order/	1	Used to return “New” details for an order
β/New/Order/OrderID	1	Id of the order for which change is occurred
β/New/Order/OrderItem/	1..N	One will be constructed for each flight order item
β/New/Order/OrderItem/OrderItemID	1	ID of the flight order item
β/New/Order/OrderItem/ PaymentTimeLimitDateTime	1	New payment timelimit.
β/New/Warning	0..1	If exist, warning related to the New information
β/Old/	1	Details about the old payment time limit
β/Old/Order/	1	Used to return details for the order before change
β/Old/Order/OrderID	1	Id of the order for which change is occurred
β/Old/Order/OrderItem/	1..N	Returned for the related flight order items. One will be constructed for each flight order item.
β/Old/Order/OrderItem/OrderItemID	1	Id of the related order item
β/Old/Order/OrderItem/ PaymentTimeLimitDateTime	1	Value of old payment time limit.
β/Old/Warning	0..1	If exist, warning related to the Old information

II. Fields to be returned for SSR_CHANGE

Parameter	#	Explanation
Notification/ChangeGroup/ChangeOperationGroup/ α	1	Details about the change(s)
α/ChangeOperation/ β	1	Only one is constructed
β/ChangeTypeCode	1	6 – Service status change
β/ReasonCode	1	116 – Other
β/New/Order/	1	Used to return change details for an order
β/New/Order/OrderID	1	Id of the order for which change is occurred
β/New/Order/OrderItem/	1..N	Repeated for all the order items present in the order for the service type for which change is occurred
β/New/Order/OrderItem/OrderItemID	1	Id of the related order item
β/New/Order/OrderItem/StatusCode	1	Current status code of the related order item.

III. Fields to be returned for SCHEDULE_CHANGE

Parameter	#	Explanation
Notification/ChangeGroup/ChangeOperationGroup/ α	1	Details about the change(s)
α/ChangeOperation/ β	**1..N**	One is constructed for each effected flight segment
β/ChangeTypeCode	1	1 - Flight number change 2 - Flight retimed 3 - Flight cancelled 21 – Other
β/ReasonCode	1	100 – Schedule Change
β/New/Order/	1	Used to return change details for an order
β/New/Order/OrderID	1	Id of the order for which change is occurred
β/New/DataLists/	0..1	Used to return new details if exists. Absence means no “New” flights were proposed for the “Old” flights.

β/New/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/ δ	1..N	Used to return details for one or more proposed segments.
δ/Arrival/AircraftScheduledDateTime	1	Details of the proposed segment.
δ Arrival/IATA_LocationCode	1	
δ/Arrival/StationName	1	
δ/CarrierDesigCode	1	
δ/CarrierName	1	
δ/DatedMarketingSegmentId	1	
δ/DatedOperatingSegmentRefId	1	
δ/Dep/AircraftScheduledDateTime	1	
δ/Dep/IATA_LocationCode	1	
δ/Dep/StationName	1	
δ/MarketingCarrierFlightNumberText	1	
/DatedOperatingSegmentList/DatedOperatingSegment/ μ	1	
μ/CarrierDesigCode	1	
μ/CarrierName	1	
μ/DatedOperatingSegmentId	1	
μ/OperatingCarrierFlightNumberText	1	
β/New/Warning	0..1	If exist, warning related to the New information
β/Old/Order/	1	Used to return “Old” flight details for which change has occurred
β/Old/Order/OrderID	1	Id of the order for which change is occurred
β/Old/DataLists/	1	Used to return “Old” flight details
β/Old/DataLists/DatedMarketingSegmentList/DatedMarketingSegment/ Θ	1	Details of the “Old” segments.
Θ/Arrival/AircraftScheduledDateTime	1	
Θ/Arrival/IATA_LocationCode	1	
Θ/Arrival/StationName	1	
Θ/CarrierDesigCode	1	
Θ/CarrierName	1	
Θ/DatedMarketingSegmentId	1	
Θ/DatedOperatingSegmentRefId	1	
Θ/Dep/AircraftScheduledDateTime	1	
Θ/Dep/IATA_LocationCode	1	
Θ/Dep/StationName	1	
Θ/MarketingCarrierFlightNumberText	1	
/DatedOperatingSegmentList/DatedOperatingSegment/ Ø	1	
Ø/CarrierDesigCode	1	
Ø/CarrierName	1	
Ø/DatedOperatingSegmentId	1	
Ø/OperatingCarrierFlightNumberText	1	
β/Old/Warning	0..1	If exist, warning related to the Old information

75dab313-821a-49d6-b5ae-d105b8469fdb

4.4.6. Input Parameters

As an OCN response IATA_Acknowledgement is expected.

Parameter	#	Explanation
Notification	0..1	It can be send to return success value
Notification**/StatusCode**	1	Only expected value is 200

IATA_Acknowledgement message should be one of the format and content shown are below:

```
<?xml version="1.0" encoding="UTF-8"?>
<n1:IATA_Acknowledgement
xmlns:n1="http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersMessage"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
```

OR

```
<?xml version="1.0" encoding="UTF-8"?>
<IATA_Acknowledgement xmlns="
http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersMessage" xmlns:ns0="
http://www.iata.org/IATA/2015/EASD/00/IATA_OffersAndOrdersCommonTypes">
    <Notification>
        <ns0:StatusCode>200</ns0:StatusCode>
    </Notification>
</IATA_Acknowledgement>
```

4.4.7. Special Considerations

1. If an OPTION_CHANGE occurs for an order, then the OrderViewRS for that order will have the PaymentTimelimitDateTime adjusted accordingly for all flight order items.
2. For SCHEDULE_CHANGE notification.
    a. If a schedule change occurs for a paid order and the change makes the order subject to Involuntary Servicing; then the following warning will be returned in the OrderViewRS for that order.

Code	Key	Description
NDC-8006	INVOLUNTARY_SITUATION_OCCURED_WARNING	Involuntary situation occurred in the order which needs to be changed or refunded

    b. If a schedule change occurs for a paid/unpaid order and the change requires special processing for the order, then the following warning will be returned in the OrderViewRS for that order.

Code	Key	Description
NDC-8007	PENDING_SCHEDULE_CHANGE_WARNING	There exist schedule changes for the itinerary within the order that have not been finalized yet.

    c. If a schedule change occurs for a paid order that is triggered by a flight cancellation within operational window (less than 72 hours to the departure time of the effected flight) then the following warning will be returned in the OrderViewRS for that order.

Code	Key	Description
NDC-8008	FLIGHT_CANCELLATION_WITHIN_OPERATIONAL_PERIOD_WARNING	There exist flight cancellation(s) within operational window within the order.

    d. Combination of above three cases can be present within an OrderViewRS.
3. If a temporary erros occurs while retrieving the order for a notification, the ORDER_CHANGE_WARNING warning is returned. If such an OCN is received, the changes in the Order can be viewed via order-retrieve.

4. For OPTION_CHANGE, OPTION_HAS_BEEN_UPDATED_UP_TO_LDTP warning is returned if calculated option is not applicable since it is restriected by LDTP. In this case, option is updated up to LDTP which also return in the warning

5. For SSR_CHANGE no information regarding the old state of the Service is provided. The notification is not aware of applicable passenger or segment index, hence for a status update on a service, notification will display all passengers and all segments that have the same service associated within. The OrderViewRS returned any time after the change will include the adjusted service status for the applicable service(s).

6. SSR_CHANGE event will be triggered for the following SSR Codes.

SSR Code	Description
GFML	Gluten free meal
KSML	Kosher meal
NLML	Low lactose meal
SFML	Seafood meal
LANG	Languages spoken
VGML	Vegetarian vegan meal
VJML	Vegetarian Jain meal
BLND	Blind passenger
DEAF	Deaf passenger
MAAS	Meet and assist
WCBD	Wheelchair - dry cell battery
WCBW	Wheelchair - wet cell battery
WCHC	Wheelchair - all the way to seat
WCHR	Wheelchair - for ramp.
WCHS	Wheelchair - up and down steps.
WCMP	Wheelchair - manual power
WCOB	Wheelchair - on board
COUR	Courier
ESAN	Passenger with Emotional Support/Psychiatric Assistance Animal in Cabin
SVAN	Passenger with service animal in cabin
DBML	Diabetic meal
BBML	Baby meal
CHML	Child meal
MEDA	Medical case
VIP	
BSCT	Bassinet/carrycot/baby basket
AVML	Vegetarian Hindu meal
CLML	Celebration Cake Meal
SPML	Special meal. Additional text mandatory
OTHS	
DPNA	

79d0b313-82ba-49d6-b5ee-d105b8469fdb

TCP	

4.4.8. WARNINGS

Code	Warning Key	Description
NDC-8113	OPTION_HAS_BEEN_UPDATED_UP_TO_LDTP	-
NDC-8031	FLIGHT_HAS_BEEN_DELAYED_WARNING	Flight has been delayed.
NDC-8014	ORDER_CHANGE_WARNING	There exists changes for the itinerary within the order. However relevant OCN fields could not be constructed.

75dab313-82ba-49d6-b5ee-d105b8469fdb