Calibrated inference: stronger bounds, explicit limits

Synthetic models and mathematical bounds
No laboratory validation

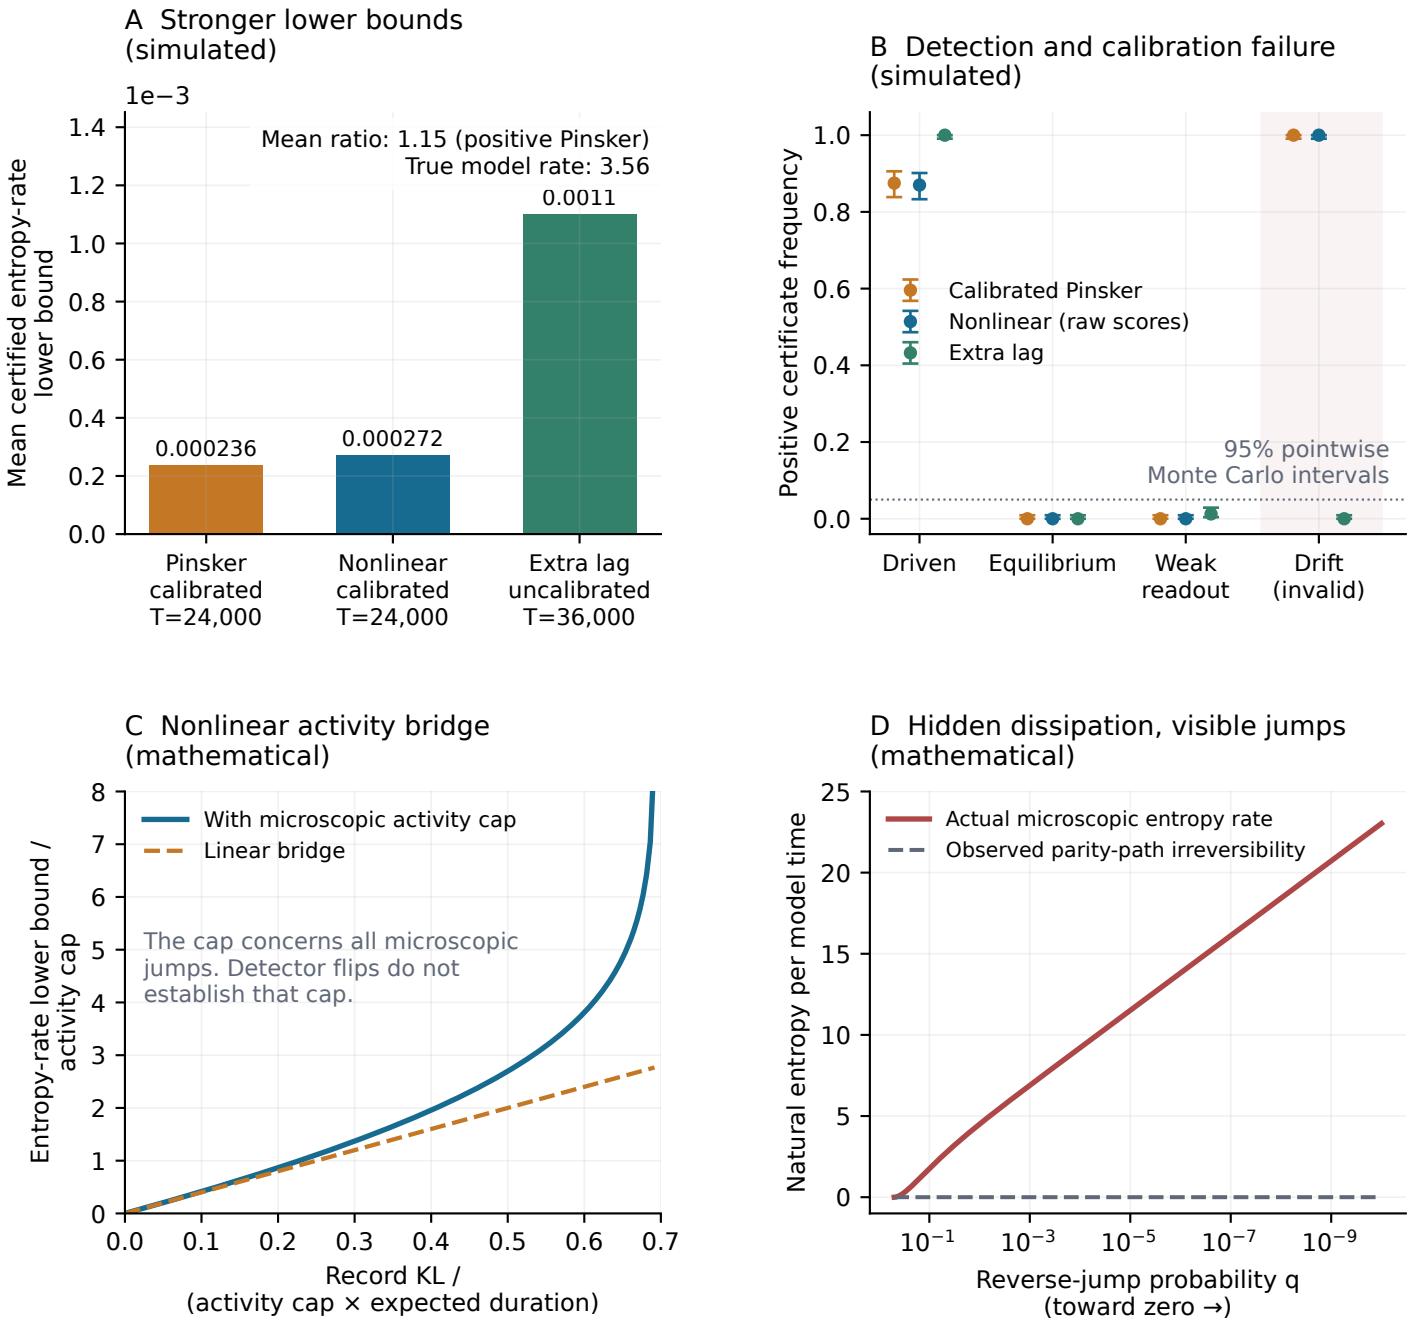

A–B: two-stage calibration benchmark, 400 simulated datasets per case; 20,000 pairs and 40,000 reads per arm. Means include zero bounds; nonlinear scores are raw.
Counts include calibration. Evolution times differ; reset, detector latency, hardware and energy overhead remain unmeasured.
C–D: conditional mathematical statements. D fixes the four-state graph and unit activity; every jump is visible, yet the entire parity path law agrees.