Virtual laboratory: failures, corrections, and matched tests

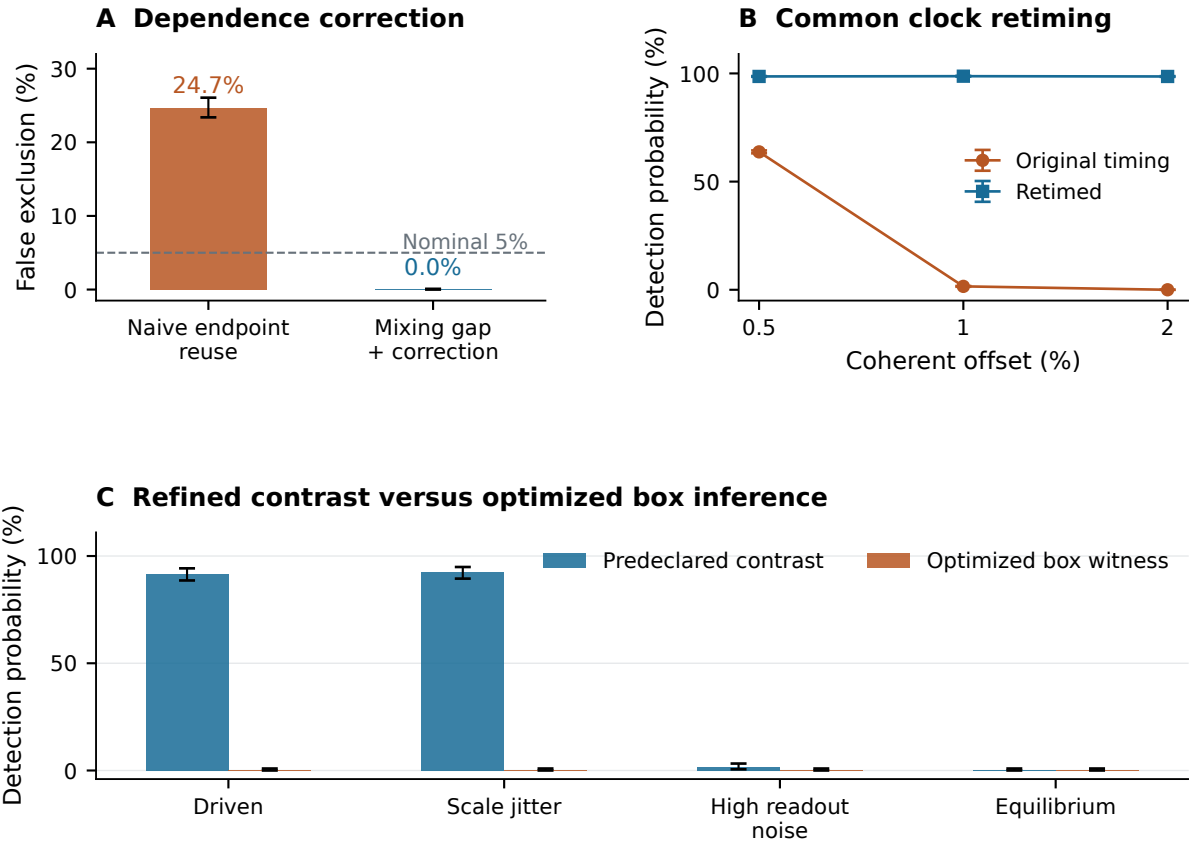

A: mixing-gap correction uses 2,001 times the observation time.

B: production records are matched; retiming adds 260,000 pilot records.

C: 15,000 records and 4,500 expected model-time exposure per dataset.

Error bars: pointwise 95% Monte Carlo intervals. Simulations, not hardware measurements.