


USE CASE DESCRIPTION

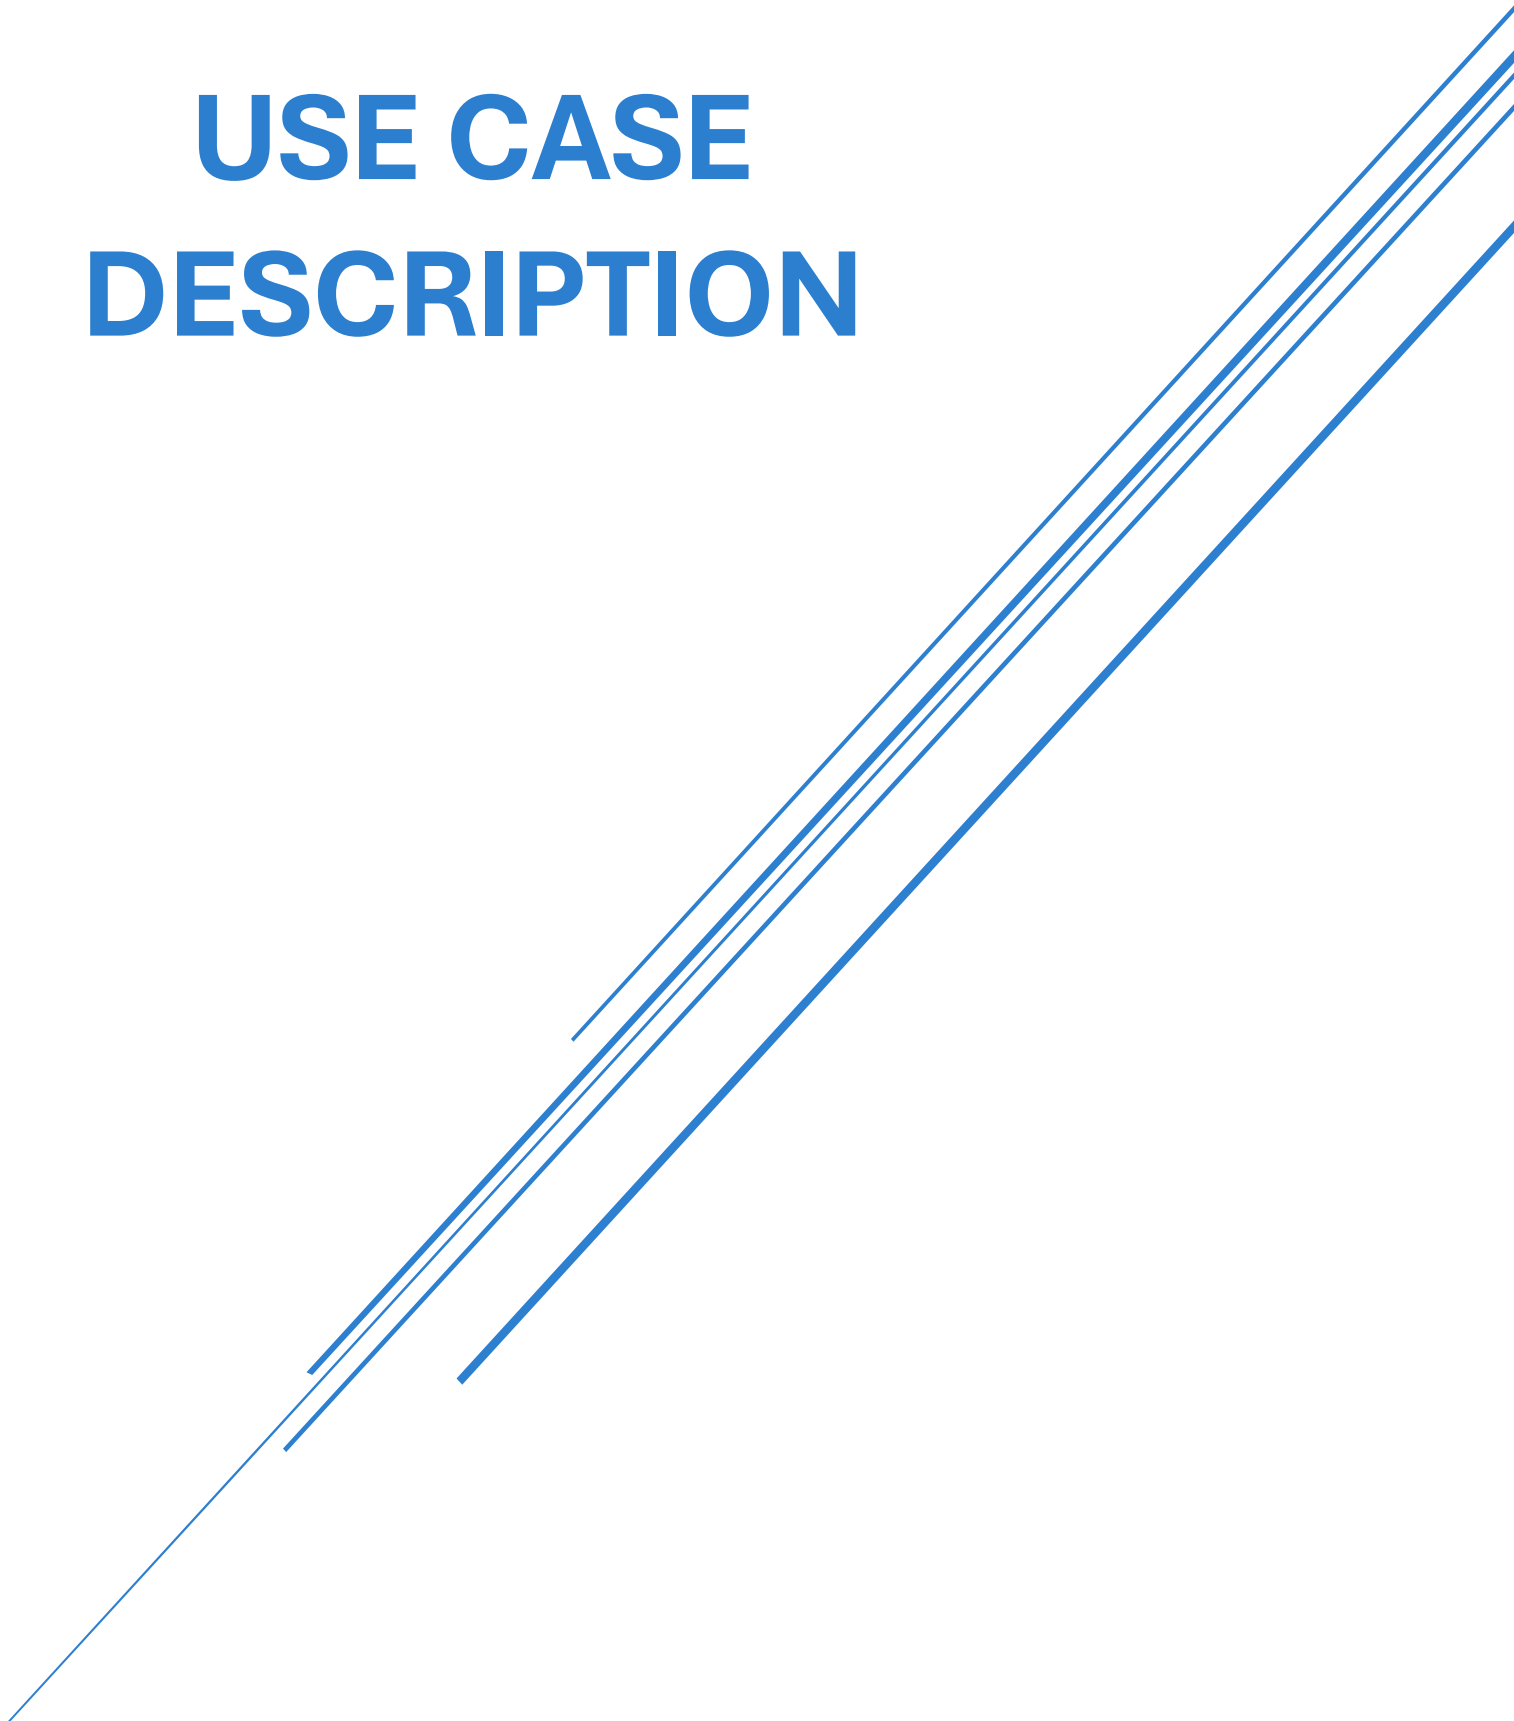

Use Cases

• Manage Tweets :	
Add tweets.....	2
Delete tweets	4
Update tweets	6
Retweet	8
Save tweets	10
• Send Warnings	12
• Ban Users	14
• Delete Users	16
• Read Reports	18
• Manage Advertisements :	
Add advertisements	20
Update advertisements	23
Delete advertisements	25
• Comment.....	27
• Follow.....	29
• Block	31
• Mute	33
• Search	35
• Read Notifications.....	37
• Add Hashtag	40
• Report.....	42
• Edit profile	44
• Sign Up	46
• Login.....	48
• Forget password.....	50
• Unfollow	52

Manage Tweets

Add Tweet :

- **Name :** Add tweets
- **Goal :** The user wants to share his thoughts, opinions, or information with his followers on twitter.
- **Preconditions :** 1) The user must have a valid account on twitter where the tweet was posted.
2) The user must be logged in to their account.
- **Postconditions :** The user posted a new tweet
- **Error Situation :** If there are any issues during publishing, the system should display an error message to the user explaining the problem and allow the user to retry publishing the tweet if possible.
- **Actor :** User (person who wants to post a tweet)
- **Standard Process :**
 - 1) The user clicks on the "Add Tweet" button.
 - 2) The system displays a window where the user can enter his tweet content.
 - 3) The user composes his tweet, including text, hashtags, and mentions (if desired). The system may provide a character counter to help the user stay within the character limit for tweets.
 - 4) The user can upload media (images, videos, GIFs) to accompany his tweet.
 - 5) The user reviews his tweet and makes any necessary edits.
 - 6) The user clicks on the "Tweet" button to publish the tweet.

- Alternative Processes :

- 1) Schedule Tweet: The user can choose to schedule his tweet for a future date and time.
- 2) Discard Tweet: The user can decide to discard his tweet without publishing it.
- 3) Character Limit Exceeded: If the user enters more text than allowed, the system displays a warning message and prevents him from publishing the tweet until he shortens it.

Delete Tweet :

- **Name :** Delete tweets
- **Goal :** The user wants to remove a tweet from his profile because it may be outdated, inaccurate, embarrassing, or for any other reason.
- **Preconditions :**
 - 1) The user must have a valid account on twitter where the tweet was posted.
 - 2) The user must be logged in to his account.
 - 3) The user must be able to locate the tweet he wants to delete by browsing his timeline or search.
- **Postconditions :**
 - 1) The system removes the targeted tweet from the user's profile and timeline.
 - 2) The tweet becomes inaccessible to the user's followers and the public.
 - 3) The system may display a confirmation message informing the user that the tweet has been deleted.
- **Error Situation :**
 - 1) The user may not have permission to delete the tweet (e.g., a tweet posted by another user they retweeted). The system should display a message explaining the restriction.
 - 2) The platform might have limitations on deleting tweets after a certain timeframe. The system should inform the user if such limitations exist.
- **Actor :** The user (who wants to delete a tweet)

- Standard Process :

- 1) The user locates the tweet he wants to delete in their timeline or search results.
- 2) The user clicks on the "Delete" button associated with the tweet.
- 3) The system displays a confirmation dialog box asking the user to verify his intention to delete the tweet.
- 4) The user confirms the deletion by clicking on the "Delete" button within the confirmation dialog.

- Alternative Processes :

- 1) Cancel Deletion: The user can choose to cancel the deletion process by clicking on a "Cancel" button within the confirmation dialog.
- 2) Tweet Not Found: If the user cannot locate the tweet he wants to delete, the system may offer search functionalities or inform them that the tweet might be unavailable (e.g., already deleted).

Update Tweets :

- **Name :** Update tweets
- **Goal :** The user wants to edit the content of a tweet to fix errors, add additional information, or improve clarity.
- **Preconditions :** The user must be able to locate the tweet he wants to update .

- **Postconditions :** The tweet is updated

- Error Situation :

- 1) Time Sensitive Edits: If the edit needs to be made very quickly after the tweet is posted the workaround solutions might not be ideal. Deleting and reposting could cause a delay, and followers who saw the original tweet might miss the correction.
- 2) Loss of Engagement: Deleting and reposting a tweet could lead to a loss of engagement (likes, replies, retweets) that the original tweet had accumulated. Quote tweeting might help retain some context, but it's not a perfect solution.

- **Actor :** The user (who wants to update his tweet)

- Standard Process :

- 1) User Locates Tweet:** The user finds the tweet he wants to modify within his profile or through search functions.
- 2) Edit Tweet Option:** The user clicks on an "Edit" button associated with the tweet. This action would open an editing window.
- 3) Modify Content:** Within the editing window, the user can make changes to the tweet's text, hashtags, or mentions. The system might provide a character counter to ensure the edited content stays within the limit.
- 4) Edit Media:** If the original tweet included media (images, videos), twitter might allow limited editing capabilities for those elements as well (e.g., replacing an image).
- 5) Save Changes:** The user confirms the edits by clicking a "Save" or "Update" button.
- 6) Confirmation:** The system displays a confirmation message indicating the tweet has been successfully updated.

- Alternative Process :

If the updating tweets isn't supported , You can choose one of the following :

- 1) Delete and Repost**
- 2) Quote with the correction**
- 3) Edit Text Within Character Limit (if applicable)**

Retweet :

- **Name :** Retweet
- **Goal :** The user wants to amplify a tweet he finds interesting, informative, or entertaining by sharing it with their own followers.
- **Preconditions :** The user must be able to locate the tweet he wants to retweet (e.g., through their feed, browsing another user's profile, or search).
- **Postconditions :** If the user confirms the retweet, The Twitter:
 - 1) Shares the original tweet (or quote tweet with added commentary) on the user's timeline.
 - 2) The retweet may include an indicator showing it's a retweet and attributing it to the original author.
 - 3) The original author may receive a notification (depending on platform settings).
- **Error Situation :**
 - 1) The user's account might have limitations on retweeting (e.g., exceeding a daily limit). The system should inform the user about the restriction.
 - 2) The original tweet might be deleted before the user completes the retweet process. The system would display a message indicating the unavailability of the tweet.
- **Actor :** User (The person who wants to share an existing tweet from another user on their own timeline)

-Standard Process :

- 1) The user locates the tweet he wants to retweet.
- 2) The user clicks on the "Retweet" button associated with the tweet.
- 3) The social media platform offers the user a choice:
 - a - Simple Retweet: Shares the original tweet without any additional commentary.
 - b - Quote Tweet: Allows the user to add his own comment or reaction before sharing the original tweet.
- 4) If the user chooses "Quote Tweet," they can compose a new tweet alongside the original content.
- 5) The user confirms his choice by clicking on a "Retweet" button within the chosen option (simple or quote).

- Alternative Process :

- 1) Cancel Retweet: The user can decide to cancel the retweet process before it's complete.
- 2) Unavailable Option: Some platforms might restrict retweeting for certain types of tweets (e.g., direct messages). The system would display a message explaining the restriction.

Save Tweets :

- **Name :** Save tweets
- **Goal :** The user wants to bookmark a tweet he find interesting, informative, or useful for later access, without necessarily sharing it with their followers.
- **Preconditions :**
 - 1) The user must have a valid account on the twitter.
 - 2) The user must be logged in to his account.
 - 3) The user must be able to locate the tweet he wants to save (e.g., through their feed, browsing another user's profile, or search).
- **Postconditions :**
 - 1) If the user clicks on "Save," the social media platform:
 - a - Adds the tweet to a designated "Saved Items" or "Bookmarks" section within the user's profile.
 - b - The saved tweet may include an indicator showing it's saved and potentially the original author's information.
 - 2) The user can access their saved tweets list at any time to revisit the content.
- **Error Situation :**
 - 1) The platform might have limitations on the number of tweets a user can save. The system should inform the user if he reaches the limit.
 - 2) The original tweet might be deleted before the user saves it. The system would display a message indicating the unavailability of the tweet.
- **Actor :** User (The person who wants to save a tweet for future reference)

- Standard Process :

- 1) The user locates the tweet he wants to save.
- 2) The user clicks on the "Save" button or icon associated with the tweet. This button might also be represented by a bookmark symbol depending on the platform.

- Alternative Processes :

- Unavailable Option: Some platforms might not offer a dedicated "Save" function for tweets. In such cases, the user might rely on alternative methods like creating a private list or taking screenshots (which isn't ideal).

Send Warnings

- **Name :** Send warnings
- **Goal :**
 - 1) To address user behavior that violates Twitter's Terms of Service or community guidelines
 - 2) To promote a safe and positive user experience on Twitter
- **Preconditions :**
 - 1) The admin user is logged in to the Twitter project platform with the appropriate permissions.
 - 2) An existing User account has been identified for a warning.
- **Postconditions :**
 - 1) The User receives a warning message outlining the violation and potential consequences
 - 2) A record of the warning is stored within the system for future reference.
- **Error Situation :**
 - 1) The Admin may not have sufficient privileges to send warnings (requires specific user role).
 - 2) The system may be unavailable due to technical issues.
- **Actor :** Admin User (A user with administrative privileges on the Twitter project platform)

- Standard Process :

- 1)** The Admin identifies a User who has violated Twitter's Terms of Service or community guidelines.
- 2)** The Admin selects the "Send Warning" option from the User's profile page or another designated management interface.
- 3)** The system presents the Admin with a pre-defined warning template or allows them to craft a custom message.
- 4)** The Admin personalizes the message if using a template (e.g., adding specific details of the violation).
- 5)** The Admin selects the delivery method for the warning (e.g., email, in-app notification).
- 6)** The Admin reviews the warning message and selects "Send".
- 7)** The system sends the warning to the User via the chosen delivery method.
- 8)** The system creates a record of the warning sent, including details like the date, time, content of the message, and delivery method.

- Alternative Processes :

- 1) Discard Warning:** The Admin may choose to discard the warning after composing it (e.g., if they decide on a different course of action).
- 2) Delivery Failure:** The system may encounter an error delivering the warning (e.g., invalid email address). The Admin should be notified of the failure and have the option to resend or choose another delivery method.

Ban Users

- **Name :** Ban users
- **Goal :** The admin user wants to prevent a specific user from accessing the Twitter project platform due to a violation of terms of service, abusive behavior, or other legitimate reasons.
- **Preconditions :**
 - 1) The admin user is logged in to the Twitter project platform with the appropriate permissions.
 - 2) The admin has identified a user who needs to be banned.
- **Postconditions :**
 - 1) The target user is banned from accessing the platform. This may involve:
 - a - Blocking login attempts.
 - b - Disabling the user account and associated content (tweets, messages, etc.).
 - c - Notifying the user about the ban (if chosen).
 - 2) The ban details are logged for administrative purposes.
- **Error Situation :**
 - 1) **Authentication Error:** The admin user might not be logged in or lack the necessary permissions to ban users. The system should display an error message indicating that login or permission is required.
 - 2) **User Not Found:** The admin user might enter invalid information or the target user might not exist on the platform. The system should display an error message indicating the user cannot be located.

- **Actor** : Admin (A user with administrative privileges on the Twitter project platform).

- **Standard Process** :

- 1) The admin user accesses the user management interface.
- 2) The admin user searches for the target user by username, email address, or other identifying information.
- 3) The admin user locates the target user and accesses their profile.
- 4) The admin user reviews the user's activity or reported violations to justify the ban.
- 5) The admin user initiates the ban process. This may involve:
 - a - Selecting the ban duration (temporary or permanent).
 - b - Specifying a reason for the ban.
 - c - Choosing to notify the user about the ban.
- 6) The admin user confirms the ban action.

- **Alternative Processes** :

- 1) Review User Activity: The admin user can review the user's past activity (e.g., tweets, messages) before initiating the ban.
- 2) Appeal Process (Optional): The system can offer a streamlined process for banned users to appeal the decision (e.g., contact support).
- 3) Ban Review: Another admin user can review the ban decision before it takes effect (optional, for high-profile cases).

Delete Users

- **Name :** Delete users

- **Goal :** The admin user wants to permanently remove a user and all associated data from the platform. This could be due to a user request, account inactivity, or other legitimate reasons.

- **Preconditions :**

- 1) The admin user is logged in to the Twitter project platform with the appropriate permissions.
- 2) The admin has identified a user who needs to be deleted.

- **Postconditions :**

- 1) The target user and all associated data are permanently removed from the platform. This may involve:
 - a - Deleting the user account and profile information.
 - b - Removing all user-generated content (tweets, messages, etc.)
 - c - Anonymizing or deleting any data linked to the user in logs or analytics.
- 2) The deletion details are logged for administrative purposes.

- **Error Situation:**

- 1) Authentication Error: The admin user might not be logged in or lack the necessary permissions to delete users. The system should display an error message indicating that login or permission is required.
- 2) User Not Found: The admin user might enter invalid information or the target user might not exist on the platform.

The system should display an error message indicating the user cannot be located.

- **Actor** : Admin User (A user with administrative privileges on the Twitter project platform).

- **Standard Process** :

- 1) The admin user accesses the user management interface.
- 2) The admin user searches for the target user by username, email address, or other identifying information.
- 3) The admin user locates the target user and accesses their profile.
- 4) The admin user confirms that user deletion is the intended action.
This may involve:
 - a - Reviewing a confirmation message highlighting the permanence of deletion.
 - b - Specifying a reason for deletion.
- 5) The admin user initiates the deletion process.

- **Alternative Processes** :

- 1) **Data Backup**: The system might offer the option to back up the user's data (e.g., tweets) before deletion, adhering to relevant data privacy regulations.
- 2) **User Confirmation**: For certain cases, the system might require confirmation from the user before deletion proceeds (e.g., upon user request).

Read reports

- **Name :** Delete users

- **Goal :** To provide Admins with a system to effectively:

1) Identify and address user-generated reports

This allows the Admins to stay informed about potential violations of Twitter's Terms of Service, harmful user behavior, and technical issues on the platform. By reading reports, Admins can prioritize and take appropriate actions to maintain a healthy and secure online environment.

2) Enhance user experience and platform safety.

By reviewing reports of abuse, harassment, or misleading content, Admins can take steps to enforce Twitter's policies and ensure a positive user experience for everyone. Additionally, reports of technical issues help identify and resolve problems that could hinder platform functionality.

- **Preconditions :**

- 1) The Admin is logged in to the Twitter platform.
- 2) Reports regarding user activity or system issues have been submitted.

- **Postconditions :**

- 1) The Admin gains awareness of reported issues and user behavior.
- 2) The system updates the report status to "Read".

- **Error Situation:**

- 1) The Admin may not have sufficient privileges to access all report categories.
- 2) The system may be unavailable due to technical issues.

- **Actor** : Admin User (A user with administrative privileges on the Twitter project platform).

- **Standard Process** :

- 1) The Admin accesses the "Reports" section within the Twitter management interface.
- 2) The system displays a list of reports, potentially categorized by type (e.g., user abuse reports, copyright infringement claims, technical bugs).
- 3) The Admin can filter the report list by various criteria (e.g., date range, report category, user involved).
- 4) The Admin selects a specific report to view its details.
- 5) The system displays the report content, including:
 - a - Information about the reported user (if applicable).
 - b - Details of the reported incident (e.g., description of abusive content, screenshot of a technical issue).
 - c - Any additional information provided by the reporter.
 - d - The current status of the report (e.g., new, under review, resolved).
- 6) The Admin may have options to:
 - a - Mark the report as "Read".
 - b - Take further action based on the report content (e.g., send a warning to the reported user, investigate a technical issue).
 - c - Leave comments or notes on the report for internal communication.

- **Alternative Processes** :

- 1) **No Reports Available:** If there are no unread reports, the system informs the Admin accordingly.
- 2) **Search for Specific Reports:** The Admin may utilize a search function to locate reports based on keywords or other criteria.

Manage Advertisements

Add Advertisement

- **Name :** Add Advertisement
- **Goal :** Create and manage advertisements to be displayed on his Twitter profile
- **Preconditions :**
 - 1) The content creator has a Twitter account with appropriate permissions for advertisement creation.
 - 2) The content creator has a valid payment method associated with his account (if required by the platform).
- **Postconditions :**
 - 1) A new advertisement campaign is created and displayed to the target audience on Twitter.
 - 2) The content creator can track the performance of his advertisement through analytics.
- **Error Situation :**

The use case description for "Add Advertisement" focuses on the ideal scenario. There are no error situations explicitly mentioned.
- **Actor :** Content Creator

- Standard Process :

- 1)** The content creator navigates to the "Advertisements" section within their Twitter profile settings.
- 2)** The system displays options for creating a new advertisement campaign.
- 3)** The content creator selects the type of advertisement they want to create (e.g., promoted tweet, promoted video, carousel ad).
- 4)** The system guides the content creator through the advertisement creation process, including:
 - a** - Defining the target audience (e.g., demographics, interests)
 - b** - Setting a budget for the advertisement campaign
 - c** - Uploading creative assets (images, videos) for the advertisement
 - d** - Composing the advertisement content (text, call to action)
 - e** - Choosing the desired placement of the advertisement (e.g., in-feed, profile takeover)
- 5)** The content creator reviews the advertisement details and submits it for approval.
- 6)** The system validates the advertisement and may require further information or adjustments before approval.
- 7)** Once approved, the advertisement goes live and starts displaying to the target audience.
- 8)** The content creator can monitor the performance of their advertisements through analytics provided by the system.

- Alternative Processes :

- 1)** The content creator can choose to schedule the advertisement to go live at a specific future date.
- 2)** The content creator can edit or pause an existing advertisement campaign at any time.
- 3)** The system may offer advanced targeting options for a fee.

Update Advertisement

- **Name :** Update Advertisement
- **Goal :** Allow a content creator to modify an existing advertisement campaign on Twitter. This update functionality enables them to:
 - a - Refine targeting
 - b - Optimize budget
 - c - Adjust scheduling
 - d - Enhance creatives
- **Preconditions :**
 - 1) The content creator has a valid Twitter account with permissions to manage advertisements.
 - 2) An advertisement campaign already exists.
- **Postconditions:**

The advertisement is updated with the content creator's changes.
- **Error Situation :**
 - 1) The system may encounter technical problems during the update process. In this case, the system should display an error message and provide the content creator with instructions for reporting the issue.
 - 2) The content creator may try to update the advertisement with invalid data (e.g., exceeding budget limits). The system should prevent the update and provide clear error messages explaining the issue.
- **Actor :** Content Creator

- Standard Process :

- 1) The content creator navigates to the "Advertisements" section within their Twitter account.
- 2) The system displays a list of existing advertisement campaigns.
- 3) The content creator selects the campaign they want to update.
- 4) The system displays the details of the selected campaign, including:
 - a - Target audience
 - b - Budget
 - c - Schedule
 - d - Creative assets (images, text)
- 5) The content creator edits the details they want to change. This may include:
 - a - Updating the target audience demographics or interests.
 - b - Adjusting the budget allocation.
 - c - Modifying the campaign schedule (start/end date).
 - d - Uploading new creative assets (images, text).
- 6) The content creator reviews their changes and submits the update request.
- 7) The system validates the changes (e.g., ensuring image size meets requirements). If validation fails, the system provides clear error messages to the content creator.
- 8) Upon successful validation, the system updates the advertisement campaign with the new details.
- 9) The system displays a confirmation message to the content creator, summarizing the changes made.

- Alternative Processes :

- 1) System Administrator Involvement
- 2) Cancel Update

Delete Advertisement

- **Name :** Delete advertisements
- **Goal :** Remove an advertisement from the Twitter account.
- **Preconditions :**
 - 1) The content creator is logged in to their Twitter account.
 - 2) The content creator has created at least one advertisement.
- **Postconditions :**
 - 1) If the advertisement is successfully deleted, it is no longer displayed on Twitter and the content creator's account balance is not affected.
 - 2) If the deletion is canceled, the advertisement remains unchanged.
- **Error Situation :**

The use case description for "Delete Advertisement" focuses on the ideal scenario. There are no error situations explicitly mentioned.
- **Actor :** Content Creator

- Standard Process :

- 1)** The content creator navigates to the "Ads" section of their Twitter account.
- 2)** The system displays a list of all the advertisements created by the content creator.
- 3)** The content creator selects the advertisement they want to delete.
- 4)** The system displays a confirmation dialog box with the following information:
 - a** - Name of the advertisement
 - b** - A clear message stating that deleting the advertisement is permanent.
- 5)** The content creator has two options:
 - a** - Confirm: Clicks a button labeled "Delete" or "Confirm". The system permanently removes the advertisement and displays a success message.
 - b** - Cancel: Clicks a button labeled "Cancel" or closes the dialog box. The system does nothing and leaves the advertisement intact.

- Alternative Processes :

- 1)** Network Error: If there is a network error while communicating with the server, the system displays an error message to the content creator and allows them to retry.
- 2)** Unauthorized Access: If the content creator tries to access an advertisement they are not authorized to delete, the system displays an error message stating that the action is not permitted.

Comment

- **Name :** Comment

- **Goal :** The user wants to express his thoughts or replies to a Tweet.

- **Preconditions :**

1) The user is logged in to his Twitter account.

2) The user has access to an existing Tweet he wish to comment on.

- **Postconditions :**

1) The user's comment is successfully added to the Tweet and displayed publicly.

2) The original Tweet's author (if applicable) is notified about the new comment.

- **Error Situation :**

1) **Spam/Abusive Content:** If the system detects spam or abusive content in the comment, it may prevent the comment from being posted and notify the user about the violation.

2) **Network Error:** If a network error occurs while trying to post the comment, the system displays an error message to the user, and they may need to retry.

- **Actor :** User (Registered Twitter user)

- Standard Process :

- 1) The user views a Tweet on his timeline or search results.
- 2) The user clicks on the "Comment" icon below the Tweet.
- 3) A text box appears where the user can write his comment.
- 4) The user types his comment text, which is limited to 280 characters. The user can also:
 - a - Mention other users using the "@" symbol followed by the username.
 - b - Add emojis to his comment.
 - c - Attach media (images, videos, GIFs) to his comment.
- 5) Once the user is satisfied with his comment, they click the "Tweet" button.
- 6) The system validates the comment content (e.g., checks for character limit).
- 7) If valid, the system creates a new Comment entity associated with the original Tweet and the user.
- 8) The comment is displayed publicly below the original Tweet, along with the user's profile picture and username.
- 9) The original Tweet's author receives a notification.

- Alternative Processes :

- 1) **Character Limit Exceeded:** If the user's comment exceeds the 280-character limit, the system displays an error message prompting them to shorten their comment.
- 2) **Discard Comment:** The user can choose to discard his comment before posting by clicking a "Cancel" button.

Follow

- **Name :** Follow

- **Goal :** The user wants to subscribe to updates from another user on Twitter.

- **Preconditions :**

- 1) The user is logged in to his Twitter account.
- 2) The user has identified another Twitter user he wish to follow.

- **Postconditions :**

- 1) The user successfully follows the target user.
- 2) The follower receives Tweets from the following user in his timeline (subject to Twitter's algorithms).

- **Error Situation :**

- 1) **Account Suspension:** If the target user's account is suspended, the follow request may not be completed.
- 2) **Network Error:** If a network error occurs while trying to follow the user, the system displays an error message to the user, and he may need to retry.

- **Actor :** User (Registered Twitter user)

- Standard Process :

- 1) The user views the profile page of another user.
- 2) The user locates the "Follow" button on the profile page.
- 3) The user clicks the "Follow" button.
- 4) The system verifies the user's request and establishes a following relationship between the two users.
- 5) The following relationship is recorded in the system's database.
- 6) The user who initiated the follow is now a follower of the other user.
- 7) The following user's Tweets appear in the follower's timeline (according to Twitter's algorithms).

- Alternative Processes :

- 1) **Already Following:** If the user is already following the target user, clicking the "Follow" button might instead be replaced with a "Following" label or provide an option to "Unfollow".
- 2) **Private Account:** If the target user has a private account, clicking the "Follow" button might initiate a follow request that needs to be approved by the target user before the following relationship is established.

Block

- **Name :** Block

- **Goal :** The user wants to prevent another user from directly contacting him or seeing his Tweets on Twitter.

- **Preconditions :**

1) The user is logged in to his Twitter account.

2) The user has identified another Twitter user he wish to block.

- **Postconditions :**

1) The user successfully blocks the target user.

2) The target user is restricted from interacting with or viewing content from the blocking user as defined above.

- **Error Situation :**

1) **Account Suspension:** If either the user or the target user's account is suspended, the block request may not be completed.

2) **Network Error:** If a network error occurs while trying to block the user, the system displays an error message to the user, and he may need to retry.

- **Actor :** User (Registered Twitter user)

- Standard Process :

- 1) The user views the profile page of another user or encounters them elsewhere on Twitter (e.g., search results, mentions).
- 2) The user locates the "Block" button or menu option associated with the target user.
- 3) The user clicks the "Block" button.
- 4) The system verifies the user's request.
- 5) The system establishes a block relationship between the two users.
- 6) The blocked user is prevented from:
 - a - Following the blocking user.
 - b - Sending Direct Messages (DMs) to the blocking user.
 - c - Mentioning the blocking user in his Tweets (publicly visible mentions).
 - d - Seeing Tweets from the blocking user in his timeline (applies if he was previously following).

- Alternative Processes :

Confirmation Prompt: The system might prompt the user for confirmation before blocking the target user, especially if blocking has permanent consequences.

Mute

- **Name :** Mute
- **Goal :** The user wants to silence updates from another user on Twitter without completely blocking them.
- **Preconditions :**
 - 1) The user is logged in to his Twitter account.
 - 2) The user has identified another Twitter user he wish to mute.
- **Postconditions :**
 - 1) The user successfully mutes the target user.
 - 2) The muted user's Tweets are no longer shown in the muting user's home timeline, lists, or notifications (with some exceptions).
- **Error Situation :**
 - 1) **Account Suspension:** If either the user or the target user's account is suspended, the mute request may not be completed.
 - 2) **Network Error:** If a network error occurs while trying to mute the user, the system displays an error message to the user, and he may need to retry.
- **Actor :** User (Registered Twitter user)

- Standard Process :

- 1) The user views the profile page of another user or encounters him elsewhere on Twitter (e.g., search results, mentions).
- 2) The user locates the "Mute" button or menu option associated with the target user.
- 3) The user clicks the "Mute" button.
- 4) The system verifies the user's request.
- 5) The system establishes a mute relationship between the two users.
- 6) The muted user's Tweets are no longer displayed in the following ways for the muting user:
 - a - Home timeline
 - b - Lists the muting user has created (if applicable)
 - c - Notifications (unless he directly interact with the muting user, like a reply or mention)
- 7) The muting user can still:
 - a - See the muted user's profile and public Tweets if he visits his profile page directly.
 - b - See the muted user's Tweets if they are retweeted or appear in search results.
 - c - Interact with the muted user's Tweets (like, reply, retweet) publicly.

- Alternative Processes :

Confirmation Prompt: The system might prompt the user for confirmation before muting the target user.

Search

- **Name :** Search

- **Goal :** The user wants to find information on Twitter, such as specific Tweets, users, hashtags, or trends.

- **Preconditions :**

The user has access to the Twitter search bar or interface.

- **Postconditions :**

The user is presented with a search results page containing Tweets, users, hashtags, and potentially other content relevant to his query.

- **Error Situation :**

1) Invalid Query: If the user enters an empty query or a term with no matching results, the system might display a message indicating no results found.

2) Network Error: If a network error occurs during the search, the user might see an error message and need to retry.

- **Actor :** User (Registered or unregistered Twitter user)

- Standard Process :

- 1) The user opens the Twitter search bar or interface.
- 2) The user enters his search query into the search bar. This query can include keywords, phrases, hashtags, usernames (preceded by "@"), or combinations of these.
- 3) The user clicks the search button or presses Enter on his keyboard.
- 4) The Twitter search engine processes the query and retrieves relevant results.
- 5) The search results page is displayed to the user. This page typically includes:
 - a - A list of Tweets containing the search terms or matching the query's intent.
 - b - A list of users with usernames matching or containing the search query.
 - c - Popular hashtags related to the search query.
 - d - Promoted content or trends related to the search query.

- Alternative Processes :

- 1) **Advanced Search:** Twitter might offer advanced search options allowing users to filter results by various criteria like date range, location, account type, etc.
- 2) **Search Suggestions:** As the user types their query, Twitter might suggest relevant hashtags, usernames, or trending topics to refine their search.
- 3) **Search Without Login:** Even unregistered users can access basic search functionality to find public Tweets. However, some features like filtering or accessing private content might be restricted.

Read Notifications

- **Name :** Read Notifications
- **Goal :** The user wants to view and understand the details of a notification he received on Twitter.
- **Preconditions :**
 - 1) The user is logged in to their Twitter account.
 - 2) The user has at least one unread notification.
- **Postconditions :**
 - 1) The user has viewed the details of the notification and can take further actions based on the content (e.g., reply to a Tweet, accept a follow request).
 - 2) The notification is marked as read and might disappear from the unread notification count.
- **Error Situation :**
 - 1) **Deleted Content:** If the content associated with the notification (e.g., a Tweet) has been deleted, the user might see an error message or be redirected to the user's profile.
 - 2) **Network Error:** If a network error occurs while trying to access the notification list, the user might see an error message and need to retry.
- **Actor :** User (Registered Twitter user)

- Standard Process :

- 1)** The user sees a notification indicator on the Twitter interface, such as a bell icon with a number or a highlighted section.
- 2)** The user clicks on the notification indicator to access the notification list.
- 3)** The notification list displays details about each notification, including:
 - a** - The type of notification (e.g., mention, reply, direct message, follow request).
 - b** - A preview of the notification content (e.g., snippet of the message, username of the sender).
 - c** - Time stamp of when the notification was received.
- 4)** The user clicks on an individual notification to view it in detail.
- 5)** Clicking the notification takes the user to the relevant content or action:
 - a** - Mentions and replies: Opens the Tweet containing the mention or reply.
 - b** - Direct Messages: Opens the conversation thread for the direct message.
 - c** - Follow Requests: Opens a screen to accept or decline the follow request.
 - d** - Other notifications (e.g., likes, retweets): Might open the specific Tweet or the user's profile depending on the notification type.

- Alternative Processes :

- 1) Mark all as read:** The user might have an option to mark all notifications as read at once.
- 2) Dismiss Notification:** The user can dismiss a notification without necessarily clicking on it (depending on the notification type). Dismissed notifications might disappear from the list or be archived for later review (depending on Twitter's implementation).

Add hashtag

- **Name :** Add hashtag

- **Goal :** 1) Content categorization and discoverability

2) Increased reach and engagement

- **Preconditions :**

1) The user is writing a tweet.

2) The user wants to categorize his tweet or increase its discoverability.

- **Postconditions :**

1) The hashtags are displayed in the tweet composer with the appropriate hashtag symbol (#).

2) The user can continue composing his tweet.

- **Error Situation :**

If the system encounters an error while fetching hashtag suggestions, it should gracefully degrade and not prevent the user from adding hashtags manually.

- **Actor :** User (Registered Twitter user)

- Standard Process :

- 1)** The user starts typing a hashtag symbol (#).
- 2)** The system displays a suggestion list of popular hashtags that are relevant to the characters entered by the user.
- 3)** The user continues typing the desired hashtag. The system filters the suggestion list (if displayed) based on the user's input.
- 4)** The user selects a hashtag from the suggestion list or finishes typing his desired hashtag.
- 5)** The system automatically adds a space between the hashtag and the tweet text.

- Alternative Processes :

- 1)** If the user enters a hashtag that does not exist, the system may not provide suggestions or special formatting, but will still include the text as a normal word.
- 2)** The user can choose to ignore the suggestion list and type his entire hashtag without selecting from the options.

Report

- **Name :** Report
- **Goal :** 1) Maintain a Safe and Positive Platform
2) Enhance User Experience

- **Preconditions :**

The user encounters content on Twitter (tweet, direct message, media, profile) that he believe violates Twitter's policies.

- **Postconditions :**

The system acknowledges the user's report submission and provides a confirmation message (e.g., "Thank you for your report. We will review it shortly").

- **Error Situation :**

If the system encounters an error during report submission, it should inform the user and allow him to retry.

- **Actor :** User (reporting content)

- Standard Process :

- 1) The user identifies the "Report" option on the content they wish to report. This option may be presented as a flag icon or text link.
- 2) The user selects the "Report" option.
- 3) The system displays a reporting menu with various reporting categories (e.g., harassment, hate speech, spam, misinformation).
- 4) The user selects the most relevant reporting category that describes the violation.
- 5) The user confirms their report submission.

- Alternative Processes :

- 1) If the user accidentally selects "Report," a confirmation step can be offered to prevent accidental submissions.
- 2) The user may have the option to report a direct message conversation if it violates Twitter's policies.

Edit profile

- **Name :** Edit profile
- **Goal :** The user wants to modify his profile information on Twitter.
- **Preconditions :**
 - 1) The user has a valid Twitter account and is logged in.
 - 2) The user wants to edit his profile
- **Postconditions :**
 - 1) The user's profile information is updated according to his edits.
 - 2) The updated profile information is reflected across the platform (e.g., profile page, mentions, search results).
- **Error Situation :**

Validation Errors: This occurs when the user enters information that violates the platform's rules. Here are some specific examples:

 - **Username restrictions:** Usernames might have minimum/maximum character limits, restrictions on allowed characters (e.g., no special symbols), or limitations on how often they can be changed.
 - **Character limits:** Other profile fields like display name or biography might have character limits to prevent excessively long entries.
 - **Invalid data:** Trying to enter an invalid website URL or location format could also be flagged as an error.
- **Actor :** The user (who wants to modify his profile information on Twitter)

- Standard Process :

- 1)** The user selects the "Edit Profile" option from the profile menu or settings.
- 2)** The system displays the user's current profile information, including:
 - Username
 - Display Name
 - Biography
 - Profile Picture
- 3)** The user can edit any of the displayed profile information.
- 4)** The user may be able to upload a new profile picture and/or banner image based on the platform's specifications (e.g., size, format).
- 5)** The user saves the changes.
- 6)** The system validates the changes according to pre-defined rules (e.g., character limits, username restrictions).
- 7)** If validation is successful, the system updates the user's profile information and displays the updated profile.
- 8)** If validation fails, the system displays error messages indicating the specific issues and the user can correct the information.

- Alternative Processes :

- 1) User cancels editing:** The user can choose to cancel editing his profile at any point, and the profile remains unchanged.
- 2) Validation errors:** If the user enters invalid information (e.g., exceeding character limits, username already in use), the system displays error messages, and the user must correct the information before saving.

Sign Up

- **Name :** Sign Up

- **Goal :** The new user wants to create a new account on Twitter.

- **Preconditions :**

The new user does not have an existing Twitter account.

- **Postconditions :**

1) A new user account is created on Twitter.

2) The user is logged in to his new account.

3) The user may be presented with an optional onboarding process.

- **Error Situation :**

1) **Validation errors, like:** weak password, invalid email format, username is already existed.

2) **Account creation error, like:** existing account with email.

- **Actor :** New User.

- Standard Process :

- 1) The new user navigates to the "Sign Up" page on the Twitter platform.
- 2) The system presents the user with a signup form requesting information such as:
 - Email address
 - Password (with password strength requirements)
 - Display Name (public name displayed on profile)
 - Birthday (to enforce age restrictions)
- 3) The user enters the required information and completes the signup form.
- 4) The system validates the user's input according to pre-defined rules.
- 5) If validation is successful:

The system sends a verification email or SMS with a confirmation link or code.
- 6) The user clicks the verification link or enters the code to confirm his email address or phone number.
- 7) The system creates a new user account and logs the user in.
- 8) The system may offer a guided onboarding process to introduce the user to the platform's features and functionality.

- Alternative Processes :

- 1) **Account already exists:** If the user attempts to sign up with an email address already associated with an account, the system displays an error message prompting them to log in or use a different email.
- 2) **Validation errors:** If the user enters invalid information (e.g., weak password, invalid email format), the system displays error messages, and the user must correct the information before proceeding.

Login

- **Name :** Login

- **Goal :** The user wants to access their existing Twitter account.

- **Preconditions :**

The user has a valid Twitter account.

- **Postconditions :**

1) The user is successfully logged in to his Twitter account.

2) A secure session is established for the user's activity.

3) The user can access the platform's features and functionalities.

- **Error Situation :**

1) **Invalid Credentials :** Incorrect Username/Email , Incorrect password.

2) **Account Issues :** Incorrect Username/Email , Incorrect password

- **Actor :** User

- Standard Process :

- 1) The user navigates to the "Login" page on Twitter.
- 2) The system presents the user with a login form requesting:
 - Username or email address
 - Password
- 3) The user enters his login credentials.
- 4) The system authenticates the user by verifying the entered username/email and password against its stored records.
- 5) If authentication is successful:
 - The system creates a secure session for the user.
 - The system directs the user to his Twitter homepage or feed.
- 6) The user can now interact with the platform's features.

- Alternative Processes :

Invalid credentials: If the user enters an incorrect username/email or password:

- The system displays an error message indicating invalid login credentials.
- The user can retry entering his credentials.

Forget Password

- **Name :** Forget password
- **Goal :** The user has forgotten his password and wants to regain access to his Twitter account.
- **Preconditions :**
 - 1) The user has a valid Twitter account.
 - 2) The user has access to their registered email address or phone number (depending on chosen recovery method).
- **Postconditions :**
 - 1) The user's password is successfully reset.
 - 2) The user can log in to their account with the new password.
- **Error Situation :**

Invalid information: Unregistered email/phone number
- **Actor :** User (reporting content)

- Standard Process :

- 1) The user navigates to the "Login" page and selects the "Forgot password?" option.
- 2) The system presents a form where the user can choose a password reset method:
 - **Email:** User enters his registered email address.
 - **Phone number:** User enters his registered phone number.
- 3) The user selects his preferred recovery method and submits the form.
- 4) The system validates the entered information (e.g., email format, phone number validity).
- 5) If validation is successful:
 - The system sends a password reset link or code to the user's chosen method (email or SMS).
 - The reset link/code typically has a limited validity period (e.g., 1 hour).
- 6) The user checks his email/SMS for the password reset link or code.
- 7) The user clicks the password reset link or enters the code on the password reset page provided by the system.
- 8) The system prompts the user to create a new password.
 - The system should enforce password strength requirements.
- 9) The user sets a new strong password and confirms it.
- 10) The system resets the user's password and allows them to log in with the new credentials.

- Alternative Processes :

Invalid information: If the user enters an unregistered email address or phone number, the system displays an error message indicating no account found associated with that information.

Unfollow

- **Name :** Unfollow

- **Goal :** The user wants to stop following another user on Twitter.

- **Preconditions :**

1) The user has a valid Twitter account and is logged in.

2) The user is currently following the account they want to unfollow.

- **Postconditions :**

1) The user is no longer following the unfollowed account.

2) The user's following list and feed are updated accordingly.

- **Error Situation :**

User cancels unfollow: This isn't an error, but it's important to account for the user changing his mind during the confirmation stage. The system should allow him to easily cancel the unfollow action by selecting a "Cancel" option in the confirmation prompt.

- **Actor :** User (reporting content)

- Standard Process :

- 1) The user navigates to the profile page of the account he wants to unfollow.
- 2) The user profile page displays a "Following" button.
- 3) The user clicks the "Following" button.
- 4) The system displays a confirmation prompt asking the user to confirm he want to unfollow.
- 5) The user selects "Unfollow" from the confirmation prompt.
- 6) The system removes the followed account from the user's following list.
- 7) The profile page and user feed are updated to reflect that the user is no longer following the unfollowed account (e.g., "Following" button disappears, tweets from the unfollowed account are no longer displayed in the feed).

- Alternative Processes :

User cancels unfollow: The user can choose to cancel the unfollow action at the confirmation stage by selecting "Cancel" from the prompt.