

(2)

Sales office (Num, loc, manager_ID) ^{from employee}

employee (ID, Name, office_Num) ^{from sales office}

Property (ID, address, city, state, ZIP, office_Num)

owner (ID, Name)

Property-owner (PR_ID, owner_ID, percent)

(1)

musician (ID, name, street, city, phone number)

Instrument (Name, key)

album (ID, title, cr-date, musician_key) ^{ID from musician}

Song (~~song_ID~~, title, author, album_ID) ^{ID from album}

plays (musician_ID, instrument_ID) ^{from musician and instrument}

perform (musician_ID, song_ID) ^{from musician and song}

3

Patient (ID , Name, Date of birth, Ward-ID, consultant-ID)

Ward (ID, Name, supervise-Nurse-num)

Nurse (ID, Name, ward-ID)

consultant (ID, name)

Drug (Code, Dosage)

Drug-Brand (Code-Num, Brand-Name)

Examination (Patient-ID, consultant-ID)

Drug-admin (nurse-Num, patient-ID, Code-Num, Date, Time, dosage)

(4)

Airline (ID, name, Address, Conc-Pr)

Airline_phone (Airline-ID, phone-Num)

Employee (ID, name, address, Br-year, Br-month, Br-day

Gender, position, Airline-ID) ^{from airline}

Employee_qualification (employee-ID, qualification)


Aircraft (ID, capacity, model, Airline-ID, Major-Pilot, Assist-Pilot, host-1, host-2)

Route (ID, origin, Destination, Distance, classif)

Aircraft_Route (Aircraft-ID, Route-ID, Departure-Datetime

arrival-Datetime, Num-of-passengers, price-per-passenger)

Transaction (ID, Date, Desc, amount, airline-ID)

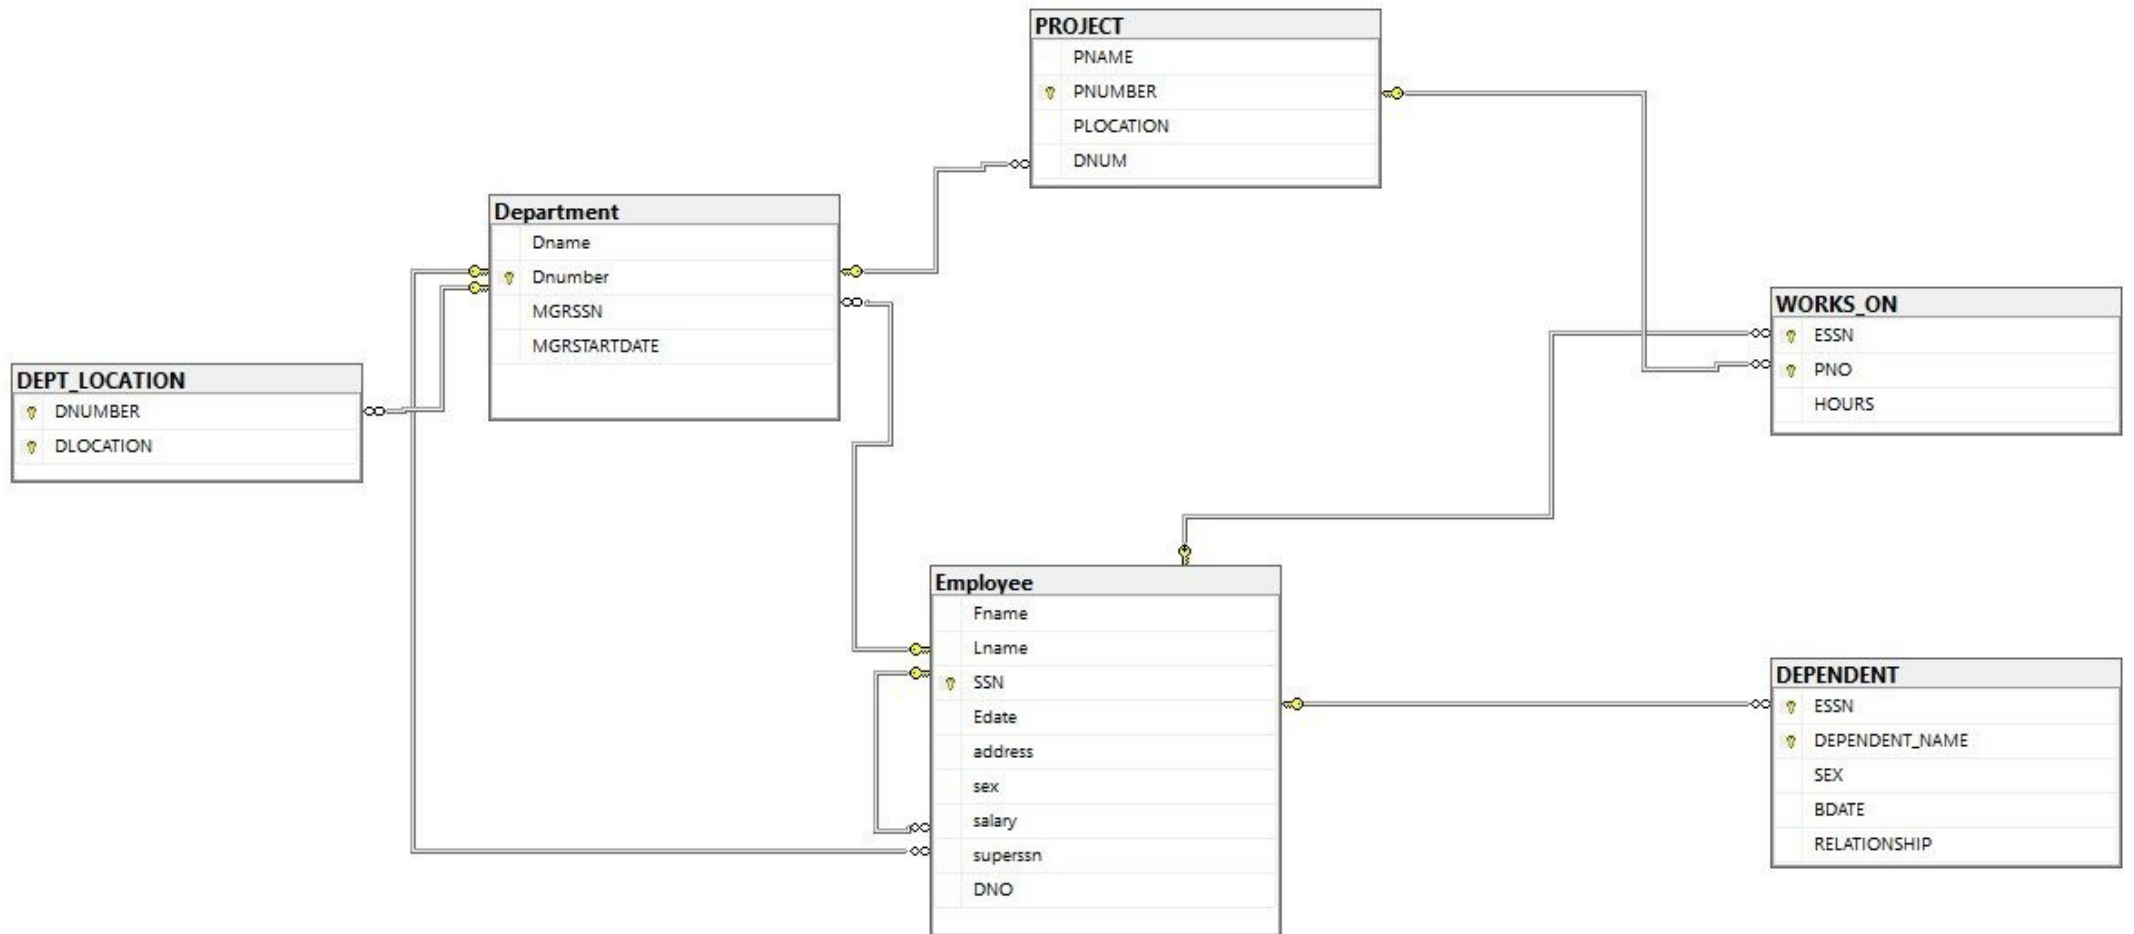

--1

```
SELECT *  
FROM EMPLOYEE;
```

--2

```
SELECT FNAME, LNAME, SALARY, DNO  
FROM EMPLOYEE;
```

--3

```
SELECT PNAME, PLOCATION, DNUM  
FROM PROJECT;
```

--4

```
SELECT  
    CONCAT(FNAME, ' ', LNAME) AS FULL_NAME,  
    (SALARY * 12 * 0.10) AS "ANNUAL COMM"  
FROM EMPLOYEE;
```

--5

```
SELECT SSN, CONCAT(FNAME, ' ', LNAME) AS EMP_NAME, SALARY  
FROM EMPLOYEE  
WHERE SALARY > 1000;
```

--6

```
= SELECT CONCAT(FNAME, ' ', LNAME) AS EMP_NAME, SALARY  
FROM EMPLOYEE  
WHERE SEX = 'F';
```

--7

```
= SELECT DNUMBER, DNAME  
FROM DEPARTMENT  
WHERE MGRSSN = 968574;
```

--8

```
= SELECT DNUMBER, DNAME  
FROM DEPARTMENT  
WHERE MGRSSN = 968574;
```

--9

```
= SELECT PNUMBER, PNAME, PLOCATION  
FROM PROJECT  
WHERE DNUM = 10;
```