Session 11:

Task 1:

Syntax used as follows:

```
Create database mydb;

Use mydb;

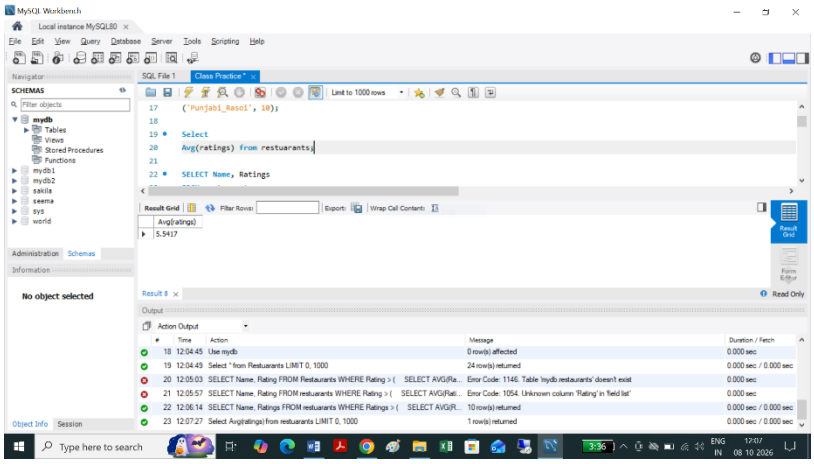

Create table Restuarants
        (Name varchar (30),
        Ratings Int);
        Select * from Restuarants;

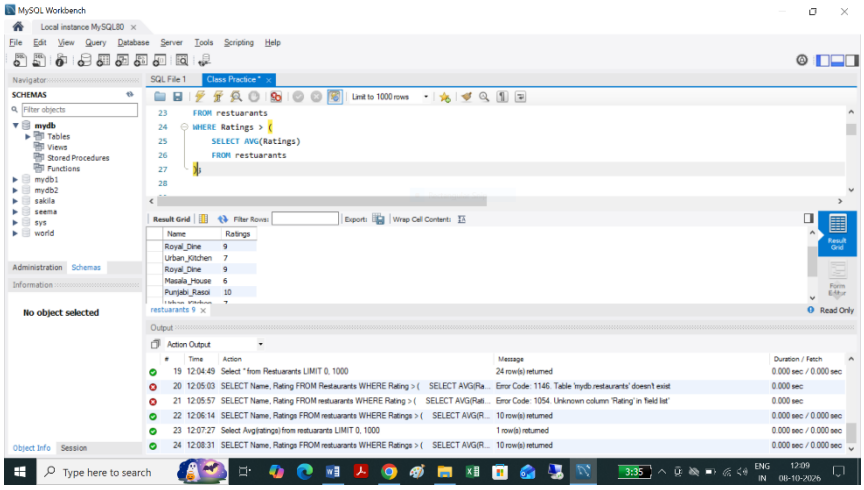

Insert into restuarants
values ('Tasty_Bites',5),
('Urban_Kitchen', 7),
('Royal_Dine', 9),
('Green_Leaf', 4),
('The_Food Hub', 3),
('Masala_House', 6),
('Café_Delight', 3),
('Punjabi_Rasoi', 10);


Select
Avg(ratings) from restuarants;


SELECT Name, Ratings
FROM restuarants
WHERE Ratings > (
```

```
    SELECT AVG(Ratings)
    FROM restuarants
);
```





The **subquery** calculates the average rating of all restaurants, and the outer query displays only restaurants whose rating is **higher than that average**.

For this sample data, the average rating is **5.5**, so restaurants with ratings above 5.5 will be displayed.

SESSION 11 -TASK 1.csv

Task 2:



SESSION 11 -TASK 2
-Table generated with

```
Create table Products
        (product_id INT,
          Name  Varchar(100),
          price Decimal (10,2),
          Category Varchar (50));



Select * from Products;


Insert into Products (Product_id, Name, Price , Category)
Values
(101, 'iPhone 14', 69999, 'Mobiles'),
(102, 'Samsung Galaxy S23', 74999, 'Mobiles'),
(103, 'OnePlus 11', 56999, 'Mobiles'),
(104, 'HP Laptop', 54999, 'Laptops'),
(105, 'Dell Inspiron', 62999, 'Laptops'),
(106, 'Lenovo IdeaPad', 48999, 'Laptops'),
(107, 'Boat Headphones', 1999, 'Audio'),
(108, 'Sony Headphones', 4999, 'Audio'),
(109, 'JBL Earbuds', 2999, 'Audio'),
(110, 'Nike Shoes', 5999, 'Footwear'),
```

(111, 'Adidas Shoes', 4999, 'Footwear');

Select

Name, Avg(Price),Category from Products group by Name, Category;

```
SELECT
  p.name,
  p.price,
  p.category,
  (
    SELECT AVG(p2.price)
    FROM Products p2
    WHERE p2.category = p.category
  ) AS average_category_price
FROM Products p;
```

SESSION 11 -TASK 2 -final output.csv

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

name	price	category	average_category_price
iPhone 14	69999.00	Mobiles	67332.333333
Samsung Galaxy S23	74999.00	Mobiles	67332.333333
OnePlus 11	56999.00	Mobiles	67332.333333
HP Laptop	54999.00	Laptops	55665.666667
Dell Inspiron	62999.00	Laptops	55665.666667

Task 3:

Result Grid | Filter Rc

	User_id	Username
▶	1	Rahul
	2	Priya
	3	Amit
	4	Neha
	5	Sneha
	6	Karan



SESSION 11 -TASK 3
-Table generated of U

```
Select * from Users;

Create table Users

(User_id int,

Username Varchar (30));


Insert into Users

VALUES

    (1,"Rahul"),

    (2,"Priya"),

    (3,"Amit"),

    (4,"Neha"),

    (5,"Sneha"),

    (6,"Karan");


select * from users;


select * from Playlists;
```

SESSION 11 -TASK 3
-Table generated of Pl

Create Table Playlists

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

playlist_id	user_id	playlist_name
101	1	Workout Hits
102	2	Bollywood
103	1	Romantic Songs
104	2	Party songs
105	2	Travel Music
106	3	Chill Vibes

```
(playlist_id int,
user_id int,
playlist_name varchar (30));

Insert into Playlists
VALUES (101,1,"Workout Hits"),
    (102,2,"Bollywood"),
    (103,1,"Romantic Songs"),
    (104, 2, "Party songs"),
    (105, 2, "Travel Music"),
    (106,3,"Chill Vibes"),
    (107,3, "Morning music"),
    (108,3,"Study Music"),
    (109,3,"Favorites"),
    (110,4,"Bollywood Hits"),
    (111,5,"Relaxing music"),
    (112,5,"Punjabi songs"),
    (113,6,"Old Classics");
select * from Playlists;
SELECT
```

```
    u.username,
    p.playlist_count
FROM Users u
JOIN (
    SELECT
        user_id,
        COUNT(*) AS playlist_count
    FROM Playlists
    GROUP BY user_id
) p
ON u.user_id = p.user_id
WHERE p.playlist_count > (
    SELECT AVG(playlist_count)
    FROM (
        SELECT
            user_id,
            COUNT(*) AS playlist_count
        FROM Playlists
        GROUP BY user_id
    ) AS playlist_counts
);
```



SESSION 11 -TASK 3
-Final Output.csv

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

username	playlist_count
Priya	3
Amit	4
Priya	3
Amit	4

Task 4:

use mydb;

Select * from Orders;



SESSION 11 -TASK 4.
Order Table generate

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

order_id	user_id	total_amount
103	U1	10.00
104	U3	25.00
105	U4	50.00
106	U3	12.00
NULL	NULL	NULL

CREATE TABLE Orders

(order_id INT PRIMARY KEY,

user_id VARCHAR(50) NOT NULL,

total_amount DECIMAL(10, 2) NOT NULL

);

INSERT INTO Orders (order _id, user _id, total _amount)

VALUES

(101, 'U1', 15.00),

(102, 'U2', 40.00),

(103, 'U1', 10.00),

(104, 'U3', 25.00),

(105, 'U4', 50.00),

(106, 'U3', 12.00);

```
SELECT DISTINCT user_id
FROM Orders
WHERE total_amount > (
   SELECT AVG(total_amount)
   FROM Orders
);
```

user_id
U2
U4