

# Usability of Modern Display Technologies

Rachel Rivera

October 16, 2014

## **Abstract**

This study aims to examine how interaction design concepts specifically map to the usability of modern display technology. //TODO: write a better abstract

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
<b>2</b>	<b>Background/ Prior Work/ Literary Review</b>	<b>3</b>
2.1	Limitations/Proposed Solutions . . . . .	3
2.2	Advantages . . . . .	4
<b>3</b>	<b>Methods</b>	<b>4</b>
3.1	Prevailing Set of Views . . . . .	4
3.2	Emerging technology . . . . .	6
<b>4</b>	<b>Discussion</b>	<b>6</b>
<b>5</b>	<b>Conclusions</b>	<b>6</b>

# 1 Introduction

Electronic screens are the devices through which information is transferred between the user and the interface. Although electronic displays have been around for roughly a century,<sup>1</sup> they are still transforming and evolving in a multitude of ways. Screens are diversifying in order to tackle the limitations that have presented themselves over the years. [8] Screen devices have been changing in size, shape, flexibility, and resolution in order to improve usability for specific tasks. For example, *focus plus context screens*, which are wall-size low-resolution displays with an embedded high-resolution display region, are currently a proposed solution to working with visual documents too large to fit standard screens. [4] Another kind of screen that is emerging is the *BiDirectional (BiDi) Screen*, which is a thin, depth-sensing liquid-crystal display (LCD) that allows for 3D interaction using light fields. [12]

Though each kind of screen has its merits, this study will focus exclusively on touch sensitive screens. In a study from Linköping University, researchers articulated how “interaction on touch sensitive screens is literally the most ‘direct’ form of HCI, where information display and control are but one surface.” [3] Though it is clear that a connection between modern touchscreen devices and the field of interaction design exists, this study aims to investigate exactly *how* interaction design concepts specifically map to the usability of touch screens.

## 2 Background/ Prior Work/ Literary Review

### 2.1 Limitations/Proposed Solutions

There exists a fair amount of previous work pertaining to the usability of touch sensitive screens. The literature often evaluates usability by examining the limitations of these screen devices. One limitation that is discussed in the literature is how typing on flat surfaces—with no physical keys to guide the fingers—requires heightened visual attention. A study by Hussain Tinwala and Scott MacKenzie suggests that since the visual demand on the user is increased, concentration is diverted from the thoughts being expressed. [20] The lack of tactile features not only diverts attention from thoughts being expressed, but moreover, it makes the devices difficult to use for Individuals with Blindness or Severe Visual Impairment (IBSVI). A study from Virginia Polytechnic Institute and State University examined how, even with the use of features such as *VoiceOver*<sup>2</sup>, touch screens still do not provide sufficient support for IBSVI. These users were only able to “develop a spatial mental model for the interface or the screen through dead reckoning” since there is an “absence of any landmark other than the boundary of the device.” [9]

One purposed solution to this limitation is a physical overlay, developed by researchers specifically to help IBSVI engage their spatial cognition, perception, and sensing resources while interacting with touch screens. [9] The tactile overlay covers the touch device screen. An IBSVI can use the tactile patterns of the overlay to locate the text, icons, or buttons in the touch device interface. A study examining the efficacy of this physical overlay illustrated that IBSVI who used it were generally more efficient than those using voice-over technology or ‘trail-and-error’ exploration. [9]

Another limitation of touchscreen devices that is examined in the literature is how the human finger as a pointing device has “very low resolution.” [3] With mobile touch screens in particular, research has illustrated the difficulty in pointing at targets that are often smaller than the width of the user’s finger. A notable technique was created by Schneiderman, Sears,

---

<sup>1</sup>One of the earliest electronic displays, the cathode ray tube (CRT), was first made commercial in 1922. [18]

<sup>2</sup>*VoiceOver* for OS X tells users what is on the screen and walks users through actions. [2]

and colleagues to specifically address this problem. [17] Their basic technique provides a cursor above the user’s finger tip with a fixed offset when touching the screen. The user drags the cursor to a desired target and then lifts the finger to select the targeted object. Although this technique generally allowed a user to perform precise movements with less errors, the user’s efficiency tended to suffer. [17]

Many studies have purposed using a stylus (pen) to interact with touch screens instead of using a bare finger. A stylus has better “resolution” than a finger tip and recent studies have demonstrated that pen input is emerging as a promising interaction modality for touch screens. [5] A study by Forlines and Balakrishnan, which evaluated multiple forms of stylus input, articulated that one drawback of this approach is the occlusion of other elements on the screen by the pen. [10]

Zooming is also found in the literature as a proposed solution to increase precision of touchscreen interaction. It is possible to use zooming to enlarge the information space of the touchscreen enough so that the user can comfortably point at the target with a bare finger. However, a study by Pär-Anders Albinsson and Shumin Zhai asserted that zooming has a fundamental drawback since “when zoomed to a sub area of interest, one loses the contextual global view that can be important for the user’s task.” [3]

## 2.2 Advantages

Previous work on the subject of touchscreen display devices not only discusses limitations and proposed solutions, but also examines advantages of touchscreen displays. Ben Schneiderman’s essay, *Touch Screens Now Offer Compelling Uses*, provides a number of reasons why touchscreen devices can be advantageous: they are forms of direct manipulation, they are easy to learn, they are the fastest pointing device, no extra workspace is required to use them, etc. [19] Many experiments have been conducted that provide evidence supporting Schneiderman’s reasons. For example, the results from an experiment by Robert Hardy and Enrico Rukzio suggest that finger interaction is, in fact, faster than alternative pointing devices in most situations. [11] Schneiderman’s assertion that touchscreen display devices are generally more learnable was also supported by an experiment that examined the learnability of a touchscreen electronic medical record system. [7]

## 3 Methods

The prior work in the field demonstrates that there is a variety of different advantages as well as limitations that can be examined when evaluating the usability of touchscreen devices. Since this paper is too short to discuss each advantage and limitation, the paper will focus exclusively on the limitation of the minimal tactile feedback provided by touchscreen devices.

### 3.1 Prevailing Set of Views

Most research pertaining to this limitation focuses on how the lack of tactile feedback affects the usability of the device for Individuals with Blindness or Severe Visual Impairment. Touch screen interfaces have been popular for over 20 years, and concerns about touch screen accessibility for IBSVI have remained active throughout this time. [6] The prevailing set of views on the subject recognize that the touch screens are not effective for the IBSVI, and propose solutions specifically to address needs of the IBSVI.

Previous research has explored techniques that make touch screens more accessible by modifying the hardware. This paper mentioned one such technique when explaining physical overlays. [9] However, a recent study articulated how hardware modifications “may be expensive to

install, may limit the flexibility of the underlying software (by imposing physical structures), and may interfere with use by sighted people.” [14] The study asserts that for these reasons, techniques that rely upon hardware modifications have not been widely adopted.

More recent efforts have focused on using gestures to provide IBSVI with access to touch screens without modifying the underlying hardware. For example, Slide Rule [13] used multi-touch gestures to allow blind users to browse and explore content on a touch screen-based smartphone.

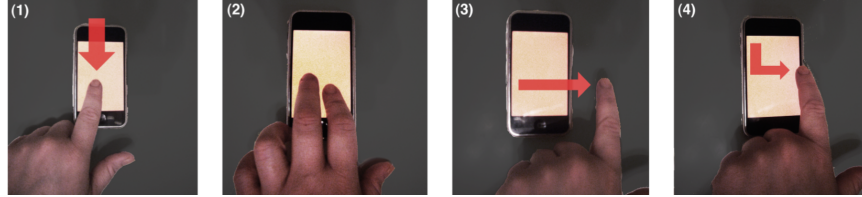


Figure 1: An example of some multi-touch gestures recognized by Slide Rule.(1) A one-finger scan to browse lists; (2) A two-finger tap to select items; (3) A flick gesture used to flip between pages; (4) An L-select gesture to browse hierarchy of menu options. [13]

There exist several input entry methods, however, that attempt to address this problem. For instance, Tinwala and MacKenzie present a system that includes auditory and tactile feedback to guide eyes-free entry using speech and non-speech sounds. [20]

Researchers have also explored techniques to address specific aspects of blind touch screen interaction, such as text entry and gesture selection [15]. However, these techniques have often focused on small, mobile phone-sized screens. Furthermore, many of these techniques change the fundamental layout of the screen to improve accessibility. Thus, our current work addresses interaction with larger touch screens, and explores methods to preserve users understanding of the screen layout.

### 3.2 Emerging technology

There is technology emerging that is not necessarily aimed to specifically help the IBSVI.

Another proposed solution comes from Tactus Technology, a company in Fremont, California. Employees from Tactus Technology are creating a keyboard with shape-shifting keys that pop up from the screen’s surface when needed and recede again when no longer necessary. [1] Craig Ciesla, the co-founder of the company, said that the keyboard will be offered later this year.



Figure 2: A Tactus keyboard

Though literature on the subject of touchscreen display devices have presented many limitations, the most relevant and important seems to be the lack of tactile features and the requirement for heightened visual attention. For people who are blind, accessing touch screen interfaces is nearly impossible. Some accessibility features are beginning to be developed though.

## 4 Discussion

Research discusses usability for IBSVI but does not delve into technology that can be effective for the sighted and IBSVI alike. The principle of feedback —sending back to the user information about what action has actually been done, what result has been accomplished— is a well-known concept in the science of control and information theory [16] "In the good old days of the telephone", "telephones were designed with much more care and concern for the user. Designers at the Bell Telephone Laboratories worried a lot about feedback. The push buttons were designed to give an appropriate feel—tactile feedback. When a button was pushed, a tone was fed back into the earpiece so the user could tell that the button had been properly pushed. When the phone call was being connected, clicks, tones, and other noises gave the user feedback about the progress of the call." "All this changed." "Why are modern telephone systems so difficult to use? Basically, the problem is that the systems have more features and less feedback"

## 5 Conclusions

Wrap up your paper with an "executive summary" of the paper itself, reiterating its subject and its major points. If you want examples, just look at the conclusions from the literature.

## References

- [1] Tactus technology. <http://tactustechnology.com/>. Accessed: 2014-10-08.
- [2] Voiceover for os x. <https://www.apple.com/accessibility/osx/voiceover/>. Accessed: 2014-10-08.
- [3] Pär-Anders Albinsson and Shumin Zhai. High precision touch screen interaction. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI '03, pages 105–112, New York, NY, USA, 2003. ACM.
- [4] Patrick Baudisch and Nathaniel Good. Focus plus context screens: Displays for users working with large visual documents. In *CHI '02 Extended Abstracts on Human Factors in Computing Systems*, CHI EA '02, pages 492–493, New York, NY, USA, 2002. ACM.
- [5] Xiaojun Bi, Tomer Moscovich, Gonzalo Ramos, Ravin Balakrishnan, and Ken Hinckley. An exploration of pen rolling for pen-based interaction. In *Proceedings of the 21st Annual ACM Symposium on User Interface Software and Technology*, UIST '08, pages 191–200, New York, NY, USA, 2008. ACM.
- [6] W. Buxton, R. Foulds, M. Rosen, L. Scadden, and F. Shein. Human interface design and the handicapped user. *SIGCHI Bull.*, 17(4):291–297, April 1986.
- [7] Gerald P. Douglas, Zach Landis-Lewis, and Harry Hochheiser. Simplicity and usability: Lessons from a touchscreen electronic medical record system in malawi. *interactions*, 18(6):50–53, November 2011.
- [8] Anne Eisenberg. Tackling the limits of touch screens. *The New York Times*, May 2014.
- [9] Yasmine N. El-Glaly, Francis Quek, Tonya Smith-Jackson, and Gurjot Dhillon. Touchscreens are not tangible: Fusing tangible interaction with touch glass in readers for the blind. In *Proceedings of the 7th International Conference on Tangible, Embedded and Embodied Interaction*, TEI '13, pages 245–253, New York, NY, USA, 2013. ACM.
- [10] Clifton Forlines and Ravin Balakrishnan. Evaluating tactile feedback and direct vs. indirect stylus input in pointing and crossing selection tasks. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI '08, pages 1563–1572, New York, NY, USA, 2008. ACM.
- [11] Robert Hardy and Enrico Rukzio. Touch & interact: Touch-based interaction of mobile phones with displays. In *Proceedings of the 10th International Conference on Human Computer Interaction with Mobile Devices and Services*, MobileHCI '08, pages 245–254, New York, NY, USA, 2008. ACM.
- [12] Matthew Hirsch, Douglas Lanman, Henry Holtzman, and Ramesh Raskar. Bidi screen: A thin, depth-sensing lcd for 3d interaction using light fields. volume 28, pages 159:1–159:9, New York, NY, USA, December 2009. ACM.
- [13] Shaun K. Kane, Jeffrey P. Bigham, and Jacob O. Wobbrock. Slide rule: Making mobile touch screens accessible to blind people using multi-touch interaction techniques. In *Proceedings of the 10th International ACM SIGACCESS Conference on Computers and Accessibility*, Assets '08, pages 73–80, New York, NY, USA, 2008. ACM.
- [14] Shaun K. Kane, Meredith Ringel Morris, Annuska Z. Perkins, Daniel Wigdor, Richard E. Ladner, and Jacob O. Wobbrock. Access overlays: Improving non-visual access to large touch screens for blind users. In *Proceedings of the 24th Annual ACM Symposium on User Interface Software and Technology*, UIST '11, pages 273–282, New York, NY, USA, 2011. ACM.

- [15] Shaun K. Kane, Jacob O. Wobbrock, and Richard E. Ladner. Usable gestures for blind people: understanding preference and performance. In Desney S. Tan, Saleema Amershi, Bo Begole, Wendy A. Kellogg, and Manas Tungare, editors, *CHI*, pages 413–422. ACM, 2011.
- [16] Donald A. Norman. *The Design of Everyday Things*. Basic Books, New York, reprint paperback edition, 2002.
- [17] Andrew Sears and Ben Shneiderman. High precision touchscreens: Design strategies and comparisons with a mouse. *International Journal of Man-Machine Studies*, 34:593–613, 1991.
- [18] Shigeo Shionoya and Hajime Yamamoto. Cathode ray tube. page 17. Plenum Publishing Corporation, 2003.
- [19] B. Shneiderman. Touch screens now offer compelling uses. *Software, IEEE*, 8(2):93–94, March 1991.
- [20] Hussain Tinwala and I. Scott MacKenzie. Eyes-free text entry with error correction on touchscreen mobile devices. In *Proceedings of the 6th Nordic Conference on Human-Computer Interaction: Extending Boundaries*, NordiCHI '10, pages 511–520, New York, NY, USA, 2010. ACM.