



15. Floating labels. Form layout

Reja:

▼ Floating labels



Bootstrap 5 yordamida **input** maydonlarida **suzib yuradigan** (floating) **yorliq** (label) yaratish mumkin

```
<div class="form-floating mb-3">
  <input type="email" class="form-control" id="email-input" placeholder="Email manzil">
  <label for="email-input">Email manzil</label>
</div>
<div class="form-floating">
  <input type="password" class="form-control" id="password-input" placeholder="Parol">
  <label for="password-input">Parol</label>
</div>
```

Validation

```
<form class="form-floating">
  <input type="email" class="form-control is-invalid" id="invalid-input" placeholder="name@example.com" value="test@example.com">
  <label for="invalid-input">Noto'g'ri kiritilgan ma'lumot</label>
</form>
```

Textarea

```
<div class="form-floating">
  <textarea class="form-control" placeholder="Izoh qoldirish" id="example-textarea"></textarea>
  <label for="example-textarea">Izohlar</label>
</div>
```


Select

```
<div class="form-floating">
  <select class="form-select" id="select-example" aria-label="Floating select label uchun misol">
    <option selected>Select menyuni ochish</option>
    <option value="1">Birinchi</option>
    <option value="2">Ikkinchi</option>
    <option value="3">Uchinchi</option>
  </select>
  <label for="select-example">Floating select label uchun misol</label>
</div>
```

Floating labels

Wrap a pair of and elements in `.form-floating` to enable floating labels with Bootstrap's textual form fields. A placeholder is required on each as our method of CSS-only floating labels uses the `:placeholder-shown` pseudo-element. Also note that the must come first so we can utilize a

 <https://getbootstrap.com/docs/5.0/forms/floating-labels/>

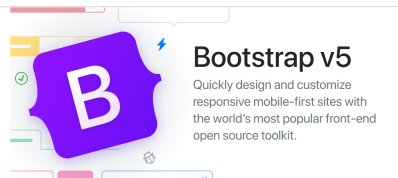

▼ Form layout



Bootstrap 5 yordamida form elementlarimiz uchun turli xil layout yaratish imkoniyati mavjud

```
<div class="row">
  <div class="col">
    <input type="text" class="form-control" placeholder="Ism" aria-label="Ism">
  </div>
  <div class="col">
    <input type="text" class="form-control" placeholder="Familiya" aria-label="Familiya">
  </div>
</div>
```

Murakkab (complex) layout

```
<form class="row g-3">
  <div class="col-md-6">
    <label for="email-input" class="form-label">Email</label>
    <input type="email" class="form-control" id="email-input">
  </div>
  <div class="col-md-6">
    <label for="password-input" class="form-label">Parol</label>
    <input type="password" class="form-control" id="password-input">
  </div>
  <div class="col-12">
    <label for="address-input" class="form-label">Manzil</label>
    <input type="text" class="form-control" id="address-input" placeholder="1234 Asosiy ko'chasi">
  </div>
  <div class="col-12">
    <label for="address2-input" class="form-label">Manzil 2</label>
    <input type="text" class="form-control" id="address2-input" placeholder="Uy raqami">
  </div>
  <div class="col-md-6">
    <label for="city-input" class="form-label">Shahar</label>
    <input type="text" class="form-control" id="city-input">
  </div>
  <div class="col-md-4">
    <label for="district-input" class="form-label">Tuman</label>
    <select id="district-input" class="form-select">
      <option selected>Tanlang...</option>
      <option>...</option>
    </select>
  </div>
  <div class="col-md-2">
    <label for="zip-input" class="form-label">Pochta indeksi</label>
    <input type="text" class="form-control" id="zip-input">
  </div>
  <div class="col-12">
    <div class="form-check">
      <input class="form-check-input" type="checkbox" id="grid-check">
      <label class="form-check-label" for="grid-check">
        Belgilang
      </label>
    </div>
  </div>
  <div class="col-12">
    <button type="submit" class="btn btn-primary">Yuborish</button>
  </div>
</form>
```

Gorizontal ko'rinishdagi form

```
<form>
  <div class="row mb-3">
```

```

<label for="email-input" class="col-sm-2 col-form-label">Email</label>
<div class="col-sm-10">
  <input type="email" class="form-control" id="email-input">
</div>
</div>
<div class="row mb-3">
  <label for="password-input" class="col-sm-2 col-form-label">Parol</label>
  <div class="col-sm-10">
    <input type="password" class="form-control" id="password-input">
  </div>
</div>
<fieldset class="row mb-3">
  <legend class="col-form-label col-sm-2">Radios</legend>
  <div class="col-sm-10">
    <div class="form-check">
      <input class="form-check-input" type="radio" name="grid-radio-1" id="grid-radio-1" value="option-1" checked>
      <label class="form-check-label" for="grid-radio-1">
        Birinchi radio
      </label>
    </div>
    <div class="form-check">
      <input class="form-check-input" type="radio" name="grid-radio-2" id="grid-radio-2" value="option-2">
      <label class="form-check-label" for="grid-radio-2">
        Ikkinchi radio
      </label>
    </div>
    <div class="form-check disabled">
      <input class="form-check-input" type="radio" name="grid-radio-3" id="grid-radio-3" value="option-3" disabled>
      <label class="form-check-label" for="grid-radio-3">
        Uchinchi disabled radio
      </label>
    </div>
  </div>
</fieldset>
<div class="row mb-3">
  <div class="col-sm-10 offset-sm-2">
    <div class="form-check">
      <input class="form-check-input" type="checkbox" id="grid-check">
      <label class="form-check-label" for="grid-check">
        Checkbox uchun misol
      </label>
    </div>
  </div>
</div>
<div>
  <button type="submit" class="btn btn-primary">Ro'yhatdan o'tish</button>
</div>
</form>

```

Layout

Every group of form fields should reside in a element. Bootstrap provides no default styling for the element, but there are some powerful browser features that are provided by default. New to browser forms? Consider reviewing the MDN form docs for an overview and complete list of

 <https://getbootstrap.com/docs/5.0/forms/layout/>

