




## 25. Popover, progress

Reja:

### ▼ Popover



**Popover** - Bootstrapning maxsus komponenti bo'lib, uning yordamida veb sahifadagi istalgan elementga qo'shimcha ma'lumot berish imkoniyati mavjud

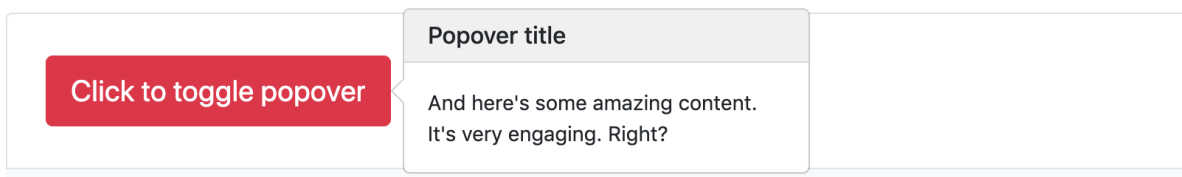

Popover veb sahifaning tezligiga ta'sir ko'rsatganligi uchun, u odatda o'chiq holatda bo'ladi. Uni yoqish uchun Javascriptdan foydalanishga to'g'ri keladi

```
<script>
var popoverTriggerList = [].slice.call(document.querySelectorAll('[data-bs-toggle="popover"]'))
var popoverList = popoverTriggerList.map(function (popoverTriggerEl) {
  return new bootstrap.Popover(popoverTriggerEl)
});
</script>
```

```
<button type="button" class="btn btn-lg btn-danger" data-bs-toggle="popover" title="Popover title" data-bs-content="And here's some ama
```

### Yo'nalishlari (directions)

```
<button type="button" class="btn btn-secondary" data-bs-container="body" data-bs-toggle="popover" data-bs-placement="top" data-bs-conte
  Popover on top
</button>
<button type="button" class="btn btn-secondary" data-bs-container="body" data-bs-toggle="popover" data-bs-placement="right" data-bs-con
  Popover on right
</button>
<button type="button" class="btn btn-secondary" data-bs-container="body" data-bs-toggle="popover" data-bs-placement="bottom" data-bs-co
  Popover on bottom
</button>
<button type="button" class="btn btn-secondary" data-bs-container="body" data-bs-toggle="popover" data-bs-placement="left" data-bs-cont
  Popover on left
</button>
```

### Dismiss (boshqa elementga sichqoncha bosilganda, popoverni berkitish)

```
<a tabindex="0" class="btn btn-lg btn-danger" role="button" data-bs-toggle="popover" data-bs-trigger="focus" title="Dismissible popover
```

### Disabled element uchun popover



Disabled elementlar uchun popover ishlamaydi. Lekin disabled elementni o'rab turgan parent elementga popover ko'rsatish orqali disabled element uchun ham popover ko'rsatish mumkin

```
<span class="d-inline-block" tabindex="0" data-bs-toggle="popover" data-bs-trigger="hover focus" data-bs-content="Disabled popover">
  <button class="btn btn-primary" type="button" disabled>Disabled button</button>
</span>
```

### Popovers

Things to know when using the popover plugin: Popovers rely on the 3rd party library Popper for positioning. You must include popper.min.js before bootstrap.js or use bootstrap.bundle.min.js / bootstrap.bundle.js which contains Popper in order for popovers to work! Popovers require the tooltip

<https://getbootstrap.com/docs/5.0/components/popovers/>



### Bootstrap v5

Quickly design and customize responsive mobile-first sites with the world's most popular front-end open source toolkit.

## ▼ Progress




**Progress** - ma'lum bir jarayonni qanday holatda ekanligini vizual tarzda bildirish uchun mo'ljallangan maxsus komponent




```
<div class="progress">
  <div class="progress-bar" role="progressbar" aria-valuenow="0" aria-valuemin="0" aria-valuemax="100"></div>
</div>
<div class="progress">
  <div class="progress-bar" role="progressbar" style="width: 25%" aria-valuenow="25" aria-valuemin="0" aria-valuemax="100"></div>
</div>
<div class="progress">
  <div class="progress-bar" role="progressbar" style="width: 50%" aria-valuenow="50" aria-valuemin="0" aria-valuemax="100"></div>
</div>
<div class="progress">
  <div class="progress-bar" role="progressbar" style="width: 75%" aria-valuenow="75" aria-valuemin="0" aria-valuemax="100"></div>
</div>
<div class="progress">
  <div class="progress-bar" role="progressbar" style="width: 100%" aria-valuenow="100" aria-valuemin="0" aria-valuemax="100"></div>
</div>
```

## Yorliq (label) qo'shish




```
<div class="progress">
  <div class="progress-bar" role="progressbar" style="width: 25%;" aria-valuenow="25" aria-valuemin="0" aria-valuemax="100">25%</div>
</div>
```

## Balandligini (height) sozlash



```
<div class="progress" style="height: 1px;">
  <div class="progress-bar" role="progressbar" style="width: 25%;" aria-valuenow="25" aria-valuemin="0" aria-valuemax="100"></div>
</div>
<div class="progress" style="height: 20px;">
  <div class="progress-bar" role="progressbar" style="width: 25%;" aria-valuenow="25" aria-valuemin="0" aria-valuemax="100"></div>
</div>
```

## Orqa fonni (background) o'zgartirish

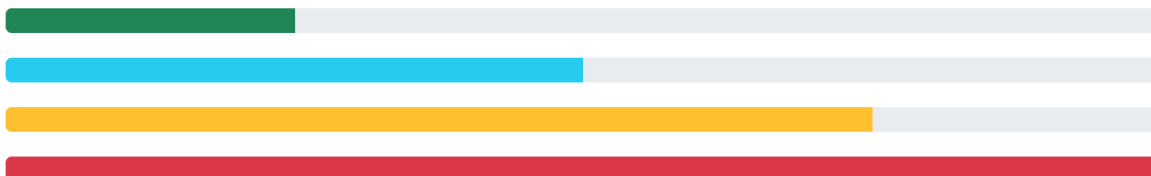


```
<div class="progress">
  <div class="progress-bar bg-success" role="progressbar" style="width: 25%;" aria-valuenow="25" aria-valuemin="0" aria-valuemax="100"></div>
<div class="progress">
  <div class="progress-bar bg-info" role="progressbar" style="width: 50%;" aria-valuenow="50" aria-valuemin="0" aria-valuemax="100"></div>
<div class="progress">
  <div class="progress-bar bg-warning" role="progressbar" style="width: 75%;" aria-valuenow="75" aria-valuemin="0" aria-valuemax="100"></div>
<div class="progress">
  <div class="progress-bar bg-danger" role="progressbar" style="width: 100%;" aria-valuenow="100" aria-valuemin="0" aria-valuemax="100"></div>
```

## Bir nechta (multiple) progress



```
<div class="progress">
  <div class="progress-bar" role="progressbar" style="width: 15%;" aria-valuenow="15" aria-valuemin="0" aria-valuemax="100"></div>
  <div class="progress-bar bg-success" role="progressbar" style="width: 30%;" aria-valuenow="30" aria-valuemin="0" aria-valuemax="100"></div>
  <div class="progress-bar bg-info" role="progressbar" style="width: 20%;" aria-valuenow="20" aria-valuemin="0" aria-valuemax="100"></div>
</div>
```

## Yo'l-yo'l (striped) progress

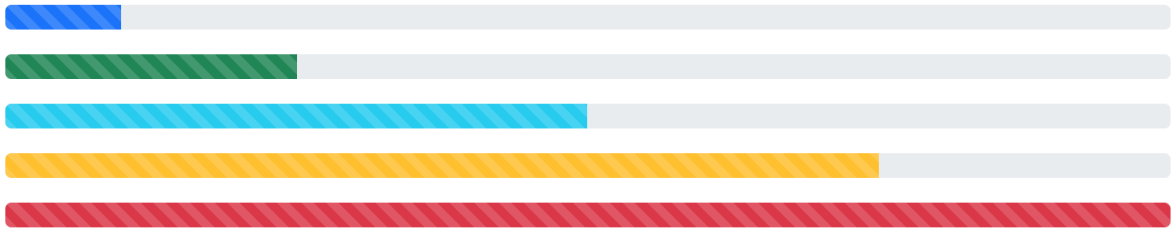

```
<div class="progress">
  <div class="progress-bar progress-bar-striped" role="progressbar" style="width: 10%" aria-valuenow="10" aria-valuemin="0" aria-valuem
</div>
<div class="progress">
  <div class="progress-bar progress-bar-striped bg-success" role="progressbar" style="width: 25%" aria-valuenow="25" aria-valuemin="0"
</div>
<div class="progress">
  <div class="progress-bar progress-bar-striped bg-info" role="progressbar" style="width: 50%" aria-valuenow="50" aria-valuemin="0" ari
</div>
<div class="progress">
  <div class="progress-bar progress-bar-striped bg-warning" role="progressbar" style="width: 75%" aria-valuenow="75" aria-valuemin="0"
</div>
<div class="progress">
  <div class="progress-bar progress-bar-striped bg-danger" role="progressbar" style="width: 100%" aria-valuenow="100" aria-valuemin="0"
</div>
```

## Animatsiyali progress



```
<div class="progress">
  <div class="progress-bar progress-bar-striped progress-bar-animated" role="progressbar" aria-valuenow="75" aria-valuemin="0" aria-val
</div>
```

### Progress

Progress components are built with two HTML elements, some CSS to set the width, and a few attributes. We don't use the HTML5 element, ensuring you can stack progress bars, animate them, and place text labels over them. We use the .progress as a wrapper to indicate the max value of the

**B** <https://getbootstrap.com/docs/5.0/components/progress/>

