

ARTI 403 – Image Processing

Lab 5: Spatial Filtering – Smoothing and Sharpening

Student: Abdulelah

Images: taken from the scikit-image general-purpose dataset (`skimage.data` , see [gallery](#)) and saved in the `images/` folder.

0. Setup – import libraries and save the images to `images/`

In [1]:

```
import os
import cv2
import numpy as np
import matplotlib.pyplot as plt
from skimage import data, io

os.makedirs('images', exist_ok=True)

# Images from the scikit-image general-purpose dataset
images = {
    'hubble.png': data.hubble_deep_field(),      # RGB - procedural task (unsharp
masking)
    'brick.png': data.brick(),                   # gray - assessment task 1 (box
filter)
    'ihc.png': data.immunohistochemistry(),      # RGB - assessment task 2
(Gaussian filters)
    'coins.png': data.coins(),                   # gray - assessment task 3
(Laplacian sharpening)
}
for name, img in images.items():
    io.imsave(os.path.join('images', name), img, check_contrast=False)
    print(f'{name:12s} shape={img.shape}, dtype={img.dtype}')
```

hubble.png shape=(872, 1000, 3), dtype=uint8
brick.png shape=(512, 512), dtype=uint8
ihc.png shape=(512, 512, 3), dtype=uint8
coins.png shape=(303, 384), dtype=uint8

1. Procedural Task – Unsharp Masking

The manual uses `Parrot.png` ; we use the **Hubble Deep Field** image from scikit-image instead.

sharpened = **f** + **k** · (**f** – **f_{blur}**), with $\sigma = 2$ and $k = 1.5$

In [2]:

```
# Read the image
image = cv2.imread('images/hubble.png')
```

```

image = cv2.cvtColor(image, cv2.COLOR_BGR2RGB) # Convert from BGR to RGB

sigma = 2      # Gaussian sigma
amount = 1.5    # unsharp-mask strength


# Convert image to float32 for processing
image_float = image.astype(np.float32) / 255.0

# Apply Gaussian blur
blurred = cv2.GaussianBlur(image_float, (0, 0), sigmaX=sigma, sigmaY=sigma)

# Perform Unsharp Masking
sharpened = np.clip(image_float + amount * (image_float - blurred), 0, 1)

fig, ax = plt.subplots(1, 3, figsize=(15, 5))
ax[0].imshow(image);      ax[0].set_title('Original Image')
ax[1].imshow(blurred);    ax[1].set_title('Blurred Image')
ax[2].imshow(sharpened);  ax[2].set_title('Sharpened (Unsharp Masking)')
for a in ax: a.axis('off')
plt.tight_layout(); plt.show()

```

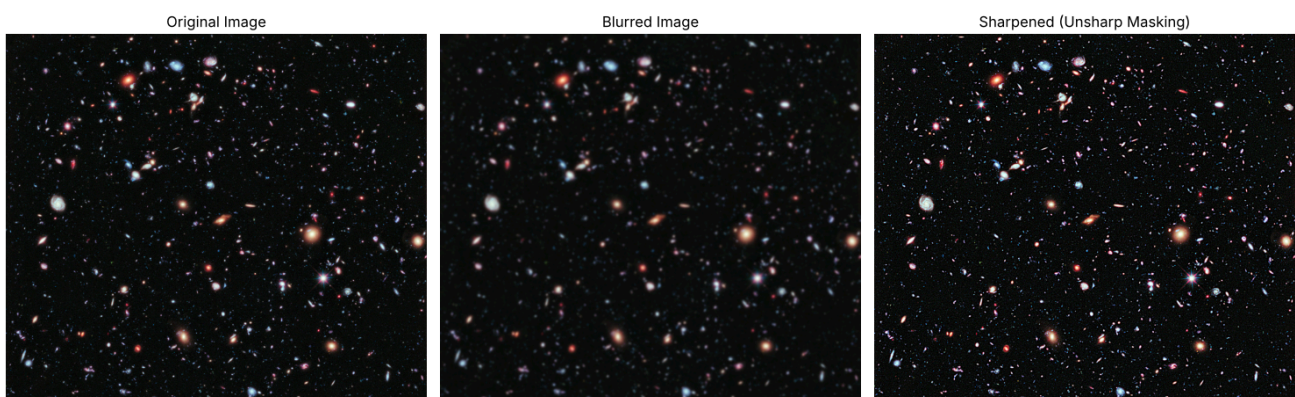

Observation: subtracting the blurred image leaves only the fine details (the *mask*). Adding $1.5\times$ that mask back makes the small galaxies and stars noticeably crisper and brighter against the dark background.

Assessment

Task 1 – Convolve an image with a 7×7 box filter

A box (mean) filter replaces each pixel with the average of its 7×7 neighbourhood: every kernel weight equals $1/49$.

In [3]:

```

img1 = cv2.imread('images/brick.png', cv2.IMREAD_GRAYSCALE)

# 7x7 box kernel (all weights = 1/49)
box_kernel = np.ones((7, 7), np.float32) / 49
print(box_kernel.round(4))

# Convolve the image with the kernel
box_smoothed = cv2.filter2D(img1, -1, box_kernel)

# (Check: same result as OpenCV's built-in box filter)


```

```
print('Same as cv2.blur:', np.array_equal(box_smoothed, cv2.blur(img1, (7, 7))))

fig, ax = plt.subplots(1, 2, figsize=(12, 6))
ax[0].imshow(img1, cmap='gray'); ax[0].set_title('Original Image')
ax[1].imshow(box_smoothed, cmap='gray'); ax[1].set_title('Smoothed - 7x7 Box Filter')
for a in ax: a.axis('off')
plt.tight_layout(); plt.show()
```

```
[[0.0204 0.0204 0.0204 0.0204 0.0204 0.0204 0.0204]
 [0.0204 0.0204 0.0204 0.0204 0.0204 0.0204 0.0204]
 [0.0204 0.0204 0.0204 0.0204 0.0204 0.0204 0.0204]
 [0.0204 0.0204 0.0204 0.0204 0.0204 0.0204 0.0204]
 [0.0204 0.0204 0.0204 0.0204 0.0204 0.0204 0.0204]
 [0.0204 0.0204 0.0204 0.0204 0.0204 0.0204 0.0204]
 [0.0204 0.0204 0.0204 0.0204 0.0204 0.0204 0.0204]]
```

Same as cv2.blur: True

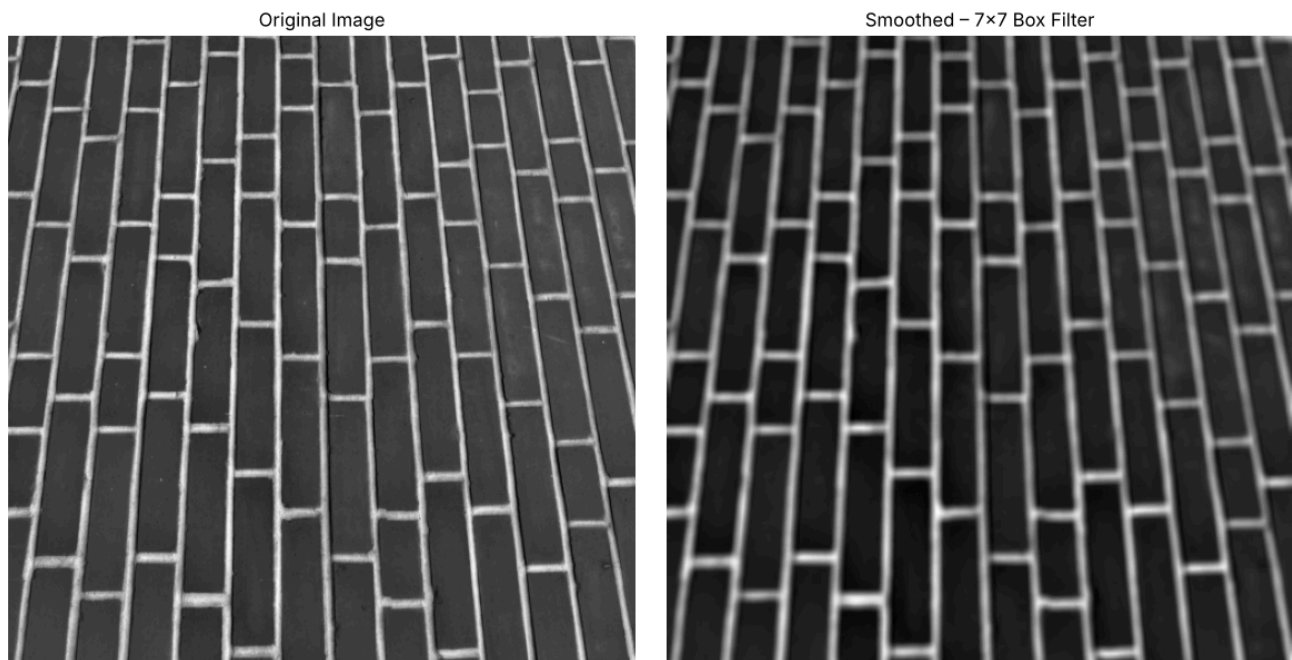

Observation: the 7×7 averaging blurs the image uniformly; the mortar lines between the bricks and the surface texture are smeared out and edges become soft.

Task 2 – 5×5 and 21×21 Gaussian filters

With `sigmaX=0`, OpenCV computes σ from the kernel size: $\sigma = 0.3 \cdot ((k - 1)/2 - 1) + 0.8$.

In [4]:

```
img2 = cv2.imread('images/ihc.png')
img2 = cv2.cvtColor(img2, cv2.COLOR_BGR2RGB)


gauss_5 = cv2.GaussianBlur(img2, (5, 5), 0)
gauss_21 = cv2.GaussianBlur(img2, (21, 21), 0)

for k in (5, 21):
    print(f'{k}x{k} kernel -> sigma = {0.3 * ((k - 1) / 2 - 1) + 0.8:.2f}')

fig, ax = plt.subplots(1, 3, figsize=(18, 6))
ax[0].imshow(img2); ax[0].set_title('Original Image')
ax[1].imshow(gauss_5); ax[1].set_title('Gaussian Filter 5x5')
```

```
ax[2].imshow(gauss_21); ax[2].set_title('Gaussian Filter 21x21')
for a in ax: a.axis('off')
plt.tight_layout(); plt.show()
```

5x5 kernel -> sigma = 1.10
 21x21 kernel -> sigma = 3.50

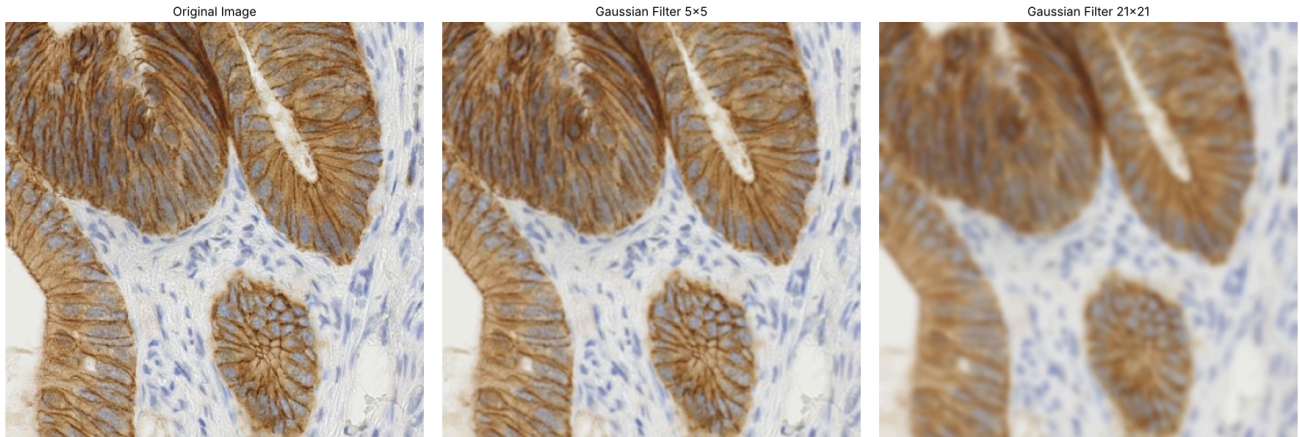

Observation: the 5×5 Gaussian only slightly softens the stained tissue image, while the 21×21 kernel (larger σ) blurs away the individual cells and nuclei. Unlike the box filter, the Gaussian weights the centre pixel most, so the blur looks smoother and more natural.

Task 3 – Sharpening with a 3×3 Laplacian filter

`cv2.Laplacian` with `ksize=1` uses the 3×3 kernel

$$\begin{bmatrix} 0 & 1 & 0 \\ 1 & -4 & 1 \\ 0 & 1 & 0 \end{bmatrix}$$

Because the centre coefficient is negative, the sharpened image is $\mathbf{g} = \mathbf{f} - \nabla^2 \mathbf{f}$.

In [5]:


```
# 1. Read the image
img3 = cv2.imread('images/coins.png', cv2.IMREAD_GRAYSCALE)

# 2. Convert image to float32
image_float = img3.astype(np.float32) / 255.0

# 3. Apply the 3x3 Laplacian
laplacian = cv2.Laplacian(image_float, cv2.CV_32F, ksize=1)

# 4. Sharpen the image
sharpened = np.clip(image_float - laplacian, 0, 1)

# 5. Plot original, Laplacian, and sharpened images
fig, ax = plt.subplots(1, 3, figsize=(18, 6))
ax[0].imshow(image_float, cmap='gray'); ax[0].set_title('Original Image')
ax[1].imshow(laplacian, cmap='gray'); ax[1].set_title('Laplacian Filter (3x3)')
ax[2].imshow(sharpened, cmap='gray', vmin=0, vmax=1)
ax[2].set_title('Sharpened Image')
for a in ax: a.axis('off')
plt.tight_layout(); plt.show()
```

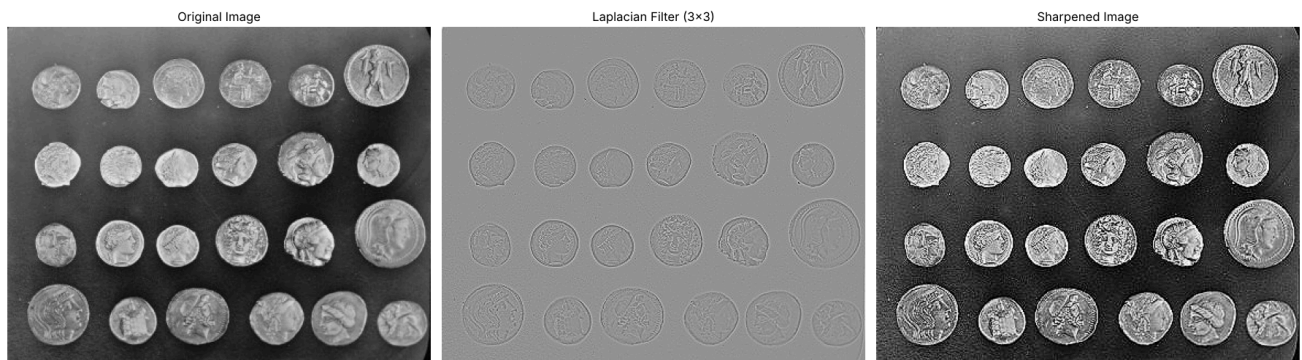

Observation: the Laplacian responds only where intensity changes quickly (coin outlines and the relief on each coin), and is near zero in flat regions. Subtracting it from the original enhances those edges, so the coin edges and engravings appear sharper and more detailed.

Conclusion

- **Smoothing** (box and Gaussian filters) is low-pass filtering: it reduces noise and detail, and the effect grows with kernel size. The Gaussian gives a more natural blur than the box filter.
- **Sharpening** (unsharp masking and the Laplacian) is high-pass enhancement: it extracts edge information and adds it back to the image to boost detail.