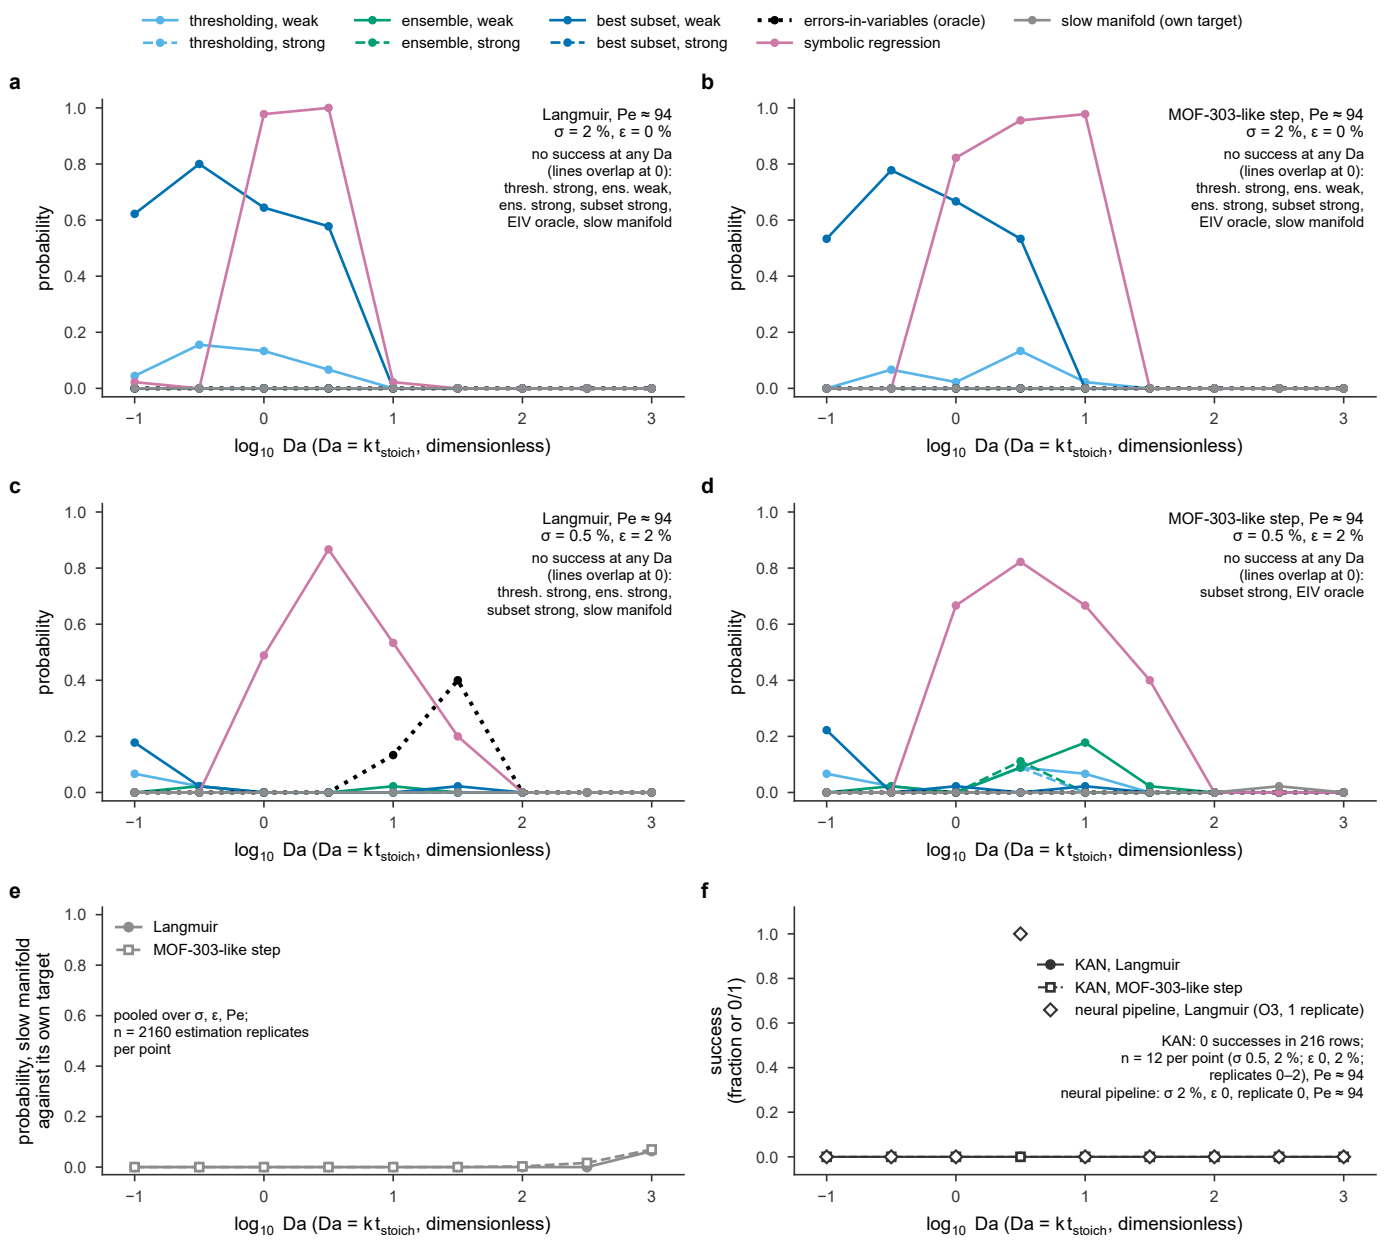

thresholding, weak
thresholding, strong
ensemble, weak
ensemble, strong
best subset, weak
best subset, strong
errors-in-variables (oracle)
symbolic regression
slow manifold (own target)
a
Langmuir, Pe ≈ 94
σ = 2 %, ε = 0 %
no success at any Da
(lines overlap at 0):
thresh. strong, ens. weak,
ens. strong, subset strong,
EIV oracle, slow manifold
b
MOF-303-like step, Pe ≈ 94
σ = 2 %, ε = 0 %
no success at any Da
(lines overlap at 0):
thresh. strong, ens. weak,
ens. strong, subset strong,
EIV oracle, slow manifold
c
Langmuir, Pe ≈ 94
σ = 0.5 %, ε = 2 %
no success at any Da
(lines overlap at 0):
thresh. strong, ens. strong,
subset strong, slow manifold
d
MOF-303-like step, Pe ≈ 94
σ = 0.5 %, ε = 2 %
no success at any Da
(lines overlap at 0):
subset strong, EIV oracle
probability
log10 Da (Da = k tstoich, dimensionless)
e
Langmuir
MOF-303-like step
pooled over σ, ε, Pe;
n = 2160 estimation replicates
per point
probability, slow manifold
against its own target
f
KAN, Langmuir
KAN, MOF-303-like step
neural pipeline, Langmuir (O3, 1 replicate)
KAN: 0 successes in 216 rows;
n = 12 per point (σ 0.5, 2 %; ε 0, 2 %;
replicates 0–2), Pe ≈ 94
neural pipeline: σ 2 %, ε 0, replicate 0, Pe ≈ 94
success
(fraction or 0/1)