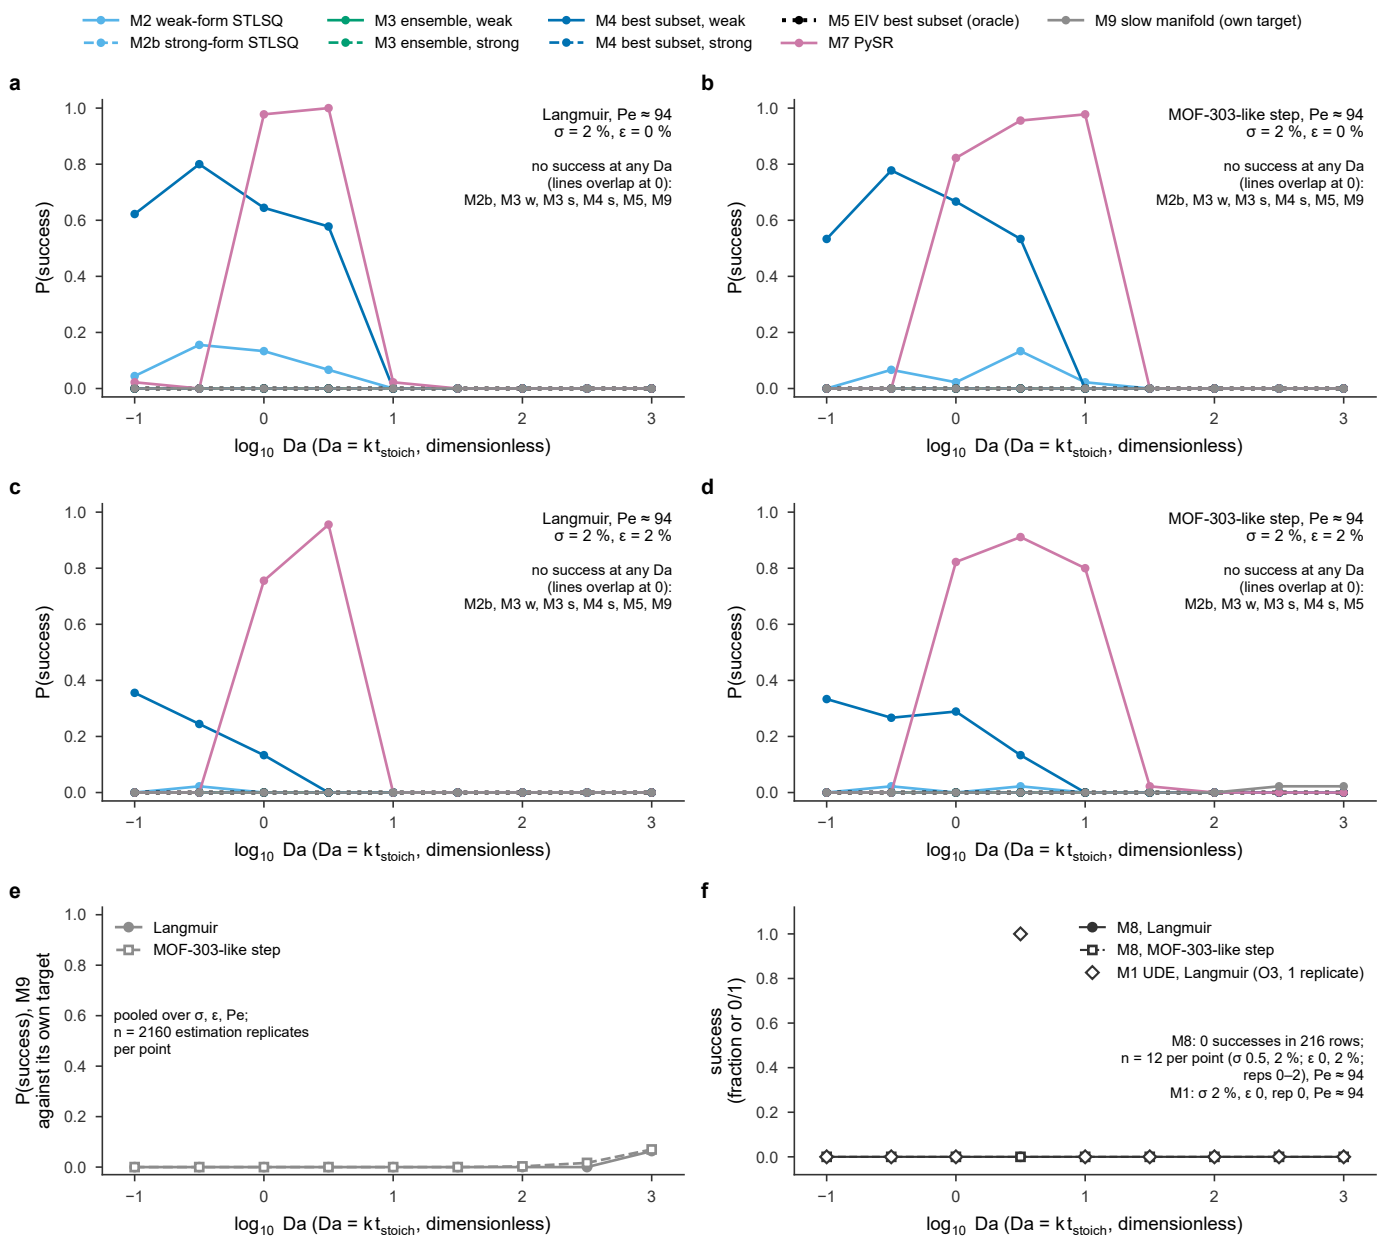

M2 weak-form STLSQ
M2b strong-form STLSQ
M3 ensemble, weak
M3 ensemble, strong
M4 best subset, weak
M4 best subset, strong
M5 EIV best subset (oracle)
M7 PySR
M9 slow manifold (own target)
a
Langmuir, Pe ≈ 94
σ = 2 %, ε = 0 %
no success at any Da
(lines overlap at 0):
M2b, M3 w, M3 s, M4 s, M5, M9
b
MOF-303-like step, Pe ≈ 94
σ = 2 %, ε = 0 %
no success at any Da
(lines overlap at 0):
M2b, M3 w, M3 s, M4 s, M5, M9
c
Langmuir, Pe ≈ 94
σ = 2 %, ε = 2 %
no success at any Da
(lines overlap at 0):
M2b, M3 w, M3 s, M4 s, M5, M9
d
MOF-303-like step, Pe ≈ 94
σ = 2 %, ε = 2 %
no success at any Da
(lines overlap at 0):
M2b, M3 w, M3 s, M4 s, M5
P(success)
log10 Da (Da = k tstoich, dimensionless)
e
Langmuir
MOF-303-like step
pooled over σ, ε, Pe;
n = 2160 estimation replicates
per point
P(success), M9
against its own target
f
M8, Langmuir
M8, MOF-303-like step
M1 UDE, Langmuir (O3, 1 replicate)
M8: 0 successes in 216 rows;
n = 12 per point (σ 0.5, 2 %; ε 0, 2 %;
reps 0–2), Pe ≈ 94
M1: σ 2 %, ε 0, rep 0, Pe ≈ 94
success
(fraction or 0/1)