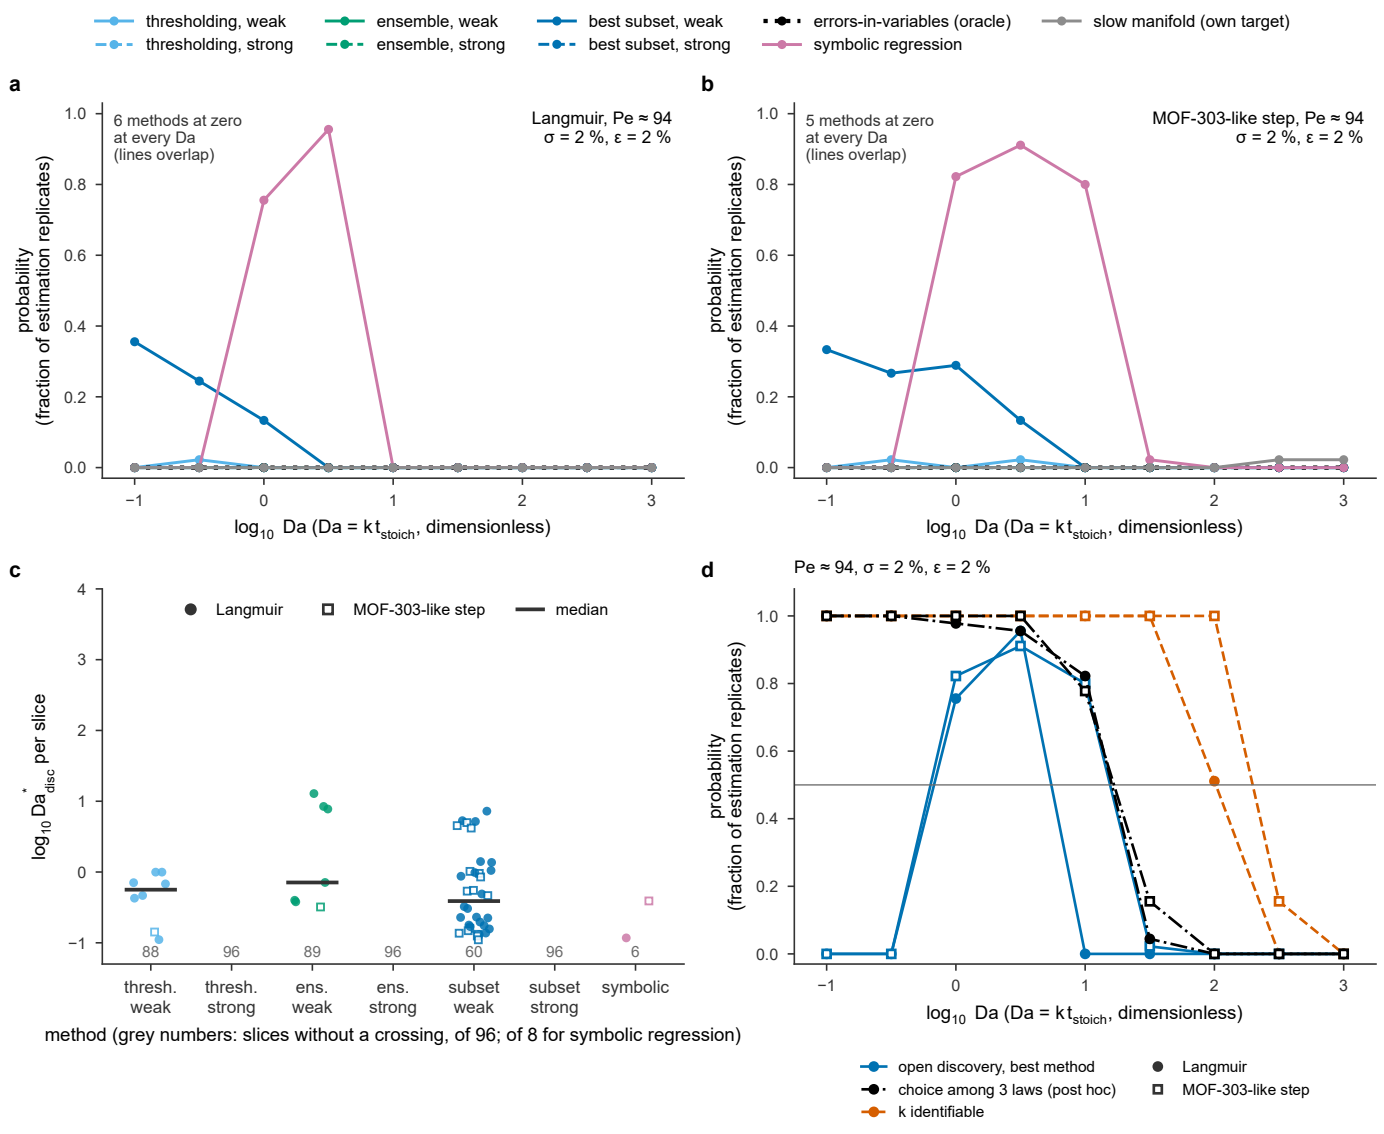

thresholding, weak
thresholding, strong
ensemble, weak
ensemble, strong
best subset, weak
best subset, strong
errors-in-variables (oracle)
symbolic regression
slow manifold (own target)
a
6 methods at zero
at every Da
(lines overlap)
Langmuir, Pe ≈ 94
σ = 2 %, ε = 2 %
probability
(fraction of estimation replicates)
log10 Da (Da = k tstoich, dimensionless)
b
5 methods at zero
at every Da
(lines overlap)
MOF-303-like step, Pe ≈ 94
σ = 2 %, ε = 2 %
c
Langmuir
MOF-303-like step
median
log10 Da*disc per slice
88
96
89
96
60
96
6
thresh. weak
thresh. strong
ens. weak
ens. strong
subset weak
subset strong
symbolic
method (grey numbers: slices without a crossing, of 96; of 8 for symbolic regression)
d
Pe ≈ 94, σ = 2 %, ε = 2 %
open discovery, best method
choice among 3 laws (post hoc)
k identifiable
Langmuir
MOF-303-like step