Workflow

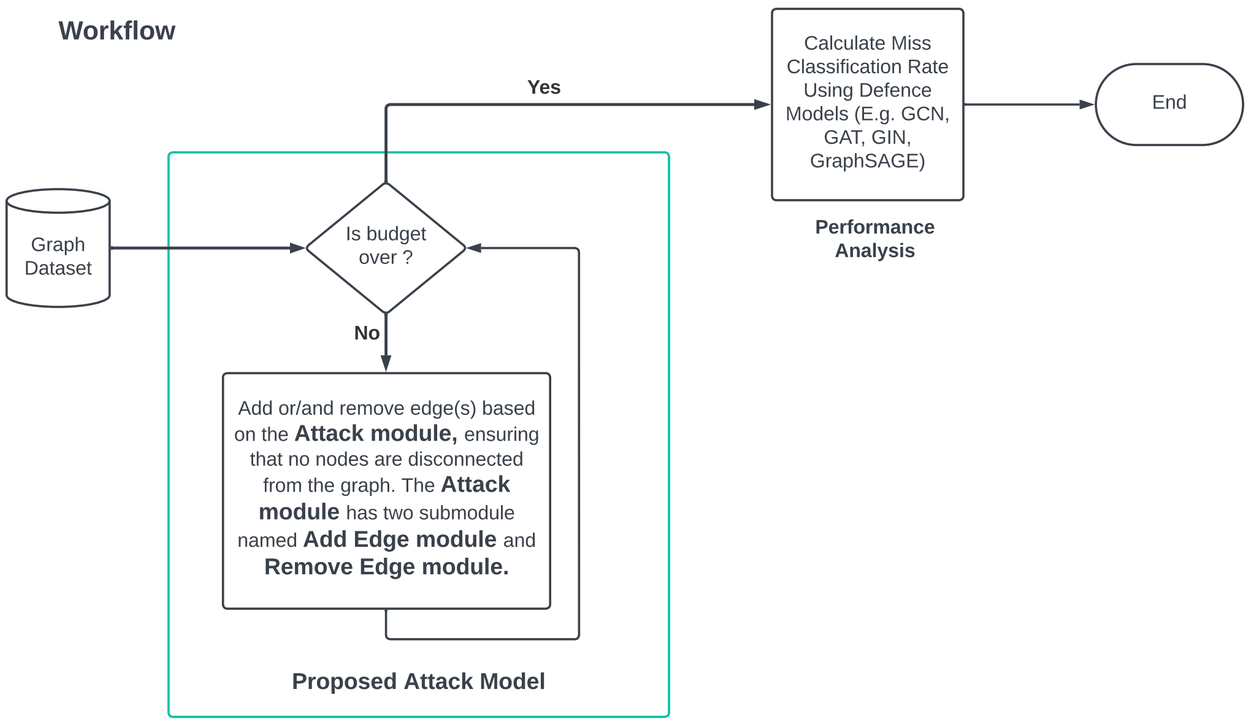

The Attack Module

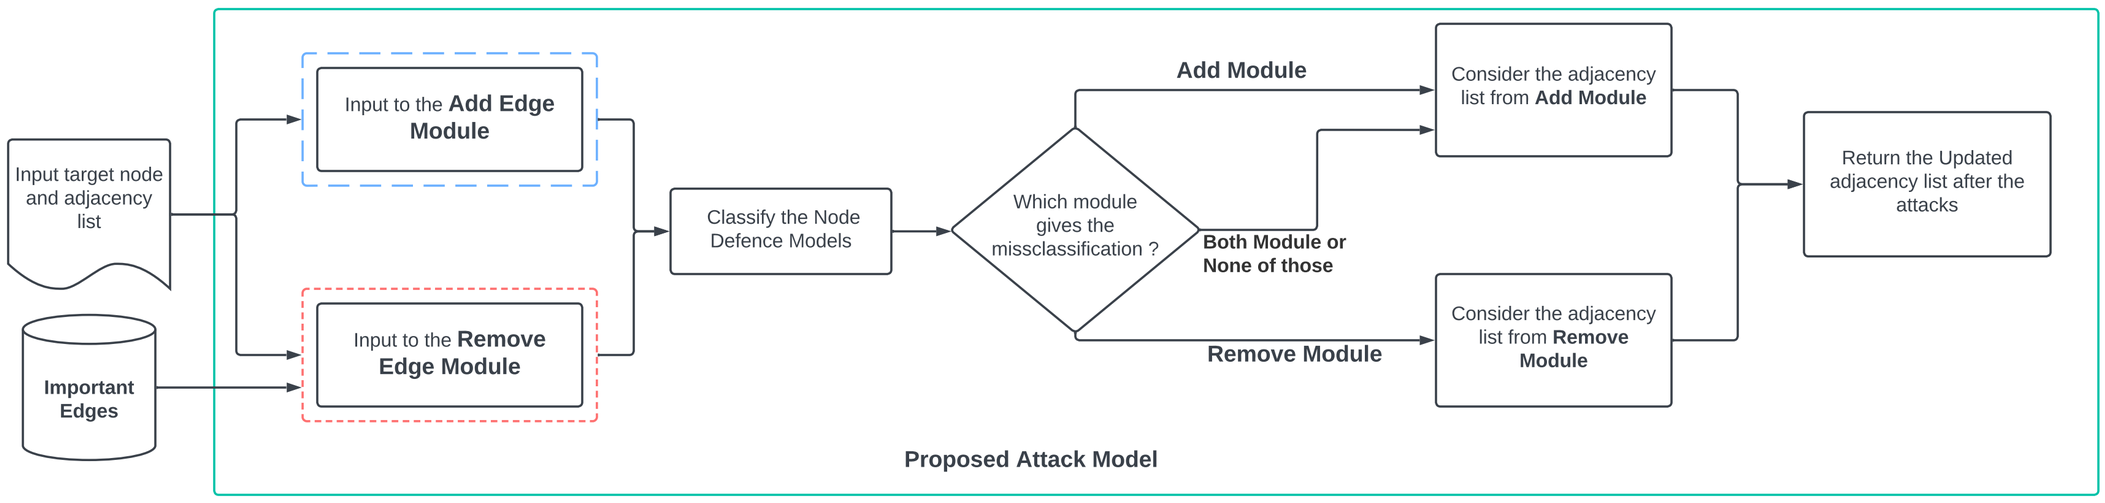

Add Module

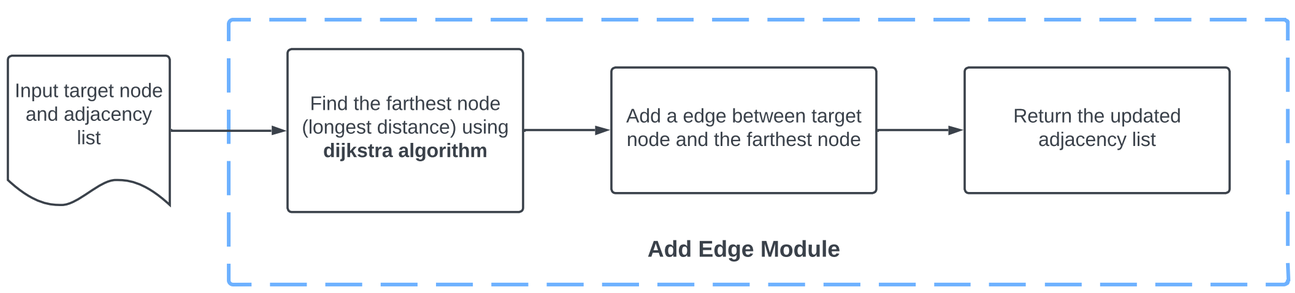

Remove Module

Phase 1: Create a list of Importent Nodes using Graph Autoencoders
(This Phase will run only one time while initialization of the attack model)

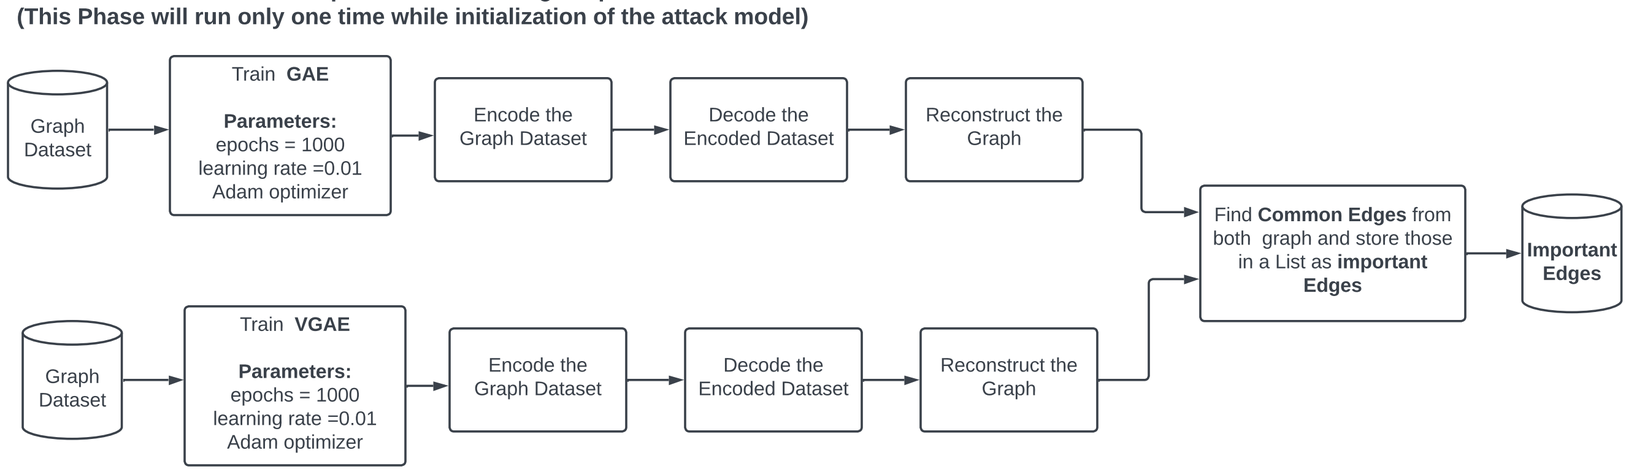
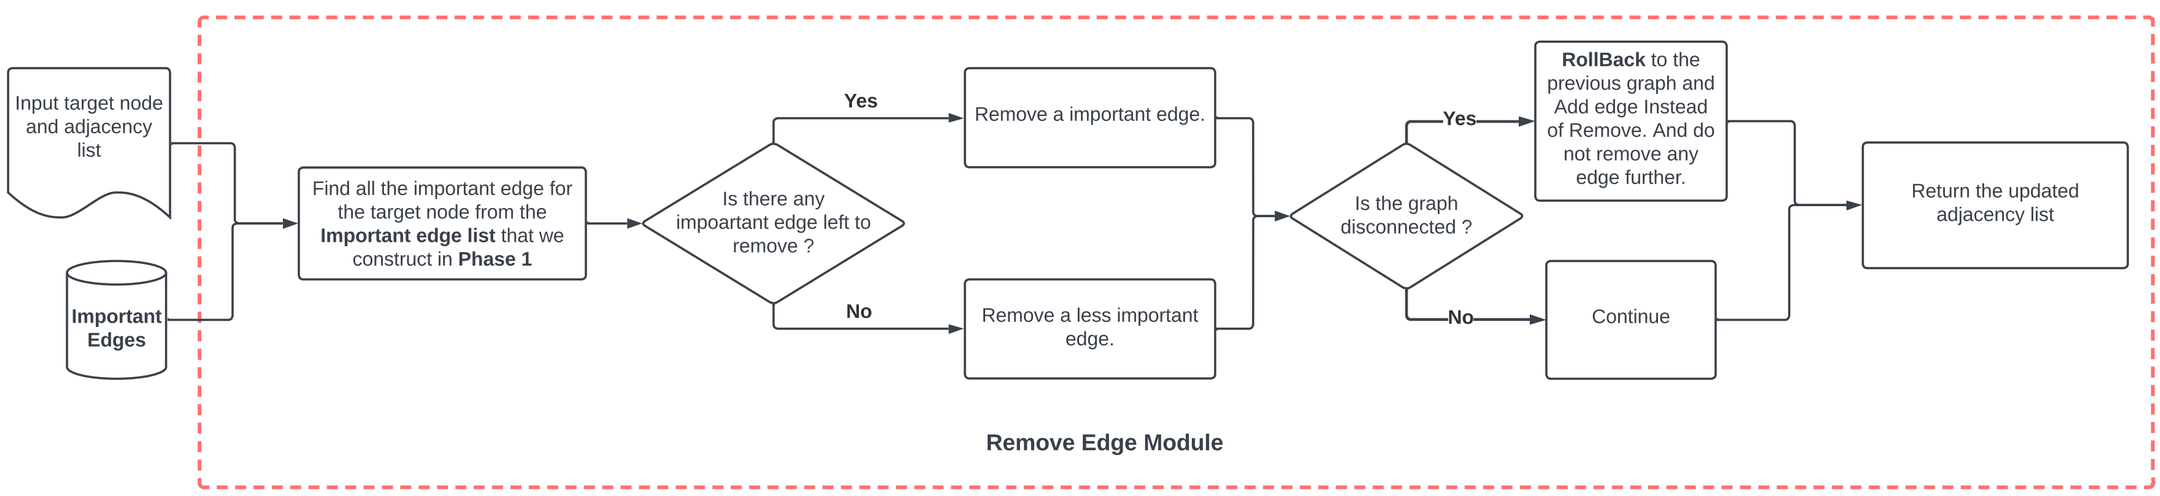
Phase 2: Remove important egde(s) from the Target node