PROGRAMMING FUNDAMENTALS

LABORATORY WORK

Name	M Abdullah
Roll No	44
Section	BSCS(D)
Lab	6

Submitted for academic assessment

9:54 76%

Coding C++

Auto saved at 09:54:08

RUN MENU

```cpp
#include <iostream>
using namespace std;

int main() {
    int a, b, c;


    cout << "Enter 3 numbers: ";
    cin >> a >> b >> c;

    if(a >= b && a >= c) {
        cout << "Largest number is: " << a;
    }
    else if(b >= a && b >= c) {
        cout << "Largest number is: " << b;
    }
    else {
        cout << "Largest number is: " << c;
    }


    return 0;
}
```

+ − ! $ [] ‘’ ()
| ^ . # % < >


CamScanner

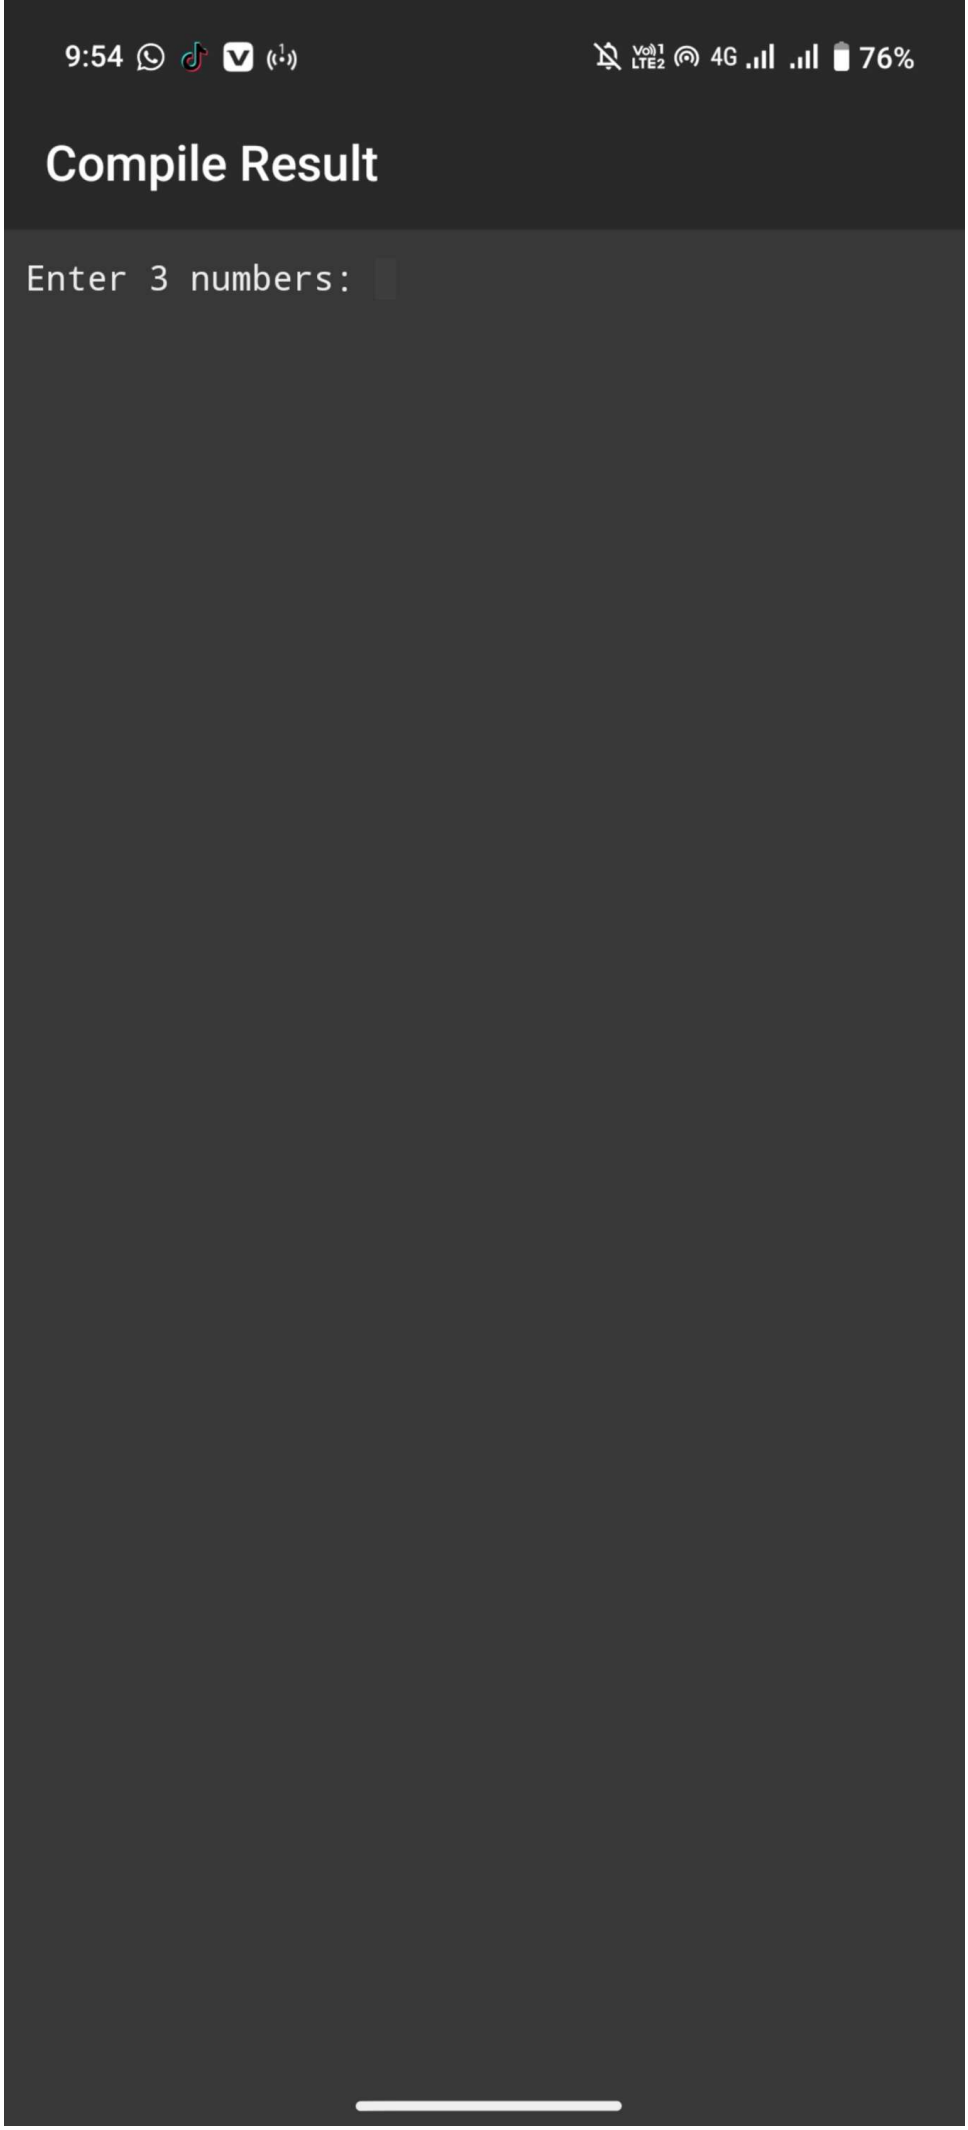


CamScanner

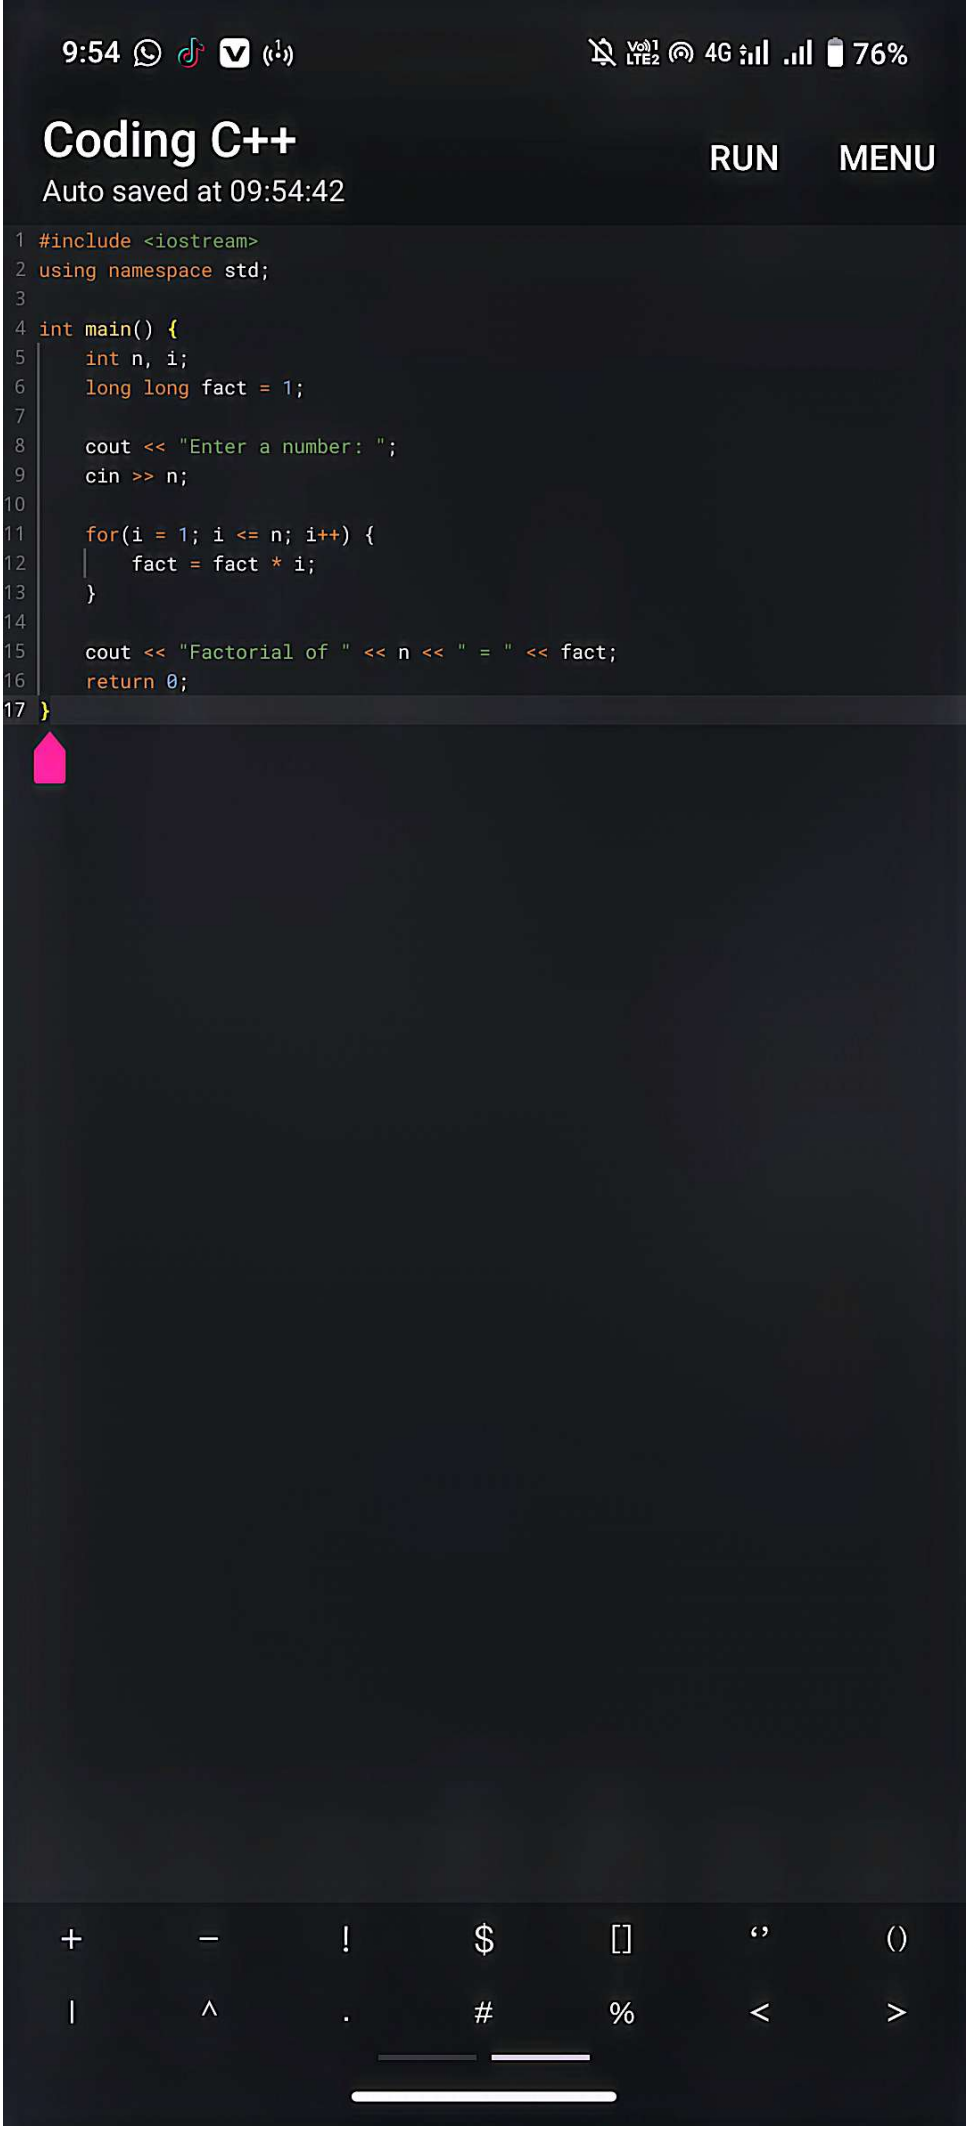
9:54
76%
Coding C++
Auto saved at 09:54:42
RUN
MENU
#include <iostream>
using namespace std;
int main() {
int n, i;
long long fact = 1;
cout << "Enter a number: ";
cin >> n;
for(i = 1; i <= n; i++) {
fact = fact * i;
}
cout << "Factorial of " << n << " = " << fact;
return 0;
}
+ − ! $ [] ‘’ ()
| ^ . # % < >


CamScanner

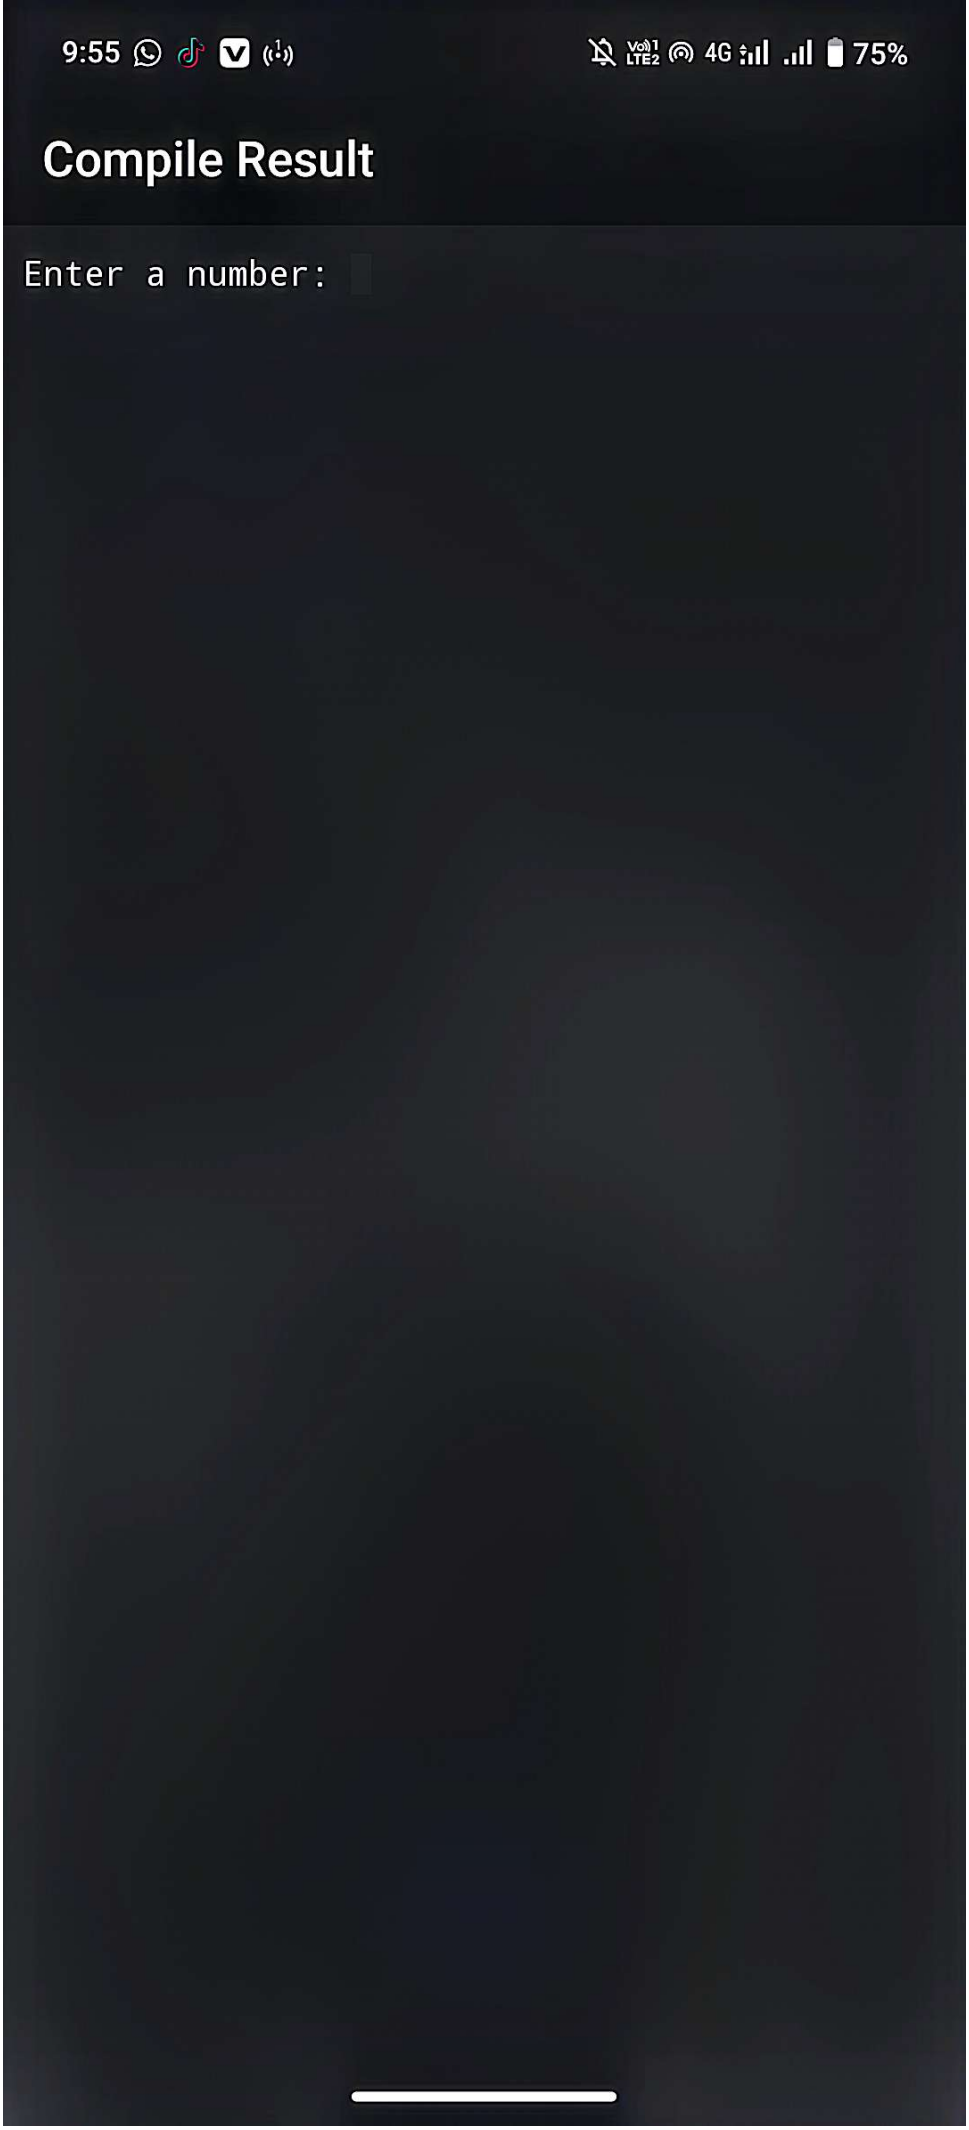

CamScanner

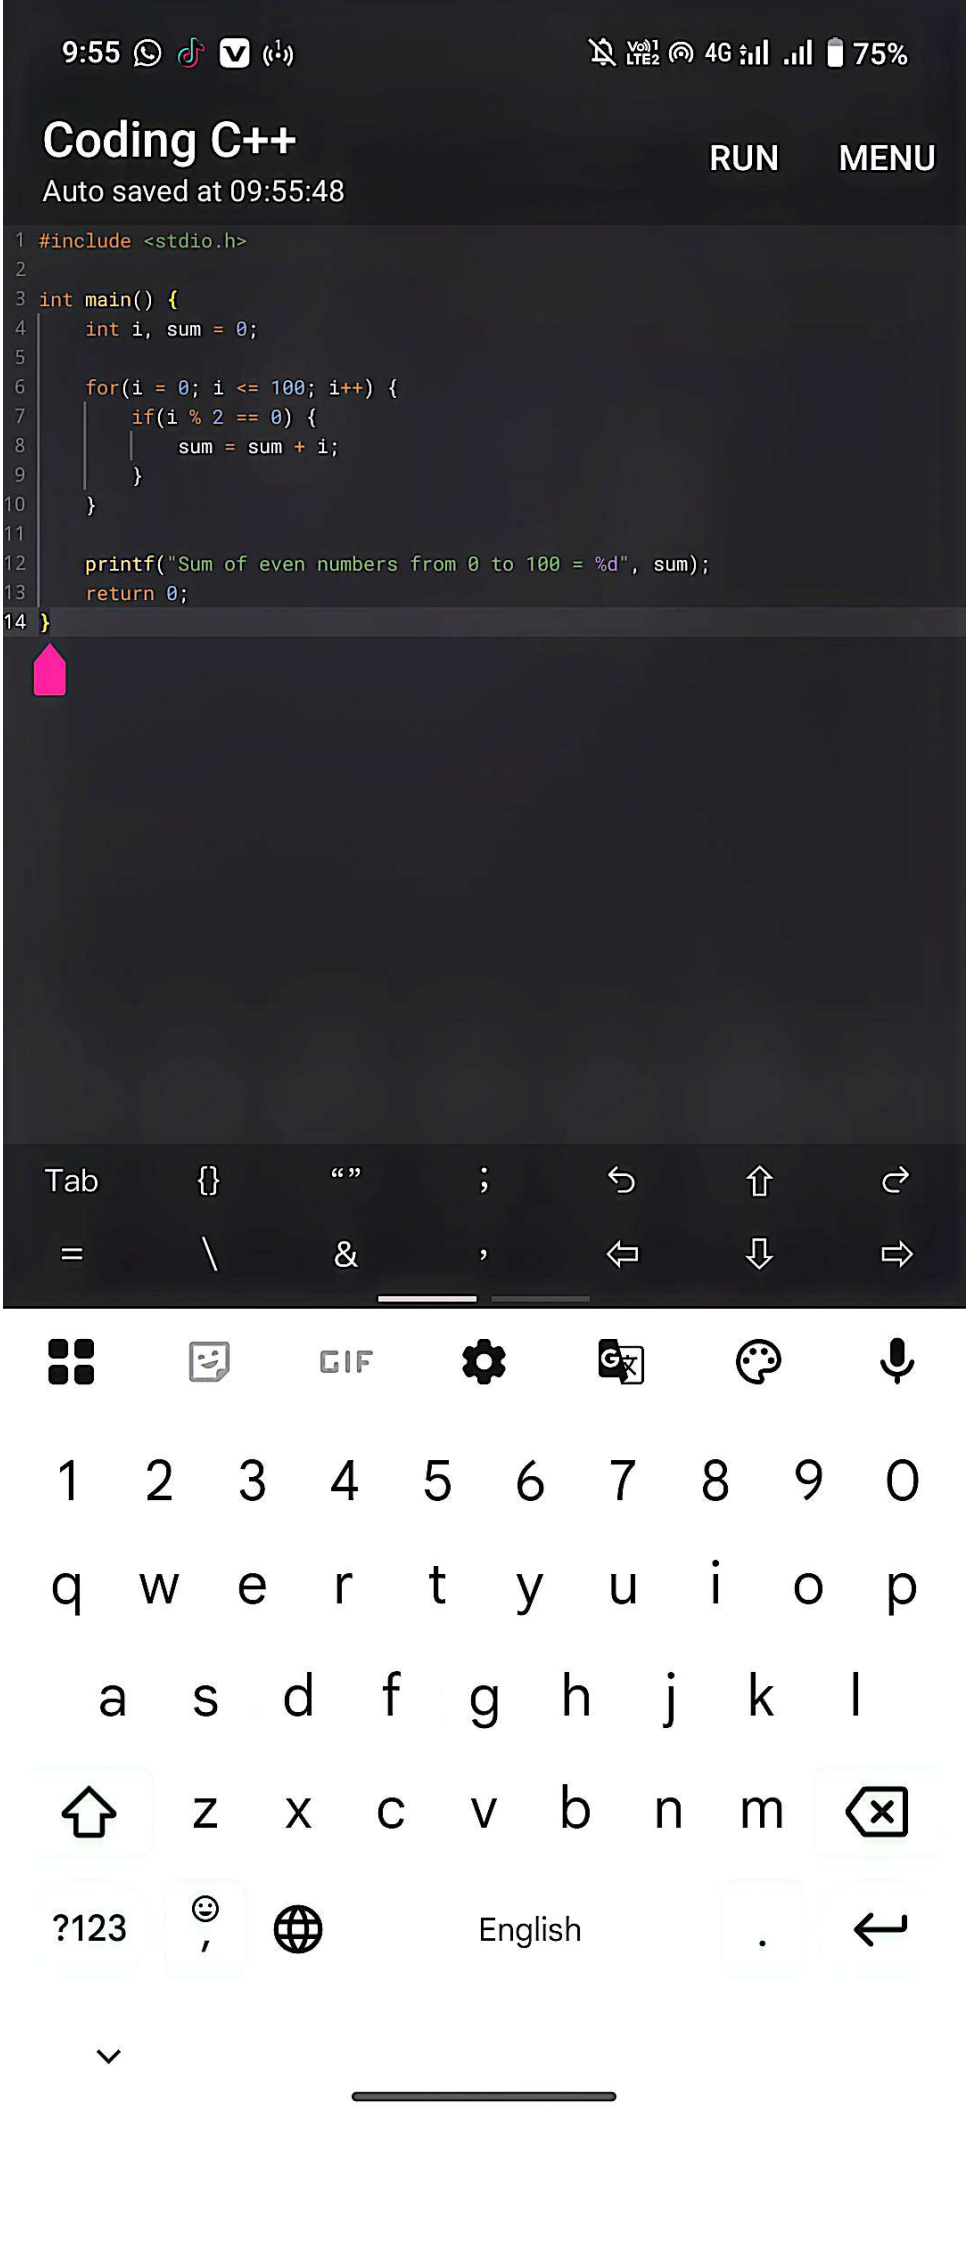
9:55
75%
Coding C++
Auto saved at 09:55:48
RUN
MENU
#include <stdio.h>
int main() {
int i, sum = 0;
for(i = 0; i <= 100; i++) {
if(i % 2 == 0) {
sum = sum + i;
}
}
printf("Sum of even numbers from 0 to 100 = %d", sum);
return 0;
}
Tab
{}
“”
;
=
\
&
,
GIF
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English
.

CamScanner

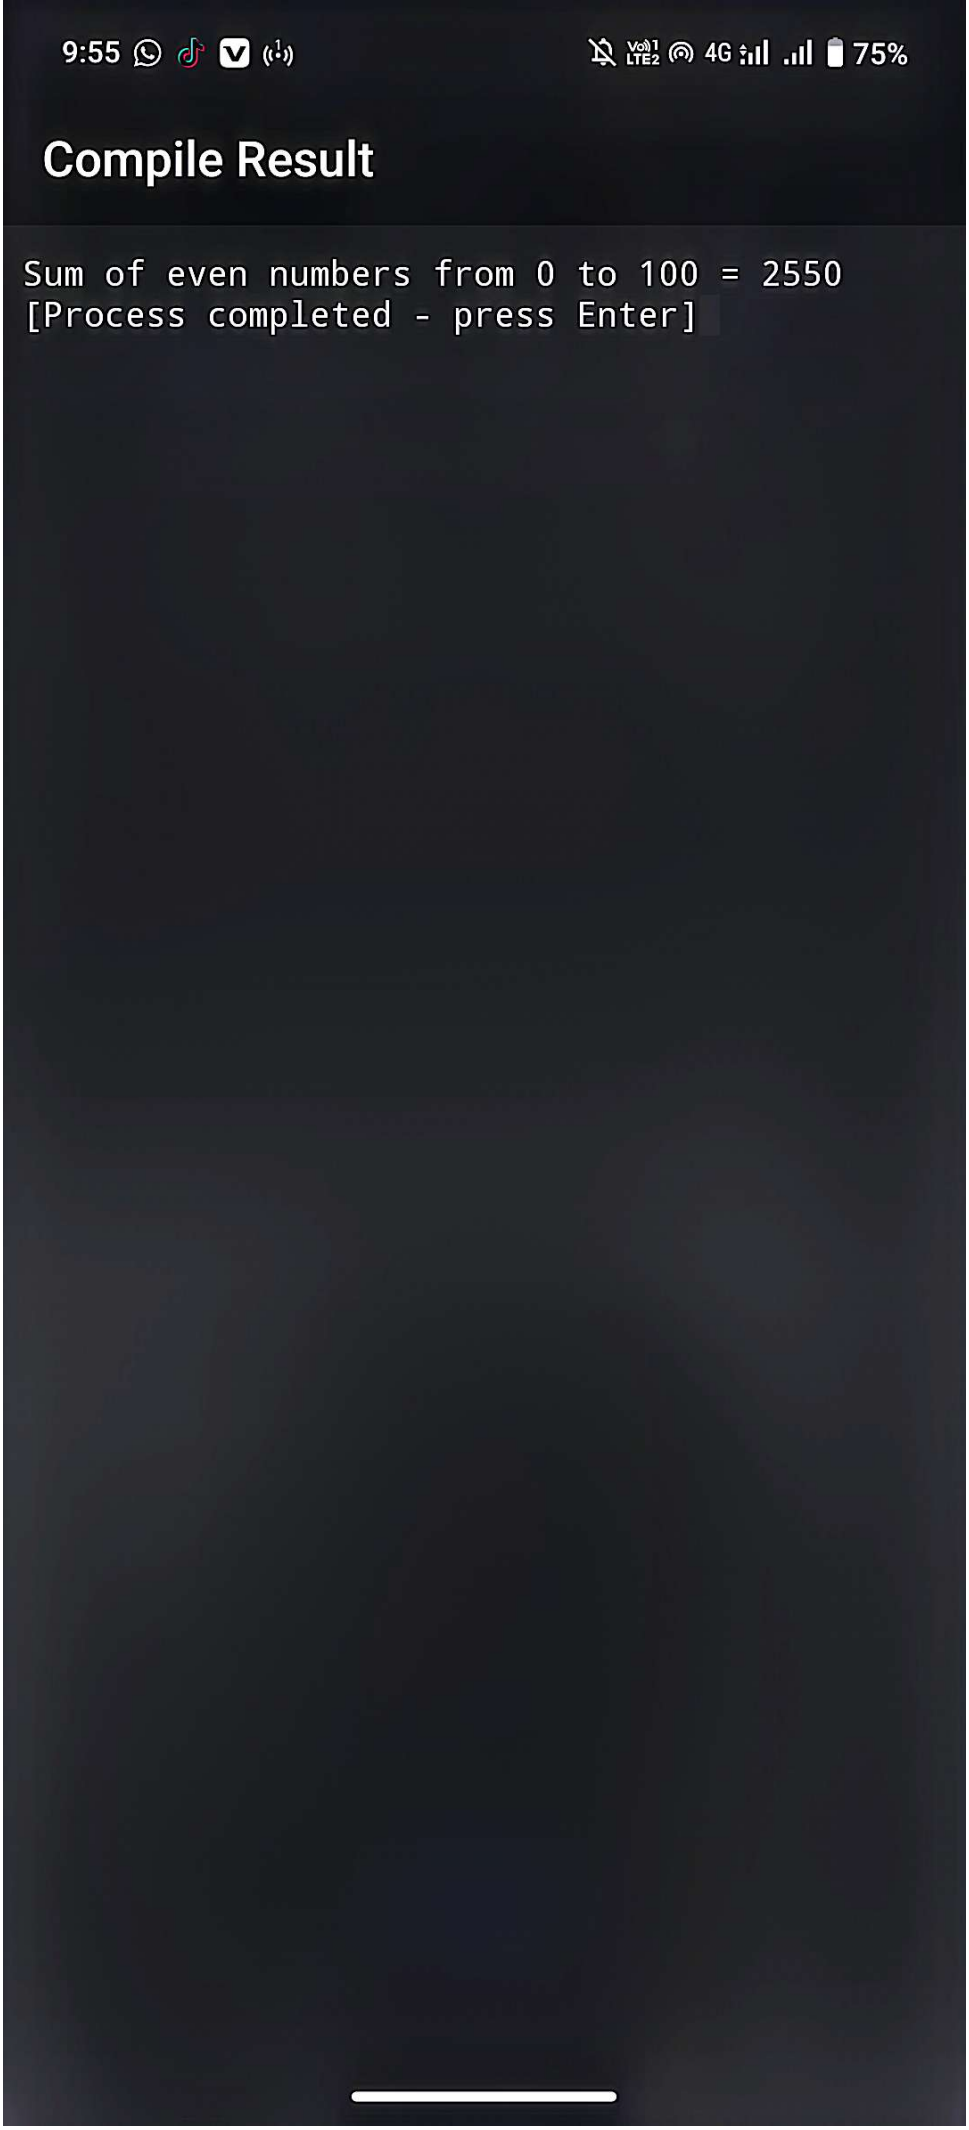
9:55
75%
Compile Result
Sum of even numbers from 0 to 100 = 2550
[Process completed - press Enter]

CamScanner

9:56 75%

Coding C++
Auto saved at 09:56:21
RUN MENU

```cpp
#include <iostream>
#include <cmath>
using namespace std;

int main() {
    float a, b, c;
    float x;

    cout << "Enter value of a, b, c: ";
    cin >> a >> b >> c;


    // Calculate discriminant
    float d = b*b - 4*a*c;

    if(d < 0) {
        cout << "No real solution (negative root)";
    }
    else {
        x = (-b + sqrt(d)) / (2 * a);
        cout << "x = " << x;
    }

    return 0;
}
```

Tab {} “” ;
= \ & ,

CamScanner

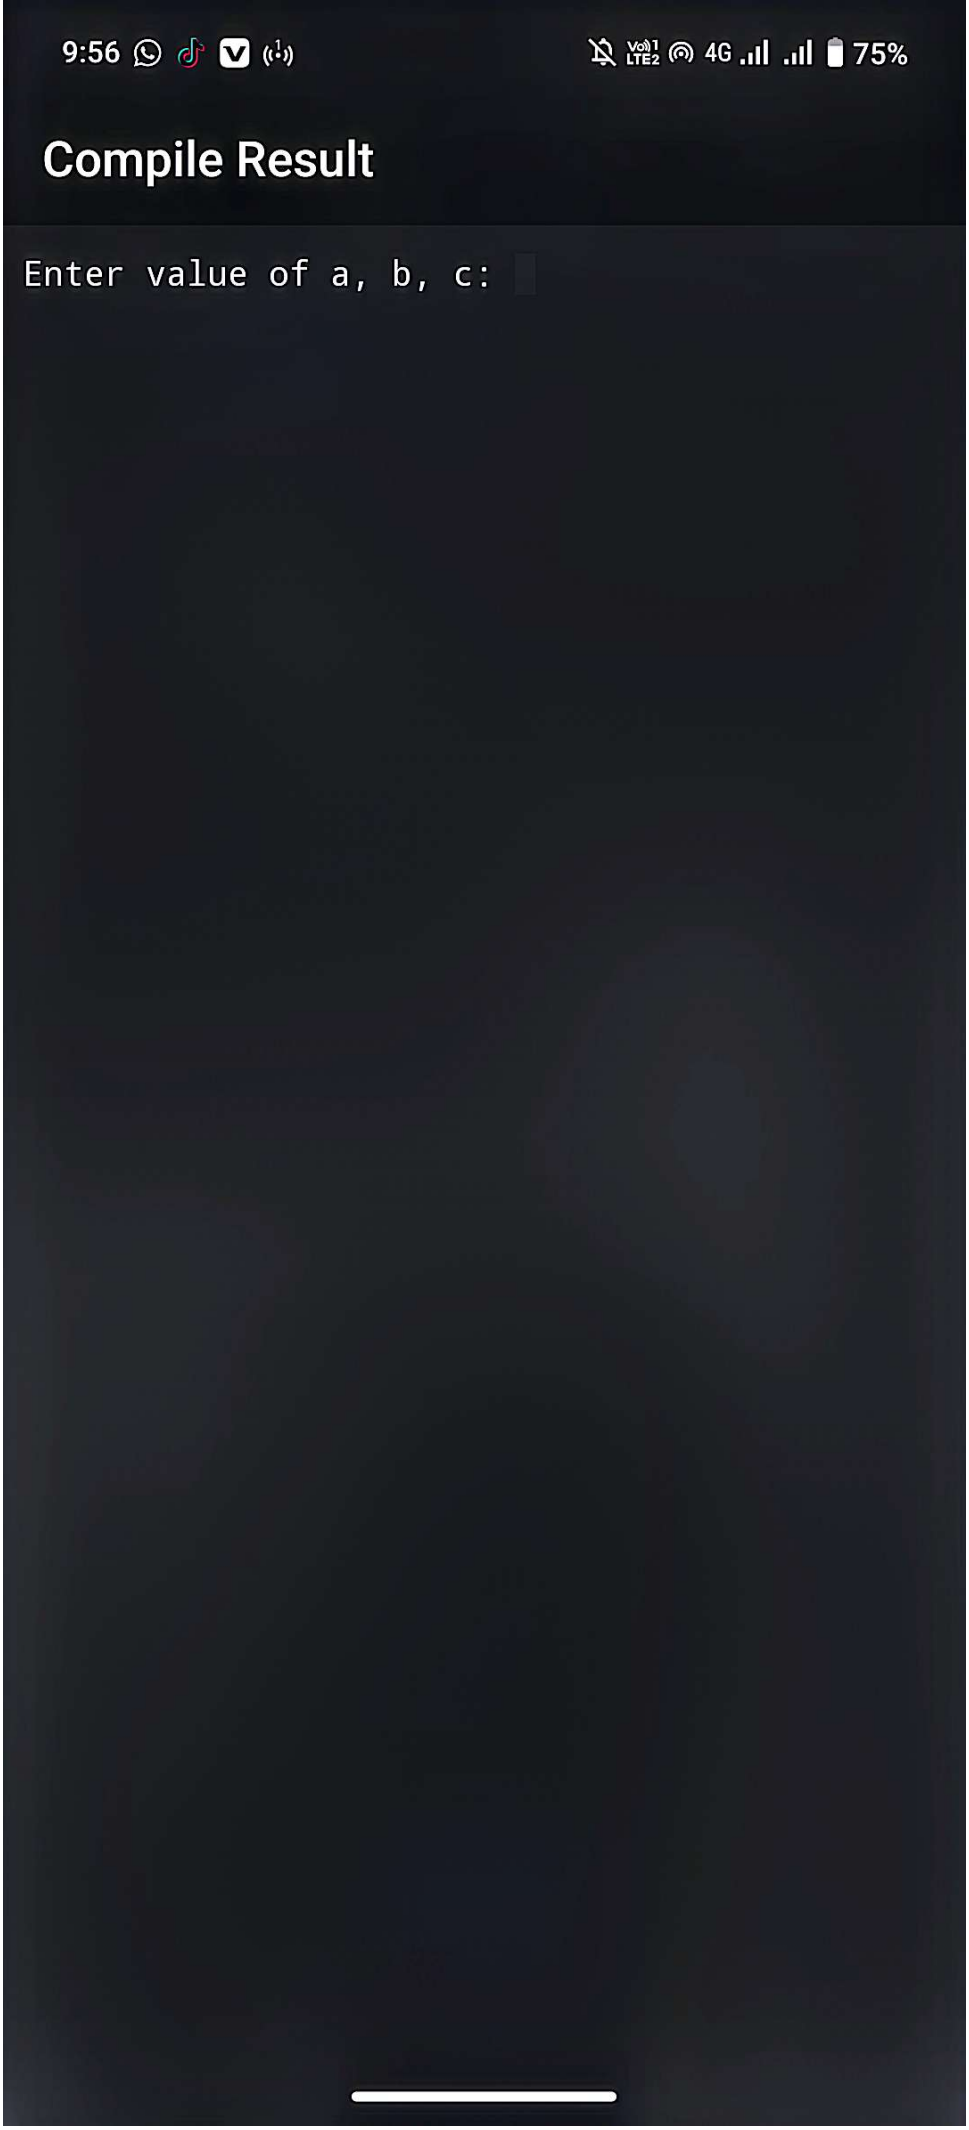

CamScanner

9:57 75%


Coding C++
Auto saved at 09:57:10
RUN MENU

```cpp
        case 3:
            cout << "Roman = III";
            break;
        case 4:
            cout << "Roman = IV";
            break;
        case 5:
            cout << "Roman = V";
            break;
        case 6:
            cout << "Roman = VI";
            break;
        case 7:
            cout << "Roman = VII";
            break;
        case 8:
            cout << "Roman = VIII";
            break;
        case 9:
            cout << "Roman = IX";
            break;
        case 10:
            cout << "Roman = X";
            break;
        default:
            cout << "Invalid number! Enter 1 to 10 only.";
    }

    return 0;
}
```

Tab {} “” ; = \ & ,

CamScanner

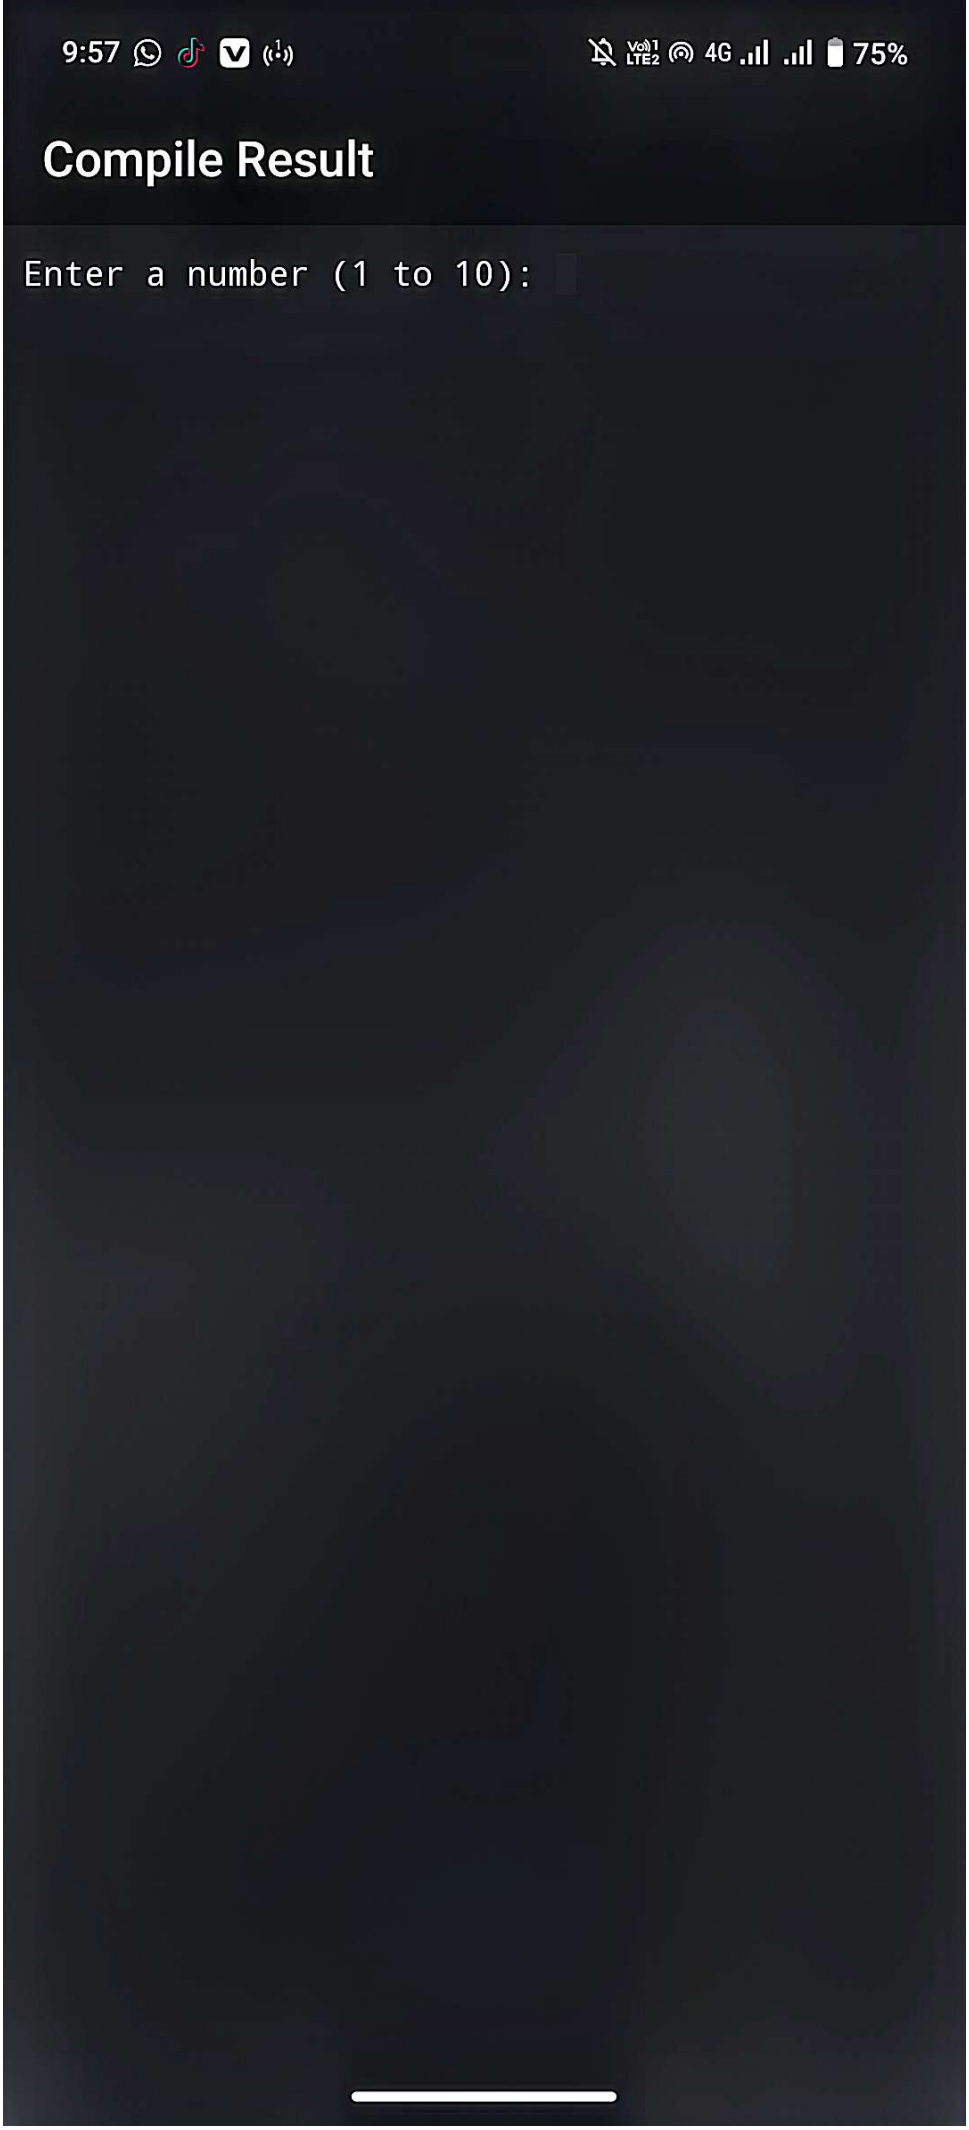

CamScanner

Q. S:①

(15)

Q. N:②

2, 4, 6, 8, 10

Q. No:③

Sum = 0 + 2 + 3 + 4 + 5 = 15

Q. No:④

6

Q. No:⑤

B

Q. No:⑥

Two, three

Q. No:⑦

16

Q. No:⑧

Hello 3 times Print