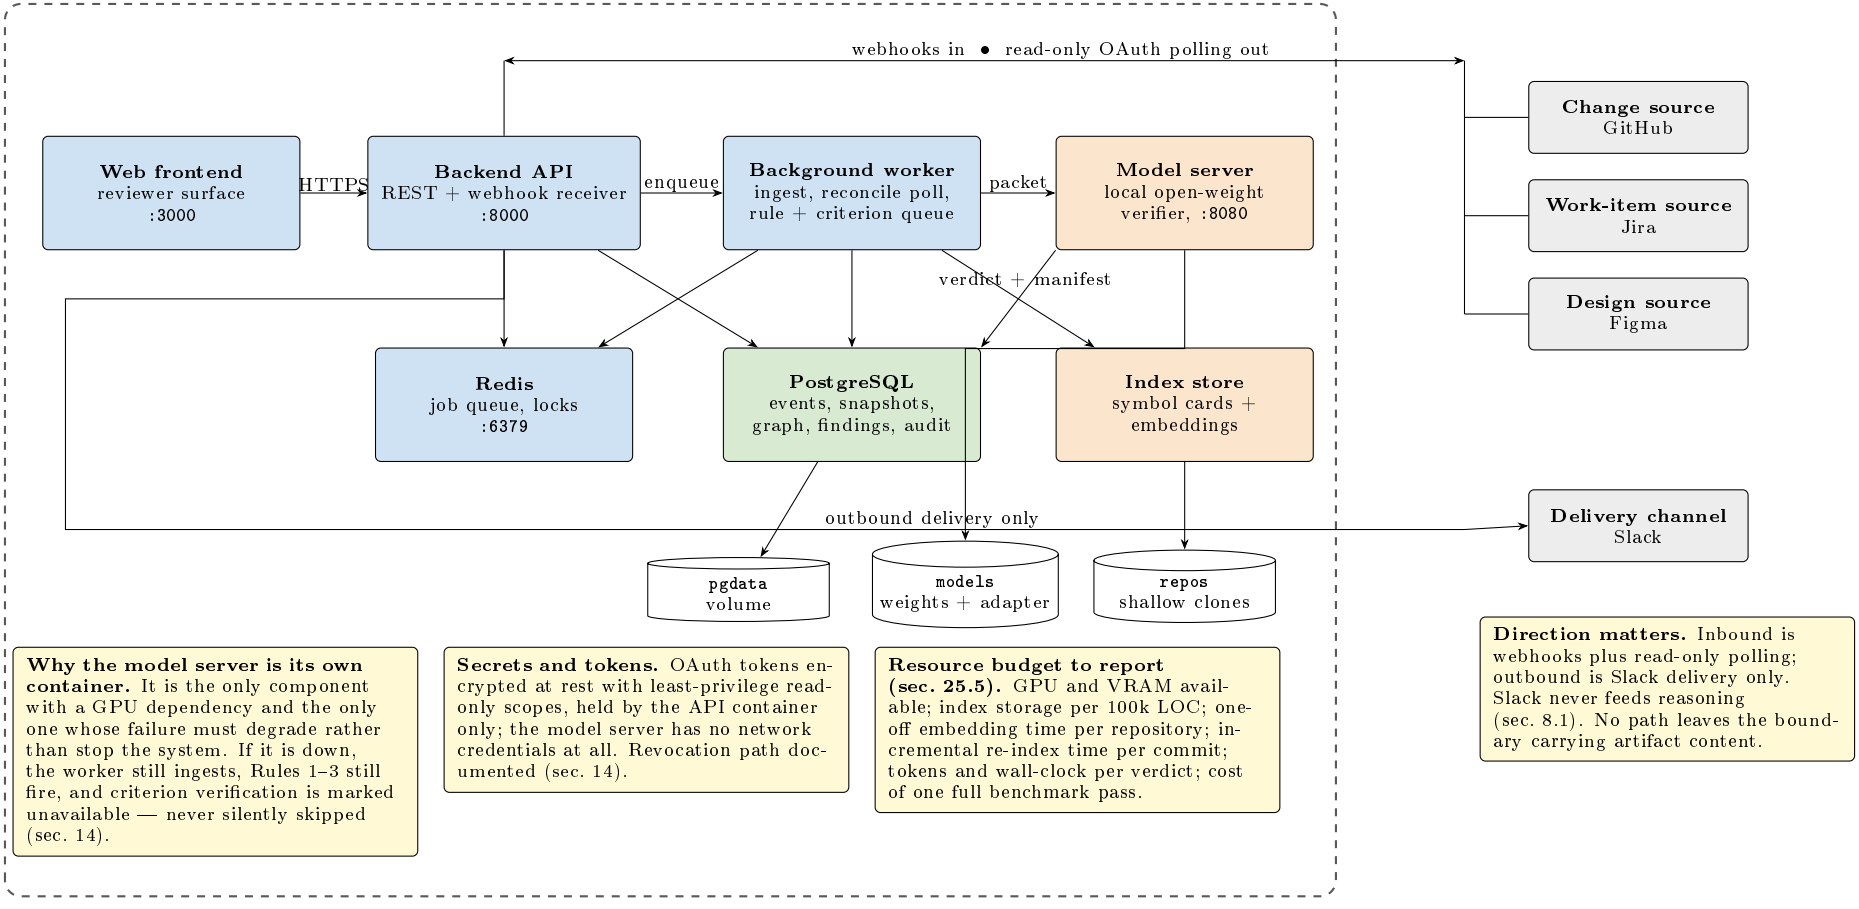

Why the model server is its own container. It is the only component with a GPU dependency and the only one whose failure must degrade rather than stop the system. If it is down, the worker still ingests, Rules 1–3 still fire, and criterion verification is marked unavailable — never silently skipped (sec. 14).

Secrets and tokens. OAuth tokens encrypted at rest with least-privilege read-only scopes, held by the API container only; the model server has no network credentials at all. Revocation path documented (sec. 14).

Resource budget to report (sec. 25.5). GPU and VRAM available; index storage per 100k LOC; one-off embedding time per repository; incremental re-index time per commit; tokens and wall-clock per verdict; cost of one full benchmark pass.

Direction matters. Inbound is webhooks plus read-only polling; outbound is Slack delivery only. Slack never feeds reasoning (sec. 8.1). No path leaves the boundary carrying artifact content.

Deployment boundary — one self-hosted machine or VM (Docker Compose)

No repository, ticket or design content crosses this line.

Degraded modes, demonstrated not asserted. *Model server down* — deterministic rules and unresolved-evidence reporting continue; one full benchmark pass is run with the model server switched off, showing which capabilities survive and which numbers drop (sec. 24.2). *Vendor unreachable* — affected resources move to **SOURCE_STALE** and dependent findings are downgraded (FR-16). *Worker restart* — the checkpoint has not advanced, so events are re-processed and the duplicate branch makes that a no-op (sec. 8.4).

Reproducibility (Gate 5). The whole footprint is one `docker compose up` on declared hardware, and a non-author must be able to stand it up from the repository. Model, adapter, tokenizer, quantisation, prompt schema and retrieval version are pinned and recorded in every verdict (sec. 27.1).