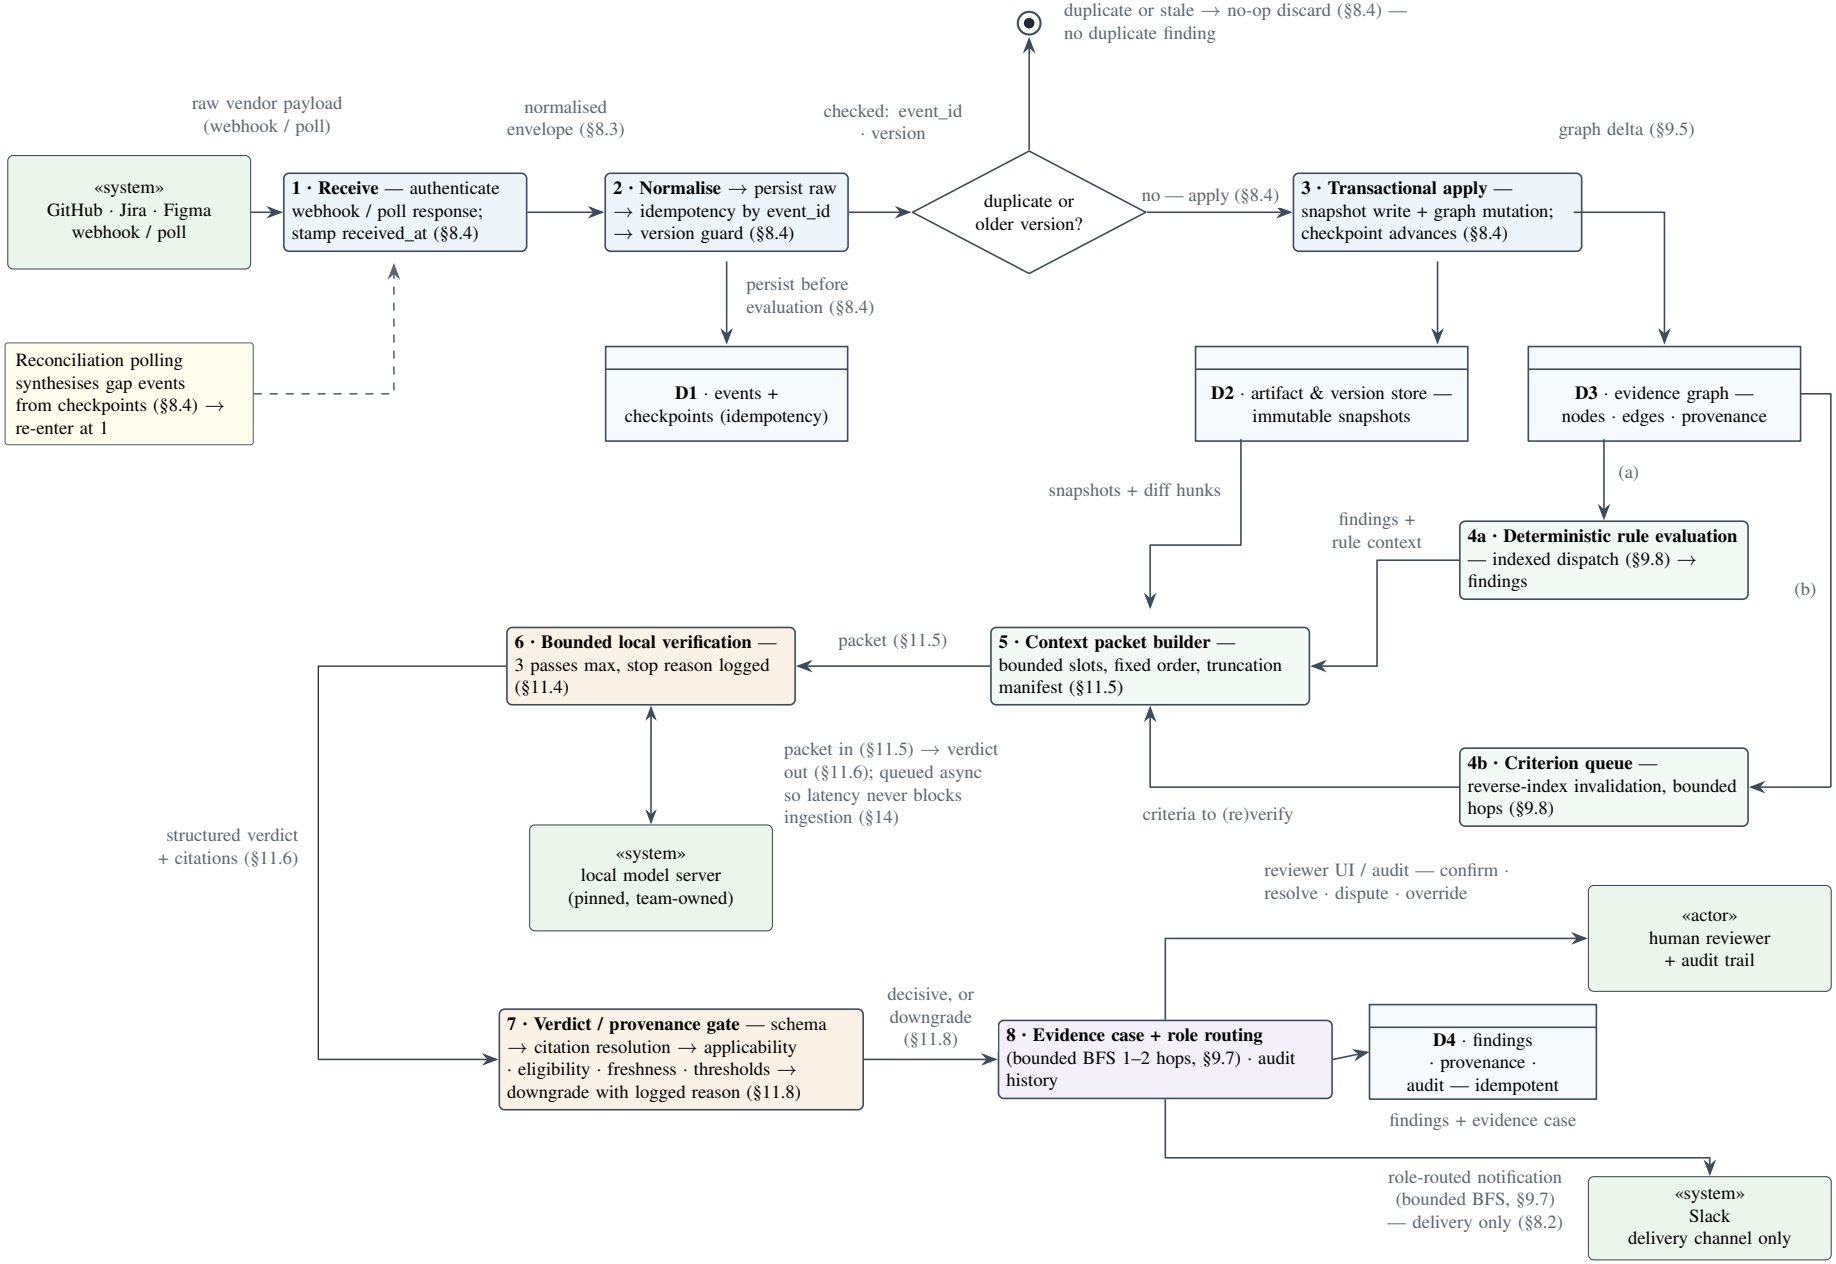
«system»
GitHub · Jira · Figma
webhook / poll
raw vendor payload
(webhook / poll)
1 · Receive — authenticate webhook / poll response; stamp received_at (§8.4)
normalised
envelope (§8.3)
2 · Normalise → persist raw → idempotency by event_id → version guard (§8.4)
checked: event_id · version
duplicate or older version?
duplicate or stale → no-op discard (§8.4) — no duplicate finding
no — apply (§8.4)
3 · Transactional apply — snapshot write + graph mutation; checkpoint advances (§8.4)
graph delta (§9.5)
persist before evaluation (§8.4)
D1 · events + checkpoints (idempotency)
D2 · artifact & version store — immutable snapshots
D3 · evidence graph — nodes · edges · provenance
Reconciliation polling synthesises gap events from checkpoints (§8.4) → re-enter at 1
(a)
snapshots + diff hunks
findings + rule context
4a · Deterministic rule evaluation — indexed dispatch (§9.8) → findings
(b)
6 · Bounded local verification — 3 passes max, stop reason logged (§11.4)
packet (§11.5)
5 · Context packet builder — bounded slots, fixed order, truncation manifest (§11.5)
packet in (§11.5) → verdict out (§11.6); queued async so latency never blocks ingestion (§14)
4b · Criterion queue — reverse-index invalidation, bounded hops (§9.8)
criteria to (re)verify
structured verdict + citations (§11.6)
«system»
local model server
(pinned, team-owned)
reviewer UI / audit — confirm · resolve · dispute · override
«actor»
human reviewer
+ audit trail
7 · Verdict / provenance gate — schema → citation resolution → applicability · eligibility · freshness · thresholds → downgrade with logged reason (§11.8)
decisive, or downgrade (§11.8)
8 · Evidence case + role routing (bounded BFS 1–2 hops, §9.7) · audit history
D4 · findings · provenance · audit — idempotent
findings + evidence case
role-routed notification (bounded BFS, §9.7) — delivery only (§8.2)
«system»
Slack
delivery channel only