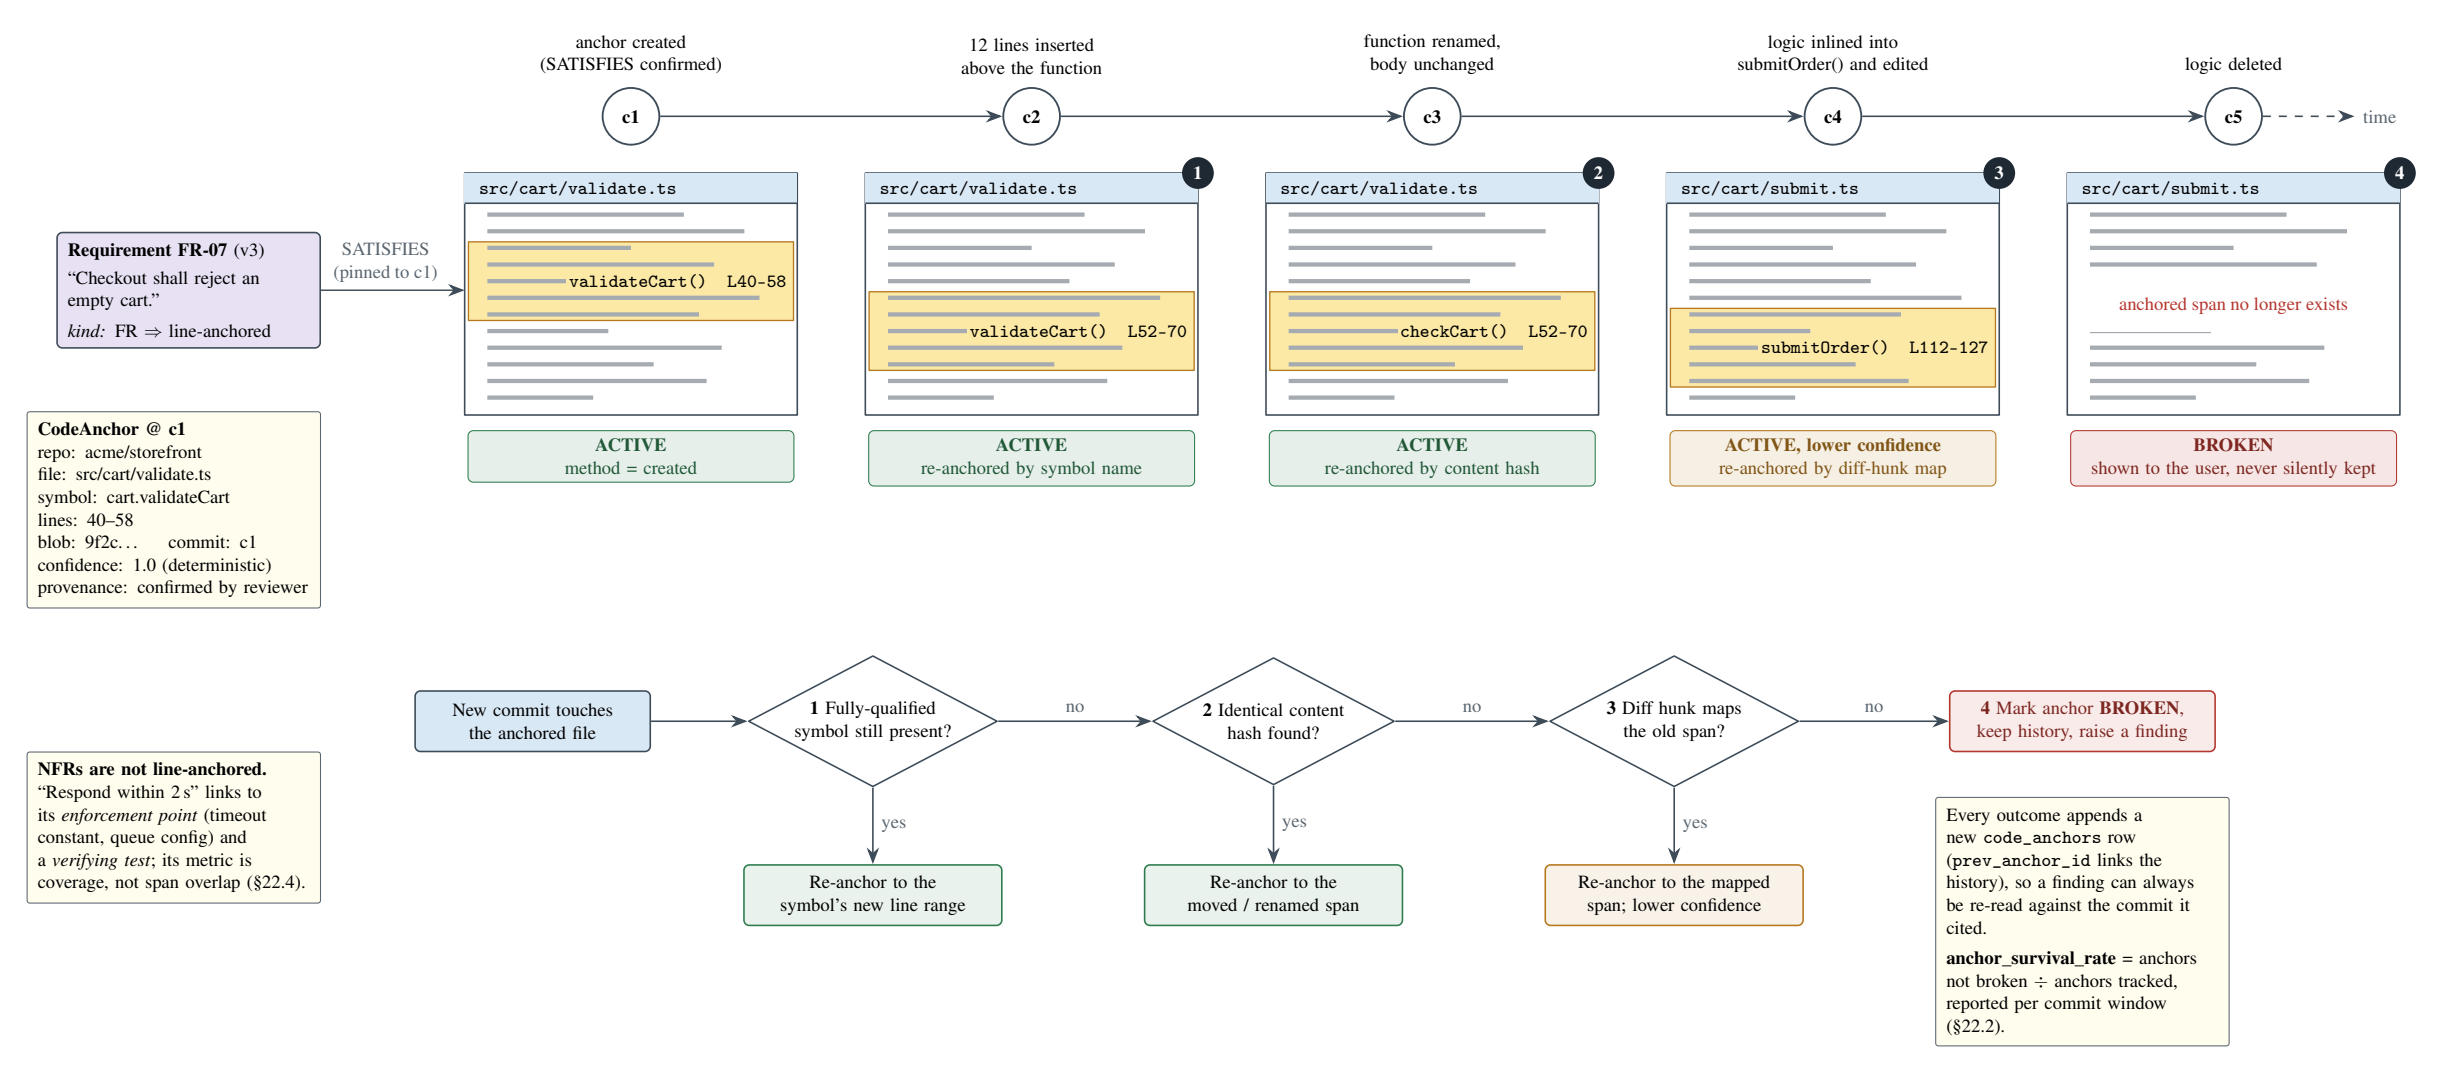

anchor created
(SATISFIES confirmed)
12 lines inserted
above the function
function renamed,
body unchanged
logic inlined into
submitOrder() and edited
logic deleted
c1
c2
c3
c4
c5
time
Requirement FR-07 (v3)
"Checkout shall reject an empty cart."
kind: FR ⇒ line-anchored
SATISFIES
(pinned to c1)
src/cart/validate.ts
validateCart() L40-58
ACTIVE
method = created
1
src/cart/validate.ts
validateCart() L52-70
ACTIVE
re-anchored by symbol name
2
src/cart/validate.ts
checkCart() L52-70
ACTIVE
re-anchored by content hash
3
src/cart/submit.ts
submitOrder() L112-127
ACTIVE, lower confidence
re-anchored by diff-hunk map
4
src/cart/submit.ts
anchored span no longer exists
BROKEN
shown to the user, never silently kept
CodeAnchor @ c1
repo: acme/storefront
file: src/cart/validate.ts
symbol: cart.validateCart
lines: 40–58
blob: 9f2c… commit: c1
confidence: 1.0 (deterministic)
provenance: confirmed by reviewer
New commit touches the anchored file
1 Fully-qualified symbol still present?
no
2 Identical content hash found?
no
3 Diff hunk maps the old span?
no
4 Mark anchor BROKEN, keep history, raise a finding
yes
Re-anchor to the symbol's new line range
yes
Re-anchor to the moved / renamed span
yes
Re-anchor to the mapped span; lower confidence
NFRs are not line-anchored.
"Respond within 2 s" links to its enforcement point (timeout constant, queue config) and a verifying test; its metric is coverage, not span overlap (§22.4).
Every outcome appends a new code_anchors row (prev_anchor_id links the history), so a finding can always be re-read against the commit it cited.
anchor_survival_rate = anchors not broken ÷ anchors tracked, reported per commit window (§22.2).