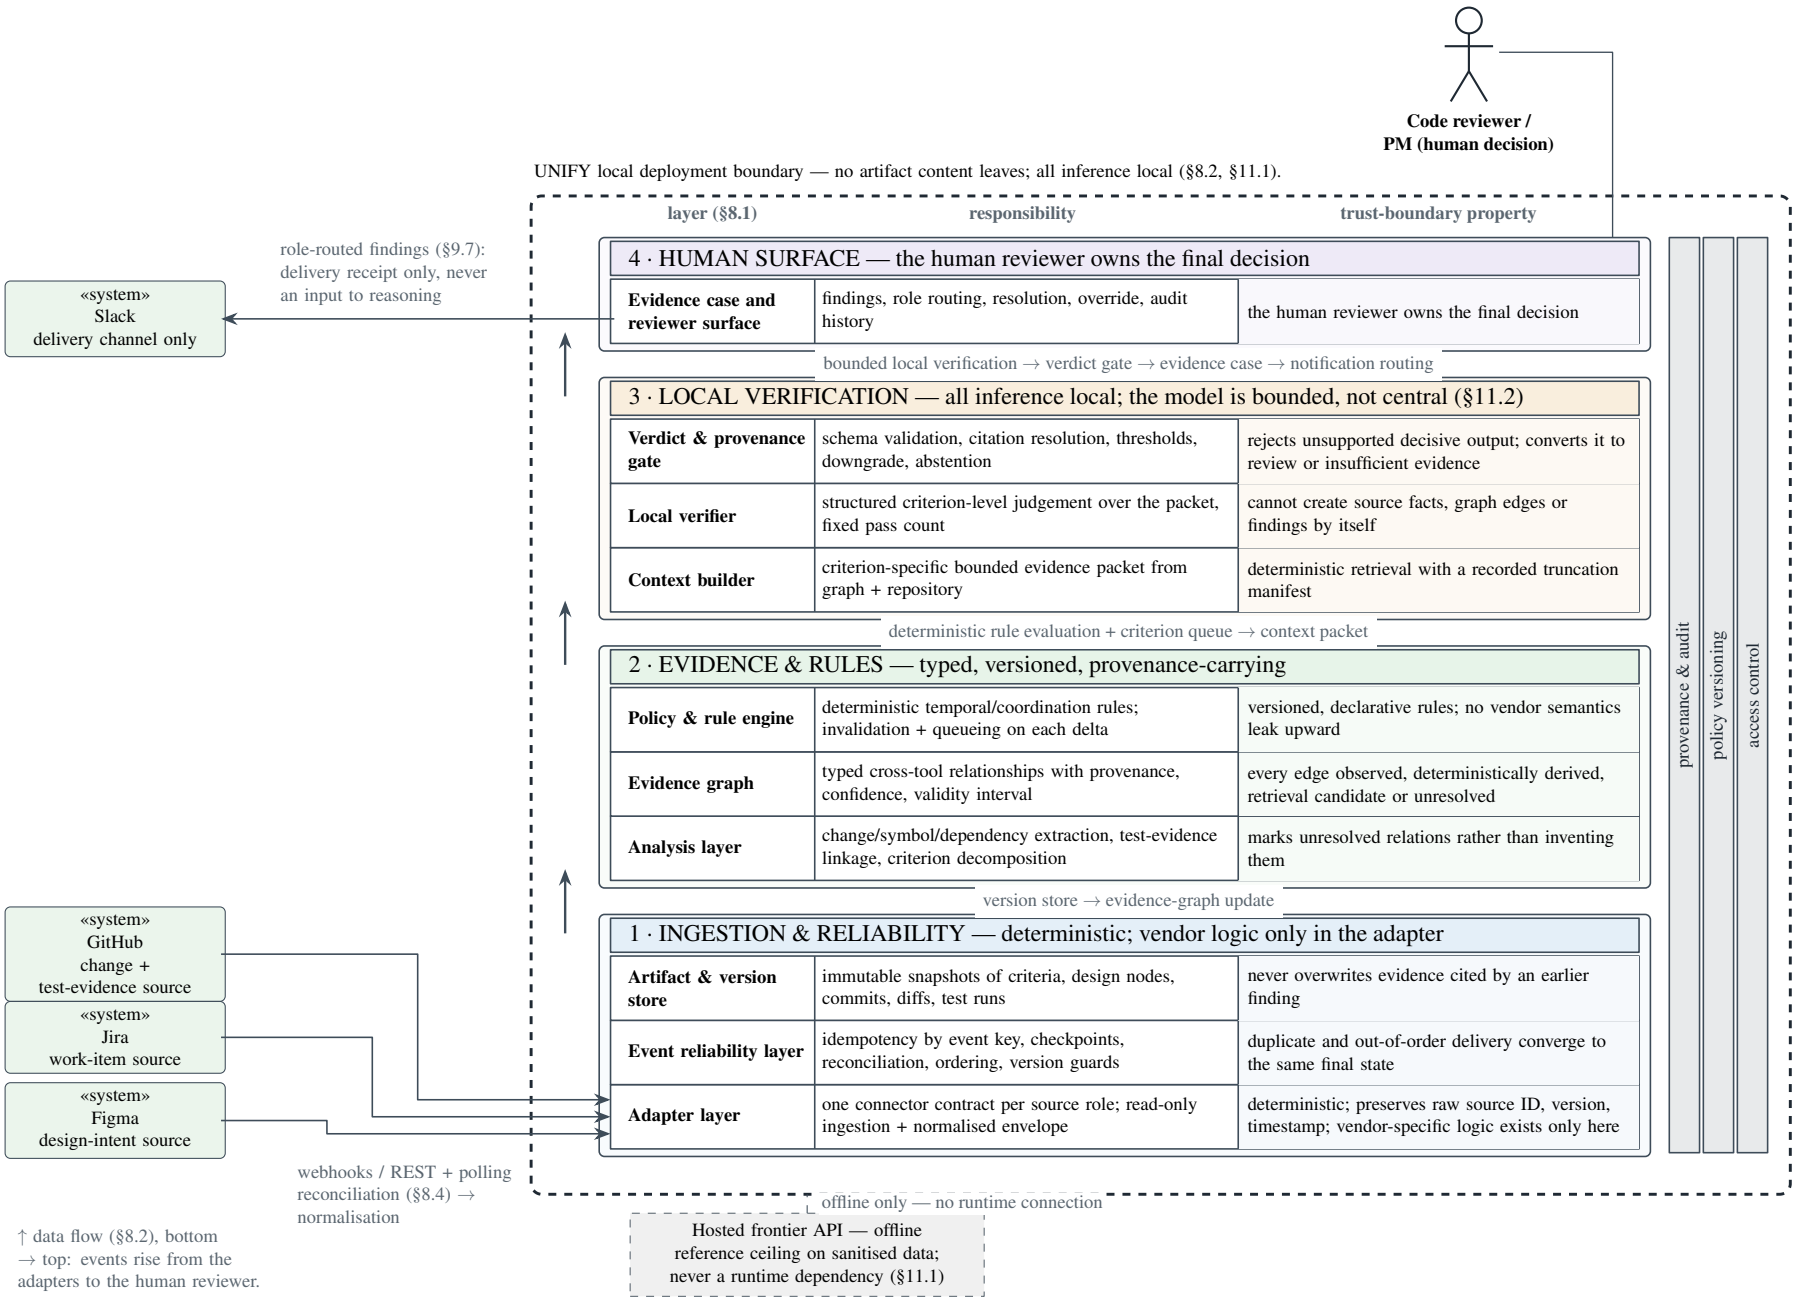
Code reviewer / PM (human decision)
UNIFY local deployment boundary — no artifact content leaves; all inference local (§8.2, §11.1).
layer (§8.1)
responsibility
trust-boundary property
role-routed findings (§9.7): delivery receipt only, never an input to reasoning
«system» Slack delivery channel only
4 · HUMAN SURFACE — the human reviewer owns the final decision
Evidence case and reviewer surface
findings, role routing, resolution, override, audit history
the human reviewer owns the final decision
bounded local verification → verdict gate → evidence case → notification routing
3 · LOCAL VERIFICATION — all inference local; the model is bounded, not central (§11.2)
Verdict & provenance gate
schema validation, citation resolution, thresholds, downgrade, abstention
rejects unsupported decisive output; converts it to review or insufficient evidence
Local verifier
structured criterion-level judgement over the packet, fixed pass count
cannot create source facts, graph edges or findings by itself
Context builder
criterion-specific bounded evidence packet from graph + repository
deterministic retrieval with a recorded truncation manifest
deterministic rule evaluation + criterion queue → context packet
2 · EVIDENCE & RULES — typed, versioned, provenance-carrying
Policy & rule engine
deterministic temporal/coordination rules; invalidation + queueing on each delta
versioned, declarative rules; no vendor semantics leak upward
Evidence graph
typed cross-tool relationships with provenance, confidence, validity interval
every edge observed, deterministically derived, retrieval candidate or unresolved
Analysis layer
change/symbol/dependency extraction, test-evidence linkage, criterion decomposition
marks unresolved relations rather than inventing them
version store → evidence-graph update
1 · INGESTION & RELIABILITY — deterministic; vendor logic only in the adapter
Artifact & version store
immutable snapshots of criteria, design nodes, commits, diffs, test runs
never overwrites evidence cited by an earlier finding
Event reliability layer
idempotency by event key, checkpoints, reconciliation, ordering, version guards
duplicate and out-of-order delivery converge to the same final state
Adapter layer
one connector contract per source role; read-only ingestion + normalised envelope
deterministic; preserves raw source ID, version, timestamp; vendor-specific logic exists only here
provenance & audit
policy versioning
access control
«system» GitHub change + test-evidence source
«system» Jira work-item source
«system» Figma design-intent source
webhooks / REST + polling reconciliation (§8.4) → normalisation
offline only — no runtime connection
Hosted frontier API — offline reference ceiling on sanitised data; never a runtime dependency (§11.1)
↑ data flow (§8.2), bottom → top: events rise from the adapters to the human reviewer.