



SQL: SCHEMA DEFINITION, BASIC CONSTRAINTS, AND QUERIES

SQL INTRODUCTION

- SQL stands for **Structured Query Language**
- Standard language for querying and manipulating data
- Data Definition Language (DDL)
 - Create/alter/delete tables and their attributes
- Data Manipulation Language (DML)
 - Query one or more tables
 - Insert/delete/modify tuples in tables

Many standards out there: ANSI SQL, SQL92 (a.k.a. SQL2), SQL99 (a.k.a. SQL3), ...

CREATE TABLE

- Creates a new relation(table) in the database
 - Specifies relation's attributes and their data types
 - Specifies constraints such as NOT NULL , UNIQUE ,CHECK etc...

```
CREATE TABLE DEPARTMENT
```

```
(DNAME          VARCHAR(10)    NOT NULL ,  
 DNUMBER        INTEGER CHECK(DNUMBER >0 AND DNUMBER <25),  
 MGRSSN         CHAR(9),  
 MGRSTARTDATE   DATE  
);
```

ADDITIONAL DATA TYPES

○ **DATE:**

- Made up of year-month-day in the format yyyy-mm-dd

○ **TIME:**

- Made up of hour:minute:second in the format hh:mm:ss

○ **TIME(i):**

- Made up of hour:minute:second plus i additional digits specifying fractions of a second
- format is hh:mm:ss:ii...i

○ **TIMESTAMP:**

- Has both DATE and TIME components

CONSTRAINTS IN SQL

- CREATE TABLE command allows us to specify the primary key, secondary keys, and foreign keys.
- Key attributes can be specified via the PRIMARY KEY and UNIQUE phrases


```
CREATE TABLE DEPARTMENT
(
    DNAME          VARCHAR(10)    NOT NULL,
    DNUMBER        INTEGER        NOT NULL,
    MGRSSN         CHAR(9),
    MGRSTARTDATE   CHAR(9),
    PRIMARY KEY (DNUMBER),
    UNIQUE (DNAME),
    FOREIGN KEY (MGRSSN) REFERENCES EMPLOYEE
);
```

REFERENTIAL INTEGRITY OPTIONS


- We can specify RESTRICT, CASCADE, SET NULL or SET DEFAULT on foreign keys.

```
CREATE TABLE DEPARTMENT
(
    DNAME          VARCHAR(10)    NOT NULL,
    DNUMBER        INTEGER        NOT NULL,
    MGRSSN         CHAR(9) ,
    MGRSTARTDATE   CHAR(9),
    PRIMARY KEY (DNUMBER),
    UNIQUE (DNAME),
    FOREIGN KEY (MGRSSN) REFERENCES EMPLOYEE
    ON DELETE SET DEFAULT ON UPDATE CASCADE
);
```

REFERENTIAL INTEGRITY OPTIONS

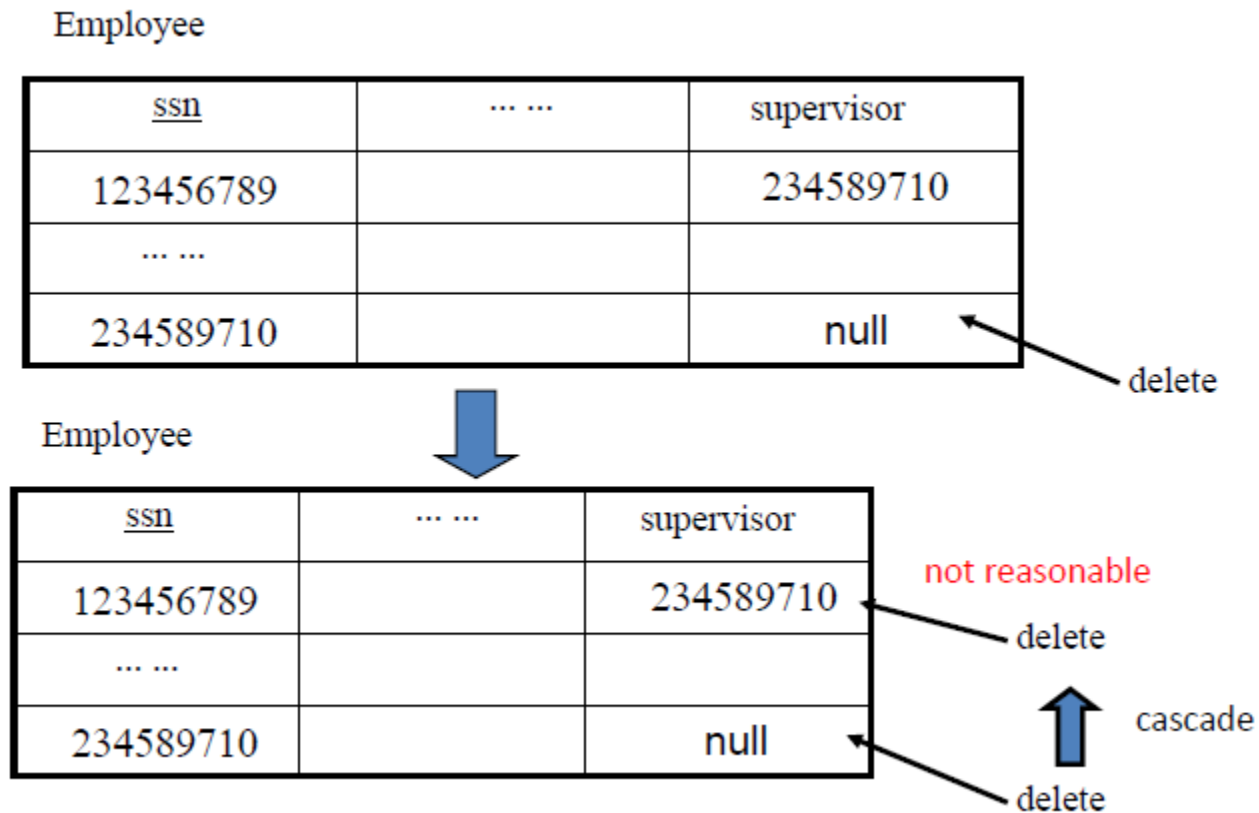

REFERENTIAL INTEGRITY OPTIONS

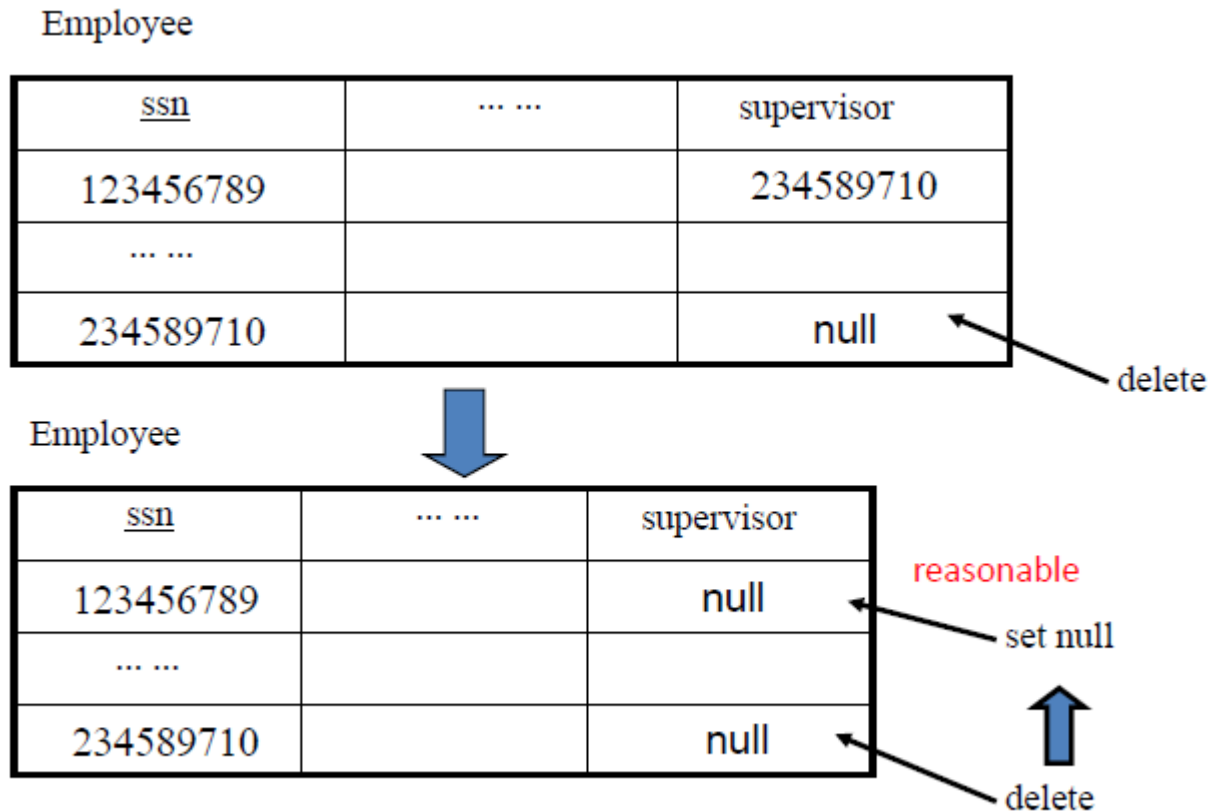

REFERENTIAL INTEGRITY OPTIONS

```
CREATE TABLE EMPLOYEE
(
    ENAME VARCHAR(30) NOT NULL,
    ESSN CHAR(9),
    BDATE DATE,
    DNO INTEGER DEFAULT 1,
    SUPERSSN CHAR(9),
    PRIMARY KEY (ESSN),
    FOREIGN KEY (DNO) REFERENCES DEPARTMENT
ON DELETE SET DEFAULT ON UPDATE CASCADE,
    FOREIGN KEY (SUPERSSN) REFERENCES EMPLOYEE
ON DELETE SET NULL ON UPDATE CASCADE
);
```

SQL CONSTRAINTS

- Assigning Names to Constraints

CONSTRAINT deptPK PRIMARY KEY(Dnumber)

CONSTRAINT deptSK UNIQUE(Dname)

- CHECK Constraint

CHECK (Dept_create_date <= Mgr_start_date)

DROP COMMAND

- Drop Command is used to delete schema or named schema elements such as table, domains, or constraints
- Example:

DROP TABLE DEPENDENT;

DROP TABLE EMPLOYEE CASCADE;

DROP SCHEMA COMPANY;

In SQL-Server (T-SQL), DROP TABLE cannot be used to drop a table that is referenced by a FOREIGN KEY. The referencing FOREIGN KEY or the referencing table must first be dropped.

ALTER COMMAND

- The definition of table can be changed using ALTER command
- ALTER can be used to add an attribute to the relation
 - Initially, the new attribute will have NULLs in all the tuples of the relation
 - NOT NULL constraint is *not allowed* for such an attribute

- **Example :**

ALTER TABLE EMPLOYEE ADD COLUMN JOB VARCHAR(12);

T-SQL syntax

ALTER TABLE EMPLOYEE ADD JOB VARCHAR(12);

- The database user have to enter a value for the new attribute JOB for each EMPLOYEE tuple.

ALTER TABLE

- ALTER command can be use to add or drop constraints
- **Example :**

ALTER TABLE EMPLOYEE add constraint unEmp UNIQUE(NAME) ;

ALTER TABLE EMPLOYEE drop constraint unEmp ;

SQL QUERIES

Basic form:

```
SELECT <attributes>  
FROM   <one or more relations>  
WHERE  <conditions>
```

- *Not same as* the SELECT operation of the relational algebra
- The result can have duplicate tuples
- SQL relation is a *multi-set* (bag) of tuples; *not* a set of tuples

RELATIONAL DATABASE SCHEMA

EMPLOYEE

FNAME	MINIT	LNAME	<u>SSN</u>	BDATE	ADDRESS	SEX	SALARY	SUPERSSN	DNO
-------	-------	-------	------------	-------	---------	-----	--------	----------	-----

DEPARTMENT

DNAME	<u>DNUMBER</u>	MGRSSN	MGRSTARTDATE
-------	----------------	--------	--------------

DEPT_LOCATIONS

<u>DNUMBER</u>	<u>DLOCATION</u>
----------------	------------------

PROJECT

PNAME	<u>PNUMBER</u>	PLOCATION	DNUM
-------	----------------	-----------	------

WORKS_ON

<u>ESSN</u>	<u>PNO</u>	HOURS
-------------	------------	-------

DEPENDENT

<u>ESSN</u>	<u>DEPENDENT_NAME</u>	SEX	BDATE	RELATIONSHIP
-------------	-----------------------	-----	-------	--------------

SIMPLE SQL QUERIES

- Retrieve the details of all employees who work in department no 4.

```
SELECT *  
FROM EMPLOYEE  
WHERE Dno = 4
```

“selection”

EMPLOYEE

Fname	Minit	Lname	<u>Ssn</u>	Bdate	Address	Sex	Salary	Super_ssn	Dno
John	B	Smith	123456789	1965-01-09	731 Fondren, Houston, TX	M	30000	333445555	5
Franklin	T	Wong	333445555	1955-12-08	638 Voss, Houston, TX	M	40000	888665555	5
Alicia	J	Zelaya	999887777	1968-01-19	3321 Castle, Spring, TX	F	25000	987654321	4
Jennifer	S	Wallace	987654321	1941-06-20	291 Berry, Bellaire, TX	F	43000	888665555	4
Ramesh	K	Narayan	666884444	1962-09-15	975 Fire Oak, Humble, TX	M	38000	333445555	5
Joyce	A	English	453453453	1972-07-31	5631 Rice, Houston, TX	F	25000	333445555	5
Ahmad	V	Jabbar	987987987	1969-03-29	980 Dallas, Houston, TX	M	25000	987654321	4
James	E	Borg	888665555	1937-11-10	450 Stone, Houston, TX	M	55000	NULL	1

SIMPLE SQL QUERIES

- Retrieve the birthdate and address of the employee whose name is 'John B. Smith'.

```
SELECT  BDATE, ADDRESS  
FROM    EMPLOYEE  
WHERE   FNAME='John' AND MINIT='B'  
        AND LNAME='Smith'
```

“selection” and
“projection”

- Similar to a SELECT-PROJECT pair of relational algebra operations

EMPLOYEE

Fname	Minit	Lname	<u>Ssn</u>	Bdate	Address	Sex	Salary	Super_ssn	Dno
John	B	Smith	123456789	1965-01-09	731 Fondren, Houston, TX	M	30000	333445555	5
Franklin	T	Wong	333445555	1955-12-08	638 Voss, Houston, TX	M	40000	888665555	5
Alicia	J	Zelaya	999887777	1968-01-19	3321 Castle, Spring, TX	F	25000	987654321	4
Jennifer	S	Wallace	987654321	1941-06-20	291 Berry, Bellaire, TX	F	43000	888665555	4
Ramesh	K	Narayan	666884444	1962-09-15	975 Fire Oak, Humble, TX	M	38000	333445555	5
Joyce	A	English	453453453	1972-07-31	5631 Rice, Houston, TX	F	25000	333445555	5
Ahmad	V	Jabbar	987987987	1969-03-29	980 Dallas, Houston, TX	M	25000	987654321	4
James	E	Borg	888665555	1937-11-10	450 Stone, Houston, TX	M	55000	NULL	1

ELIMINATING DUPLICATES

```
SELECT Salary
FROM Employee
```

Salary
30000
40000
25000
43000
38000
25000
25000
55000

```
SELECT DISTINCT Salary
FROM Employee
```

Salary
30000
40000
25000
43000
38000
55000

EMPLOYEE

Fname	Minit	Lname	<u>Ssn</u>	Bdate	Address	Sex	Salary	Super_ssn	Dno
John	B	Smith	123456789	1965-01-09	731 Fondren, Houston, TX	M	30000	333445555	5
Franklin	T	Wong	333445555	1955-12-08	638 Voss, Houston, TX	M	40000	888665555	5
Alicia	J	Zelaya	999887777	1968-01-19	3321 Castle, Spring, TX	F	25000	987654321	4
Jennifer	S	Wallace	987654321	1941-06-20	291 Berry, Bellaire, TX	F	43000	888665555	4
Ramesh	K	Narayan	666884444	1962-09-15	975 Fire Oak, Humble, TX	M	38000	333445555	5
Joyce	A	English	453453453	1972-07-31	5631 Rice, Houston, TX	F	25000	333445555	5
Ahmad	V	Jabbar	987987987	1969-03-29	980 Dallas, Houston, TX	M	25000	987654321	4
James	E	Borg	888665555	1937-11-10	450 Stone, Houston, TX	M	55000	NULL	1



JOIN OPERATION

- Retrieve the name and address of all employees who work for the 'Research' department.

```
SELECT    FNAME, LNAME, ADDRESS
FROM      EMPLOYEE, DEPARTMENT
WHERE     DNAME='Research' AND DNUMBER=DNO
```

- DNAME='Research' is a *selection condition*
- DNUMBER=DNO is a *join condition*

DEPARTMENT

Dname	Dnumber	Mgr_ssn	Mgr_start_date
Research	5	333445555	1988-05-22
Administration	4	987654321	1995-01-01
Headquarters	1	888665555	1981-06-19

EMPLOYEE

Fname	Minit	Lname	Ssn	Bdate	Address	Sex	Salary	Super_ssn	Dno
John	B	Smith	123456789	1965-01-09	731 Fondren, Houston, TX	M	30000	333445555	5
Franklin	T	Wong	333445555	1955-12-08	638 Voss, Houston, TX	M	40000	888665555	5
Alicia	J	Zelaya	999887777	1968-01-19	3321 Castle, Spring, TX	F	25000	987654321	4
Jennifer	S	Wallace	987654321	1941-06-20	291 Berry, Bellaire, TX	F	43000	888665555	4
Ramesh	K	Narayan	666884444	1962-09-15	975 Fire Oak, Humble, TX	M	38000	333445555	5
Joyce	A	English	453453453	1972-07-31	5631 Rice, Houston, TX	F	25000	333445555	5
Ahmad	V	Jabbar	987987987	1969-03-29	980 Dallas, Houston, TX	M	25000	987654321	4
James	E	Borg	888665555	1937-11-10	450 Stone, Houston, TX	M	55000	NULL	1

<u>Fname</u>	<u>Lname</u>	<u>Address</u>
John	Smith	731 Fondren, Houston, TX
Franklin	Wong	638 Voss, Houston, TX
Ramesh	Narayan	975 Fire Oak, Humble, TX
Joyce	English	5631 Rice, Houston, TX

JOIN(CONT.)

- For every project located in 'Stafford', list the project number, the controlling department number, and the department manager's last name, address, and birthdate.

```
SELECT PNUMBER, DNUM, LNAME, ADDRESS, BDATE
FROM   PROJECT, DEPARTMENT, EMPLOYEE
WHERE  DNUM=DNUMBER AND MGRSSN=SSN AND
       PLOCATION='Stafford'
```

EMPLOYEE

Fname	Minit	Lname	Ssn	Bdate	Address	Sex	Salary	Super_ssn	Dno
John	B	Smith	123456789	1965-01-09	731 Fondren, Houston, TX	M	30000	333445555	5
Franklin	T	Wong	333445555	1955-12-08	638 Voss, Houston, TX	M	40000	888665555	5
Alicia	J	Zelaya	999887777	1968-01-19	3321 Castle, Spring, TX	F	25000	987654321	4
Jennifer	S	Wallace	987654321	1941-06-20	291 Berry, Bellaire, TX	F	43000	888665555	4
Ramesh	K	Narayan	666884444	1962-09-15	975 Fire Oak, Humble, TX	M	38000	333445555	5
Joyce	A	English	453453453	1972-07-31	5631 Rice, Houston, TX	F	25000	333445555	5
Ahmad	V	Jabbar	987987987	1969-03-29	980 Dallas, Houston, TX	M	25000	987654321	4
James	E	Borg	888665555	1937-11-10	450 Stone, Houston, TX	M	55000	NULL	1

PROJECT

Pname	Pnumber	Plocation	Dnum
ProductX	1	Bellaire	5
ProductY	2	Sugarland	5
ProductZ	3	Houston	5
Computerization	10	Stafford	4
Reorganization	20	Houston	1
Newbenefits	30	Stafford	4

DEPARTMENT

Dname	Dnumber	Mgr_ssn	Mgr_start_date
Research	5	333445555	1988-05-22
Administration	4	987654321	1995-01-01
Headquarters	1	888665555	1981-06-19

Pnumber	Dnum	Lname	Address	Bdate
10	4	Wallace	291Berry, Bellaire, TX	1941-06-20
30	4	Wallace	291Berry, Bellaire, TX	1941-06-20

UNSPECIFIED WHERE-CLAUSE

- *Missing WHERE-clause*
 - indicates there is no condition and is same as WHERE TRUE
- Retrieve the SSN values for all employees.

```
SELECT SSN  
FROM EMPLOYEE
```

- If there is no join condition, then we get *CARTESIAN PRODUCT*

```
SELECT SSN, DNAME  
FROM EMPLOYEE, DEPARTMENT
```

Ssn	Dname
123456789	Research
333445555	Research
999887777	Research
987654321	Research
666884444	Research
453453453	Research
987987987	Research
888665555	Research
123456789	Administration
333445555	Administration
999887777	Administration
987654321	Administration
666884444	Administration
453453453	Administration
987987987	Administration
888665555	Administration
123456789	Headquarters
333445555	Headquarters
999887777	Headquarters
987654321	Headquarters
666884444	Headquarters
453453453	Headquarters
987987987	Headquarters
888665555	Headquarters

ALIASES

- In SQL, we can use the same name for two (or more) attributes as long as the attributes are in *different relations*
- A query that refers to two attributes with the same name must *prefix* the relation name to the attribute name

Example:

EMPLOYEE.DNO, DEPARTMENT.DNUMBER

ALIASES

- For each employee, retrieve the employee's name, and the name of his or her immediate supervisor.

- SELECT E.FNAME, E.LNAME, S.FNAME, S.LNAME
FROM EMPLOYEE E
WHERE E.SUPERSSN=S.SSN**

- Can also use the AS keyword to specify aliases

- SELECT E.FNAME, E.LNAME, S.FNAME, S.LNAME
FROM EMPLOYEE AS E, EMPLOYEE AS S
WHERE E.SUPERSSN=S.SSN**

EMPLOYEE

Fname	Minit	Lname	Ssn	Bdate	Address	Sex	Salary	Super_ssn	Dno
John	B	Smith	123456789	1965-01-09	731 Fondren, Houston, TX	M	30000	333445555	5
Franklin	T	Wong	333445555	1955-12-08	638 Voss, Houston, TX	M	40000	888665555	5
Alicia	J	Zelaya	999887777	1968-01-19	3321 Castle, Spring, TX	F	25000	987654321	4
Jennifer	S	Wallace	987654321	1941-06-20	291 Berry, Bellaire, TX	F	43000	888665555	4
Ramesh	K	Narayan	666884444	1962-09-15	975 Fire Oak, Humble, TX	M	38000	333445555	5
Joyce	A	English	453453453	1972-07-31	5631 Rice, Houston, TX	F	25000	333445555	5
Ahmad	V	Jabbar	987987987	1969-03-29	980 Dallas, Houston, TX	M	25000	987654321	4
James	E	Borg	888665555	1937-11-10	450 Stone, Houston, TX	M	55000	NULL	1

(d)

<u>E.Fname</u>	<u>E.Lname</u>	<u>S.Fname</u>	<u>S.Lname</u>
John	Smith	Franklin	Wong
Franklin	Wong	James	Borg
Alicia	Zelaya	Jennifer	Wallace
Jennifer	Wallace	James	Borg
Ramesh	Narayan	Franklin	Wong
Joyce	English	Franklin	Wong
Ahmad	Jabbar	Jennifer	Wallace

ARITHMETIC OPERATIONS

- Arithmetic operators '+', '-', '*', and '/') can be applied to numeric values in an SQL query result
- Give all employees who work on the 'ProductX' project a 10% raise.

- ```
SELECT FNAME, LNAME, 1.1*SALARY
FROM EMPLOYEE, WORKS_ON, PROJECT
WHERE SSN=ESSN AND PNO=PNUMBER AND
 PNAME='ProductX'
```

**EMPLOYEE**

| FNAME | MINIT | LNAME | <u>SSN</u> | BDATE | ADDRESS | SEX | SALARY | SUPERSSN | DNO |
|-------|-------|-------|------------|-------|---------|-----|--------|----------|-----|
|-------|-------|-------|------------|-------|---------|-----|--------|----------|-----|

**PROJECT**

| PNAME | <u>PNUMBER</u> | PLOCATION | DNUM |
|-------|----------------|-----------|------|
|-------|----------------|-----------|------|

**WORKS\_ON**

| <u>ESSN</u> | <u>PNO</u> | HOURS |
|-------------|------------|-------|
|-------------|------------|-------|



# ORDER BY

- The **ORDER BY** clause sort the tuples in a query result
- Retrieve a list of employees and the projects each works in, ordered by the employee's department

```
SELECT DNAME, LNAME, FNAME, PNAME
FROM DEPARTMENT, EMPLOYEE, WORKS_ON, PROJECT
WHERE DNUMBER=DNO AND SSN=ESSN AND PNO=PNUMBER
ORDER BY DNAME
```

- The default order is in ascending order of values
- We can specify the keyword **DESC** if we want a descending order
  - **ORDER BY** Dname **DESC**, Lname **ASC**

## ORDER BY

- Retrieve a list of employees and the projects each works in, ordered by the employee's department, and within each department ordered alphabetically by employee last name, then first name.

```
SELECT DNAME, LNAME, FNAME, PNAME
FROM DEPARTMENT, EMPLOYEE, WORKS_ON, PROJECT
WHERE DNUMBER=DNO AND SSN=ESSN AND PNO=PNUMBER
ORDER BY DNAME, LNAME, FNAME
```

# NULLS IN SQL QUERIES

- SQL allows queries that check if a value is NULL
- SQL uses **IS** or **IS NOT** to compare NULLs
- Retrieve the names of all employees who do not have supervisors.

- |               |                         |
|---------------|-------------------------|
| <b>SELECT</b> | <b>FNAME, LNAME</b>     |
| <b>FROM</b>   | <b>EMPLOYEE</b>         |
| <b>WHERE</b>  | <b>SUPERSSN IS NULL</b> |

- Note: If a join condition is specified, tuples with NULL values for the join attributes are not included in the result

# JOINED RELATIONS IN SQL

- Allows the user to specify different types of joins (regular "theta" JOIN, NATURAL JOIN, LEFT OUTER JOIN, RIGHT OUTER JOIN, CROSS JOIN, etc )

- **Example:**

- SELECT E.FNAME, E.LNAME, S.FNAME, S.LNAME  
FROM EMPLOYEE AS E , EMPLOYEE AS S  
WHERE E.SUPERSSN=S.SSN
- SELECT E.FNAME, E.LNAME, S.FNAME, S.LNAME  
FROM (EMPLOYEE E **JOIN** EMPLOYEE S  
**ON** E.SUPERSSN=S.SSN
- SELECT E.FNAME, E.LNAME, S.FNAME, S.LNAME  
FROM (EMPLOYEE E **LEFT OUTER JOIN** EMPLOYEE S  
**ON** E.SUPERSSN=S.SSN)

# JOINED RELATIONS FEATURE IN SQL

```
SELECT FNAME, LNAME, ADDRESS
FROM EMPLOYEE, DEPARTMENT
WHERE DNAME='Research' AND DNUMBER=DNO
```

could be written as:

```
SELECT FNAME, LNAME, ADDRESS
FROM (EMPLOYEE JOIN DEPARTMENT
 ON DNUMBER=DNO)
WHERE DNAME='Research'
```

or as:

```
SELECT FNAME, LNAME, ADDRESS
FROM (EMPLOYEE NATURAL JOIN DEPARTMENT
 AS DEPT(DNAME, DNO, MSSN, MSDATE))
WHERE DNAME='Research'
```

# JOINED RELATIONS FEATURE IN SQL

- Example that illustrates multiple joins

```
SELECT PNUMBER, DNUM, LNAME,
FROM (PROJECT JOIN DEPARTMENT
 ON DNUM=DNUMBER)
 JOIN EMPLOYEE ON MGRSSN=SSN))
WHERE PLOCATION='Stafford'
```

# SET OPERATIONS

- SQL has incorporated some set operations like
  - Union operation (**UNION**),
  - Set difference (**EXCEPT**) and
  - Intersection operation (**INTERSECT**)
- *Duplicate tuples are eliminated from the result*
- *Requires union compatible relations*

## SET OPERATIONS (CONT.)

- Make a list of all project numbers for projects that involve an employee whose last name is 'Smith' as a worker or as a manager of the department that controls the project.

- ```
(SELECT PNAME
FROM   PROJECT, DEPARTMENT, EMPLOYEE
WHERE  DNUM=DNUMBER AND MGRSSN=SSN AND
        LNAME='Smith')

UNION

(SELECT PNAME
FROM   PROJECT, WORKS_ON, EMPLOYEE
WHERE  PNUMBER=PNO AND ESSN=SSN AND
        LNAME='Smith')
```


AGGREGATE FUNCTIONS

- Include **COUNT**, **SUM**, **MAX**, **MIN**, and **AVG**
- Find the maximum salary, the minimum salary, and the average salary among all employees.

```
SELECT      MAX(SALARY), MIN(SALARY), AVG(SALARY)
FROM        EMPLOYEE
```

- Some SQL implementations *may not allow more than one function* in the SELECT-clause

AGGREGATE FUNCTIONS (CONT.)

- Retrieve the number of employees in the 'Research' department

```
SELECT      COUNT (*)  
FROM        EMPLOYEE, DEPARTMENT  
WHERE       DNO=DNUMBER AND  
            DNAME='Research'
```

AGGREGATE EXAMPLE

- **Example:** Count the number of distinct salary values in the database.
 - **SELECT COUNT (DISTINCT Salary)**
 - **FROM EMPLOYEE;**
- NULL values are **discarded** when aggregate functions are applied to a particular attribute.

GROUPING

- **GROUP BY**-clause specifies the grouping attributes
- For each department, retrieve the department number, the number of employees in the department, and their average salary.

○ **SELECT DNO, COUNT (*), AVG (SALARY)**
FROM EMPLOYEE
GROUP BY DNO

(a)

Fname	Minit	Lname	<u>Ssn</u>	...	Salary	Super_ssn	Dno
John	B	Smith	123456789		30000	333445555	5
Franklin	T	Wong	333445555		40000	888665555	5
Ramesh	K	Narayan	666884444		38000	333445555	5
Joyce	A	English	453453453	...	25000	333445555	5
Alicia	J	Zelaya	999887777		25000	987654321	4
Jennifer	S	Wallace	987654321		43000	888665555	4
Ahmad	V	Jabbar	987987987		25000	987654321	4
James	E	Bong	888665555		55000	NULL	1

Dno	Count (*)	Avg (Salary)
5	4	33250
4	3	31000
1	1	55000

Result of Q24

Grouping EMPLOYEE tuples by the value of Dno

GROUPING (CONT.)

- For each project, retrieve the project number, project name, and the number of employees who work on that project.



```
SELECT PNUMBER, PNAME, COUNT (*)  
FROM PROJECT, WORKS_ON  
WHERE PNUMBER=PNO  
GROUP BY PNUMBER, PNAME
```

	PNUMBER	PNAME	count
1	1	ProductX	2
2	2	ProductY	3
3	3	ProductZ	2
4	10	Compu...	3
5	20	Reorga...	3
6	30	Newbe...	3

- The grouping and functions are applied *after* the joining of the two relations
- Select clause can only include the grouping attributes and aggregate functions

HAVING-CLAUSE

- HAVING-clause specify a selection condition on groups
- For each project *on which more than two employees work* , retrieve the project number, project name, and the number of employees who work on that project.



SELECT	PNUMBER, PNAME, COUNT (*)
FROM	PROJECT, WORKS_ON
WHERE	PNUMBER=PNO
GROUP BY	PNUMBER, PNAME
HAVING	COUNT (*) > 2

HAVING-CLAUSE

(b)

Pname	Pnumber	...	Essn	Pno	Hours
ProductX	1		123456789	1	32.5
ProductX	1		453453453	1	20.0
ProductY	2		123456789	2	7.5
ProductY	2		453453453	2	20.0
ProductY	2		333445555	2	10.0
ProductZ	3		666884444	3	40.0
ProductZ	3		333445555	3	10.0
Computerization	10	...	333445555	10	10.0
Computerization	10		999887777	10	10.0
Computerization	10		987987987	10	35.0
Reorganization	20		333445555	20	10.0
Reorganization	20		987654321	20	15.0
Reorganization	20		888665555	20	NULL
Newbenefits	30		987987987	30	5.0
Newbenefits	30		987654321	30	20.0
Newbenefits	30		999887777	30	30.0

These groups are not selected by the HAVING condition of Q26.

PNUMBER	PNAME	count
2	ProductY	3
10	Computerization	3
20	Reorganization	3
30	Newbenefits	3

After applying the WHERE clause but before applying HAVING

HAVING-CLAUSE

----- Applying the HAVING clause condition -----

Pname	Pnumber	...	Easn	Pno	Hours		Pname	Count (*)
ProductY	2		123456789	2	7.5	}	ProductY	3
ProductY	2		453453453	2	20.0		Computerization	3
ProductY	2		333445555	2	10.0		Reorganization	3
Computerization	10		333445555	10	10.0	}	Newbenefits	3
Computerization	10	...	999887777	10	10.0			
Computerization	10		987987987	10	35.0	}		
Reorganization	20		333445555	20	10.0			
Reorganization	20		987654321	20	15.0			
Reorganization	20		888665555	20	NULL	}		
Newbenefits	30		987987987	30	5.0			
Newbenefits	30		987654321	30	20.0			
Newbenefits	30		999887777	30	30.0			


Result of Q26
(Pnumber not shown)

After applying the HAVING clause condition

GENERAL FORM OF GROUPING AND AGGREGATION

```
SELECT  S
FROM    R1,...,Rn
WHERE   C1
GROUP BY a1,...,ak
HAVING  C2
```

Evaluation steps:

1. Evaluate FROM-WHERE, apply condition C1
 2. Group by the attributes a_1, \dots, a_k
 3. Apply condition C2 to each group (may have aggregates)
 4. Compute aggregates in S and return the result
- 

SUBSTRING COMPARISON

- **LIKE** operator is used to compare partial strings
- Two reserved characters are used:
 - '%' (or '*' in some implementations) replaces an arbitrary number of characters, and
 - '_' replaces a single arbitrary character
- Retrieve all employees whose address is in Houston, Texas.
- | | |
|---------------|------------------------------------|
| SELECT | FNAME, LNAME |
| FROM | EMPLOYEE |
| WHERE | ADDRESS LIKE '%Houston,TX%' |

SUBSTRING COMPARISON (CONT.)

- Retrieve all employees who were born during the 1950s.
- Here, '5' must be the third character of the string , so the BDATE value is ' __5_____',.

```
SELECT      FNAME, LNAME  
FROM        EMPLOYEE  
WHERE       BDATE LIKE  ' __5_____',.
```

- LIKE operator allows us to get around the fact that each value is considered atomic and indivisible;
 - hence, in SQL, character string attribute values are not atomic

PRACTICE

1. Display the department that has no employees.
2. Find all employees who are older than their manager.
3. Display the ssn of all employees who report to John.
4. Find out how many managers there are without listing them.
5. Find out the difference between highest and lowest salaries.
6. List ssn of all employees with more than 2 dependents

NESTING OF QUERIES

- A complete SELECT query, called a *nested query* , can be specified within the WHERE-clause of another query, called the *outer query*
- Retrieve the name and address of all employees who work for the 'Research' department.

```
SELECT  FNAME, LNAME, ADDRESS
FROM    EMPLOYEE
WHERE   DNO IN ( SELECT DNUMBER
                  FROM   DEPARTMENT
                  WHERE  DNAME='Research' )
```

	FNAME	LNAME	ADDRESS
1	John	Smith	731 Fondren, Houston, Tx
2	Franklin	Wong	639 Voss, Houston, TX
3	Joyce	English	5631 Rice, Houston, TX
4	Ramesh	Narayan	975 Fire Oak, Humble, TX

	DNUMBER
1	5

CORRELATED NESTED QUERIES

- If a condition in the *nested query* references an attribute of a relation declared in the *outer query* , then two queries are said to be *correlated*
- Retrieve the name of each employee who has a dependent with the same first name as the employee.

```
SELECT E.FNAME, E.LNAME  
FROM   EMPLOYEE AS E  
WHERE  E.SSN IN (SELECT ESSN  FROM   DEPENDENT AS D  
                WHERE E.SSN = D.ESSN AND FNAME=DEPENDENT_NAME)
```

EMPLOYEE

Fname	Minit	Lname	Ssn	Bdate	Address	Sex	Salary	Super_ssn	Dno
John	B	Smith	123456789	1965-01-09	731 Fondren, Houston, TX	M	30000	333445555	5
Franklin	T	Wong	333445555	1955-12-08	638 Voss, Houston, TX	M	40000	888665555	5
Alicia	J	Zelaya	999887777	1968-01-19	3321 Castle, Spring, TX	F	25000	987654321	4
Jennifer	S	Wallace	987654321	1941-06-20	291 Berry, Bellaire, TX	F	43000	888665555	4
Ramesh	K	Narayan	666884444	1962-09-15	975 Fire Oak, Humble, TX	M	38000	333445555	5
Joyce	A	English	453453453	1972-07-31	5631 Rice, Houston, TX	F	25000	333445555	5
Ahmad	V	Jabbar	987987987	1969-03-29	980 Dallas, Houston, TX	M	25000	987654321	4
James	E	Borg	888665555	1937-11-10	450 Stone, Houston, TX	M	55000	NULL	1

DEPENDENT

Essn	Dependent_name	Sex	Bdate	Relationship
333445555	Alice	F	1986-04-05	Daughter
333445555	Theodore	M	1983-10-25	Son
333445555	Joy	F	1958-05-03	Spouse
987654321	Abner	M	1942-02-28	Spouse
123456789	Michael	M	1988-01-04	Son
123456789	Alice	F	1988-12-30	Daughter
123456789	Elizabeth	F	1967-05-05	Spouse

Nested query is evaluated once for each tuple in outer query

CORRELATED NESTED QUERIES (CONT.)

- A query written with nested SELECT... FROM... WHERE... blocks and using the = or IN comparison operators can ***always*** be expressed as a single block query.

Retrieve the name of each employee who has a dependent with the same first name as the employee.

```
SELECT      E.FNAME, E.LNAME
FROM        EMPLOYEE E, DEPENDENT D
WHERE       E.SSN=D.ESSN AND
            E.FNAME=D.DEPENDENT_NAME
```

NESTED QUERIES

SQL allows use of **tuples** of values in comparisons

- Select the SSN of all employees who work the same (project, hours) combination that 'John Smith' (whose Ssn = '123456789') works on.
- **SELECT DISTINCT** Essn
FROM WORKS_ON
WHERE (Pno, Hours) **IN** (**SELECT** Pno, Hours
 FROM WORKS_ON
 WHERE Essn='123456789');

EXISTS FUNCTION

- EXISTS Function checks whether the result of a nested query is empty or not
- Retrieve the name of each employee who has a dependent with the same first name as the employee.

```
SELECT      FNAME, LNAME
FROM        EMPLOYEE
WHERE       EXISTS (SELECT *
                    FROM      DEPENDENT
                    WHERE      SSN=ESSN AND
                             FNAME=DEPENDENT_NAME)
```

EXISTS FUNCTION (CONT.)

- Retrieve the names of employees who have no dependents.

```
SELECT      FNAME, LNAME  
FROM        EMPLOYEE  
WHERE       NOT EXISTS (SELECT *  
                        FROM DEPENDENT  
                        WHERE SSN=ESSN)
```

- The above correlated nested query retrieves all DEPENDENT tuples related to an EMPLOYEE tuple.
 - If *none exist*, the EMPLOYEE tuple is selected
- EXISTS is necessary for the expressive power of SQL

EXISTS FUNCTION (CONT.)

- Find the names of managers who have at least one dependents.

```
SELECT  FNAME, LNAME
FROM    EMPLOYEE
WHERE   EXISTS (SELECT *
                  FROM DEPENDENT
                  WHERE SSN=ESSN)

AND

EXISTS (SELECT *
        FROM DEPARTMENT
        WHERE SSN=Mgr_SSN)
```

EXISTS FUNCTION (CONT.)

- Retrieve the name of each employee who works on *all* the projects controlled by department number 4.
- Set theory: S1 contains S2 if $(S2 - S1 = 0)$

```
SELECT  FNAME, LNAME  
FROM    EMPLOYEE  
WHERE   NOT EXISTS (  
        (SELECT PNUMBER  
        FROM PROJECT  
        WHERE  DNUM=4)  
        EXCEPT  
        (SELECT  PNO  
        FROM    WORKS_ON  
        WHERE   SSN=ESSN)  
        )
```

S1 = set of projects of
each employee
S2 = set of dept 4
projects

WORKS_ON

Essn	Pno	Hours
123456789	1	32.5
123456789	2	7.5
666884444	3	40.0
453453453	1	20.0
453453453	2	20.0
333445555	2	10.0
333445555	3	10.0
333445555	10	10.0
333445555	20	10.0
999887777	30	30.0
999887777	10	10.0
987987987	10	35.0
987987987	30	5.0
987654321	30	20.0
987654321	20	15.0
888665555	20	NULL

PROJECT

Pname	Pnumber	Plocation	Dnum
ProductX	1	Bellaire	5
ProductY	2	Sugarland	5
ProductZ	3	Houston	5
Computerization	10	Stafford	4
Reorganization	20	Houston	1
Newbenefits	30	Stafford	4

NESTED CORRELATED QUERIES (CONTD)

You can also use: $s > \text{ALL } R$
 $s > \text{ANY } R$
 $\text{EXISTS } R$

Find Employee whose salary is greater than the salary of all employee in department 5

```
SELECT Fname
FROM Employee
WHERE Salary > ALL (SELECT Salary
                    FROM Employee
                    where Dno=5)
```

	Fname
1	James
2	Jennifer

COMPLEX CORRELATED QUERY

- Find Employee (his dno and salary) whose salary is greater than all employees in the same department

```
SELECT Fname, Salary, Dno
FROM Employee as E
WHERE Salary > ALL (SELECT Salary
                    FROM Employee as S
                    WHERE E.dno=S.dno and E.ssn !=S.ssn )
```

	Fname	salary	Dno
1	Franklin	40000	5
2	James	55000	1
3	Jennifer	43000	4



NESTED QUERIES

- Find the second highest salary

```
SELECT MAX(Salary)
FROM Employee
WHERE Salary NOT IN (
    SELECT MAX(Salary)
    FROM Employee )
```

CORRELATED NESTED QUERIES

- Find the third highest salary

```
SELECT *  
FROM Employee E1  
WHERE (N-1) = (  
    SELECT COUNT(DISTINCT(E2.Salary))  
    FROM Employee E2  
    WHERE E2.Salary > E1.Salary)
```


NESTED CORRELATED QUERIES (CONTD)

You can also use: $s > \text{ALL } R$
 $s > \text{ANY } R$
 $\text{EXISTS } R$

Product (pid, pname, price, maker, year)

Find products that are more expensive than all those produced
By “IBM”

```
SELECT name
FROM   Product
WHERE  price > ALL (SELECT price
                    FROM   Purchase
                    WHERE  maker='IBM')
```



COMPLEX CORRELATED QUERY

Product (pid, pname, price, maker, year)

- Find products (and their manufacturers) that are more expensive than all products made by the same manufacturer before 1972

```
SELECT DISTINCT pname, maker
FROM   Product AS x
WHERE  price > ALL (SELECT price
                   FROM   Product AS y
                   WHERE  x.maker = y.maker AND x.pname!=y.pname
                   and
                   y.year < 1972)
```

Very powerful ! Also much harder to optimize.



TWO EXAMPLES

Store(sid, sname)

Product(pid, pname, price, maker, year, sid)

Find stores that sell *only* products with price > 100

same as:

Find stores s.t. all their products have price > 100)



```
SELECT Store.name
FROM Store, Product
WHERE Store.sid = Product.sid
GROUP BY Store.sid, Store.name
HAVING 100 < min(Product.price)
```

Find stores s.t. all their
products have price > 100

Almost equivalent...

```
SELECT Store.name
FROM Store
WHERE
    100 < ALL (SELECT Product.price
               FROM product
               WHERE Store.sid = Product.sid)
```

```
SELECT Store.name
FROM Store
WHERE Store.sid NOT IN
    (SELECT Product.sid
     FROM Product
     WHERE Product.price <= 100)
```



GROUP BY AND HAVING

- Count the *total* number of employees whose salaries exceed \$30,000 in each department, but only for departments where more than five employees work
- **SELECT Dname, COUNT (*)**
FROM DEPARTMENT, EMPLOYEE
WHERE Dnumber=Dno AND Salary>30000
GROUP BY Dname
HAVING COUNT (*) > 5;

GROUP BY AND HAVING

- Count the *total* number of employees whose salaries exceed \$30,000 in each department, but only for departments where more than five employees work

- ```
SELECT Dno, COUNT (*) No_of_Employees
FROM EMPLOYEE
WHERE salary > 30000 and DNO IN
 (SELECT Dno
FROM EMPLOYEE
GROUP BY Dno
HAVING COUNT (*) > 5)
```

|   | Dno | No_of_Employees |
|---|-----|-----------------|
| 1 | 4   | 1               |
| 2 | 5   | 2               |

Group by DNO

## SUMMARY OF SQL QUERIES

- A query in SQL can consist of up to six clauses, but only the first two, SELECT and FROM, are mandatory. The clauses are specified in the following order:

**SELECT        <attribute list>**  
**FROM         <table list>**  
**[WHERE       <condition>]**  
**[GROUP BY <grouping attribute(s)>]**  
**[HAVING      <group condition>]**  
**[ORDER BY <attribute list>]**

- A query is evaluated by first applying the WHERE-clause, then GROUP BY and HAVING, and finally the SELECT-clause

## SUMMARY OF SQL QUERIES (CONT.)

- The SELECT-clause lists the attributes or functions to be retrieved
- The FROM-clause specifies all relations (or aliases) needed in the query but not those needed in nested queries
- The WHERE-clause specifies the conditions for selection and join of tuples from the relations specified in the FROM-clause
- GROUP BY specifies grouping attributes
- HAVING specifies a condition for selection of groups
- ORDER BY specifies an order for displaying the result of a query



# SQL QUERIES

- There are various ways to specify the same query in SQL
  - This is to give flexibility to user to specify queries
- For query optimization, it is preferable to write a query with as little nesting and implied ordering as possible.
- Ideally, DBMS should process the same query in the same way regardless of how the query is specified.
  - But this is quite difficult in practice, (chapter 19,20)

## SPECIFYING UPDATES IN SQL

- There are three SQL commands to modify the database;
  - INSERT,
  - DELETE, and
  - UPDATE

# INSERT

- It is used to add one or more tuples to a relation

- **Example:**

```
INSERT INTO EMPLOYEE
VALUES ('Richard','K','Marini', '653298653', '30-DEC-52',
'98 Oak Forest,Katy,TX', 'M', 37000,'987654321', 4)
```

- Attribute values should be listed in the same order as the attributes were specified in the CREATE TABLE command

## INSERT (CONT.)

- **Example:** Insert a tuple for a new EMPLOYEE for whom we only know the FNAME, LNAME, and SSN attributes.

```
INSERT INTO EMPLOYEE (FNAME, LNAME, SSN)
VALUES ('Richard', 'Marini', '653298653')
```

- Attributes with NULL values can be left out

## INSERT (CONT.)

- Suppose we want to create a temporary table that has the name, number of employees, and total salaries for each department.
- A table DEPTS\_INFO is created by Q1, and is loaded with the information retrieved from the database by the query Q2.

**Q1:**            **CREATE TABLE DEPTS\_INFO**  
                              **(DEPT\_NAME        VARCHAR(10),**  
                              **NO\_OF\_EMPS        INTEGER,**  
                              **TOTAL\_SAL        INTEGER);**

**Q2:**            **INSERT INTO        DEPTS\_INFO (DEPT\_NAME,**  
                                              **NO\_OF\_EMPS, TOTAL\_SAL)**  
**SELECT**            **DNAME, COUNT (\*), SUM (SALARY)**  
**FROM**              **DEPARTMENT, EMPLOYEE**  
**WHERE**             **DNUMBER=DNO**  
**GROUP BY**         **DNAME ;**

# DELETE

- Removes tuples from a relation
- Tuples are deleted from only *one table* at a time (unless CASCADE is specified on a referential integrity constraint)
- Examples:

```
DELETE FROM EMPLOYEE
WHERE LNAME='Brown'
```

```
DELETE FROM EMPLOYEE
WHERE DNO IN (SELECT DNUMBER
FROM DEPARTMENT
WHERE DNAME='Research')
```

```
DELETE FROM EMPLOYEE
```

# UPDATE

- Used to modify attribute values of selected tuples
- **Example:** Change the location and controlling department number of project number 10 to 'Bellaire' and 5, respectively.

```
UPDATE PROJECT
SET PLOCATION = 'Bellaire', DNUM = 5
WHERE PNUMBER=10
```

## UPDATE (CONT.)

- **Example:** Give all employees in the 'Research' department a 10% raise in salary.

```
UPDATE EMPLOYEE
SET SALARY = SALARY *1.1
WHERE DNO IN (SELECT DNUMBER
 FROM DEPARTMENT
 WHERE DNAME='Research')
```



# VIEWS IN SQL

- A view is a “virtual” table that is derived from other tables
- Allows for limited update operations (since the table may not physically be stored)
- Allows full query operations
- A convenience for expressing certain operations
- They are used to:
  - simplify complex queries, and
  - define distinct conceptual interfaces for different users.



## SQL VIEWS: AN EXAMPLE

- Specify a different WORKS\_ON table

**CREATE VIEW WORKS\_ON1 AS**

SELECT FNAME, LNAME, PNAME, HOURS  
FROM EMPLOYEE, PROJECT, WORKS\_ON  
WHERE SSN=ESSN AND PNO=PNUMBER

**WORKS\_ON1**

| Fname | Lname | Pname | Hours |
|-------|-------|-------|-------|
|-------|-------|-------|-------|



## SQL VIEWS: AN EXAMPLE2

```
CREATE VIEW DEPT_INFO(Dept_name, No_of_emps, Total_sal)
AS SELECT Dname, COUNT (*), SUM (Salary)
FROM DEPARTMENT, EMPLOYEE
WHERE Dnumber=Dno
GROUP BY Dname;
```

### DEPT\_INFO

| Dept_name | No_of_emps | Total_sal |
|-----------|------------|-----------|
|-----------|------------|-----------|

## USING A VIRTUAL TABLE

- We can specify SQL queries on a newly created view:

```
SELECT FNAME, LNAME
FROM WORKS_ON1
WHERE PNAME='ProductX';
```

- DBMS is responsible to keep view always up-to-date
- When no longer needed, a view can be dropped:

```
DROP WORKS_ON1;
```



## EFFICIENT VIEW IMPLEMENTATION

- **Query modification:** present the view query in terms of a query on the underlying base tables

```
SELECT Fname, Lname
FROM WORKS_ON1
WHERE Pname='ProductX';
```

```
SELECT FNAME, LNAME
FROM EMPLOYEE, PROJECT, WORKS_ON
WHERE SSN=ESSN AND PNO=PNUMBER AND PNAME='PRODUCTX'
```

- Disadvantage:
  - Inefficient for views defined via complex queries (esp if additional queries are to be applied within a short time period )



## EFFICIENT VIEW IMPLEMENTATION

- **View materialization:** involves physically creating and keeping a temporary table
  - assumption: other queries on the view will follow
  - concerns: maintaining correspondence between the base table and the view when the base table is updated
  - strategy: incremental update



# VIEW UPDATE

- **Single view without aggregate operations:**
  - update may map to an update on the underlying base table
- **Views involving joins:**
  - an update *may* map to an update on the underlying base relations
  - not always possible



# VIEW UPDATE

## ○ Example:

UPDATE WORKS\_ON1

SET PNAME=XYZ'

WHERE FNAME='JOHN      AND  
                 LNAME='SMITH'      AND  
                 PNAME='PRODUCTX'

PROJECT

| Pname           | <u>Pnumber</u> | Plocation | Dnum |
|-----------------|----------------|-----------|------|
| ProductX        | 1              | Bellaire  | 5    |
| ProductY        | 2              | Sugarland | 5    |
| ProductZ        | 3              | Houston   | 5    |
| Computerization | 10             | Stafford  | 4    |
| Reorganization  | 20             | Houston   | 1    |
| Newbenefits     | 30             | Stafford  | 4    |

WORKS\_ON1

| Fname | Lname | Pname | Hours |
|-------|-------|-------|-------|
|-------|-------|-------|-------|

WORKS\_ON

| <u>Essn</u> | <u>Pno</u> | Hours |
|-------------|------------|-------|
| 123456789   | 1          | 32.5  |
| 123456789   | 2          | 7.5   |
| 666884444   | 3          | 40.0  |
| 453453453   | 1          | 20.0  |
| 453453453   | 2          | 20.0  |
| 333445555   | 2          | 10.0  |
| 333445555   | 3          | 10.0  |
| 333445555   | 10         | 10.0  |
| 333445555   | 20         | 10.0  |
| 999887777   | 30         | 30.0  |
| 999887777   | 10         | 10.0  |
| 987987987   | 10         | 35.0  |
| 987987987   | 30         | 5.0   |
| 987654321   | 30         | 20.0  |
| 987654321   | 20         | 15.0  |
| 888665555   | 20         | NULL  |





**A) UPDATE WORKS\_ON1**

SET PNO = (SELECT PNUMBER FROM PROJECT  
WHERE PNAME='XYZ')

WHERE ESSN IN (SELECT SSN FROM EMPLOYEE  
WHERE LNAME='SMITH' AND FNAME='JOHN')

AND

PNO = (SELECT PNUMBER FROM PROJECT  
WHERE PNAME='PRODUCTX')

**B) UPDATE PROJECT SET PNAME='XYZ'**

WHERE PNAME='PRODUCTX'

## UN-UPDATABLE VIEWS

- Views defined using groups and aggregate functions are not updateable

```
UPDATE DEPT_INFO
SET Total_sal=100000
WHERE Dname='Research';
```

- Views defined on multiple tables using joins are generally not updateable



# SQL TRIGGERS

- Objective: to monitor a database and take action when a condition occurs
- Triggers include the following:
  - event (e.g., an update operation)
  - condition
  - action (to be taken when the condition is satisfied)
- Triggers are classified into two main types:
  - After Triggers (For Triggers)
  - Instead Of Triggers



## SQL TRIGGERS: AN EXAMPLE

- A trigger to compare an employee's salary to his/her supervisor after insert or update operations:

- **CREATE TRIGGER** Emp\_Salary **ON** Employee

**FOR INSERT, UPDATE AS**

IF EXISTS (select \* from inserted as i join employee as e on i.super\_SSN= e.SSN  
          where i.salary > e.salary)

**BEGIN** PRINT 'Employee salary is greater than the Supervisor Salary'

**END**

INSERT INTO EMPLOYEE (FNAME, LNAME, SSN, Super\_SSN, Salary) VALUES ('Richard',  
'Marini', '653298653', '123456789', 500000)



# EXAMPLE: BOAT RENTAL DATABASE

- Consider the following Boat Rental database schema:

- SAILOR (SID, SName, Phone, City)
- BOAT (BName, BType, Price, OID)
- RESERVATION (SID, BName, Date, Duration)
- OWNER (OID, OName, Phone, Street, City, Country)

- SELECT DISTINCT Bname

- FROM BOAT

- WHERE Price > ALL (SELECT price  
FROM BOAT b , OWNER o  
WHERE b.oid=o.oid and  
Country='Pakistan' )

**What does the query do?**



# EXAMPLE: BOAT RENTAL DATABASE

- **Consider the following Boat Rental database schema:**

- SAILOR (SID, SName, Phone, City)
- BOAT (BName, BType, Price, OID)
- RESERVATION (SID, BName, Date, Duration)
- OWNER (OID, OName, Phone, Street, City, Country)

- Select bname,count(\*)
- From reservation r ,boat b,owner o
- Where b.bname=r.bname and b. oid=o.oid and country='Pakistan'
- Group by bname
- Having count(\*) > 5

**What does the query do?**



# EXAMPLE: BOAT RENTAL DATABASE

- Consider the following schema
  - SAILOR (SID, SName, Phone, City)
  - BOAT (BName, BType, Price, OID)
  - RESERVATION (SID, BName, Date, Duration)
  - OWNER (OID, OName, Phone, Street, City, Country)
- **Find the names of boats that are reserved by at least ten different sailors.**
- - Select bname
  - From reservation r
  - Group by bname
  - Having count(DISTINCT SID) >9

# EXAMPLE: BOAT RENTAL DATABASE

- Consider the following schema
  - SAILOR (SID, SName, Phone, City)
  - BOAT (BName, BType, Price, OID)
  - RESERVATION (SID, BName, Date, Duration)
  - OWNER (OID, OName, Phone, Street, City, Country)
- **List name, owner name, and price of the boats which were reserved in 2007 but not in 2008.**



# EXAMPLE: BOAT RENTAL DATABASE

- Consider the following schema
  - SAILOR (SID, SName, Phone, City)
  - BOAT (BName, BType, Price, OID)
  - RESERVATION (SID, BName, Date, Duration)
  - OWNER (OID, OName, Phone, Street, City, Country)
- Find the name and city of sailors who reserve every 'Fishing' boat.

```
○ SELECT SNAME, CITY
 FROM SAILOR s
 WHERE NOT EXISTS ((SELECT BNAME
 FROM BOAT
 WHERE BTYPE='Fishing')
 EXCEPT
 (SELECT BNAME
 FROM reservation r
 WHERE r.SID=s.SID))
```

# ASSERTION

- In SQL, table constraints are associated with a single table.
  - **CHECK(DNUMBER >0 AND DNUMBER <25)**
  - **CHECK (Dept\_create\_date <= Mgr\_start\_date)**
- Expression in the **CHECK** clause can refer to other tables but when a constraint involves many tables, it becomes cumbersome
- Assertions are constraints that are not associated with any one table.
- SQL-server do not support assertion, however it do support trigger and check constraint

## ASSERTIONS: AN EXAMPLE

- “The salary of an employee must not be greater than the salary of the manager of the department that the employee works for”

```
CREATE ASSERTION SALARY_CONSTRAINT
CHECK (NOT EXISTS (SELECT *
 FROM EMPLOYEE E, EMPLOYEE M, DEPARTMENT D
 WHERE E.SALARY > M.SALARY AND
 E.DNO=D.NUMBER AND D.MGRSSN=M.SSN))
```



## USING GENERAL ASSERTIONS

- Specify a query that violates the condition; include inside a `NOT EXISTS` clause
- Query result must be empty
  - if the query result is not empty, the assertion has been violated
- **Create Assertion to enforce the** constraint that
  - The number of Employees in each department should be less than 20.
  - An employee should be assign a project of his\her department only.
  - The total working hours of all the employees in a department should be less than 180.



- CHECK clause can also be used to specify constraints on *individual* attributes, domains and *individual* tuples

**CONSTRAINT deptPK PRIMARY KEY(Dnumber)**

**CONSTRAINT deptSK UNIQUE(Dname)**

**CHECK (Dept\_create\_date <= Mgr\_start\_date)**

- Difference between CREATE ASSERTION and the individual domain and tuple constraints is
  - CHECK on individual attributes, domains, and tuples are checked *only when tuples are inserted or updated*.