


Problem 2

In this assignment you are to implement OOP principles you learned in a single mini-project.

1. Define an interface **Measurable**. It has a single abstract method: **double getArea()**; 2. Define an abstract class **Shape** which has two fields: **type** and **name** both of type String. a. Provide constructor with a single input parameter: **name**.
 - b. Provide accessor methods for both fields.
 - c. Provide setter method for **name**.
 - d. Provide **toString()** method that simply returns the "**{type}: {name}**"
 - e. **Shape** class implements **Measurable** interface without implementing its only abstract method.
3. Define a concrete class **Rectangle** which extends the **Shape** class.
 - a. It has **width** and **height** fields both of type double.
 - b. Provide single constructor that takes three input parameters: **name**, **width** and **height** resp.
 - c. Provide accessor methods for both fields.
 - d. Implement the unimplemented method **getArea()** so that it returns the area of the rectangle object.
 - e. Override **toString()** method so that it returns the following information:
 - i. "**{type}: {name} – [{width}, {height}]**" e.g., **rectangle: my_rect_1 – [3.0, 5.0]**
- Define a concrete class **Sphere** which extends the **Shape** class.
 - a. It has **radius** field of type double.
 - b. Provide single constructor that takes two input parameters: **name** and **radius** resp.
 - c. Provide the accessor method.
 - d. Implement the unimplemented method **getArea()** so that it returns the surface area of the sphere object.
 - e. Override **toString()** method so that it returns the following information:
 - i. "**{type}: {name} – [{radius}]**" e.g., **sphere: my_sphere_1 – [3.0]**
5. Now imagine you are given an array of different shapes and are required to sort them based on the area.
 - a. Define a static method **sort** in the class **ShapeUtil** that will sort the array of different Shape objects. (You may use any sorting algorithm, just make sure you implement it yourself)
 - b. Define another static method **printShapes** in the class **ShapeUtil** that prints an array of Shape objects in a single row. Consider using **toString()** methods of those.
6. The customer is willing to paint all the Shape objects. If he provides us with the number of liters of paint per can and the number of cans he bought, could you define a method [static method **getPaintedShape** in class **PaintManager**] that takes
 - a. the array of shapes
 - b. the volume of a single can
 - c. the number of cans

- and return the shapes that will be completely painted.
- d. If the amount of paint is not sufficient, he desires to paint as many shapes as possible.
7. Customer also need you to provide her with the following functionality:
- As there are many objects and she likes to name each of them, sometimes she forgets about some. For simplicity, assume that the names are unique (there are no two objects with the same name)
 - Define a method [**findShapeByName** in the class **ShapeUtil** which will take an **array** of Shape objects and a String **name**, which returns
 - the Shape **object** with that name if exists or
 - null** if there are no object with that name.

UML Class diagram

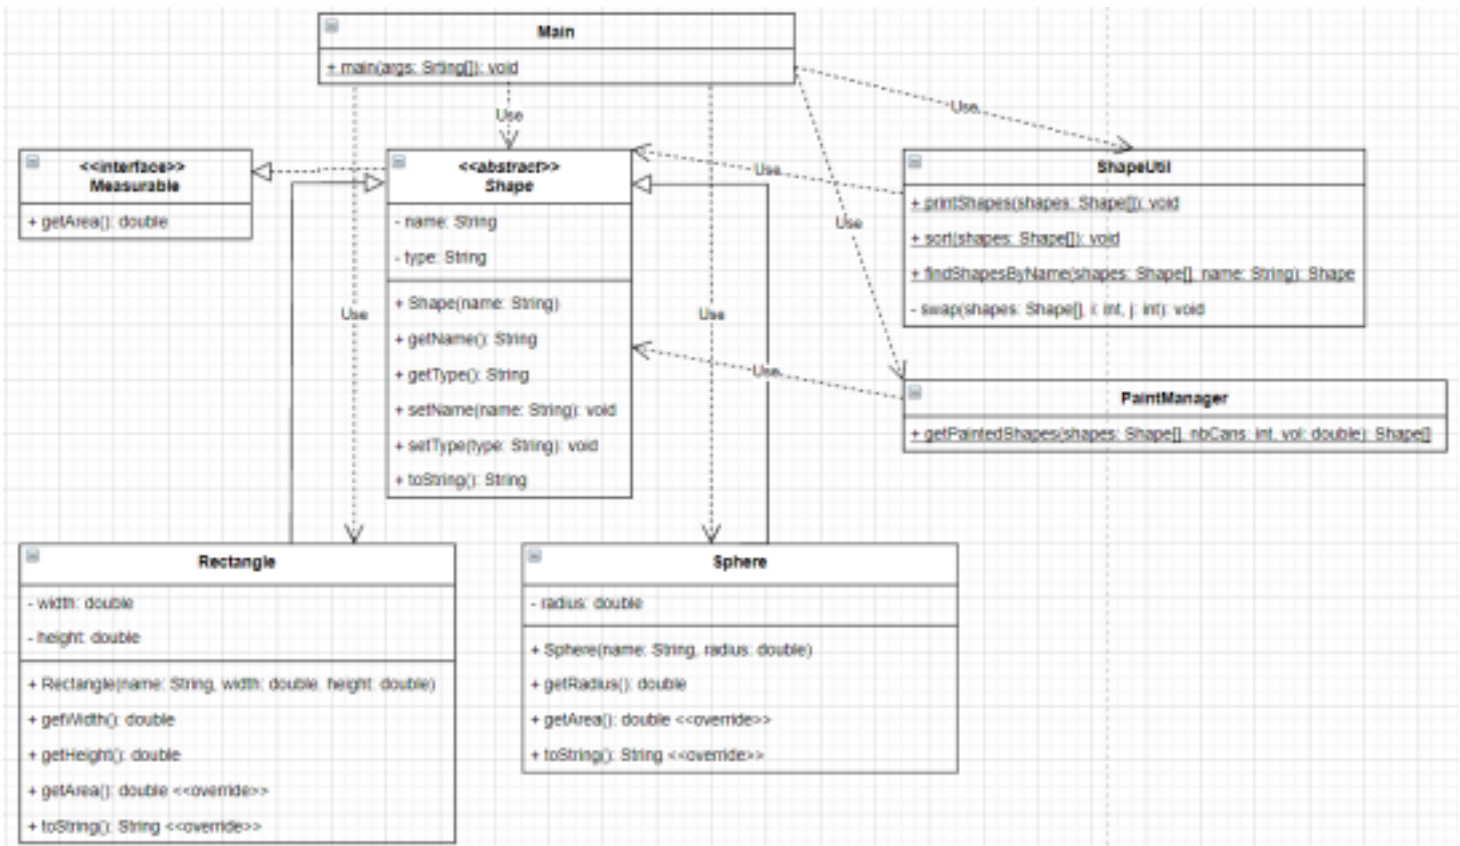

Output: (if you execute Main)

Printing all the shapes

[sphere: s2[6.0]: 452.389, rectangle: r1[3.0, 5.0]: 15.000, sphere: s1[3.0]: 113.097, rectangle: r2[2.0, 7.0]: 14.000, sphere: ball[5.0]: 314.159, rectangle: my_rect[5.0, 5.0]: 25.000]

***Printing the shapes that could be painted
given the #cans and value of each can***

[rectangle: r2[2.0, 7.0]: 14.000, rectangle: r1[3.0, 5.0]: 15.000, rectangle: my_rect[5.0, 5.0]: 25.000, sphere: s1[3.0]: 113.097]

Finding and printing the shapes based on the given name

r1: rectangle: r1[3.0, 5.0]

ball: sphere: ball[5.0]

rect: null