

ReadySignal: Cybersecurity SaaS Landing Page

Internship report, Task 2 (HTML5 and CSS3 only, zero JavaScript)

Name	Abdullah Khan
Registration number	OCT26-FE06-08
Assignment	Task 2: Cybersecurity SaaS Landing Page
Organisation	Appverse Technologies, Frontend Developer Internship (Phase 1)
Submission date	9 October 2026
Repository	github.com/abdullahsatech-eng/appverse-frontend-internship (task-submissions/task-02-cybersecurity-saas-landing-page)

1. Project overview and objectives

ReadySignal is a **fictional concept**: a SaaS product that would help small businesses understand their cybersecurity readiness and organise their next improvements. The assignment required a complete, responsive landing page built with only HTML5 and CSS3. Mandatory requirements were a custom-property token system, fluid typography with `clamp()`, CSS Grid and Flexbox, a pure CSS checkbox-hack mobile menu, smooth scrolling, CSS load-in animations, a print stylesheet, and a Lighthouse target above 95 for Accessibility and Best Practices.

The page is a static design. It does not scan, monitor or certify anything, and every number in the dashboard preview and pricing section is illustrative sample data. No customer logos, testimonials or statistics were invented.

2. Main website sections

Section	Purpose
Header and navigation	Logo, in-page links, call to action, checkbox-hack menu on small screens
Hero	Value proposition, two calls to action, CSS-built readiness preview
Trust	Four honest principles and an explicit statement of what the page is not
Features	Six proposed capabilities presented as concepts
Product preview	Dashboard built from HTML and CSS: score ring, risk categories, checklist, next actions, progress
How it works	Three-step concept (understand, prioritise, track)
Use cases	Small businesses, online stores, software agencies, startups
Pricing	Three clearly labelled illustrative tiers, no checkout
FAQ	Six answers using native details and summary
Final call to action and footer	Honest next step, internal links, placeholder contact, privacy and terms



Figure 1. Desktop hero at 1440px (captured from the running page in headless Chromium).

3. CSS architecture and design tokens

The stylesheet is split by responsibility and loaded in cascade order: tokens, reset, base, layout, components, responsive, animations, with `print.css` loaded under `media="print"`. Components use BEM naming (for example `.plan`, `.plan__name`, `.plan--featured`) and mostly single-class selectors, so specificity stays low and `!important` is never needed.

Token group	Examples
Colour	<code>--color-bg #0B1220</code> , <code>--color-bg-alt #111D30</code> , <code>--color-surface #152238</code> , <code>--color-accent #8BE9A4</code> , <code>--color-text #F5F7FA</code> , <code>--color-text-muted #A9B5C7</code> , <code>--color-border #29384D</code>
Fluid type	<code>--text-xs</code> to <code>--text-3xl</code> , each defined with <code>clamp()</code>
Spacing	<code>--space-1</code> to <code>--space-8</code> ; fluid <code>--space-gutter</code> , <code>--space-section</code> , <code>--space-gap</code>
Layout	<code>--container-max</code> , <code>--container-narrow</code> , <code>--header-height</code> , <code>--tap-target</code>
Shape and depth	<code>--radius-*</code> , <code>--border-*</code> , <code>--shadow-*</code>
Motion and layers	<code>--duration-fast/base/slow</code> , <code>--ease-out</code> , <code>--z-header</code> , <code>--z-skip-link</code>

Changing a value in `tokens.css` updates the whole site. The print stylesheet demonstrates the benefit: it re-maps the same colour tokens to a paper palette without rewriting any component.

4. Responsive design and mobile navigation

The layout is mobile-first: base styles work at 320px and three content-driven breakpoints (30rem, 48rem, 62rem) add enhancements. Card grids use `repeat(auto-fit, minmax(min(100%, X), 1fr))` so columns appear only when space allows. **Container queries** let the dashboard rearrange its panels, and the feature cards switch to an icon-beside-text layout, according to the width of their own container.

The mobile menu is a visually hidden but focusable checkbox, a styled label (“Menu”) and a navigation panel shown with `:checked ~ .site-nav`. Closed links use `visibility: hidden`, so they are removed from the tab order. At 992px and above the checkbox and label are hidden and the navigation becomes a horizontal bar.

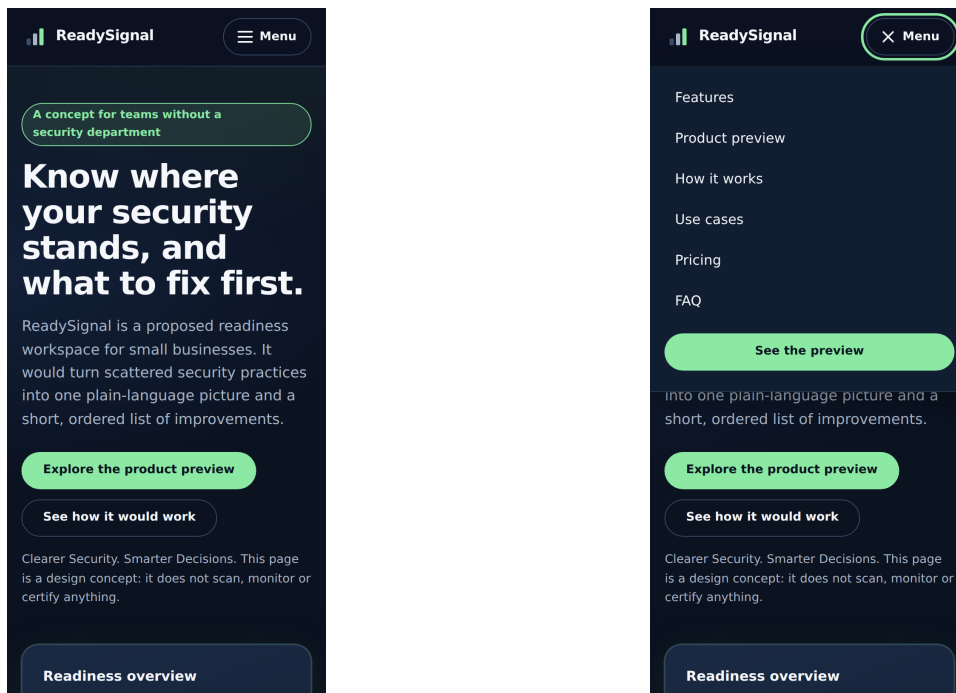


Figure 2. Left: mobile hero at 375px. Right: menu opened with the Space key; the keyboard focus ring is visible on the control.

5. Accessibility implementation

- Skip-to-content link, semantic landmarks (header, nav, main, section, footer) and one logical heading hierarchy (h1, then h2 sections and h3 cards).
- A real checkbox with an associated label for the menu, visible 3px focus ring on all interactive elements and 44px minimum tap targets.
- Decorative SVG icons and the hero mock-up are hidden with `aria-hidden`; the full labelled dashboard remains available.
- Status is never conveyed by colour alone: every colour-coded value carries words such as Strong, Fair, Needs work, Done, In progress, High priority.
- The only external link announces that it opens in a new tab and uses `rel="noopener noreferrer"`.
- Calculated contrast ratios from the tokens: body text on background 17.45:1, muted text on surfaces 7.68 to 8.15:1, accent on surface 10.84:1, button text on accent 12.74:1.
- No JavaScript, no keyboard traps and no fake interactive controls.




Figure 3. Keyboard focus ring on the desktop navigation after pressing Tab.

6. Animations, smooth scrolling and print stylesheet

Load-in motion (a short staggered rise of the hero content and a one-time fill of the readiness ring) and scroll-behavior: smooth are declared **only** inside `@media (prefers-reduced-motion: no-preference)`. Under reduce the duration tokens become 0s and no animation runs. Keyframes describe only the starting state, so content is fully visible whenever an animation does not play. This was verified: with motion enabled the headline ends at full opacity; with reduced motion no animation runs and an anchor jump still lands on the correct section.

The print stylesheet switches to a black-on-white palette, removes backgrounds and shadows, hides the menu, the decorative hero preview and secondary buttons, keeps cards and FAQ items from splitting across pages, shows FAQ answers and prints the address of external links. A headless-Chromium print to A4 produced a nine-page document with the hero, dashboard and FAQ answers all present.

7. Testing and Lighthouse results

Verified checks

Check	Result
Direct opening via file://	Passed; all 8 stylesheets load
Horizontal overflow at 320, 360, 375, 390, 414, 480, 768, 1024, 1280, 1440, 1920px	None at any width
Console errors and failed requests	None reported
Internal anchors	All resolve to existing ids
JavaScript	0 scripts in the document
Keyboard order and menu	Skip link, logo, menu checkbox, then links; Space toggles the menu
Reduced motion and print	Behave as described in section 6

Lighthouse

Lighthouse scores have not been measured yet. Lighthouse was not available in the environment used to generate the project, so no score is claimed. The table below must be completed with real values from Chrome DevTools (Lighthouse tab, Navigation mode, Mobile and Desktop) before submission.

Category	Mobile	Desktop	Target
Performance	[enter measured value]	[enter measured value]	Observe
Accessibility	[enter measured value]	[enter measured value]	Above 95
Best Practices	[enter measured value]	[enter measured value]	Above 95
SEO	[enter measured value]	[enter measured value]	Observe

Not yet performed: Lighthouse run, Firefox and Safari testing, screen-reader testing, GitHub Pages deployment check (see docs/TESTING-CHECKLIST.md).

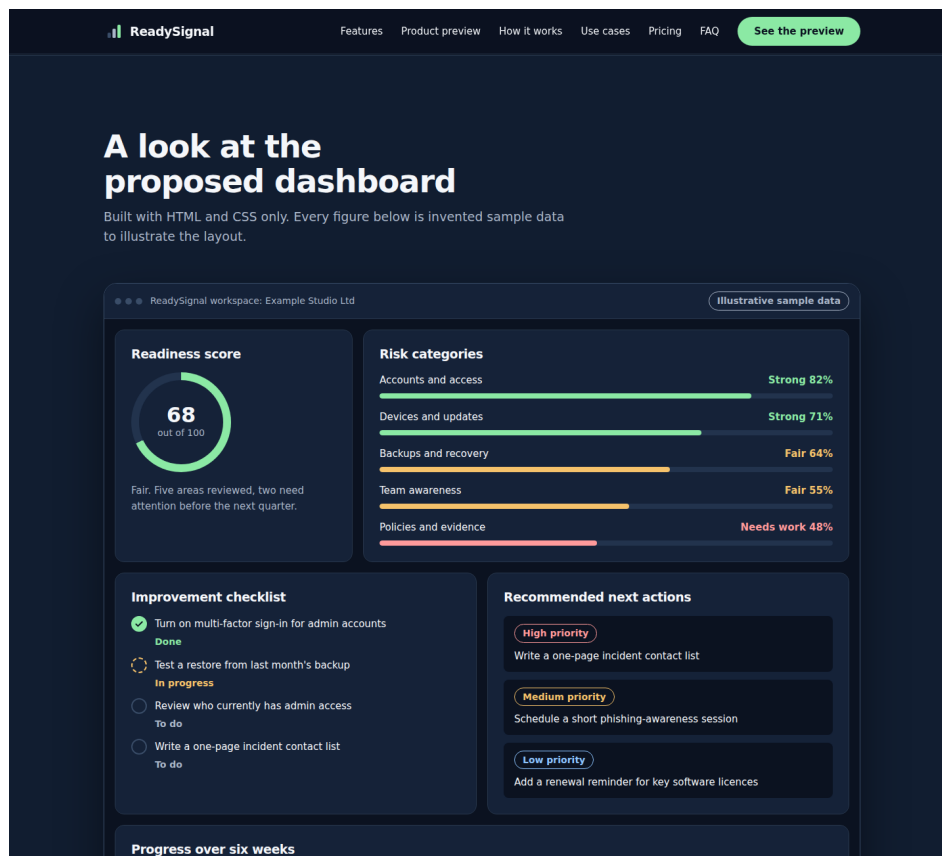


Figure 4. Dashboard preview at 1440px. All figures are illustrative sample data.

8. Conclusion and learning outcomes

ReadySignal applies the Task 1 lessons (design tokens, BEM, low specificity) to a full, realistic interface and adds fluid typography, container queries, a JavaScript-free mobile menu, motion that respects user preference, and a print stylesheet. Main lessons: how much interface behaviour HTML and CSS can provide alone; why visibility rather than display lets a hidden menu both transition and stay out of the tab order; why animations should declare only a starting frame; and why audit scores must be measured instead of assumed.

Known limitation: without JavaScript, the mobile menu stays open after an in-page link is tapped and is closed with the Menu button. The deployed URL is expected to be <https://abdullahsatech-eng.github.io/appverse-front-end-internship/task-submissions/task-02-cybersecurity-saas-landing-page/> and should be confirmed after deployment.