

**Gypsum Powder | Gypsum Board
Gypsum Tile | Ceiling Suspension Grid
Drywall Accessories**



United Gypsum Pvt. Ltd.

The Ultimate Choice for
Gypsum Products in Pakistan.





The Content

About United Gypsum	01
CEO's Statement	02
Quality Policy	03
Gypsum Rock of Pakistan	04
Smart Gypsum Boards	05
Smart Tile	09
Smart Grid	11
Drywall Accessories	12
Recognized & Certified	17

About United Gypsum

United Gypsum (Pvt.) Ltd. has been established to fulfill all the requirements of Pakistan's construction industry and ensure its sustainable growth by producing innovative, cost-effective, and reliable gypsum-based products. We aim to gain the confidence and trust of our customers through the consistency and quality of our products, while also focusing on improvements to make our position prominent in both local and international markets. Our manufacturing processes utilize the best quality raw materials sourced from gypsum mines in Pakistan, containing pure gypsum deposits. The manufacturing facility employs the most advanced and developed equipment, approved laboratories, and state-of-the-art technology, including automated processing and calcination of gypsum. This enables a large production capacity and ensures consistency in the quality of products. We design, manufacture, and distribute a wide range of construction materials, including Gypsum Powder, Gypsum Board, Gypsum Ceiling Tiles, and Drywall Accessories. Every product we manufacture complies with the standards of the international quality management system ISO 9001:2015 and 14001:2015 and also meets ASTM requirements.

United Gypsum (Pvt.) Ltd. employs skilled personnel for supervision and management, to ensure constant monitoring and quality control. This strict quality assurance is reflected in our products, which provide the best interior building solutions – safe, durable, economical, aesthetically pleasing, and easy to use, install, or dismantle. Several of our products contribute to a safe, comfortable, and healthy indoor environment due to their maintainability, recycling capability, and features that make them resistant to fire, impact, thermal radiation, and humidity. Our approach focuses primarily on manufacturing products capable of delivering excellent results in less time. Through the use of the best quality raw materials available and processing them with modern state-of-the-art equipment under strict quality control, we are determined to establish ourselves at the forefront of the construction industry and continue to provide innovative and reliable gypsum products.

CEO's Statement

“

At UNITED GYPSUM PVT LTD., we believe that success comes from constant improvement in technology, ultimately resulting in advanced products. It is a great honor to be a part of UNITED GYPSUM PVT LTD. and to work with a team of highly recognized and qualified engineers to ensure we deliver customer satisfaction with every unit produced on the assembly line.

Here at UNITED GYPSUM PVT LTD., we are dedicated to improving the future with advancements in technology and enhancements in quality standards, providing our customers with the best products they can avail. Efficiency and long-term planning both drive us towards our new goals, making products environmentally friendly and incorporating stronger bonding agents between our customers and us.

”

Vision Statement

United Gypsum aims to be a global leader, providing innovative, cost-effective, and sustainable gypsum products for the construction industry. Our commitment to excellence, quality, and environmental responsibility ensures safe, durable, and aesthetically pleasing solutions. Through advanced technology and customer trust, we strive to shape the future of construction globally.



Quality Policy


Our products have been designed and tested to give long lasting endurance. We are committed to provide higher quality products using excellent raw materials, state-of-the-art technology and international quality control systems. We take pride in meeting various requirements of customers globally and reinvesting into our product research and development.

Gypsum Rock of Pakistan

Pakistan boasts abundant gypsum rock, a valuable mineral integral to various industries, particularly the construction sector. Renowned for its purity and quality, Pakistani gypsum deposits contribute significantly to the production of gypsum-based products. Mined from rich reserves, these gypsum rocks serve as the foundation for United Gypsum's commitment to delivering innovative, cost-effective, and sustainable solutions to meet the evolving needs of the construction industry.



Smart Gypsum Board

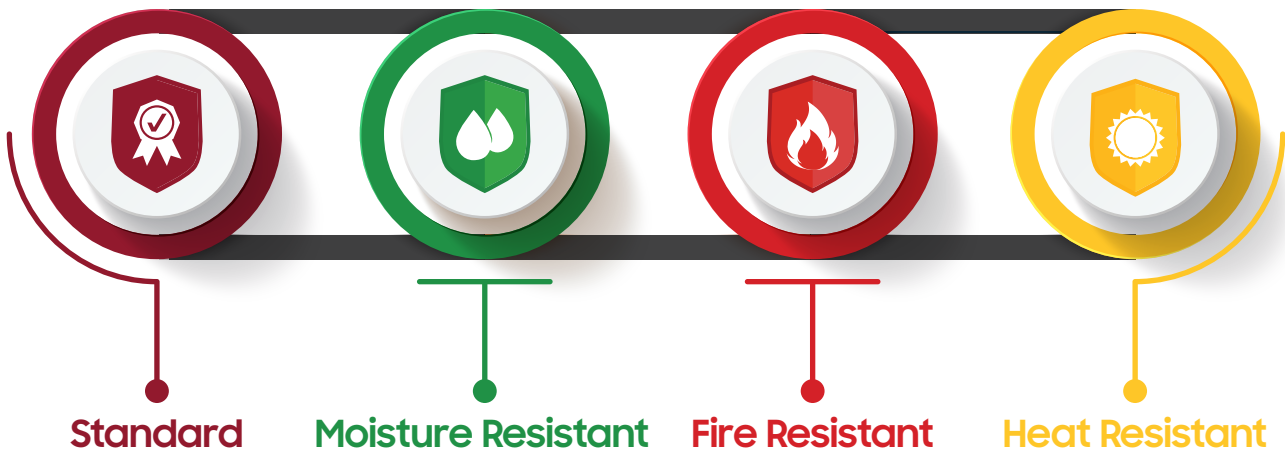

Smart Gypsum Boards

Smart Gypsum Board is primarily composed of gypsum and contains an incombustible core while covered with extra tough paper on both sides which provides its strength and durability. The manufacturing of Smart Gypsum Board is aimed at meeting the specific demands of customers while complying with ASTM standards tested on E 119, C471, C472, C473 & C1396. Its development through precision engineering of the highest quality materials makes it a quality-assured product.

Smart Gypsum Board comes in a comprehensive range of high quality boards, utilizing the best material coupled with precision engineering to match specific customer requirements:

Standard

Smart Standard Gypsum Board is suitable for interior walls, partitions and ceilings which require no special protection from fire or moisture.



Moisture Resistant

Smart Moisture Resistant Gypsum Board is an ideal choice for walls, partitions and ceilings that need additional protection from moisture. This special board consists of a blend of wax and a silicone compound enclosed in tough green paper on the surfaces which strengthens walls, partitions and ceilings to endure moist and damp surroundings.



Fire Resistant

Smart Fire Resistance Gypsum Board is an excellent choice for walls, partitions and ceilings that need extra protection from fire. It contains an incombustible fiber added to gypsum enclosed within a tough pink cohesive, compressed paper which provides extra strength. This special board has been particularly tailored and tested according to various fire rating requirements and is strongly recommended for walls, partitions and ceilings in areas which need special fire protection, particularly for fire escape stairs, computer rooms, elevators, and interior walls of buildings.



Heat Resistant

Smart Heat Resistant Gypsum Board offers effective interior heat insulation for exterior walls and upper-floor ceilings of both commercial and residential buildings that are significantly impacted by heat and sunlight. Beneficial in both hot and cold climates, the board's back liner, attached to a specialized aluminum foil, reflects 95% of thermal radiation, ensuring a comfortable temperature. It also acts as a reliable vapor retarder and prevents moisture penetration in walls and ceilings.

This board is preferred for areas requiring additional heat control and can be incorporated into all Smart Gypsum Boards, including Standard, Fire Resistant, and Moisture Resistant.



Types of Edges

Smart Gypsum Board is available in two distinct types of edges, which are designed for particular types of work. Using the edge-type which is more befitting ensures better performance and appearance.

Square Edge (S.E)



Suitable for interior walls and ceilings. No jointing required.

Tapered Edge (T.E)



Tapered edges offer enough space for firmly fixing the joint filler and tape, hence resulting in an even finish at joints. Suitable for interior walls and ceilings that need a smooth level finish. Jointing is required.

Storage

Smart Gypsum Board should be stored in cool and dry conditions. Support should be placed every 50cm to prevent the board from being in direct contact with the floor. Storage area/room should have adequate ventilation.

Limitation

Smart Gypsum Board is not recommended for areas exposed to constant moisture or extreme dampness such as saunas, steam rooms and swimming pools.

Product Specification:

Thickness	Metric Size (mm)	Imperial Size (mm)	Weight (approx.) kg/sheet	20 ft. Container Loading
7 mm	1220x2400	1220x2440	15	1400 Sheets
9 mm	1220x2400	1220x2440	19	900 Sheets
12 mm	1220x2400	1220x2440	25	680 Sheets
*15 mm	1220x2400	1220x2440	30	580 Sheets

*Sizes will be available on special orders placed in advance.


Smart Tile features a non-combustible gypsum core encased by sturdy paper on both surfaces. These tiles offer a wide selection of elegant vinyl laminates, known for their aesthetic appeal, cost-effectiveness, and lasting durability. The vinyl lamination undergo rigorous testing and are classified as Class "2" in the Flame Spread Test in accordance to British Standard 476 Part 7: 1971



Smart Tiles are available in two variations:


Front Vinyl Laminated and Paper Backing

Smart Tile offers premium Vinyl Laminates in a variety of embossed, plain, and printed patterns, providing the flexibility to seamlessly match or contrast with the decorative layout of the surrounding area. The vinyl surface is easy to clean, reflects ample light, and requires no additional ornamentation.

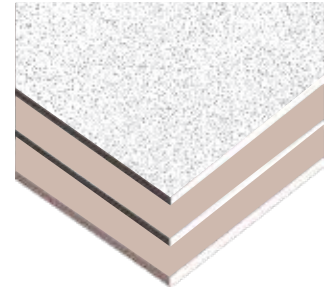

Front Vinyl Laminated and Aluminium Foil Backing

Adding to its features, Smart Tile back-liners are affixed to a distinctive aluminum foil. This foil serves as an effective barrier against heat transfer, acts as a reliable vapor retarder, and efficiently reflects 95% of the thermal radiation. This makes it particularly suitable for application on the top-floors of both commercial and residential buildings that are significantly impacted by heat and sunlight.

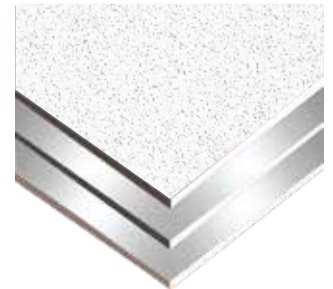


Product Specification:

Thickness	Metric Size (mm)	Imperial Size (mm)	Packing
7 mm	600x600	603x603	10 pcs / CTN
9 mm	600x600	603x603	8 pcs / CTN
9 mm	600x1200	603x1206	6 pcs / CTN
*12 mm	600x600	603x603	6 pcs / CTN
*12 mm	600x1200	603x1206	4 pcs / CTN
*15 mm	600x600	603x603	4 pcs / CTN

*Sizes will be available on special orders placed in advance.

Recommended Edge

Square Edge is suitable for T-Bar ceilings and requires no jointing.

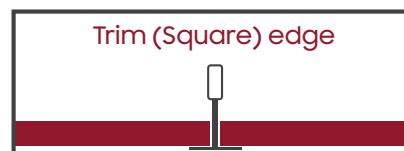


SMART GRIDTM

Smart Grid suspended ceiling system (T-Grid) is manufactured using galvanized steel coated with zinc to prevent corrosion through rusting. The underlying side of the bar has a thick polyester coating making it durable and sturdy to withstand climatic changes.


SMART GRID 38 I Premium

This grid system is uniquely designed with interlocked main and cross T-bars, making it an ideal choice for suspended and false ceilings in buildings, cinema halls, auditoriums, and other commercial spaces.

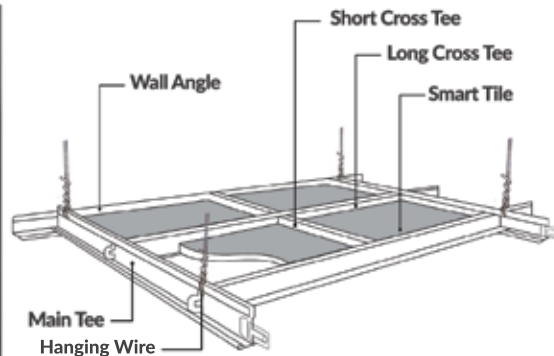

Main Runner


38mm H x 24mm W x 3660mm L

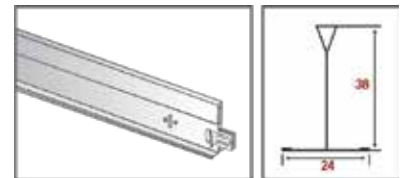

Cross Runner


26mm H x 24mm W x 1220mm L

26mm H x 24mm W x 610mm L

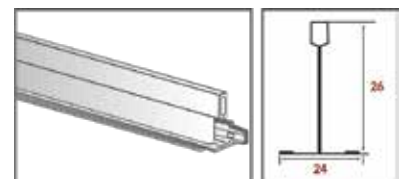

Wall Angle

22mm H x 22mm W x 3050mm L

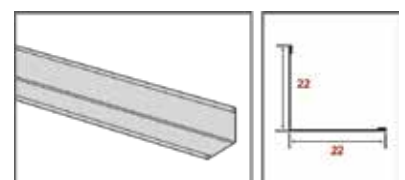

Drywall Accessories



SMART / SCREW[™]

Smart Screw[™] are specialized drywall screws, featuring fine threads along their entire length, designed for securing drywalls to metal studs efficiently. Ensuring rapid and secure attachment of Smart Gypsum Boards to metal studs, these screws have a unique bugle head that allows precise piercing without damaging the outer paper layer. The screws are phosphate-treated, providing corrosion resistance for long-lasting and higher durability.

Recommended Penetration Depth:

Ensure a minimum penetration of 10mm into the metal framing, through the board.

Product Specification:

Smart Screw [™]	
Size	25mm
Material	Carbon Steel
Diameter	# 6
Recess	# 2
Thread	Fine Thread
Type	Bugle Head, Black Phosphate, Self Drilling Tips

Drywall Accessories



SMART FILLERTM

For a quality product like Smart Gypsum board, skillful jointing and smooth finishing are essential. Smart FillerTM Ready Mixed offers the perfect solution for achieving flawless flush joints and finishes. Specifically manufactured for jointing and finishing drywalls and ceilings, this pre-mixed compound possesses adhesive properties and dries to a hard, smooth surface, ideal for painting.

Smart FillerTM Ready Mixed is a premixed compound that can be directly applied without the need for additional mixing or water.

Application:

Suitable for commercial, residential, and industrial purposes, Smart Filler is also designed to patch up and improve various types of interior surfaces.

Product Specification:

Smart Filler TM Joint Filler Ready Mixed	
Time Between Coats	12-24 hours (depends on the local conditions)
Average Consumption	1.75kg/m ² /mm Thickness depending on substrate conditions
Contained Volume	5kg & 26kg Plastic Bucket
Storage Method	Store in a cool, dry place with low humidity conditions Avoid direct exposure to heat or sunlight
Products Shelf Life	Best before 8 months from manufacturing date
Standards	Complies with ASTM C475 & ASTM C840

Drywall Accessories



SMART / TAPE™

This self-adhesive fiberglass tape is used to reinforce ceilings and drywall joints. It is made from a thin and lightweight yet exceptionally strong fiberglass mesh. Smart Fiberglass Tape resists shrinkage, shredding, stretching, and deformation. It effectively prevents the common issue of joint cracking associated with ordinary fiberglass mesh tape. The utilization of Smart Tape™ significantly enhances joint strength, durability, and resistance to cracking, tearing, stretching, and distortion. With its high tensile strength, Smart Tape™ creates a superior bond, ensuring crack resistance in joints.

Application:

Ideal for concealing joints between ceilings and drywall panels, offering a quick and effortless application without the requirement of a bedding or taping coat for the jointing material. Also suitable for patching holes and cracks in both drywalls and ceilings.

Product Specification:

Smart Tape™	
Mesh Size	9x9 mesh/inch (50mm x 90M)
Warp of Yarn	33 tex x 2
Woof of Yarn	100 tex
Average Weight	63-68 g/m ²
Tensile Strength	warp: 550N/50mm
Woof	≤ 10um
Resin Content	26% - 28%
Alkaline Resistance Properties	After 28 days of immersion in 5% NaOH solution, retention rate of tensile fracture ≥ 70%

Drywall Accessories



SMART / BEADTM

Smart BeadTM paper-faced metal bead tape, also known as Drywall Corner Tape, is specifically crafted for finishing both inside and outside drywall edges. It features a unique, high-quality paper tape that is laminated to two steel strips, ensuring a robust and secure finish. The bead tape adheres effortlessly to joint compounds, textures, and paints. The corrosion-resistant metal guarantees impact resistance, preventing edge cracking and chipping. This results in corners that maintain their fine condition despite continuous exposure to everyday wear-and-tear.

Usage:

Primarily used for reinforcing corners. Smart Bead ensures smooth and robust edges. Additionally, it is suitable for applications on archways and curves.

Product Specification:

Smart Bead TM	Units	Data
Weight	g/m	≥ 55
Thickness	mm	0.30 ± 0.02
Tensile Strength	kN/m	≥ 4.4
Metal & Paper Peel Off Strength	kN/m	≥ 0.3
Ash	%	5 - 7
Water	%	4.5 - 5.5
Thickness Tolerance	um	≥ 10
Steel Strip Width	mm	11


Drywall Accessories

SMART / ACCESSTM

Smart AccessTM are integrated accessories designed for easy fitting into ceilings. This panel system offers a smart, cost-effective solution that combines aesthetic appeal with efficient functionality. Installed at various locations on suspended ceilings, it provides permanent access for regular checking, inspections and modifications.

User-Friendly:

The access panels open effortlessly by applying pressure to the flap on the spring-loaded latch side. The Smart Access panel system features robust aluminum profiles with white powder coating, available in various sizes including: 300 x 300mm, 400 x 400mm, and 600 x 600mm.

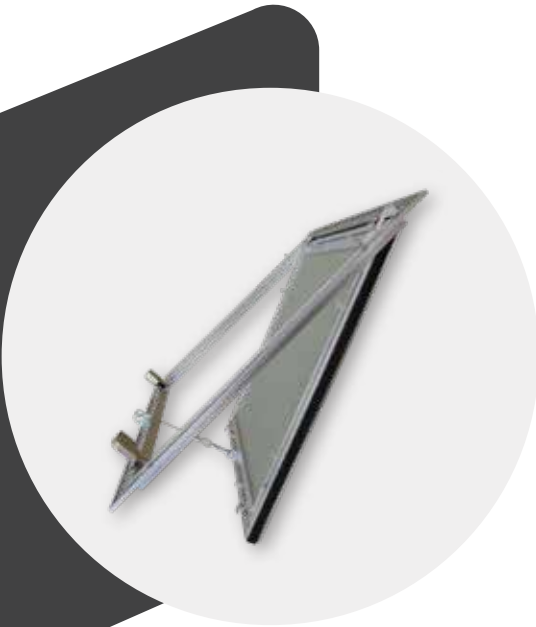

Recognized & Certified





WIDE NETWORK OF OUR DEALERS



OTHER COUNTRIES

-  United Arab Emirates
-  Sri Lanka
-  Oman
-  Nepal





CERTIFIED ISO 9001 : 2015 & 14001 : 2015

