



NAVIGATE

ADVANCE


DELIVERY

API Documentation

V.2.5.0

Get Started

ID Express provides a simple and powerful RESTful API (Application Programming Interface) to integrate seamlessly with other applications. This documentation explains how to successfully generate a new order, manage the orders and check the shipping fee from ID Express.

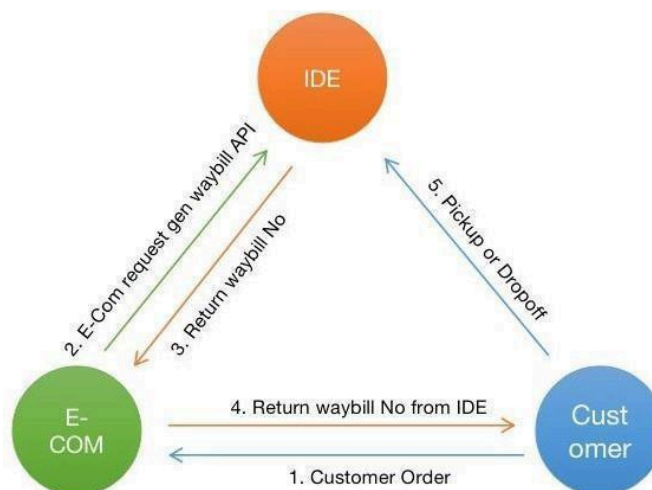

Before You Start

You will need an `appld` and `securityKey`, please contact IDExpress Tech Division to get them. And at the end of this document there will be a standard Waybill paper specification that needs to be met.

Notes: the `appld` and `securityKey` in this document are only used as examples.

Overview

- Call the interface using HTTP POST
- Sandbox base URL: <https://api-stg.idexpress.tech>
- POST encoding format: "application/x-www-form-urlencoded"
- Data field is used to indicate the JSON / data content to be requested during POST. For data security, a called request must contain a signature (sign) value. To get signatures, please use the Md5 algorithm: md5(data+appld+securityKey).
- The response (return value) will be in JSON format:

```
{
  "code": if no error = 0, else return errorCode
  (int) "desc": error description (String)
  "total": total_records (Long)
  "data": Object or Array result
}
```

Key	Description	Example
data	JSON data value	{ "senderCityId": 42, "recipientDistrictId": 14896, "weight": "1", "expressType": "00" }
appld	client app identifier	123456
securityKey	To make confidential requests to another server.	ABCDEFGH123456
sign	To ensure information integrity. Signatures are used to ensure that API requests or responses have not been tampered with transit.	07bb98b114726acb8c748f2a3e9fa012

PHP example:

```
<?php
$appId = '123456';
$secKey = 'ABCDEFGH123456';
$data = '{
  "senderCityId": 42,
  "recipientDistrictId": 14896,
  "weight": "1",
  "expressType": "00"
}';
$sign = md5($data.$appId.$secKey);
echo $sign;
?>
```

The sign should be:

07bb98b114726acb8c748f2a3e9fa012

JS example:

```
const utf8 = require('utf8');
const md5 = require("js-md5");
var data = `{
  "senderCityId": 42,
  "recipientDistrictId": 14896,
  "weight": "1",
  "expressType": "00"
}`;
var appId = '123456';
var secret = 'ABCDEFGH123456';
var encoded = utf8.encode(data+appId+secret);
var output = md5(encoded);
console.log("output : " + output);
```

The sign should be:

07bb98b114726acb8c748f2a3e9fa012

API List

1.1. Create Batch Orders

Function:

- To create one or more orders

Validation:

- If ServiceType = 00 (Pickup), then pickupStartTime and pickupEndTime parameters are mandatory.
- pickupStartTime must be > 1.5 hours greater than orderTime & current time
- pickupEndTime must be at least 4 hours greater than pickupStartTime

Methods:

- POST

Request URL:

- {{base_url}}/open/v1/waybill/create

Request Body (x-www-form-urlencoded):

Key	Description	Type	Mandatory	Notes
appId	client app identifier	String	Yes	
sign	Signature	String	Yes	
data	Order List	JSON Array	Yes	

Order List Data (JSON):

Param	Description	Type	Mandatory	Notes
orderNo	Order Number	String (32)	Yes	Max 32 CHAR, Alphanumerical
waybillNo	Reserved Waybill Number	String (15)	No	Only if using reserved/booking waybill
orderTime	Order creation time	Long	Yes	10 digit - Unix Timestamp
expressType	ID Express Shipping Service	String (2)	Yes	00 = STD (Standard) 03 = iDlite (iDlite) 06 = iDtruck (Cargo)

itemName	Name of Item	String (1024)	Yes	
insured	Insurance Status	String (1)	No	0 = No (Default) 1 = Yes
itemRemarks	Item Notes	String (1024)	No	
itemQuantity	Quantity of item	Integer	Yes	
itemCategory	Category of item	String (2)	Yes	00 = Items 01 = Document 02 = Bird Nest
weight	Total weight all items in Kilogram (KG)	String	Yes	Unit: Kilograms (KG) Support 2 decimal places
length	Item's length in Centimeters (CM)	Integer	No	Unit: Centimeters (CM)
width	Item's width in Centimeters (CM)	Integer	No	Unit: Centimeters (CM)
height	Item's height in Centimeters (CM)	Integer	No	Unit: Centimeters (CM)
serviceType	Pick up / Drop Off Service Type	String (2)	Yes	00 = Pickup 01 = Drop off
itemValue	Item value	String	Yes, if insured= 1	- Max value is 100,000,000 - Max value is 5,000,000 if codAmount > 0
senderName	Sender Name	String (128)	Yes	
senderEmail	Sender Email	String (128)	No	
senderCellphone	Sender Phone Number	String (16)	Yes	Must be started with "0" or "62", max. 16 CHAR
senderPhoneNumber	Sender Secondary Phone Number	String (16)	No	Must be started with "0" or "62", max. 16 CHAR
senderProvinceId	Sender Province Code	Long	No	Get code from Area List provided
senderCityId	Sender City Code	Long	Yes	Get code from Area List provided
senderDistrictId	Sender District Id	Long	Yes	Get code from Area List provided
senderAddress	Sender Address Details	String (512)	Depends on Service Type, default = No	If serviceType = 00, then senderAddress is mandatory, else not mandatory
senderZipCode	Sender Zip Code	String (5)	No	
recipientName	Recipient Name	String (128)	Yes	

recipientEmail	Recipient Email	String (128)	No	
recipientCellphone	Recipient Phone Number	String (16)	Yes	Must be started with "0" or "62", max. 16 CHAR
recipientPhoneNumber	Recipient Secondary Phone Number	String (16)	No	Must be started with "0" or "62", max. 16 CHAR
recipientProvinceId	Recipient Province Code	Long	No	Get code from Area List provided
recipientCityId	Recipient City Code	Long	Yes	Get code from Area List provided
recipientDistrictId	Recipient District Id	Long	Yes	Get code from Area List provided
recipientAddress	Recipient Address Details	String (512)	Yes	
recipientZipCode	Recipient Zip Code	String (5)	No	
codAmount	COD Amount in Rupiah	String	No	Min value 10,000 Max value 5,000,000
paymentType	Settlement Type	String (2)	Yes	01 = Periodic
pickupStartTime	Starting time range of Pick-up Time	Long	Depends on serviceType	10 digit- Unix Timestamp (Must be 90 minutes greater than orderTime & current time)
pickupEndTime	End time range of Pick-up Time	Long	Depends on serviceType	10 digit - Unix Timestamp (Must be 240 minutes greater than pickupStartTime)
shippingclient	VIP User Name	String	No	Only for VIP client (client who are using our VIP Portal)

Response Parameter:

Parameter	Description	Type	Remark
code	Business code	Integer	
desc	Return description	String	
total	Total	Integer	
data	Return result object	Array	

Data

Parameter	Description	Type	Remark
code	Business code	Integer	
orderNo	Order No.	String	
waybillNo	Waybill No.	String	Will shown if orderNo is duplicated
sortingCode	Sorting Code	String	Will shown if orderNo is duplicated
minSla	Min SLA in days	Integer	
minSla	Max SLA in days	Integer	
msg	Message	String	

Request Example

- Method: POST
- URL: <https://api-stg.idexpress.tech/open/v1/waybill/create>
- Request Body:
- x-www-form-urlencoded:

```
data=[
  {
    "orderNo":"IDTEST234220",
    "waybillNo":"",
    "orderTime": 1609144242,
    "expressType":"00",
    "itemName":"Colorful Clothes",
    "insured":"0",
    "itemRemarks":"Size: L, Black Blue White",
    "itemQuantity":1,
    "itemCategory":"00",
    "weight":"1",
    "length":11,
    "width":15,
    "height":17,
    "itemValue":"200000",
```



```
"senderName":"John Doe",
"senderEmail":"sender@example.com",
"senderPhoneNumber":"081292823829",
"senderCellphone":"081292823829",
"senderProvinceId":1,
"senderCityId":37,
"senderDistrictId":14905,
"senderAddress":"512 Daugherty Circles New Dejuanburgh, DE 63176-1395",
"senderZipCode":"10060",
"recipientName":"Kevin",
"recipientEmail":"recipient@gmail.com",
"recipientPhoneNumber":"085921065965",
"recipientCellphone":"085921065965",
"recipientProvinceId":1,
"recipientCityId":39,
"recipientDistrictId":14918,
"recipientAddress":"JL Gatot Subroto X No 9",
"serviceType":"00",
"codAmount":"100000",
"paymentType":"01",
"pickupStartTime":1609194642,
"pickupEndTime":1609453842,
},
{
  "orderNo": "IDTEST2343320",
  "orderTime": 1609144242,
  "expressType":"00",
  "itemName": "Milego Jeans",
  "insured":"0",
  "itemRemarks": "Size: 32, Black Washed",
  "itemQuantity":1,
  "itemCategory":"00",
  "weight": "0.5",
  "length":0,
  "width":0,
  "height":0,
  "insuranceAmount":"120",
```

```
"itemValue":"100000",
"senderName":"John Doe",
"senderEmail":"sender@example.com",
"senderPhoneNumber":"081292823829",
"senderCellphone":"081292823829",
"senderProvinceId":1,
"senderCityId":37,
"senderDistrictId":14905,
"senderAddress":"512 Daugherty Circles,New Dejuanburgh, DE 63176-1395",
"senderZipCode":"10060",
"recipientName": "Kevin",
"recipientEmail":"recipient@gmail.com",
"recipientPhoneNumber":"085921065965",
"recipientCellphone":"085921065965",
"recipientProvinceId":1,
"recipientCityId":39,
"recipientDistrictId":14918,
"recipientAddress":"JL Gatot Subroto X No 9",
"serviceType":"01",
"codAmount":"100000",
"paymentType":"01"
}
]
&appId=xxxxxxx&sign=xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
```

Successful Response (Created Successfully)

```
{
  "code": 0,
  "desc": null,
  "total": null,
  "data":
  [
    {
      "code": "0",
      "orderNo":
      "IDTEST234220", "waybillNo":
      "IDP003699812429",
      "sortingCode": "JKT-JK403-JKTT02",
      "minSla":1,
      "maxSla":3,
      "msg": null,
    },
    {
      "code": "0",
      "orderNo":
      "IDTEST2343320", "waybillNo":
      "IDP003280765110",
      "sortingCode": "JKT-JK403-JKTT02",
      "minSla":1,
      "maxSla":3,
      "msg": null
    }
  ]
}
```

Failed Response

```
{
  "code": -100000,
  "desc": "System
exception", "total": null,
  "data": null
}
```

Failed Response (Duplicated Order/Already existed)

```
{
  "code": 0,
  "data": [
    {
      "code": -1,
      "msg": "duplicate IDE701613846737,JKT-JK403-JKTT02",
      "orderNo": "IDTESTN0000123",
      "sortingCode": "JKT-JK403-JKTT02",
      "waybillNo": "IDE701613846737"
    }
  ],
  "desc": null,
  "total": 1
}
```

1.2. Modify Waybill / Edit Waybill

Function:

- To edit waybill information
Note: Waybill that has been picked up cannot be modified.

Methods:

- POST

Request URL:

- {{base_url}}/open/v1/waybill/update

Request Body (x-www-form-urlencoded):

Key	Description	Type	Mandatory	Notes
data	Order Information	Object	Yes	
appld	client app identifier	String	Yes	
sign	sign	String	Yes	

Order Information (JSON):

Param	Description	Type	Mandatory	Notes
orderTime	Order creation time (GMT+00)	Long	Yes	Unix Timestamp (GMT+00)
expressType	Express type	String (2)	Yes	00 = STD (Standard) 03 = iDlite (iDlite) 06 = iDtruck (Cargo)
itemName	Item name	String (1024)	Yes	
insured	insured	String (1)	No	0=No (Default) 1=Yes
itemRemarks	Item Remarks	String (1024)	No	
itemQuantity	Item Quantity	Integer	Yes	
itemCategory	Item Category	String (2)	Yes	00 Items 01 Document
weight	weight	String	Yes	Unit: KG. Support two decimal places
length	length	Integer	No	CM
width	width	Integer	No	CM
height	height	Integer	No	CM

itemValue	Item value	String	Yes, if insured= 1	- Max value is 100,000,000 - Max value is 5,000,000 if codAmount > 0
senderName	Sender Name	String (128)	Yes	
senderEmail	Sender Email	String (128)	No	
senderCellphone	Sender Phone Number	String (16)	Yes	Must be started with "0" or "62", max. 16 CHAR
senderPhoneNumber	Sender Secondary Phone Number	String (16)	No	Must be started with "0" or "62", max. 16 CHAR
senderProvinceId	Sender Province Code	Long	Yes	Get code from Area List provided
senderCityId	Sender City Code	Long	Yes	Get code from Area List provided
senderDistrictId	Sender District Code	Long	Yes	Get code from Area List provided
senderAddress	Sender Address	String (512)	Depends on Service Type, default = No	If serviceType = 00, then senderAddress is mandatory, else not mandatory
senderZipCode	Sender ZipCode	String (5)	No	
recipientName	Recipient Name	String (128)	Yes	
recipientEmail	Recipient Email	String (128)	No	
recipientCellphone	Recipient Phone Number	String (16)	Yes	Must be started with "0" or "62", max. 16 CHAR
recipientPhoneNumber	Recipient Secondary Phone Number	String (16)	No	Must be started with "0" or "62", max. 16 CHAR
recipientProvinceId	Recipient Province Code	Long	Yes	Get code from Area List provided
recipientCityId	Recipient City Code	Long	Yes	Get code from Area List provided
recipientDistrictId	Recipient District Code	Long	Yes	Get code from Area List provided
recipientAddress	Recipient Address	String (512)	Yes	
recipientZipCode	Recipient ZipCode	String (5)	No	
serviceType	Service Type	String (2)	Yes	00 = Pickup 01 = Drop off
codAmount	COD Amount in Rupiah	String	No	Min value 10,000 Max value 5,000,000
paymentType	Payment Type	String (2)	Yes	01 = Periodic
pickupStartTime	Pickup StartTime (GMT+00)	Long	No	Unix Timestamp (GMT+00)
pickupEndTime	Pickup EndTime (GMT+00)	Long	No	Unix Timestamp (GMT+00)

Request Example

- Method: POST
- URL: <https://api-stg.idexpress.tech/open/v1/waybill/update>
- Request body:

```
data =  
  
  {  
    "orderTime": 1609144242,  
    "expressType": "00",  
    "itemName": "Colorful Shoes",  
    "insured": "0",  
    "itemRemarks": "Size 33",  
    "itemQuantity": 1,  
    "itemCategory": "01",  
    "weight": "1", "length": 11, "width": 15, "height": 17,  
    "itemValue": "124000",  
    "senderName": "John Doe",  
    "senderEmail": "john@example.com",  
    "senderPhoneNumber": "628192920911",  
    "senderCellphone": "628382139111",  
    "senderProvinceId": 1, "senderCityId": 37, "senderDistrictId": 14905,  
    "senderAddress": "512 Daugherty Circles New Dejuanburgh, DE 63176-1395",  
    "senderZipCode": "10060",  
    "recipientName": "Kevin",  
    "recipientEmail": "recipient@gmail.com",  
    "recipientPhoneNumber": "085921065965",  
    "recipientCellphone": "085921065965",  
    "recipientProvinceId": 1, "recipientCityId": 39, "recipientDistrictId": 14918,  
    "recipientAddress": "JL Gatot Subroto X No 9",  
    "serviceType": "00",  
    "codAmount": "123",  
    "paymentType": "01",  
    "pickupStartTime": 1609194642,  
    "pickupEndTime": 1609453842,  
  }  
  
  &appId=100101&sign=xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
```

Successful Response

```
{  
  "code": 0,  
  "desc": null,  
  "total": null,  
  "data": null  
}
```

Failed Response (Business Exception)

```
{  
  
  "code": 1100,  
  "desc": "The waybill has been picked up and cannot be updated",  
  "total": null,  
  "data": null  
}
```

Failed Response (System Exception)

```
{  
  
  "code": -100000,  
  "desc": "System exception",  
  "total": null,  
  "data": null  
}
```


1.3. Cancel Waybill

Function:

- To cancel waybill
Note: Waybills that have been picked up cannot be canceled.

Methods:

- POST

Request URL:

- {{base_url}}/open/v1/waybill/cancel

Request Body (x-www-form-urlencoded):

Key	Description	Type	Mandatory	Notes
data	Waybill No	Object	Yes	
appld	client app identifier	String	Yes	
sign	sign	String	Yes	

Response Parameter

Parameter	Description	Type	Remark
code	Business code	Integer	
desc	Return description	String	
total	Total	Integer	
data	Return Content	Array	

Request Example

- Method: POST
- URL: <https://api-stg.idexpress.tech/open/v1/waybill/cancel>
- Request Body:
x-www-form-urlencoded:

```
data=
{
  "waybillNo": "IDP003699812429"
}
&appld=100101&sign=xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
```

Successful Response

```
{  
  "code": 0,  
  "desc": null,  
  "total": null,  
  "data": null  
}
```

Failed Response (Business Exception)

```
{  
  "code": 1100,  
  "desc": "The waybill has been taken and cannot be canceled",  
  "total": null,  
  "data": null  
}
```

Failed Response (System Exception)

```
{  
  "code": -100000,  
  "desc": "System exception",  
  "total": null,  
  "data": null  
}
```

2.1. Tracking Waybill

Function:

- To track the waybill progress.
Supported for order number and waybill number.

Methods:

- GET

Request URL:

- `{{base_url}}/open/v1/waybill/get-tracking`

Request Parameter

Key	Description	Type	Mandatory	Notes
appld	client app identifier	String	Yes	
sign	Signature	String	Yes	
data	Waybill No or Order No	JSON Array	Yes	

Response Parameter

Parameter	Description	Type	Notes
code	Business Code	Integer	
desc	Description	String	
Total	Total of Waybill	Integer	
Data	List of Waybill Shipping Information	Array	

Data

Object	Description	Type	Notes
basicInfo	Waybill Basic Information	Object	
itemInfo	Item's Information	Object	
senderInfo	Sender's Information	Object	
recipientInfo	Recipient's Information	Object	
history	Scan history	Array	

basicInfo

Parameter	Description	Type	Notes
orderNo	Order No.	String	
waybillNo	Waybill No.	String	
orderTime	Order create time	Long	Unix Timestamp

itemInfo

Parameter	Description	Type	Notes
itemName	Item Name	String	
insured	Insured	String	
itemRemarks	Item Remarks	String	
itemQuantity	Item Quantity	Integer	
itemCategory	Item Category	Integer	
weight	weight	String	Unit: KG, 2 decimals
length	length	Integer	in CM
width	length	Integer	in CM
height	height	Integer	in CM
insuranceAmount	Insurance Amount	String	
itemValue	Item value	String	

senderInfo

Parameter	Description	Type	Notes
senderName	Sender Name	String	
senderEmail	Sender Email	String	
senderPhoneNumber	Sender PhoneNumber	String	
senderCellphone	Sender Cellphone	String	
senderProvince	Sender Province	String	
senderCity	Sender City	String	
senderDistrict	Sender District	String	
senderAddress	Sender Address	String	
senderZipCode	Sender ZipCode	String	

recipientInfo

Parameter	Description	Type	Notes
senderName	Sender Name	String	
senderEmail	Sender Email	String	
senderPhoneNumber	Sender PhoneNumber	String	
senderCellphone	Sender Cellphone	String	
senderProvince	Sender Province	String	
senderCity	Sender City	String	
senderDistrict	Sender District	String	
senderAddress	Sender Address	String	
senderZipCode	Sender ZipCode	String	

history

Parameter	Description	Type	Notes
waybillNo	Waybill No.	String	
operationType	Operation Type	String	List of Operation type: 1. Pick up scan 2. Loading scan 3. Sending scan 4. Arrival scan 5. Unloading scan 6. Delivery scan 7. POD scan / POD Entry 8. Return Confirm 9. Return POD Scan 10. Problem On Shipment scan 11. Create Return Bill 12. Confirm Return Bill 13. Pickup failure 14. Dropped Off at Store 15. Cancel Order New
operationTime	Operation Time	Long	Unix Timestamp
courierName	Courier Name	String	
currentBranch	Current Branch	String	
nextBranchName	Next Branch Name	String	
signer	Signer	String	
problemCode	Problem Code	String	
description	Description of status	String	
proofOfStatus	Image of proof	String	Proof of Pickup, Problem on Shipment and POD in form of URL
relation	Relation of signer	String	00 - Parent 01 - Security 02 - Receptionist 03 - Siblings

Request Example

- Method: GET
- URL: https://api-stg.idexpress.tech/open/v1/waybill/_get-tracking?data=IDD654963289986&appld=100001&sign=xxxxxxxxxxxxxx

Successful Response

```
{
  "code":0,
  "desc":null,
  "total":null,
  "data":
  {
    "basicInfo":
    {
      "orderNo":"OR0111666000999",
      "waybillNo":"IDD955255915888",
      "shipingTime":1294890876859
    },
    "itemInfo":
    {
      "itemName":"ITEMNAME",
      "insured":"0",
      "itemRemarks": "itemRemarks",
      "itemQuantity":122,
      "itemCategory":"01",
      "weight":"12.34",
      "length":222,"width":222,"height":222,
      "insuranceAmount":"123",
      "itemValue":"124"
    },
    "senderInfo":
    {
      "senderName":"senderName",
      "senderEmail":"sender@gmail.com",
      "SenderPhoneNumber":"1599090889",
      "SenderCellphone":"5678999",
      "SenderProvince":"DKI JAKARTA",
      "SenderCity":"JAKARTA TIMUR",
      "SenderDistrict":"KUNINGAN",
      "SenderAddress":"SenderAddress House 521",
      "SenderZipCode":"5035",
    },
  },
}
```

```
"recipientInfo":
{
  "recipientName":"recipientName",
  "recipientEmail":"recipient@gmail.com",
  "recipientPhoneNumber":"15990908888",
  "recipientCellphone":"5678888",
  "recipientProvince":"JAWA TENGAH",
  "recipientCity":"CILACAP",
  "recipientDistrict":"CILACAP",
  "recipientAddress":"recipientAddress House 677",
},
"historys":
[
  {
    "waybillNo":"IDD955255915888",
    "operationType":"pick up scan",
    "operationTime":1294890876859,
    "courierName":"CourierAdmin",
    "currentBranch": "HEADQUARTER",
    "nextBranchName":"BranchName",
    "proofOfStatus": "https://google.com/image.jpg",
    "relation":"Parent",
    "signer":"signer1"
  },
  {
    "waybillNo":"IDD955255915888",
    "operationType":"Loading scan",
    "operationTime":1294890876859,
    "courierName":"CourierAdmin",
    "currentBranch": "HEADQUARTER",
    "nextBranchName":"BranchName",
    "proofOfStatus":" ",
    "relation":"Parent",
    "signer":"signer1"
  }
]
```

```
}
```



```
}
```

Failed Response (Business Exception)

```
{  
  "code": 100002,  
  "desc": "Unable to find waybill",  
  "total": null,  
  "data": null  
}
```

Failed Response (System Exception)

```
{  
  "code": -100000,  
  "desc": "System exception, please contact us",  
  "total": null,  
  "data": null  
}
```

2.2. Get Waybill's Last Status

Function:

- To get last status of a waybill(s)

Methods:

- POST

Request URL:

- {{base_url}}/open/v1/waybill/get-last-operation-waybill-with-fee

Request Body (x-www-form-urlencoded):

Parameter	Description	Type	Mandatory
data	List of waybills (JSON)	Object	Yes
appId	client app identifier	String	Yes
sign	sign	String	Yes

Response Parameter

Parameter	Description	Type
code	Business code	Integer
desc	Return description	String
total	Total	Integer
data	Return Content	Array

Data

Parameter	Description	Type
waybillNo	Waybill No.	String
lastStatus	Last operation of waybill	String
lastOperationTime	Last operation Time	Long
Description	Description details of operation	String
expressType	expressType used for this waybill	String
shippingFee	Total shipping fee of waybill	String
codAmount	Total of COD Amount from this waybill	

Last Status list:

Tracking Status (Operation Type)	Get Last Status (LastStatus name)
Pick up scan	Pick up
Loading scan	Pick up
Sending scan	Sending
Arrival scan	Arrival
Unloading scan	Arrival
Delivery Scan	OnDelivery
POD scan / POD Entry	POD
Return Confirm	(unused)
Return POD Scan	Return POD
Problem on Shipment scan	Problem on Shipment
Create Return Bill	Problem on Shipment
Confirm Return Bill	Returned
Pickup Failure	Pickup Failed
Dropped Off at Store	Dropped Off at Store

Request Example

- Method: POST
- URL: <https://api-stg.idexpress.tech/open/v1/waybill/get-last-operation-waybill-with-fee>
- Request Body:
x-www-form-urlencoded:

```
data=
[
  {
    "waybillNo": "IDE12345689001"
  },
  {
    "waybillNo": "IDE123456789122"
  }
]
&appId=100001&sign=xxxxxxxxxxxxxxxxxxxx
```

Successful response (All created successfully)

```
{
  "code": 0,
  "desc": null,
  "total": null,
  "data": [
    {
      "waybillNo": "IDE123456789122",
      "lastStatus": "Return POD",
      "description": "Return Package has been [Delivered], Represented POD  
[Receptionist], signer is [w222222], POD branch is [AGENT_LIAONING], courier  
is [LIAONING]",
      "expressType": "STD",
      "shippingFee": "4600.00000000",
      "codAmount": "0",
      "lastOperationTime": 1619708508000,
      "lastOperationBranchName": "AGENT_LIAONING"
    },
  ],
}
```

```
{  
  "waybillNo": "IDC123456789122",  
  "lastStatus": "POD",  
  "description": "Package has been [Delivered], Represented POD [Parent],  
  signer is [Bung rafid], POD branch is [AGENT_LIAONING], courier is [LIAONING]",  
  "expressType": "STD",  
  "shippingFee": "4600.00000000",  
  "codAmount": "0",  
  "lastOperationTime": 1619707053000,  
  "lastOperationBranchName": "AGENT_LIAONING"  
}
```

Failed response (Business exception)

```
{  
  "code": -100000,  
  "desc": "System exception",  
  "total": null,  
  "data": null  
}
```

3.1. Check Standard Shipping Fee

Function:

To get the shipping fee from origin and destination inputted

Methods:

- POST

Request URL:

- {{base_url}}/open/v2/waybill/get-standard-fee

Request Body (x-www-form-urlencoded):

Parameter	Description	Type	Mandatory
data	Sender, Recipient, Weight and express type	Object	Yes
appId	client app identifier	String	Yes
sign	sign	String	Yes

Data

Parameter	Description	Type	Mandatory	Notes
senderCityId	Sender City Code	Long	Yes	
recipientDistrictId	Recipient Location Code	Long	Yes	
weight	Weight	String	Yes	Unit: Kg Support 2 decimals
expressType	Express Type	String	No	00 = STD (Standard) 03 = iDlite (iDlite) 06 = iDtruck (Cargo)

Response

Parameter	Description	Type	Notes
code	Business code	Integer	
desc	Return description	String	
total	Total	Integer	
data	Data	Object	Selected or All type
expressType	Express type	String	00 = STD (Standard) 03 = iDlite (iDlite) 06 = iDtruck (Cargo)
publishRate	Standard shipping fee	Integer	
clientRate	Special rate (if available)	Integer	
canCOD	COD info	Boolean	0 = not support COD 1 = support COD
minSla	Min SLA in days	Integer	
maxSla	Max SLA in days	Integer	

Request Example

- Method: POST
- URL: <https://api-stg.idexpress.tech/open/v2/waybill/get-standard-fee>
- Request Body:
x-www-form-urlencoded:

```
data=
{
  "senderCityId":36,
  "recipientDistrictId":14989,
  "weight":"0.5",
  "expressType":"00"
}
&appId=100001&sign=xxxxxxxxxxxxxxxxxxxx
```

Successful Response when expressType is defined:

```
{
  "code": 0,
  "desc": "",
  "total": 1,
  "data": {
    "selected": {
      "expressType": "00",
      "publishRate": 5200,
      "clientRate": 5200,
      "canCOD": 1,
      "minSla": 0,
      "maxSla": 0
    }
  }
}
```

Successful Response when expressType is undefined:

```
{
  "code": 0,
  "desc": "",
  "total": 1,
  "data": {
    "all": [
      {
        "expressType": "00",
        "publishRate": 10000,
        "clientRate": 10000,
        "canCOD": 1,
        "minSla": 1,
        "maxSla": 2
      },

```



```
{
  "expressType": "03",
  "publishRate": 6000,
  "clientRate": 6000,
  "canCOD": 1,
  "minSla": 1,
  "maxSla": 2
},
{
  "expressType": "06",
  "publishRate": 30000,
  "clientRate": 30000,
  "canCOD": 1,
  "minSla": 3,
  "maxSla": 4
}
]
}
}
```

Failed Response (Business Exception)

```
{
  "code": 1101,
  "desc": "No standard quote information found",
  "total": null,
  "data": null
}
```

Failed Response (System Exception)

```
{
  "code": -100000,
  "desc": "System exception",
  "total": null,
  "data": null
}
```

3.2. Check Nearest Branch from Longitude & Latitude

Function:

To get the nearest branch from inputted longitude and latitude

Methods:

- POST

Request URL:

- {{base_url}}/open/v1/waybill/get-nearest-branch

Request Body (x-www-form-urlencoded):

Parameter	Description	Type	Mandatory
data	Longitude and Latitude	Object	Yes
appld	client app identifier	String	Yes
sign	sign	String	Yes

Data:

Parameter	Description	Type	Mandatory
longitude	longitude	String	Yes
latitude	latitude	String	Yes

Response:

Parameter	Description	Type	Notes
code	Business code	Integer	
desc	Return description	String	
total	Total	Integer	
data	Return content	Array	

Response Data:

Parameter	Description	Type	Notes
branchNo	Branch No	String	
branchName	Branch Name	String	
longitude	Longitude	String	
latitude	Latitude	String	
pic	PIC	String	
cellphone	Phone	String	
detailAddress	Detail address	String	

Request Example

- Method: POST
- URL: <https://api-stg.idexpress.tech/open/v1/waybill/get-nearest-branch>
- Request Body:

```
data =  
{  
    "longitude":"-6.20934100",  
    "latitude":"106.97338300"  
}  
&appId=1000001&sign=xxxxxxxxxxxxxxxxxxxxxxxx
```

Successful Response:

```
{
  "code":0,
  "desc":null,
  "total":null,
  "data":
  [
    {
      "branchNo": "IDE_10",
      "branchName": "IDE_Name1",
      "longitude": "-6.20760500",
      "latitude": "106.58821900",
      "pic": "021458521334",
      "cellphone": "021458521334",
      "detailAddress": "recipientAddress House 678"
    },
    {
      "branchNo": "IDE_11",
      "branchName": "IDE_Name2",
      "longitude": "-8.20760500",
      "latitude": "106.58821900",
      "pic": "021458521335",
      "cellphone": "021458521335",
      "detailAddress": " recipientAddress House 679"
    }
  ]
}
```

Failed Response (Business Exception)

```
{
  "code": 1102,
  "desc": "The branch does not exist",
  "total": null,
  "data": null
}
```

4.1. Webhook Push Tracking Status

Function:

- To push tracking status of a waybill

Methods:

- POST

Request URL:

- To be provided by client

Request Parameters

Parameters	Type	Description
clientCode	String	Client identifier (appld)
orderNo	String	Customer unique Transaction Id.
waybillNo	String	iDexpress Waybill No.
operationType	String	This field will act as Last Operation status, the lists are: 1. Pick up scan (00) 2. Sending scan (04) 3. Arrival scan (05) 4. Delivery scan (09) 5. POD scan (10) 6. Return POD Scan (16) 7. Problem on Shipment scan (18) 8. Confirm Return Bill (20) 9. Pickup failure (22) 10. Dropped Off at Store (28) 11. Automatic Cancel (54)
lastOperationTime	Long	Unix Timestamp – 10 Digits
courierName	String	This value will be shown When the operationType between: 1. Pickup Scan 2. Delivery Scan 2. POD Scan 3. Return POD Scan
courierPhoneNumber	String	This value will be shown When the operationType = “Delivery Scan”
currentBranch	String	Current branch that handling the operationType.
nextBranch	String	Next branch that handling the operation type, only applied when operationType is Sending scan
signer	String	Signer name, this value only shown when the operation type “POD Scan”
relation	String	This value is shown when the signer is not the recipient, list of relation: 00 - Parent 01 - Security 02 - Receptionist 03 – Siblings

		Note: This data will only be shown if the value is not Null and operationType = "POD Scan"
problemDescription	String	When the operationType is "Problem on Shipment scan" This value will show the description of the problem.
proofOfStatus	String	Contain link of photo when last status is between: 1. Pickup scan (EPOP) 2. POD Scan (EPOD) 3. Problem on Shipment
Message	String	Standardize message Please refer to table Message

Message

Operation type	Message
Pickup	Paket telah di pickup oleh [courierName]
Sending	Paket dalam transit ke [nextBranch]
Arrival	Paket telah sampai di [currentBranch]
Delivery	Paket sedang dalam pengiriman oleh [courierName]
POD	Paket telah di terima oleh [relation, signer] note: [Relation] will be shown if relation != Null
Return POD	Paket retur telah diterima oleh [signer]
Problem on Shipment	Pengiriman bermasalah dikarenakan [problemDescription]
Confirm Return Bill	Paket akan di return
Pickup Failure	Paket gagal di pick up dikarenakan [problemDescription]
Cancel Order	Pengiriman telah dibatalkan secara otomatis karena tidak diproses melewati 14 hari

Response Parameter

Parameter	Description	Type
status	Status Code	Integer
message	Return description	String

Sample Request

```
[
  {
    "clientCode": "100101",
    "orderNo": "ORD000000123",
    "waybillNo": "IDE123456789012",
    "operationtype": "Pickup Scan",
    "lastOperationTime": "1641800878",
    "courierName": "Abdulah",
    "courierPhoneNumber": null,
    "currentBranch": "TH KEMBANGAN",
```

```
        "nextBranch": null,
        "signer": null,
        "relation": null,
        "problemDescription": null,
        "proofOfStatus": "test.jpg",
        "message": "Paket telah di pickup oleh Abdulah"
    },
    {
        "clientCode": "100101",
        "orderNo": "ORD000000123",
        "waybillNo": "IDE123456789012",
        "operationtype": "Sending Scan",
        "lastOperationTime": "1641800878",
        "courierName": null,
        "courierPhoneNumber": null,
        "currentBranch": "TH KEMBANGAN",
        "nextBranch": "TH BEKASI",
        "signer": null,
        "relation": null,
        "problemDescription": null,
        "proofOfStatus": null,
        "message": "Paket dalam transit ke TH BEKASI"
    },
    {
        "clientCode": "100101",
        "orderNo": "ORD000000123",
        "waybillNo": "IDE123456789012",
        "operationtype": "Problem on Shipment Scan",
        "lastOperationTime": "1641800878",
        "courierName": null,
        "courierPhoneNumber": null,
        "currentBranch": "TH BEKASI",
        "nextBranch": null,
        "signer": null,
        "relation": null,
        "problemDescription": "Paket Hilang",
        "proofOfStatus": "test.jpg",
```

```
    "message": "Pengiriman bermasalah dikarenakan Paket Hilang"
  },
  {
    "clientCode": "100101",
    "orderNo": "ORD000000123",
    "waybillNo": "IDE123456789012",
    "operationtype": "Delivery Scan",
    "lastOperationTime": "1641800878",
    "courierName": "Abdulah",
    "courierPhoneNumber": "08123456789",
    "currentBranch": "TH BEKASI",
    "nextBranch": null,
    "signer": null,
    "relation": null,
    "problemDescription": null,
    "proofOfStatus": null
    "message": "Paket sedang dalam pengiriman oleh abdulah"
  },
  {
    "clientCode": "100101",
    "orderNo": "ORD000000123",
    "waybillNo": "IDE123456789012",
    "operationtype": "POD Scan",
    "lastOperationTime": "1641800878",
    "courierName": "abdulah",
    "courierPhoneNumber": null,
    "currentBranch": TH BEKASI,
    "nextBranch": null,
    "signer": Hafif,
    "relation": Parent,
    "problemDescription": null,
    "proofOfStatus": "test.jpg",
    "message": "Paket telah di terima oleh parent, hafif"
  }
]
```


Sample Response

SUCCESS

```
{
  "status": 200,
  "message": "Success"
}
```

FAILED

```
{
  "status": 400,
  "message": "Invalid data sent"
}
```

4.2. Webhook Push Weight & Shipping Fee

Function:

- To push the weight & shipping fee

Methods:

- POST

Request URL:

- To be provided by client

Parameters	Type	Description
clientCode	String	Client identifier (appId)
waybillNo	String	iDexpress Waybill No.
expressType	String	The express type that will be pushed 00 : STD, 01 : SMD, 06 : IDtruck
actualWeight	Integer	Actual weight of the parcel (unrounded) in gram
volumetricWeight	Integer	Volumetric weight of the parcel (unrounded) in gram
calculatedWeight	Integer	Rounded weight that will be counted for Shipping Fee
cityName	String	Order creation origin city
actualCityName	String	Courier pickup origin city
actualDistrictName	String	Courier pickup origin district
totalShippingFee	Integer	Total Shipping Fee (weight*shipping fee)+insurance

Response Parameter

Parameter	Description	Type
status	Status Code	Integer
message	Return description	String

Sample Request

```
{
  "clientCode": "100101",
  "waybillNo": "IDE123456789012",
  "expressType": "00",
  "actualWeight": "2400",
  "volumetricWeight": "1900",
  "calculatedWeight": "3000",
  "cityName": "KOTA DEPOK",
  "actualCityName": "KOTA SUKABUMI",
  "actualDistrictName": "",
  "totalShippingFee": "30000",
}
```

Sample Response

SUCCESS

```
{
  "status": 200,
  "message": "Success"
}
```

FAILED

```
{
  "status": 400,
  "message": "Invalid data sent"
}
```

5.1 Generate Reserved Waybill Number

Function:

- To generate reserved waybill number

Methods:

- POST

Request URL:

- {{base_url}}/open/v1/book

Request Body (x-www-form-urlencoded):

Key	Description	Type	Mandatory	Notes
data	Waybill No	Object	Yes	
appld	client app identifier	String	Yes	
sign	sign	String	Yes	

data

Parameter	Description	Type	Mandatory	Remark
total	Total of the number waybill that want to be generated	Integer	Yes	Max. 10.000 waybills generated per request
expireTime	10 digits, UNIX timestamp	integer	Yes	Cannot backdate

Response Parameter

Parameter	Description	Type	Remark
code	Business code	Integer	
desc	Return description	String	
total	Total	Integer	
data	Return Content	Array	

Request Example

- Method: POST
- URL: <https://api-stg.idexpress.tech/open/v1/book>
- Request Body:
x-www-form-urlencoded:

```
data=
{
  "total": 10,
  "expireTime": 1695882808
} &appId=100101&sign=xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
```

Successful Response

```
{
  "code": 0,
  "data": [
    "IDE701404685341",
    "IDE702883044767",
    "IDE701399259164",
    "IDE701578550181",
    "IDE703035058975",
    "IDE702622247893",
    "IDE703747823788",
    "IDE702780931084",
    "IDE703925095130",
    "IDE703450327602"
  ],
  "desc": "success",
  "total": 10
}
```

Failed Response (expire time cannot backdate)

```
{
  "message": "expire_time_cannot_be_earlier_than_now"
}
```

Failed Response (client not authorized to use generate waybill)

```
{
  "message": "this action is not permitted due to app permission"
}
```

5.2 Extend Expire Time Reserved Waybill Number

Function:

- To extend the expire time of generated reserved waybill number

Methods:

- PUT

Request URL:

- {{base_url}}/open/v1/rebook

Request Body (x-www-form-urlencoded):

Key	Description	Type	Mandatory	Notes
data	Waybill No	Object	Yes	
appld	client app identifier	String	Yes	
sign	sign	String	Yes	

Data

Parameter	Description	Type	Remark
waybillNo	List of waybill no that want to be extend	array	Cannot be extend if waybill already been picked up or not exist
expireTime	10 digits, UNIX timestamp	integer	Cannot backdate

Response Parameter

Parameter	Description	Type	Remark
code	Business code	Integer	
desc	Return description	String	
total	Total	Integer	
data	Return Content	Array	

Request Example

- Method: POST
- URL: <https://api-stg.idexpress.tech/open/v1/rebook>
- Request Body:
x-www-form-urlencoded:

```
data=
{
  "waybillNo":["IDE701404685341",
    "IDE702883044767",
    "IDE701399259164",
    "IDE701578550181"]
  "expireTime":1695882808
} &appId=100101&sign=xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
```

Successful Response

```
{
  "code": 0,
  "desc": null,
  "total": null,
  "data": null
}
```

Failed Response (expire time cannot backdate)

```
{
  "message": "expire_time_cannot_be_earlier_than_now"
}
```

Failed Response (client not authorized to use extend waybill)

```
{
  "message": "this action is not permitted due to app permission"
}
```

Failed Response (the waybill is not exists or already been picked up)

```
{
  "message": "supplied generated waybill is not registered"
}
```

Error Message

Error Code List:

Code	Description
0	Success
100000	Partial data exception
100001	The waybill has been picked up and cannot be updated
100002	Unable to find waybill
100003	No standard quote information found
100004	No shipment tracking found
100005	Provinces and cities or regions are illegal
100006	The waybill is not exist
100007	The waybill is exist
100008	Shipping client doesn't exist
100009	Shipping client must be filled for COD Transaction
100011	Pickup Start Time and Pickup End Time cannot be null
100012	PickupEndTime must be at least 4 hours greater than pickupStartTime
100013	PickupStartTime must be at least 1.5 hours greater than orderTime
100014	Cash Payment is not available
100015	WaybillNo and "orderNo" cannot be empty
100016	The waybillNo is not equal to "orderNo"
100017	pickupStartTime must use 10 digits unix timestamp
100018	pickupEndTime must use 10 digits unix timestamp
100019	Weight must be greater than 0
100020	Destination Province, City and District are not match
-100000	System exception, please contact us
-100001	Signature error
-100002	Update failed
-100003	Order is insured, itemValue cannot be empty
-100004	Illegal parameter

***Note: This is a non-final version of error message list. If you found any code that doesn't exist in the table above, please contact ID Express TECH Division.**

Waybill Paper information

				Waybill Barcode
21 Juli 2021		IDV004010139681		
Tujuan: CIHAMPÉLAS Penerima: Kevin 087892837491 Jl. Cihampelas No. 195-209		PERIODIK	IDlite	
Pengirim: Kenny 081237492892 JAKARTA UTARA Botol Kaca 1L X 12		COD		COD / Non-COD
		Total: 120.000		Total billing for recipient
		Waktu Antar : Normal Percobaan Pengantaran		
		1	2	3
		QTY : 1		12 KG
BDO-BDO46-BDOB02				
				Weight in KG
				Sorting Code (TLC)

Above is the example of iDexpress waybill label, there is no restriction on the size of the paper. However, please make sure the information that highlighted in the above picture is included, and also make sure the visibility of the information.

Changelog:

Ver. 2.1 :

- Add proofOfStatus parameter on Get Tracking Status API
- Add waybillNo parameter on Create Order API to cater reserved waybill

Ver. 2.2 :

- Add Book & Rebook capability for reserve waybill
- Add waybillNo parameter on Create Batch Order

Ver 2.2.1:

- Add value "Dropped Off at Store" on operationType parameter for Get Tracking Waybill
- Add value "Dropped Off at Store" on lastStatus parameter for Get Waybill's Last Status
- Add value "Dropped Off at Store" on operationType parameter for Webhook Push Tracking Status

Ver 2.2.2:

- Add new parameter "minSla" and "maxSla" to Batch Create Orders and Check Standard Shipping Fee

Ver 2.3.0:

- Add iDlite express type and remove SameDay express type on Create Order & Check Shipping Fee
- Add new status on Get Tracking (Cancel New Order) and Webhook Push Tracking Status (Cancel Order) for orders that canceled due to still unprocessed after 14 days

Ver 2.4.0:

- Change endpoint Check Shipping Fee to v2

Ver 2.5.0:

- Add cityName, actualCityName and actualDistrictName on Webhook Push Weight & Shipping Fee