

COMP 354

Requirements for the project myMoney

Team PA-PK

February 11, 2018

Table 1: Team

Name	ID Number
Anne-Laure Ehresmann	27858906
Marc-Antoine Dube	40029307
Kadeem Caines	26343600
Abdel Rahman Jawhar	27192142
Keith Dion	40036340
Hrachya Hakobyan	40041555

Table 2: Revision history

Version	Date
1.0	10th February 2018

Contents

1	Document Purpose	4
2	Project description	4

2.1	Introduction	4
2.2	System Context	4
2.3	Scope	4
2.4	Business Goals	5
2.5	Domain Concepts	5
2.6	Actors	5
	User	5
	Bank	6
3	Functional Requirements and Business Rules	6
3.1	Non-Functional Requirements	6
4	Functional Requirements	12
5	Data Dictionary	12
A	Description of File Format: Input	12
B	Description of File Format: Output	12
C	Use Cases	12
C.1	Overview	12
D	Reference	13

List of Figures

1	System Context	5
2	Use Case Diagram	13

List of Tables

1	Team	1
2	Revision history	1
3	Non-Functional Requirement 1 - Reliability and usability	6
4	Non-Functional Requirement 2 - Simplicity and ease-of-use	7
5	Non-Functional Requirement 3 - Performance	7
6	Non-Functional Requirement 4 - Maintainability and testability	8

7	Non-Functional Requirement 5 - Security	8
8	Non-Functional Requirement 6 - Portability	9
9	Non-Functional Requirement 7 - Scalability	9
10	Non-Functional Requirement 8 - Data integrity	10
11	Non-Functional Requirement 9 - Java	10
12	Non-Functional Requirement 10 - Object-oriented design	10
13	Non-Functional Requirement 11 - Model-view-controller architecture	10
14	Non-Functional Requirement 12 - SQLite database	11
15	Use Case 1 - Create User Account	14
16	Use Case 2 - Delete User Account	14
17	Use Case 3 - Add Bank Account to a User Account	15
18	Use Case 4 - Remove Bank Account from a User Account	15
19	Use Case 5 - View Transactions for Specific Bank Account	16
20	Use Case 6 - View All Transactions from all Bank Accounts	17
21	Use Case 7 - View Transaction by Type	17
22	Use Case 8 - Categorize Transaction	17
23	Use Case 9 - View Transactions by Category	17

1 Document Purpose

The purpose of this document is to define requirements for the desktop application myMoney. This document may thus be to orient the development of the application. It seeks to understand the requirements of the problem, formulate the necessary functions and properties needed to answer this problem and its requirements, and then test these functions against these requirements. Hence, it may be used by our users to specify the problem and its requirements, by the developers to understand what functions their system must implement, and what to test their system against. The primary audience is the development team of the system, and the project testers for fine-tuning their testing strategy. It may also be read by users of the end product to find out the functionality of the system.

2 Project description

2.1 Introduction

At the present time, users who have more than one bank account can quickly get overwhelmed with the differing methods of access and interfaces for each account. It becomes arduous to access every account and difficult to visualise how much money one has and how one's budget changes on a day-to-day basis. There exists a plethora of software for money management, each greatly varying in design due to the complex and multifarious clientele. Existing applications of quality also tend to have extensive budgeting functionalities, and setting them up then learning to use them requires investing some number of hours that often scares off casual users who aren't interested in complex accounting functionalities. This lack of appropriate software for centralised, simple money management costs time and frustration for the common user, and discourages them from fully taking advantage of services that are provided by their banks, for fear of the complexity that make come with such services. Even simply keeping track of their finances becomes a daunting task, which negatively impacts both the users and the banks. We seek to design a desktop application to solve the most common issues in a simple and lightweight manner.

2.2 System Context

Our system will mainly involve the user interacting with a desktop application interface. The user shall provide information about his bank accounts to the interface, which the system will store it in a local database. The system then establish a connection to the banks, passing along the user information. It will then receive the data associated with the bank account(s) of the user, which it will then display to the user.

2.3 Scope

myMoney aims to be a small, simple tool which provides an easy method of viewing accounts across multiple banks, their transactions, and categorisation tools for grouping transactions across multiple accounts. One may create a user account and link their bank accounts to easily access them through myMoney. They may check the transactions of a specific account or all of accounts at once, sort the transactions by date, type, or any other property of the transaction, and categorise certain transactions

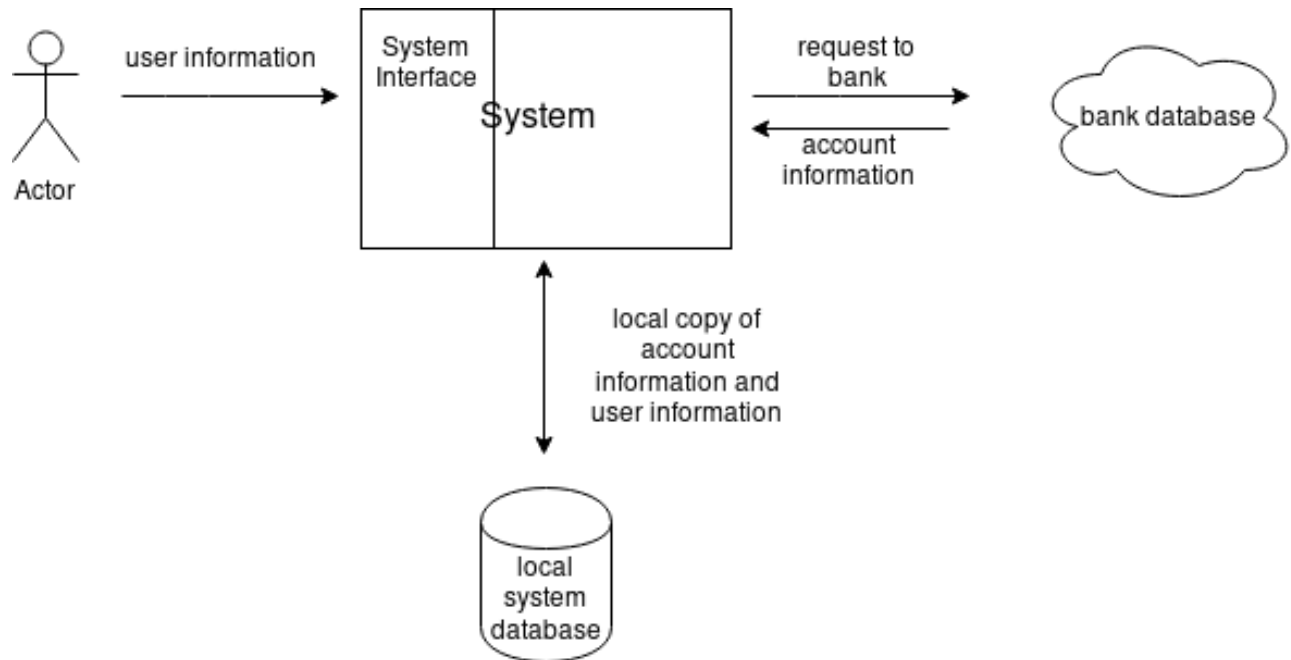


Figure 1: System Context

for better organisation and minimal budgetting. myMoney is intended to work alongside banking institutions: it relies on the data provided by banks to create a transaction history for the users. In short, it seeks to be an application for managing expenses so as to quickly make judgement calls on financial decisions, in a way that is accessible to even the most financially inexperienced user.

2.4 Business Goals

- **Compete with existing solutions**
- **Target market: wide user-base composed mainly of millenials, students, new professionals**
- **Reduce total cost of ownership**
- **Future-proof, long-term robustness of the system**

2.5 Domain Concepts

2.6 Actors

User

Our main actor is the user. All use cases are triggered by the user, as it their requests that directly cause the bank system or our system to take action. All identification needed to access the bank system will be provided by the user. Using this information, the system will be able to answer queries made by the user as described in the use cases.

Bank

Our sole other actor is the bank(s) system. Each bank system provides an API for accessing its bank account data. Our system will pull this data directly from the bank systems (who act as secondary actors), using identification as given by the user for the bank's authentication system. In other words, our system will merely act as a middle man between the user demanding information in a specific format, and the banks holding that information in a inconvenient format.

3 Functional Requirements and Business Rules

3.1 Non-Functional Requirements

Table 3: Non-Functional Requirement 1 - Reliability and usability

Action	Reliability and usability
Requirement ID:	01
Type:	Quality of service
Description:	We want to guarantee that our system's reliability is only constrained by the reliability of the banks servers. We also to ensure the application is always usable, except during maintenance or communication with the database.
Reasoning:	The current procedure which users employ benefits from near perfect uptime, as its only constraint is the reliability of the bank servers. In order to be competitive with this current solution, we must match this level of reliability.
Quality attribute scenario:	System operates mostly offline, and can function even without access to the internet using past data. System meets security and connectivity performance of current procedure.

Table 4: Non-Functional Requirement 2 - Simplicity and ease-of-use

Action	Simplicity and ease-of-use
Requirement ID:	02
Type:	Quality of service
Description:	The system should be easy to understand and not overburdened by unused features, allowing for clear display of relevant information.
Reasoning:	The current procedure for users to view their bank transactions across different accounts requires them to log in each individual bank account interface, then compare each distinct format for the bank accounts manually. This is tedious for most users, and hence easy to outperform and become competitive with the current procedures. It is also in our interest to pursue this, as our business targets a more casual user-base which tend to favours a more simpler and more lightweight application.
Quality attribute scenario:	Installation of the system should be easy and require very little, if any, decisions from the user beyond choosing to install the system. With no training, a user should be able to intuitively learn and use the system in a short amount of time.

Table 5: Non-Functional Requirement 3 - Performance

Action	Performance
Requirement ID:	02
Type:	Quality of service
Description:	The system should ensure minimal load times, notably when connecting to the bank and the local database.
Reasoning:	With our target audience in mind, we want to be able to provide adequate performance when the system is used in frequent, short-time bursts. These sorts of applications tends to be popular with millennial audiences. This also allows the system to be competitive, as being less performant than the current procedures would certainly lead to a dissatisfaction in our user-base.
Quality attribute scenario:	System files should be small, less than 50MB. When the system connects to the internet (with reasonable bandwidth) to fetch transactions, they are returned to the user in less than 2 seconds.

Table 6: Non-Functional Requirement 4 - Maintainability and testability

Action	Maintainability and testability
Requirement ID:	03
Type:	Quality
Description:	The system should be maintainable on a long-term basis, A testing suite is imperative for adaptative development, as it aids in reducing time and cost of debugging, and lets us quickly conduct system diagnostics.
Reasoning:	Due to the dependency of the system upon the banks' API, it is necessary that the system should be easy to alter and maintain, and hence be capable of adapting to third-party changes. This both reduce costs of ownership and favours long-term use of the application.
Quality attribute scenario:	New modifications to the system should be fully covered by unit tests before another modification is implemented.

Table 7: Non-Functional Requirement 5 - Security

Action	Security
Requirement ID:	04
Type:	Quality
Description:	The system should guarantee a level of security, requiring valid credentials in order to access any sensitive information and denying access otherwise.
Reasoning:	A user's bank information is incredibly sensitive, and any possible security flaw could cripple the entire system and destroy any sort of trusted relationship that users may have developed with our business. It is thus of utmost importance that any data coming from the banks are accessible solely with proper authentication. Improper security would certainly negatively impact user trust in our business.
Quality attribute scenario:	Database should be encrypted, and testing suite should include verification of security measures on the system.

Table 8: Non-Functional Requirement 6 - Portability

Action	Portability
Requirement ID:	05
Type:	Quality
Description:	Since the system is fairly lightweight, it should also focus on compatibility with older hardware (within reason) and support numerous operating systems, to encourage a wide user-base.
Reasoning:	We want to cater to a wide and somewhat casual audience, who may not be technologically adept and still rely on old (but familiar) hardware. The lightweight quality of our application means that it would easily be run on older hardware, provided we also ensure compatibility with said hardware.
Quality attribute scenario:	System should support older versions of popular OS's, such as windows 7/windows vista.

Table 9: Non-Functional Requirement 7 - Scalability

Action	Scalability
Requirement ID:	06
Type:	Quality
Description:	The system should function even on a long-term basis, and hence be capable of handling a growing number of transactions. The scaling size of the database should be managed by the system so as not to overwhelm the hardware it is running on.
Reasoning:	As we foresee our system being used on a long period of time, we should also acknowledge the possibility of users acquiring a large history of transactions over time. We should thus plan accordingly and put measures of precautions so as not to overwhelm their machines when loading in a large database. Crippling their machine could result in a negative perception of business and system.
Quality attribute scenario:	System should use SQLite to minimize database size, and take precautions not to load an entire database in memory should the number of transactions exceed a size that may be unmanageable by the hardware.

Table 10: Non-Functional Requirement 8 - Data integrity

Action	Data integrity
Requirement ID:	07
Type:	Quality
Description:	Bank accounts data (description as well as transactions) must match the data provided by the banks.
Reasoning:	For obvious reasons, we want to guarantee data integrity. Not meeting this requirement would harm the reputation of the business, and render the system rather useless.
Quality attribute scenario:	system should verify data validity, and tests should include verification of matching data between the local database and the banks' database

Table 11: Non-Functional Requirement 9 - Java

Action	Java
Requirement ID:	08
Type:	Design Constraint
Description:	The system should be programmed in Java.
Reasoning:	To take advantage of the JVM's portability, we would be able to develop for numerous platforms whilst having to maintain a single version of the system.

Table 12: Non-Functional Requirement 10 - Object-oriented design

Action	Object-oriented design
Requirement ID:	09
Type:	Design Constraint
Description:	The design of the system should be object-oriented.
Reasoning:	As we will be using java, we should embrace the style of the language and use object-oriented programming. This will also ease maintainability and portability.

Table 13: Non-Functional Requirement 11 - Model-view-controller architecture

Action	Model-view-controller architecture
Requirement ID:	10
Type:	Design Constraint
Description:	The design of the system should use a MVC architecture.
Reasoning:	As our main development time for creating a prototype is fairly short, using MVC will allow us to properly segment each part of our code, and thus give it a strict structure, as well as make it more easily maintainable and testable.

Table 14: Non-Functional Requirement 12 - SQLite database

Action	SQLite database
Requirement ID:	11
Type:	Design Constraint
Description:	The system should use SQLite
Reasoning:	As our system is fairly simple and favours a lightweight design, using a more complex database would be a waste of resources.

4 Functional Requirements

This section will cover the functional requirements associated with the myMoney app. These are the software capabilities that must be present in order for the user to carry out the services provided by the app or to execute the use cases.

- **User account creation:** The system allows the creation of user accounts, with information (username, password, first name, and last name) provided by the user.
- **User account authentication:** The system shall grant a user access only to a properly authenticated user. If a user does not enter credentials, the system shall notify the user of the failure to authenticate.
- **User account management:** The system shall require proper authentication to modify and/or delete a user account.
- **Bank account management:** The system permits a logged-in user to add, manipulate, or remove bank accounts that are connected to the user account.
- **Transaction management:** The system permits a logged-in user to access the details of transactions associated with all bank accounts that were added to the user account. The system obtains these transactions through the banking system's API. The system allows different display formats, such as 'sorted by date' or 'sorted by type' or 'sorted by bank account'.
- **Categorisation:** The system permits the categorisation of transactions, a property by which the transactions may be sorted.

5 Data Dictionary

A Description of File Format: Input

The user enters plain text through the interface of the system. The banking systems provide bank account data by passing a copy of their account, in binary form.

B Description of File Format: Output

The system outputs its database data in plain text form, displayed through its interface.

C Use Cases

C.1 Overview

Use cases 1 through 4 deal with the user manipulating his accounts. Use cases 5 through 7 and 9 deal with the user viewing the data in different formats. Use case 8 deals with the user manipulating the

transactions' formats. For iteration 1, we have only included use case 1, 3, 5, and 6, as those are the ones we have fully implemented.

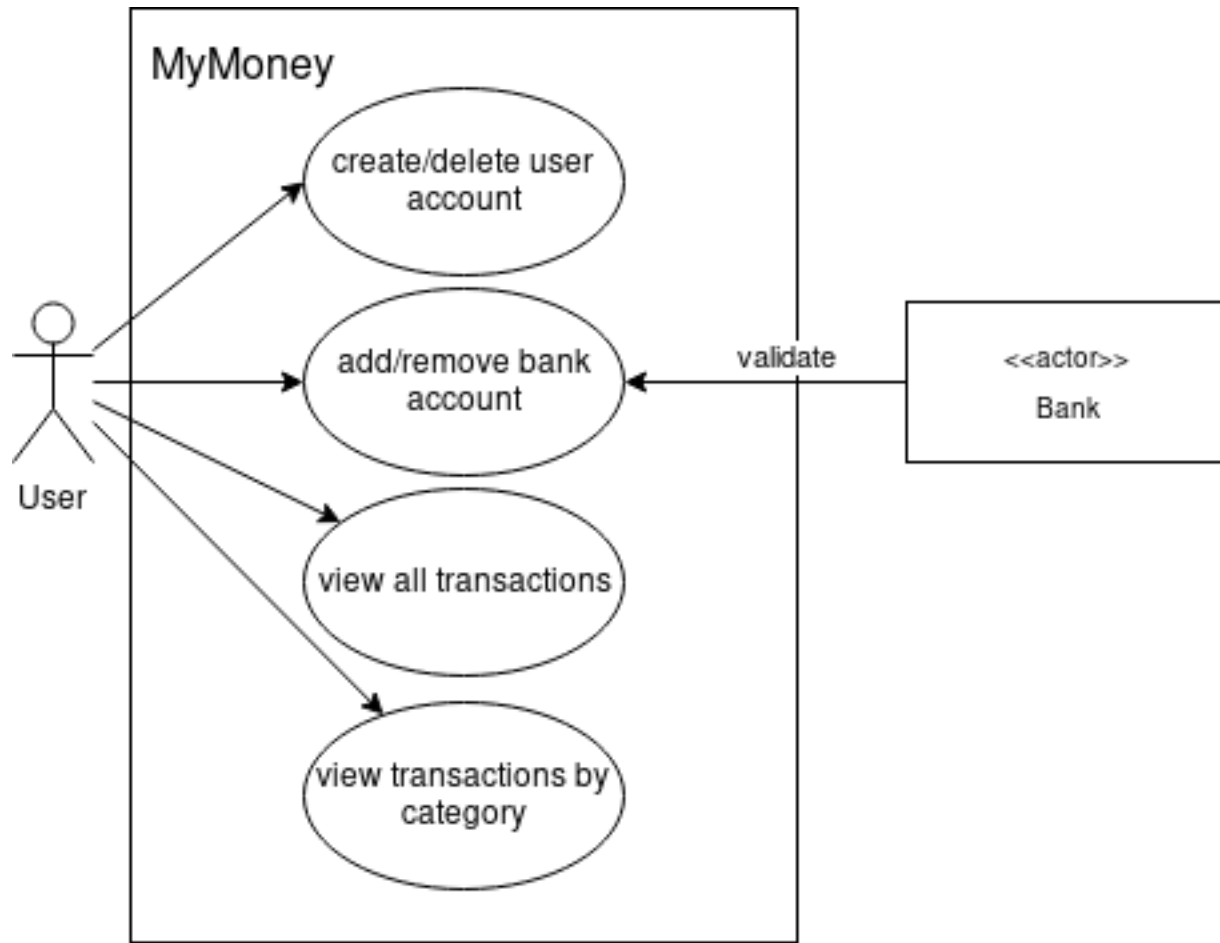


Figure 2: Use Case Diagram

D Reference

User information: As our user and use-cases was based on feedback provided by our developers, our references lie mainly within our own team.

Requirements specification template:

Table 15: Use Case 1 - Create User Account

Action	Create User Account
Case ID	01
Summary	User gives information about a new user account, system validates it and creates the account.
Scope	money and budget management application
Level	user-goal
Actors	User
Stakeholders and Interests	<ol style="list-style-type: none"> 1. User: Wants fast and easy account creation, clear and comprehensible display, proof of successful account creation. 2. Company: Wants user interests to be fulfilled, wants to prevent erroneous input, wants fast communication with the local account database as well as fault tolerance in case of database conflicts, issues with editing authorization, or other possible database problems.
Pre-Conditions	User has opened the application and is in the signup menu.
Success Guarantee	Account successfully saved in local account database, with name and password as specified by the user.
Main Success Flow	<ol style="list-style-type: none"> 1. User enters a username, first name, last name, and password. 2. System validates username and password (format, whether username is already used, etc). 3. System creates new account. 4. System notifies the user of the successful account creation, then returns to home menu.
Exceptions	
Post-Conditions	
Priority	
Traces to Test Cases	

Table 16: Use Case 2 - Delete User Account

Action	Delete User Account
Case ID	02
Summary	User deletes a user account from the local accounts database, removing all bank accounts and information associated with that account.

Table 17: Use Case 3 - Add Bank Account to a User Account

Action	Add Bank Account to a User Account
Case ID	03
Summary	User gives information about a new bank account, system sends it to the bank for verification then creates necessary entries in the local database once the bank approves the information.
Scope	money and budget management application
Level	user-goal
Actors	User , Bank
Stakeholders and Interests	<ol style="list-style-type: none"> 1. User: Wants fast and easy account creation, clear and comprehensible display, proof of successful account creation. 2. Company: Wants user interests to be fulfilled, wants to prevent erroneous input, wants fast communication with the local account database as well as the bank, wants fault tolerance in case of database conflicts, issues with the bank, or other possible local database problems. 3. Bank: Wants to satisfy its customer base, wants correctly formatted account information given to its API, inexpensive and non-redundant communication of bank account data to third-party applications.
Pre-Conditions	User has logged in a user account and is in the user home menu.
Success Guarantee	Bank account successfully saved in local account database, with information corresponding the data validated by the bank.
Main Success Flow	<ol style="list-style-type: none"> 1. User enters his/her bank account number. 2. System validates input, and sends it to the bank for verification and connection. 3. Bank validates bank account number, and then responds with the bank account information. 4. System records the valid bank account details securely in its database, and notifies the user of the successful addition of the bank account in the database.
Exceptions	
Post-Conditions	
Priority	
Traces to Test Cases	

Table 18: Use Case 4 - Remove Bank Account from a User Account

Action	Remove Bank Account from a User Account
Case ID	04
Summary	User deletes a bank account from the local database.

Table 19: Use Case 5 - View Transactions for Specific Bank Account

Action	View Transactions for Specific Bank Account
Case ID	05
Summary	User selects specific bank account and views transactions associated with with selected bank account
Scope	money and budget management application
Level	user-goal
Actors	User
Stakeholders and Interests	<ol style="list-style-type: none"> 1. User: Wants quick and convenient viewing of previous transactions from one specific bank account 2. Company: Wants to give user ability to micromanage every aspect of the application down to each bank account and transaction.
Pre-Conditions	User has created and logged into a user account, and has added at least one bank account to his/her myMoney account.
Success Guarantee	User can view transaction by bank account.
Main Success Flow	<ol style="list-style-type: none"> 1. User selects specific bank account from list of all accounts. 2. System displays all previous transactions under specified bank account. 3. User selects desired transaction. 4. System shows all information about desired transaction, such as date and amount withdrawn, deposited, or transferred.
Exceptions	
Post-Conditions	
Priority	
Traces to Test Cases	

Table 20: Use Case 6 - View All Transactions from all Bank Accounts

Action	View All Transactions from all Bank Accounts
Case ID	06
Summary	User can view all transactions that have been made from all bank accounts
Scope	money and budget management application
Level	user-goal
Actors	User
Stakeholders and Interests	<ol style="list-style-type: none"> 1. User: Wants easy and convenient viewing of all transactions among all bank accounts. 2. Company: Wants user interests to be fulfilled.
Pre-Conditions	User has created and logged into a user account, and at least one bank account has been added to his/her myMoney account.
Success Guarantee	User is able to conveniently view all transactions from all institutions in one display.
Main Success Flow	<ol style="list-style-type: none"> 1. User selects View All Transactions option. 2. System shows all transactions across all accounts on one display.
Exceptions	
Post-Conditions	
Priority	
Traces to Test Cases	

Table 21: Use Case 7 - View Transaction by Type

Action	View Transaction by Type
Case ID	07
Summary	User can view transactions by the following types: deposits, withdrawals, and transfers.

Table 22: Use Case 8 - Categorize Transaction

Action	Categorize Transaction
Case ID	08
Summary	User can select a category to represent a transaction.

Table 23: Use Case 9 - View Transactions by Category

Action	View Transactions by Category
Case ID	09
Summary	User can view transaction according to categories of spending.