
Milestone #3

Abraham Hammond Jr


10/19/26

Table of Contents


1. Updates (server A)
2. Updates (server B)
3. Change Hostname (server A)
4. Change Hostname (server B)
5. Hostname Confirmation (server A)
6. Hostname Confirmation (server B)
7. Windows Feature Installation (server A)
8. Downloading
9. Download Complete
10. Windows Feature Installation (server B)
11. Downloading
12. Download Complete
13. Wwwroot
14. Wwwroot file text (server A)
15. Wwwroot file text (server B)
16. IEESC
17. IEESC Continuation
18. URL Rewrite
19. URL Rewrite Continuation
20. URL Rewrite Wizard Install
21. ARR
22. ARR Download
23. ARR Wizard Install
24. IIS Manager
25. Server A File
26. ARR
27. ARR Server Proxy
28. ARR Server Proxy Config
29. ARR Config Continuation
30. ARR Config Continuation
31. Confirmation
32. Server Farms
33. Creating a Server Farm
34. Server Farm Name
35. Add Server
36. Add Server Config
37. IP Address
38. Add Server
39. Confirmation
40. Server Farm
41. Load Balancing
42. Load balancing Config
43. Server Affinity
44. Server Affinity Config
45. Confirmation
46. Health Test
47. Health Test Config
48. Verifying URL
49. Testing
50. Confirmation
51. Monitoring and Management
52. M&M Statistics
53. Server A Node Completion
54. Server B Node Completion

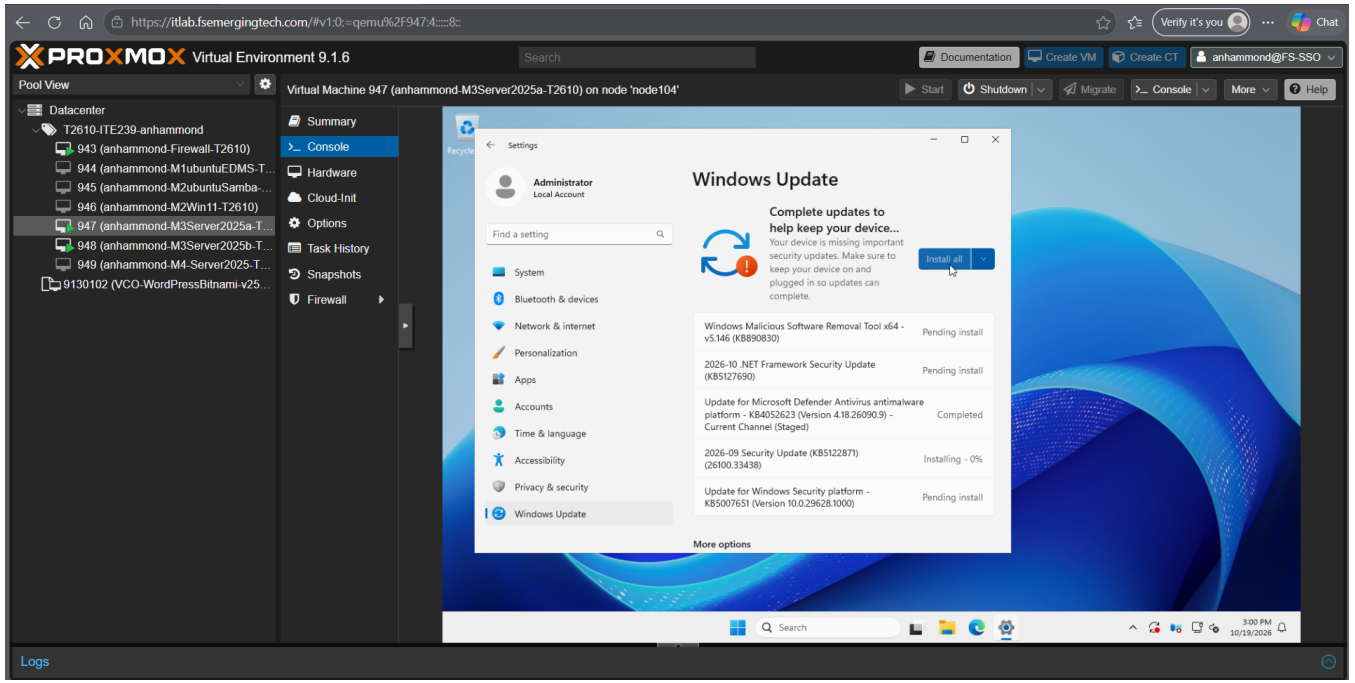


- First thing we want to do is update our OS and make sure everything is running smooth. You will find these in settings, in the Windows Update section.

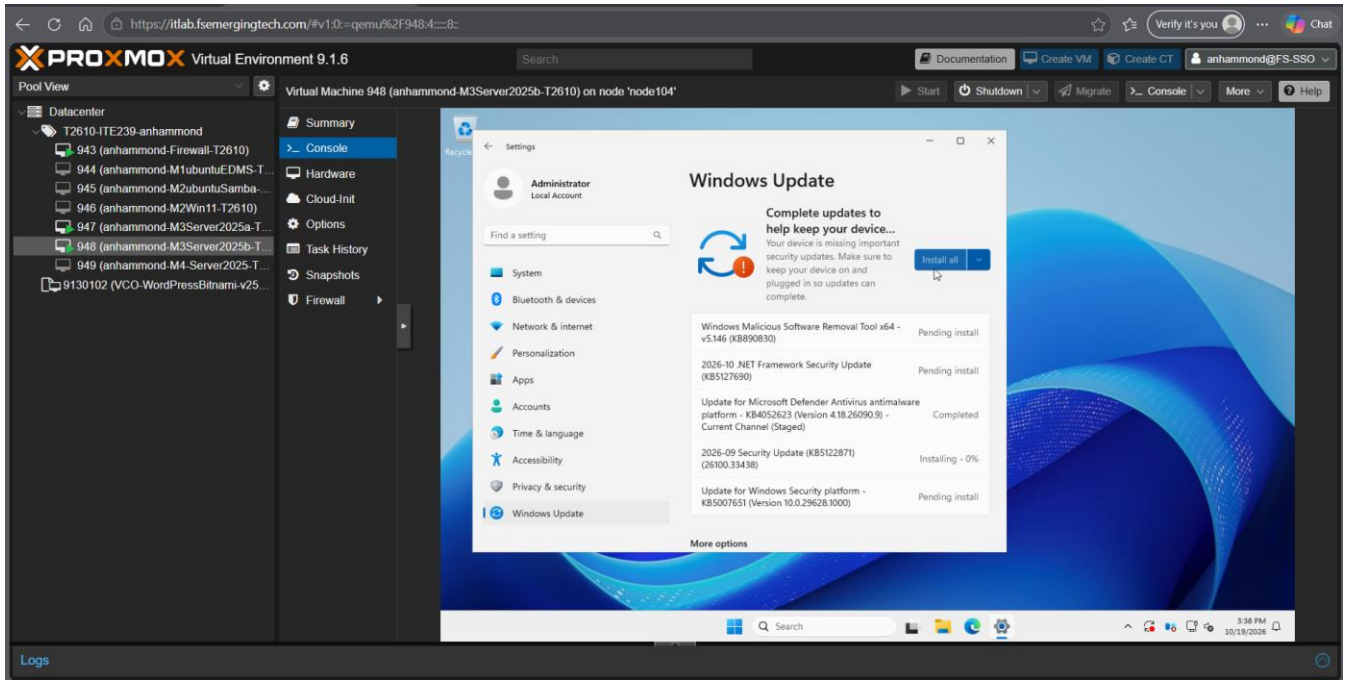


- Next, you want to do the same thing for server B. Go ahead and install the updates.

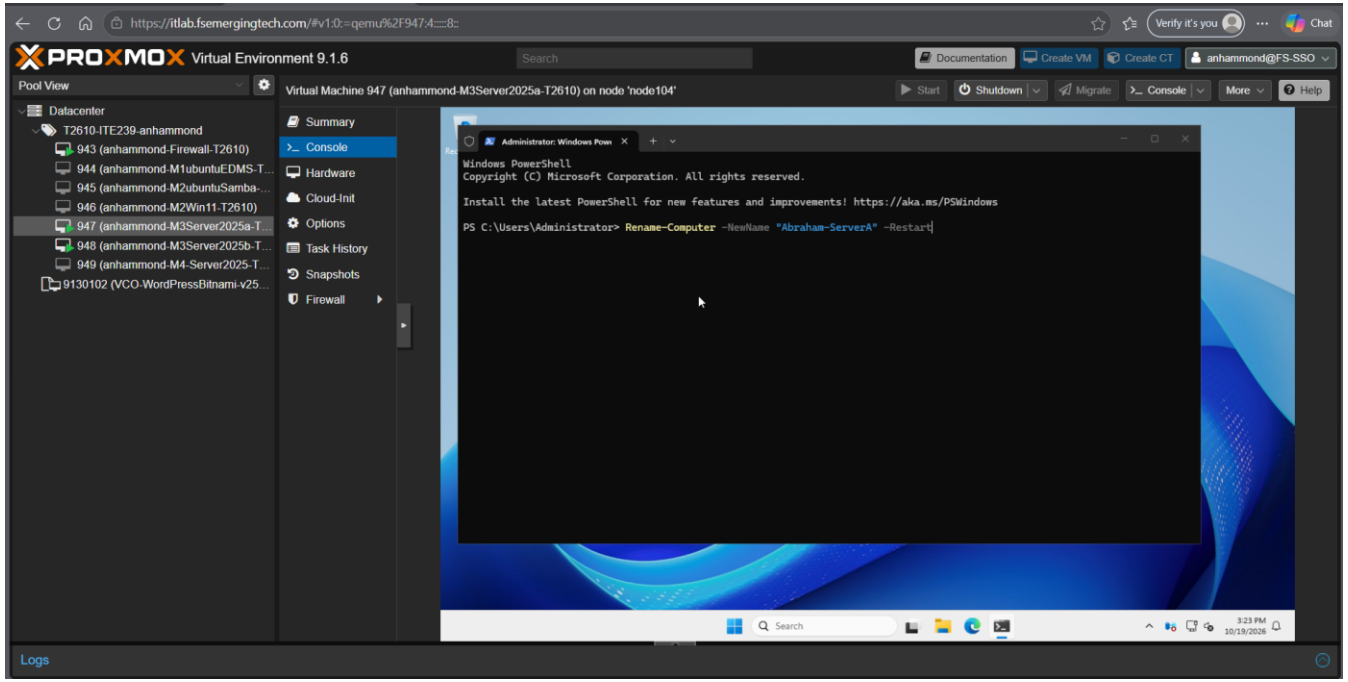


- Next, we want to change the hostname on server A. By doing this, we need to type in the command shown in the picture on Windows PowerShell. The system will then restart.

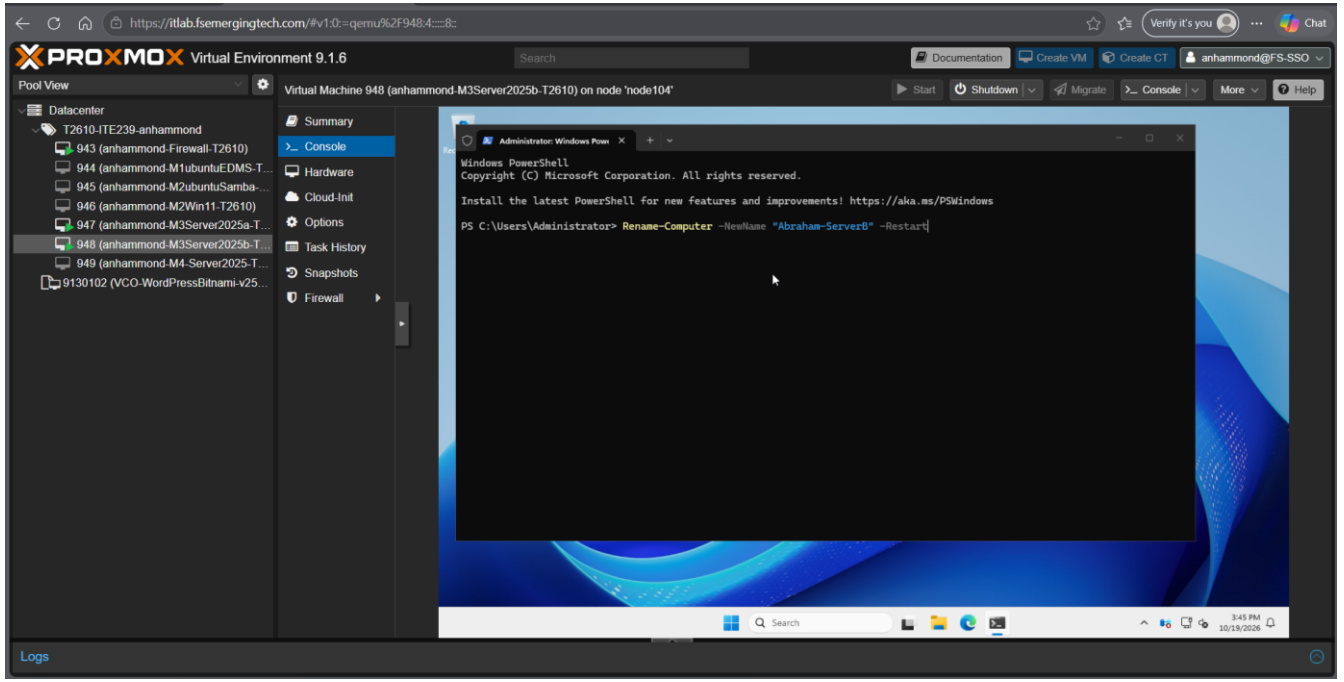


- After the updates on server B, change the hostname as well. Make sure you use Server B for this one instead of Server A.

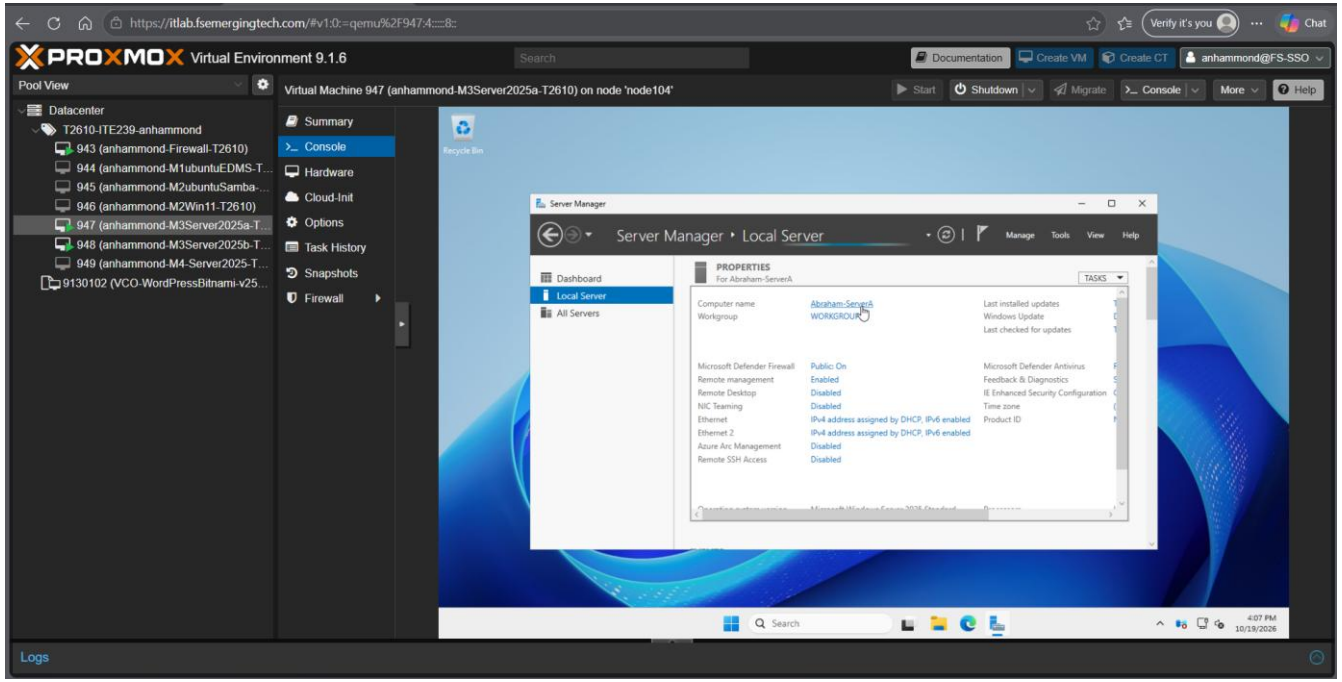


- Then go back to local server. You should see that the hostname has been changed.

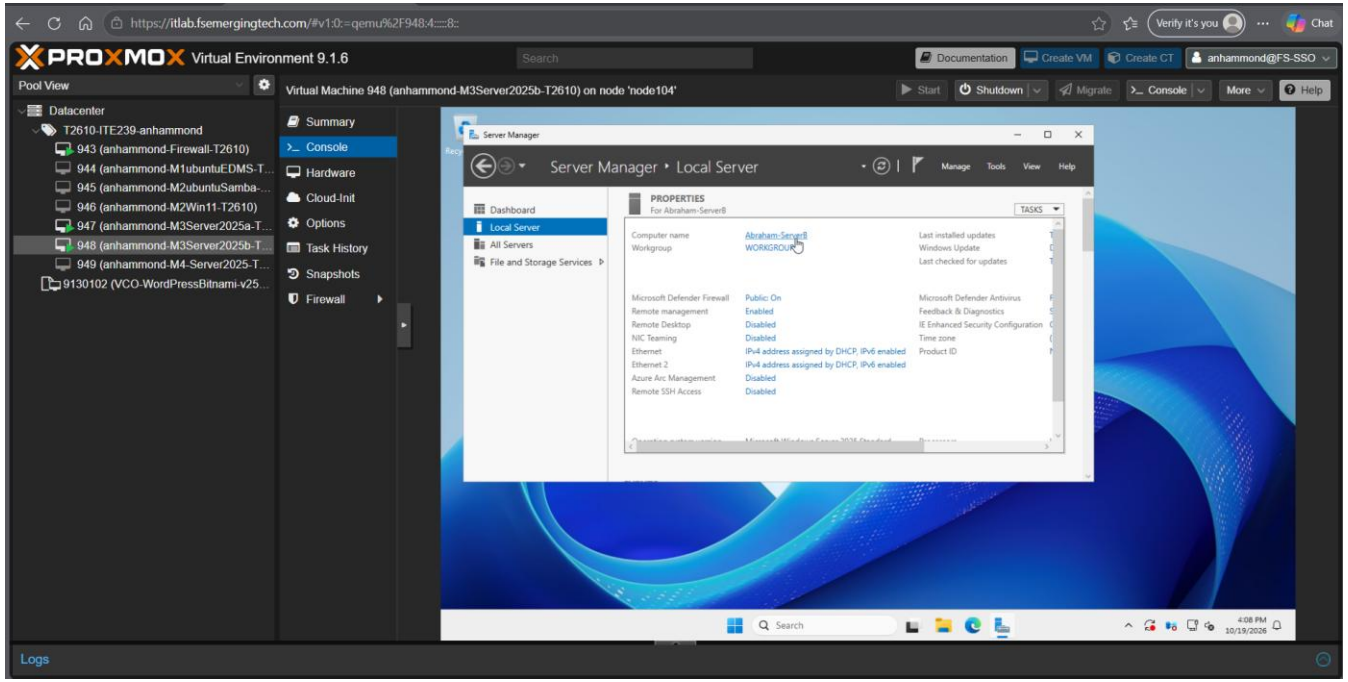


- Go to server B next. Also check and see if the hostname has changed on there as well.

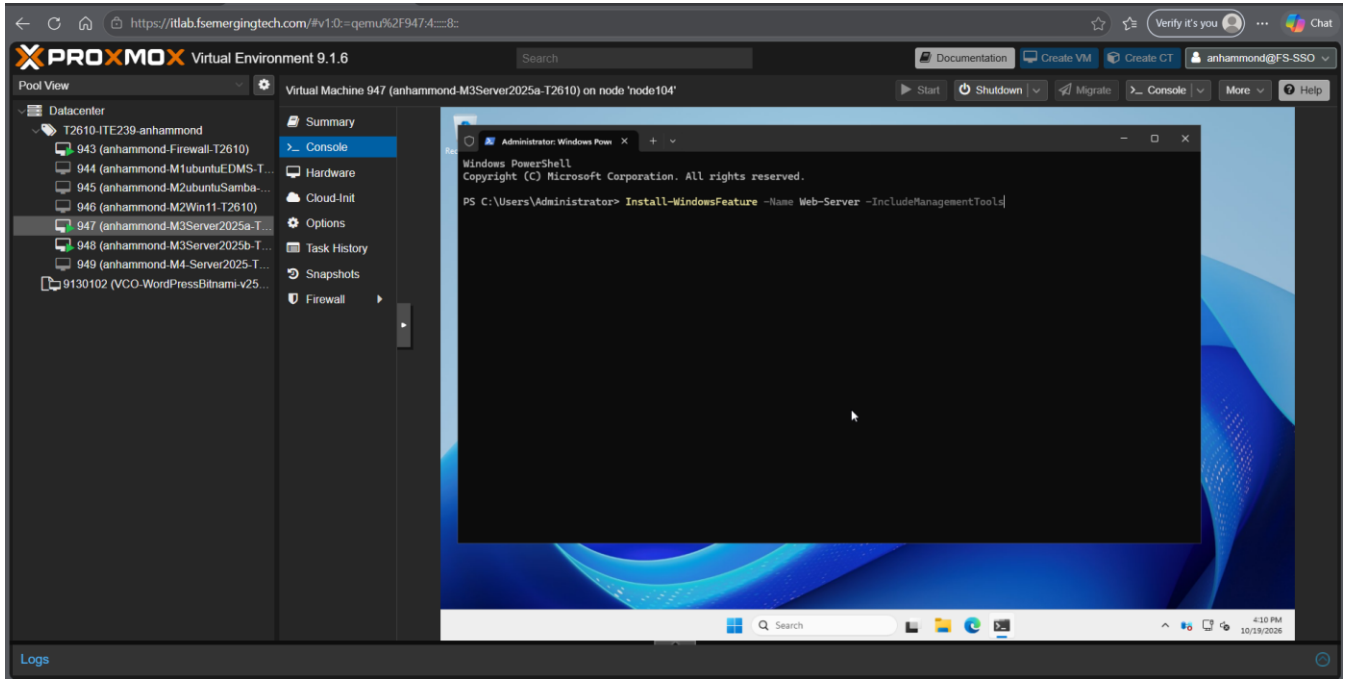


- Next, we want to type in this command into PowerShell on server A. This will add the Windows Features that we need.

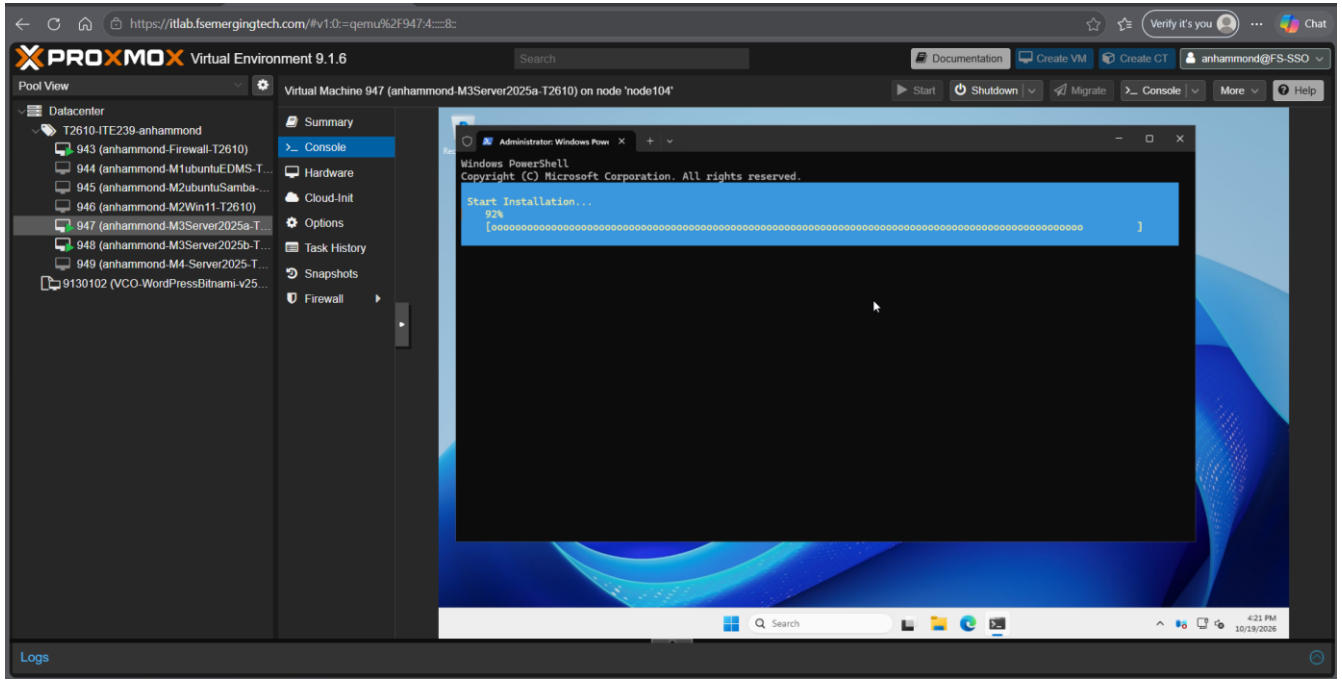


- This is how it should look after hitting enter. It will show the download progress.

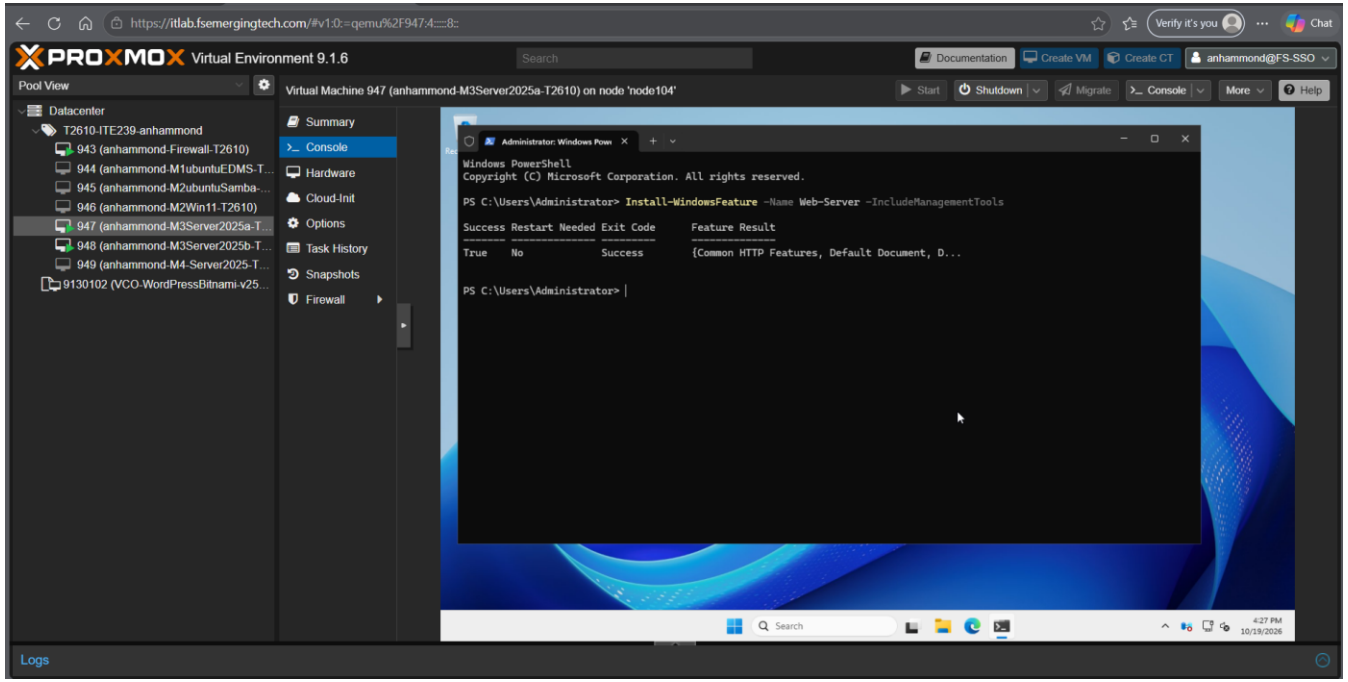


- After it is done, you should get this message. This just lets you know that it was downloaded successfully.

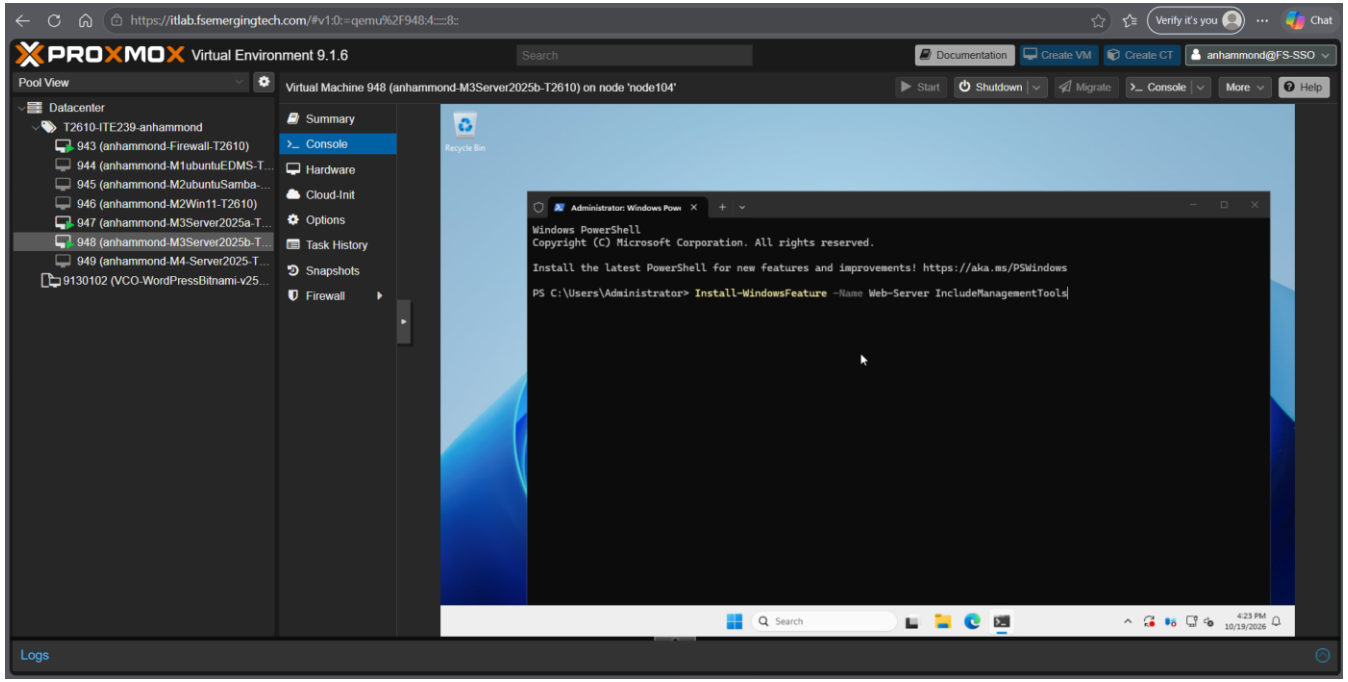


- Now we're going to do the same thing for server B. Let's go ahead and type in the same command.

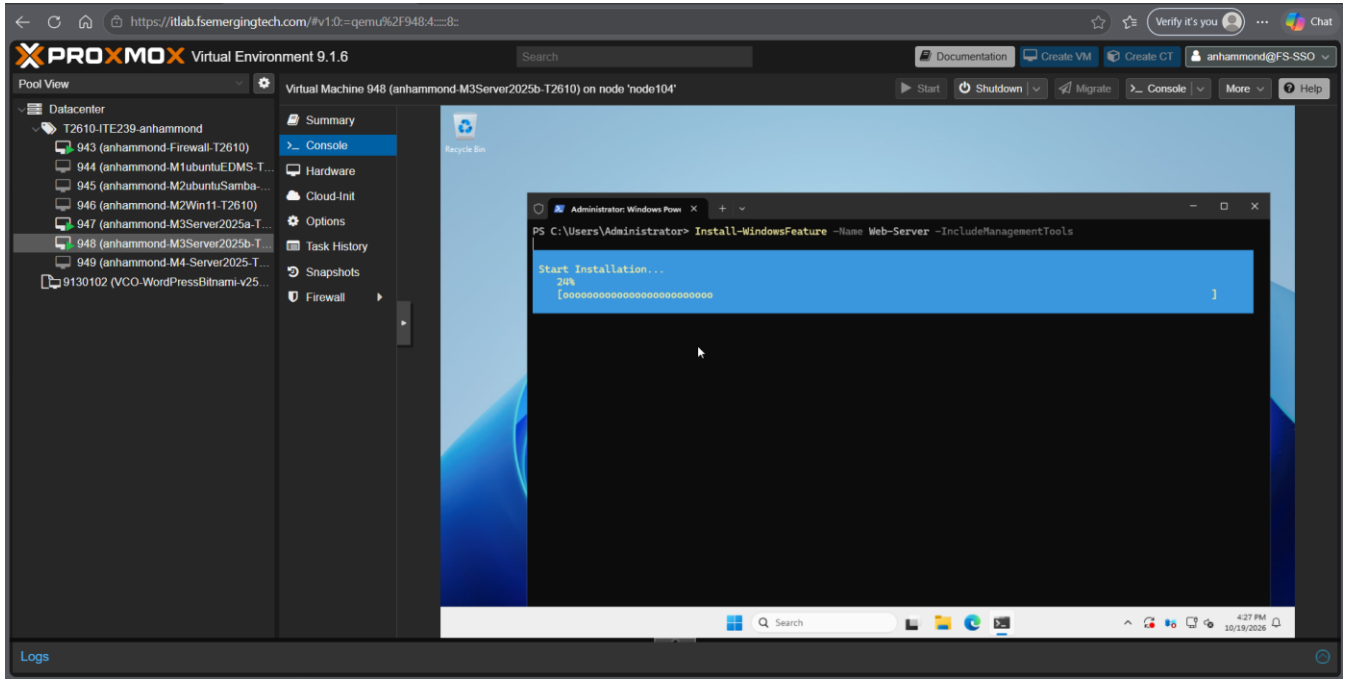


- Same thing for this slide as well. It will begin downloading the contents needed.

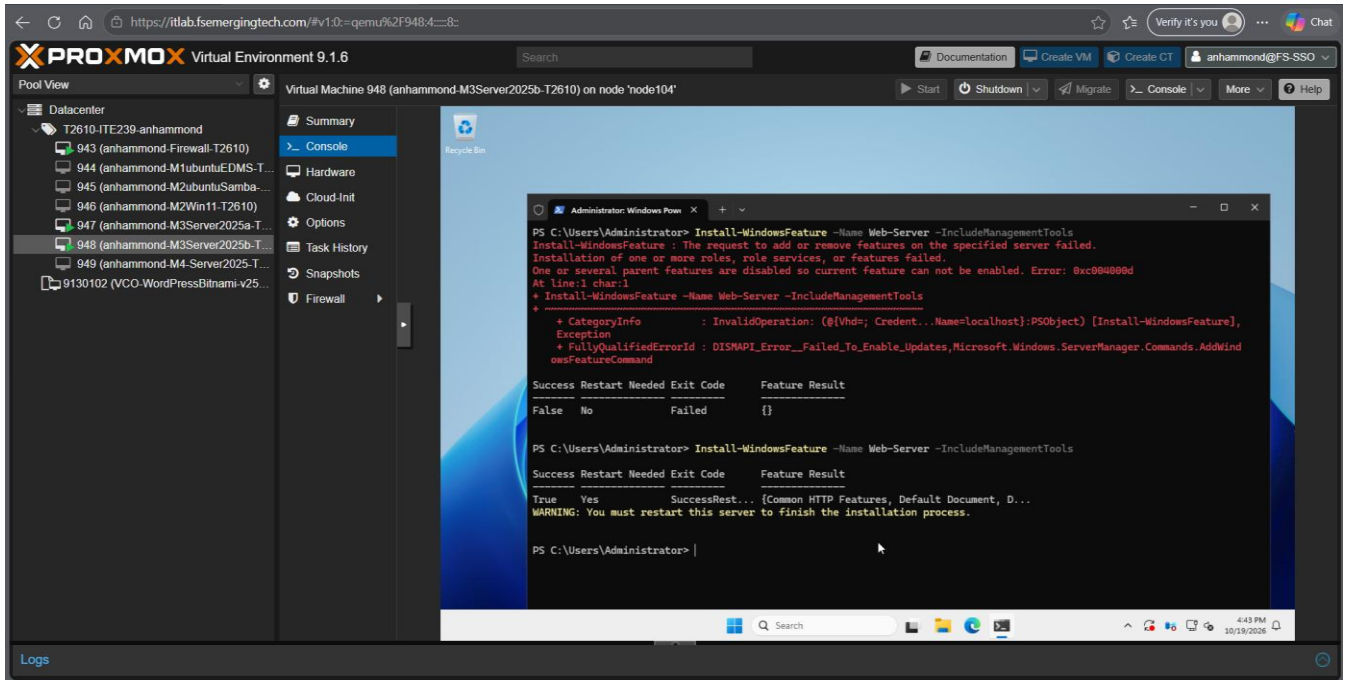


- Now we have another success message. This let's us know that everything has been downloaded.

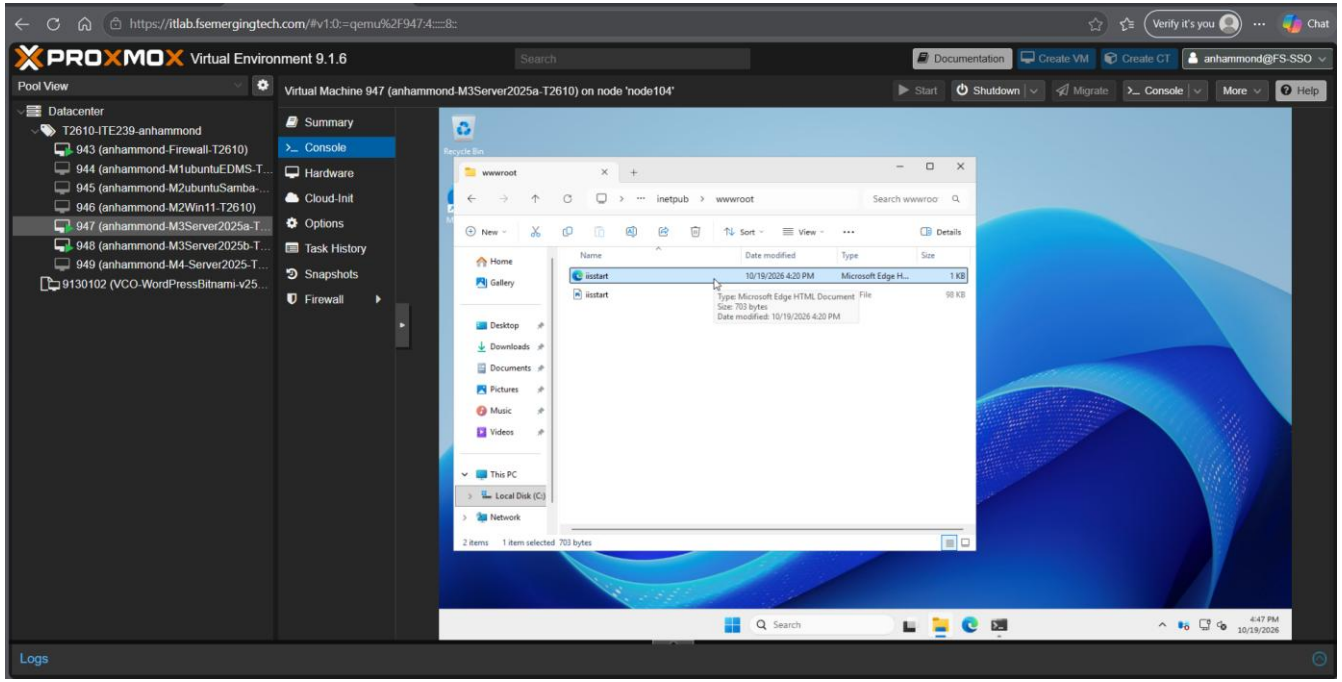


- Next, we want to go back to server A. Go to file explore and please go to the local disk. Afterwards, go to the address bar and type in “wwwroot”. Go in the file and you should see these two files shown in the picture.

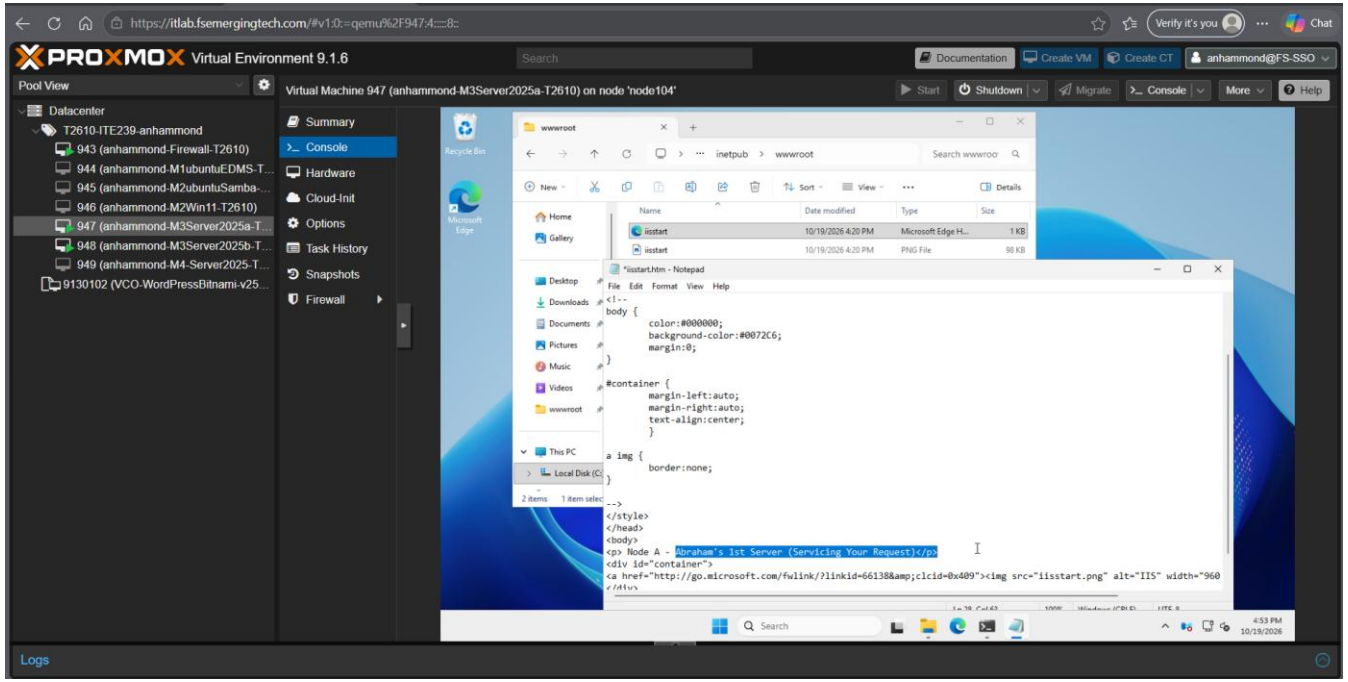


- Right click on the file and open it with notepad. After opening the text file, scroll down and type in what is written underneath “body”. Please replace my name with your own.

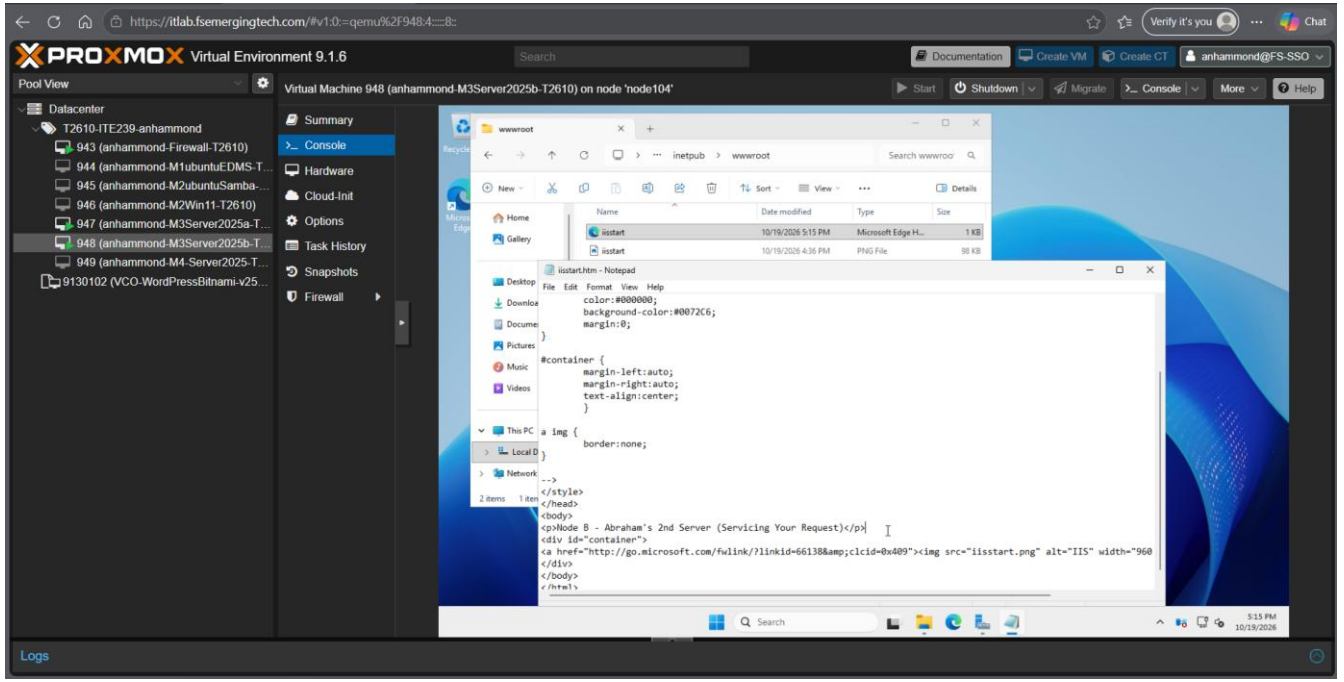


- Next, you want to do the same thing for server B. Only difference is that this will be Node B.

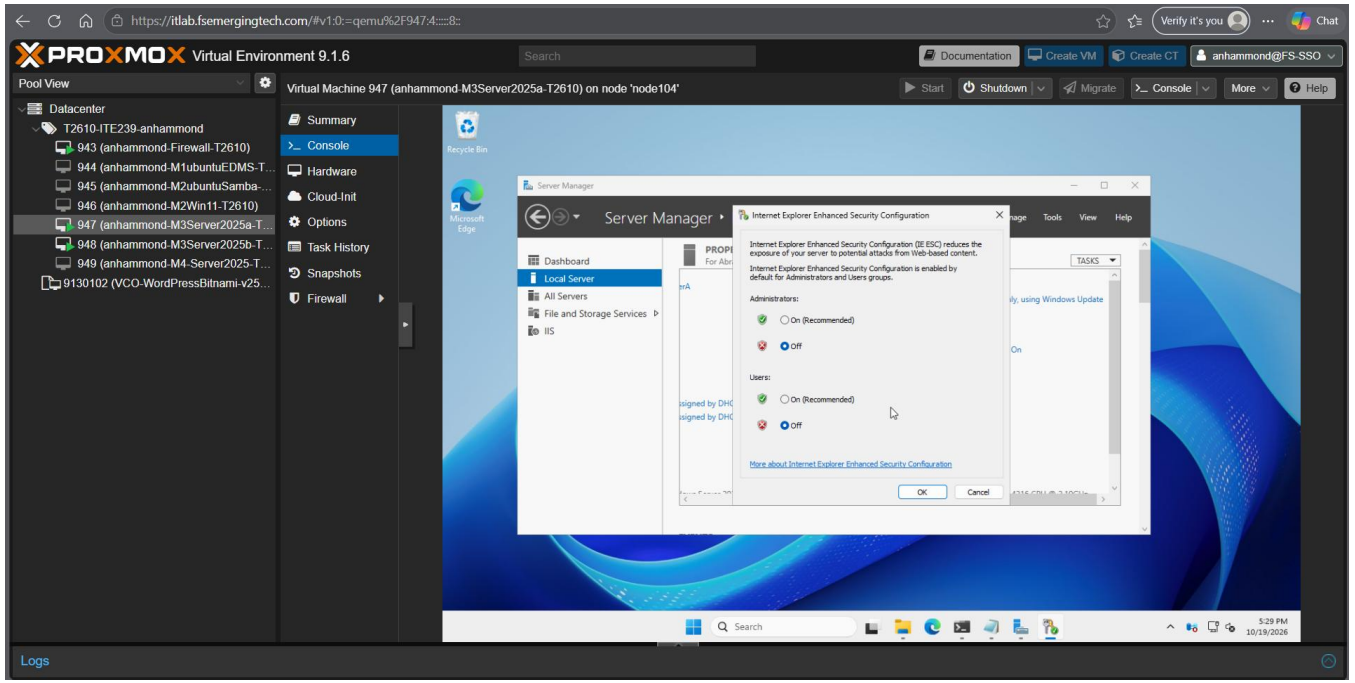


- Now we want to go to the server manager and go to the local server tab. Click on the Internet Explore Enhanced Security Configuration and turn off both features. Click ok afterwards.

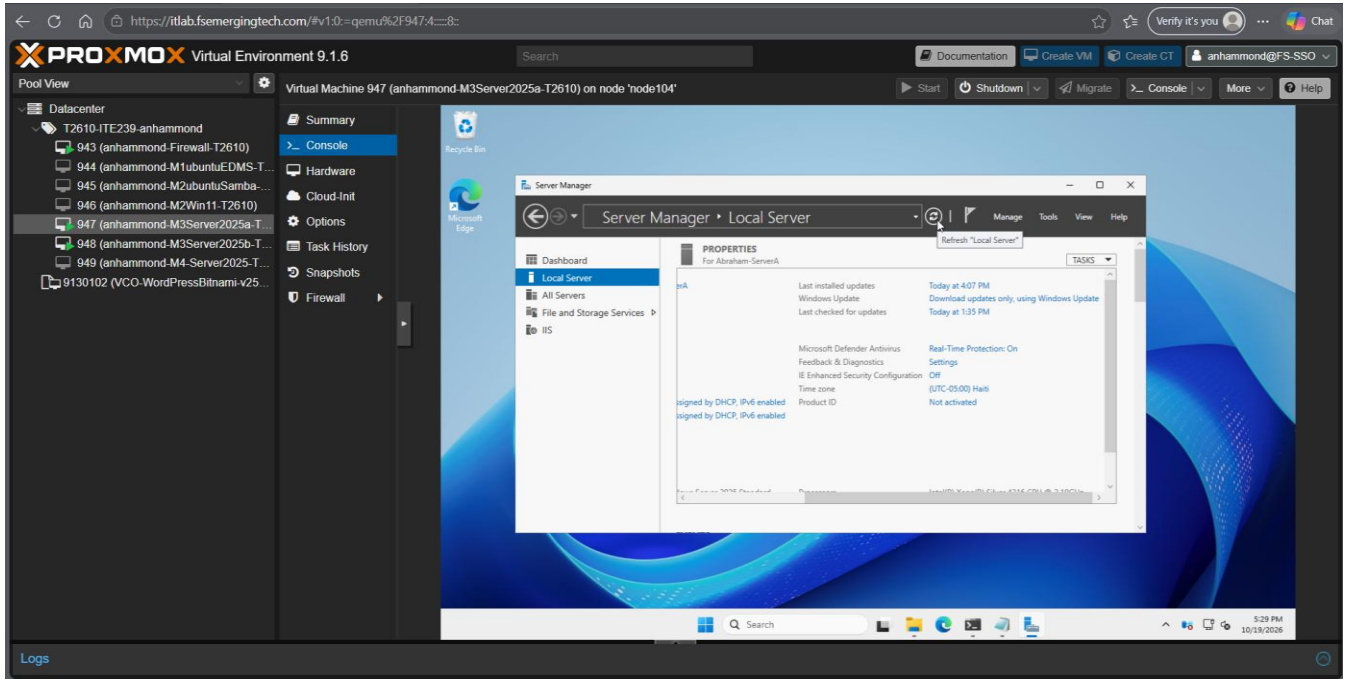


- After switching them off, refresh the page. The refresh icon is located at the top in the picture shown. After refreshing, you should see that the feature has been turned off.

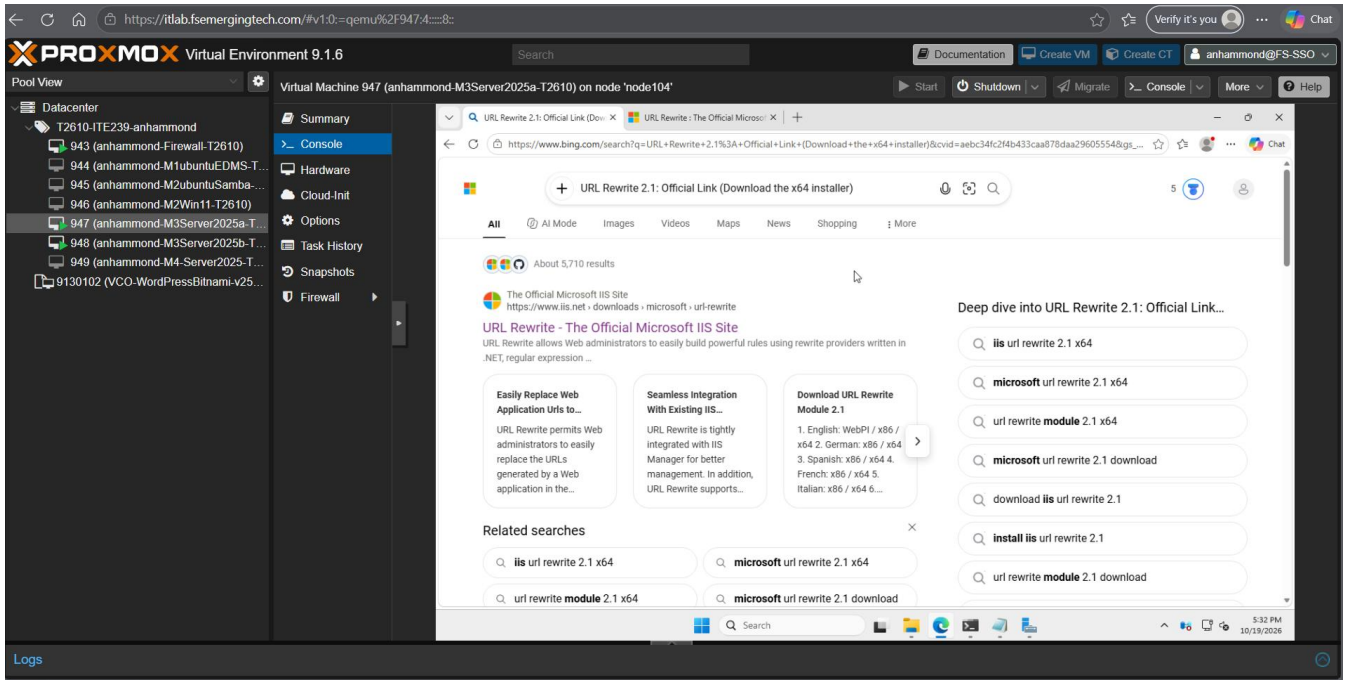


- Now we want to go to Microsoft Edge/Firefox and look up this URL Rewrite website shown in the picture. Please click on the site.

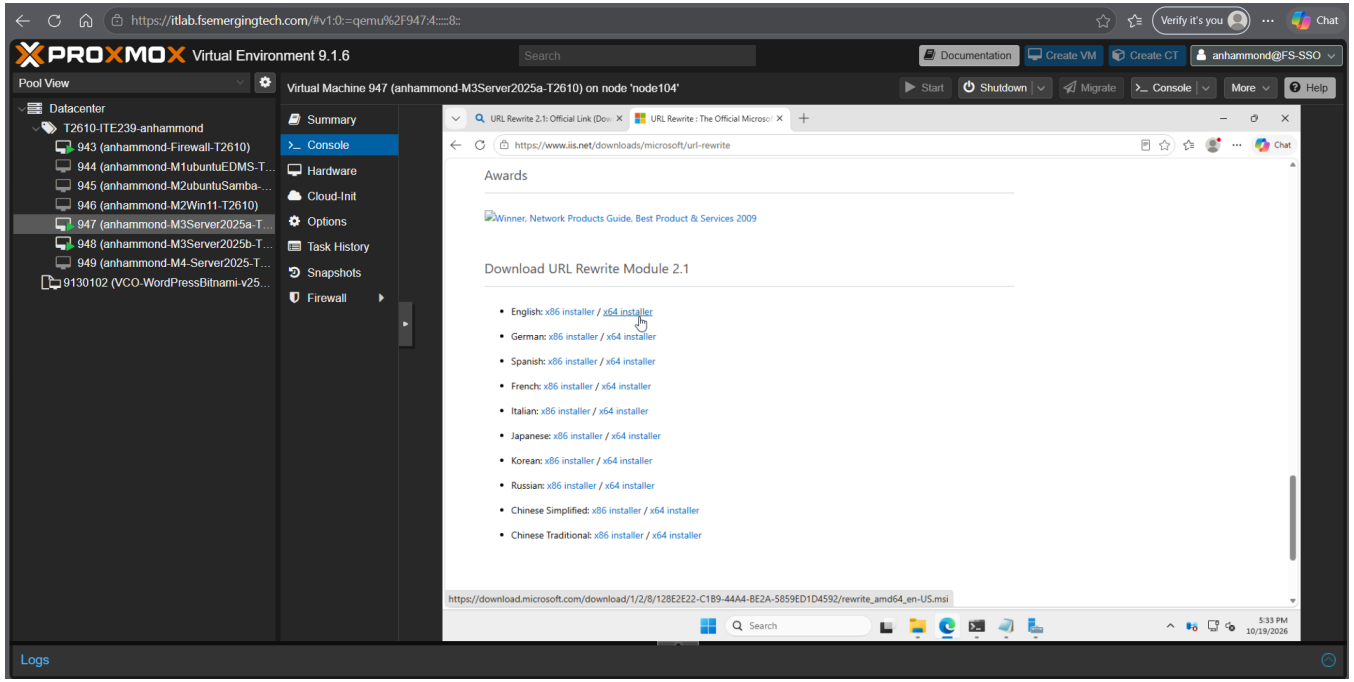


- When you click on the page, this site should come up. Scroll down and look for the English 64-bit file and begin downloading it.

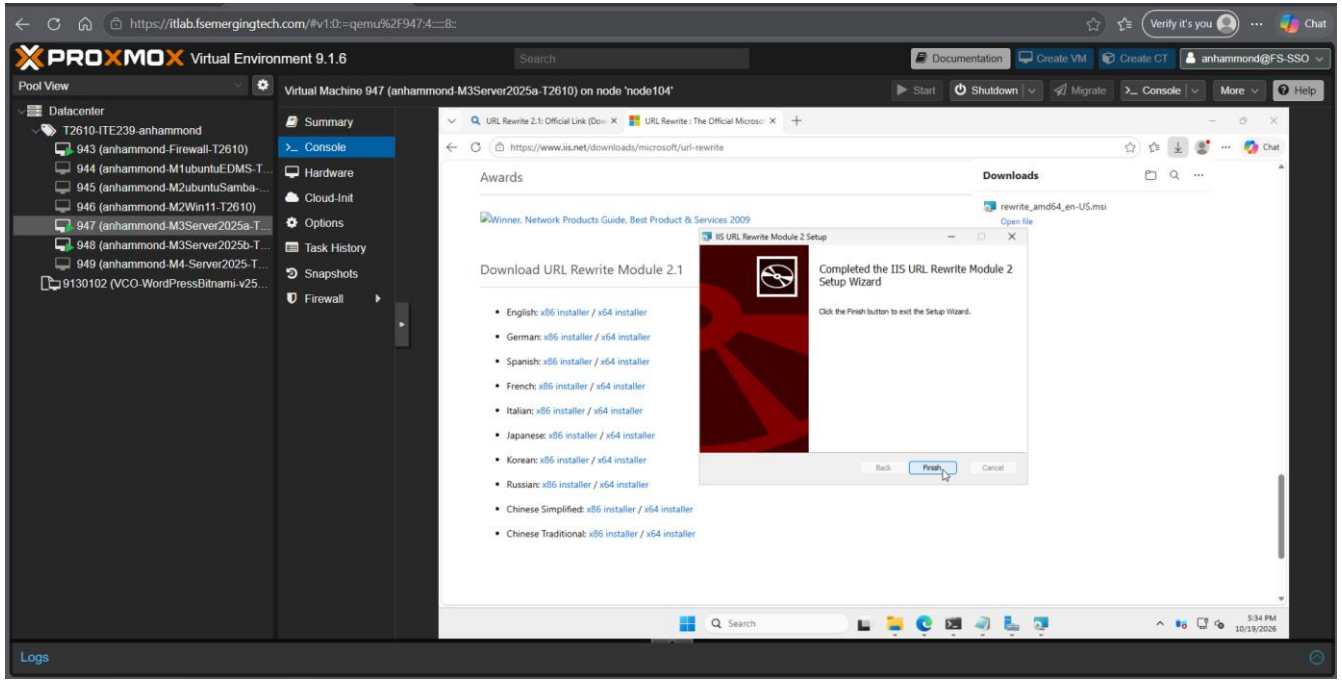


- You should have had an installation wizard appear after opening the file. Click finish once it's done downloading all it's contents.

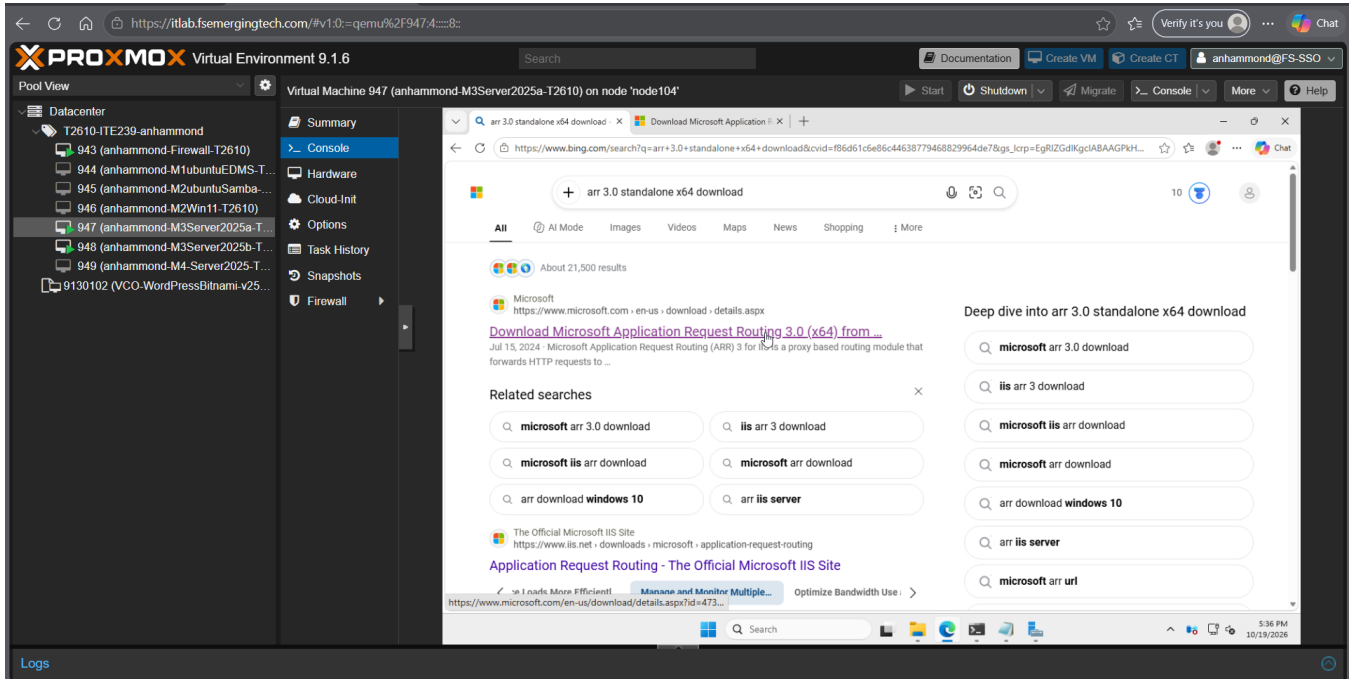


- We need to download the ARR 3.0 64-bit package next. Please type in the URL shown in the picture and click the first option shown.

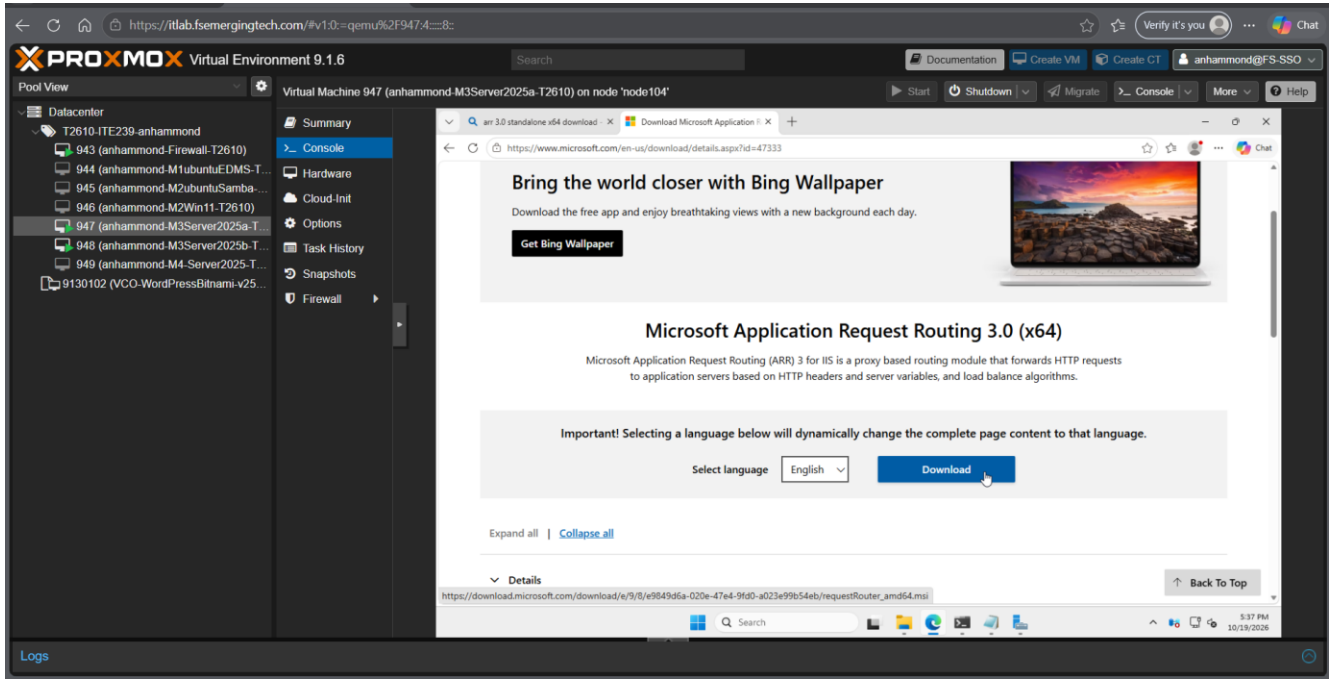


- This is the page that will appear after clicking the site, They make it easy for us and show us the download icon as soon as the page loads. Please press the download icon.

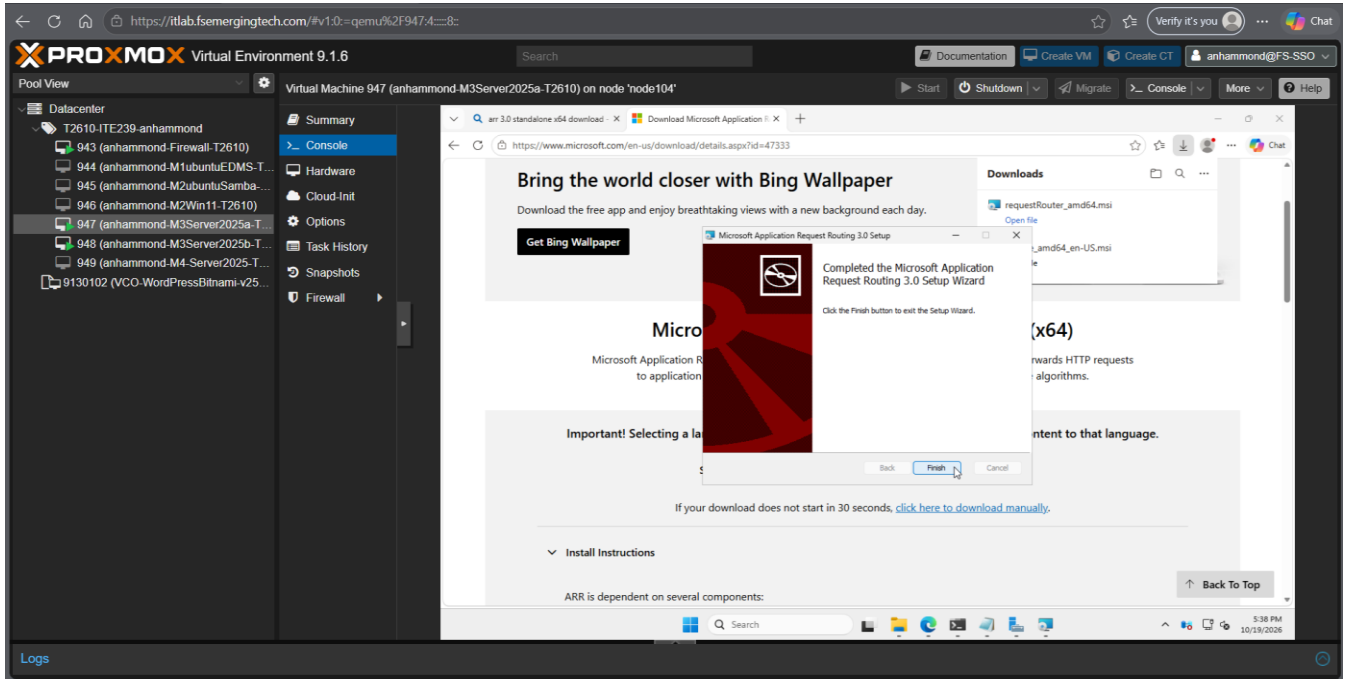


- After opening the download file, another wizard should appear for installation. Let all the contents download and click finish once it completes.

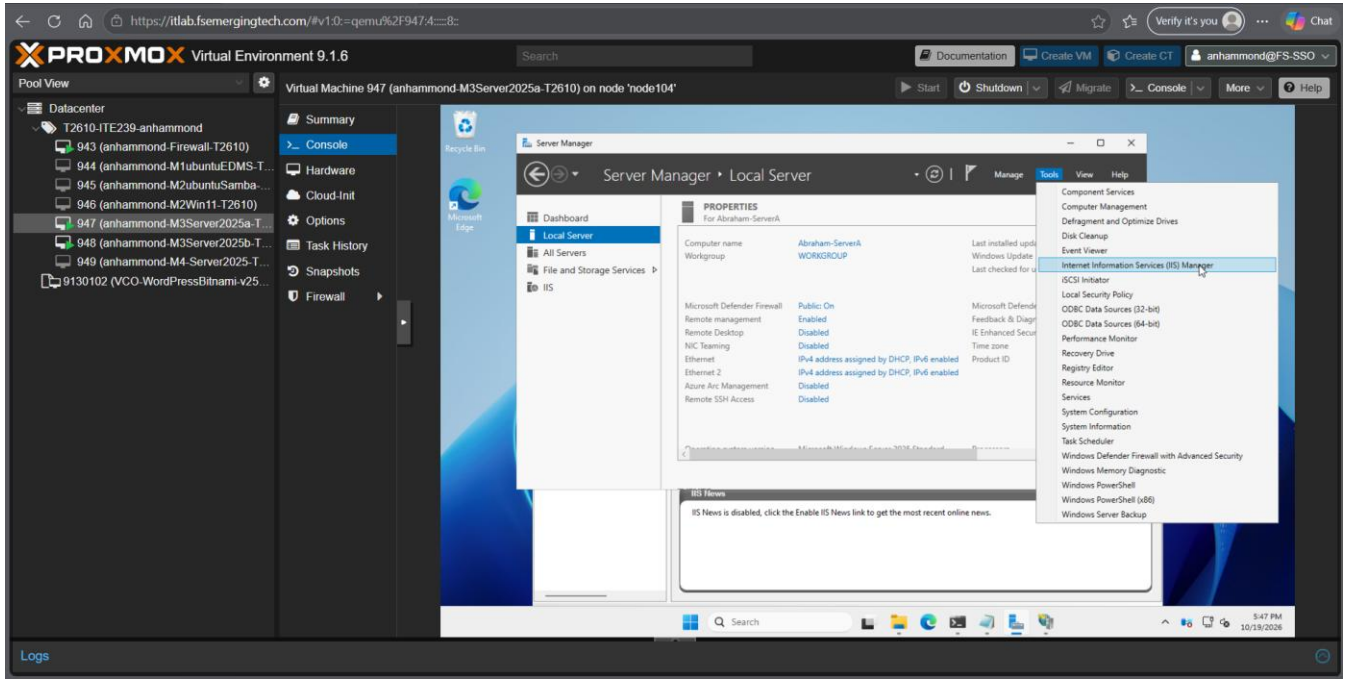


- In server A we want to go back to the server manager and click on the tool Dropbox. In the Dropbox, please look for the IIS tab that is shown in the picture above.

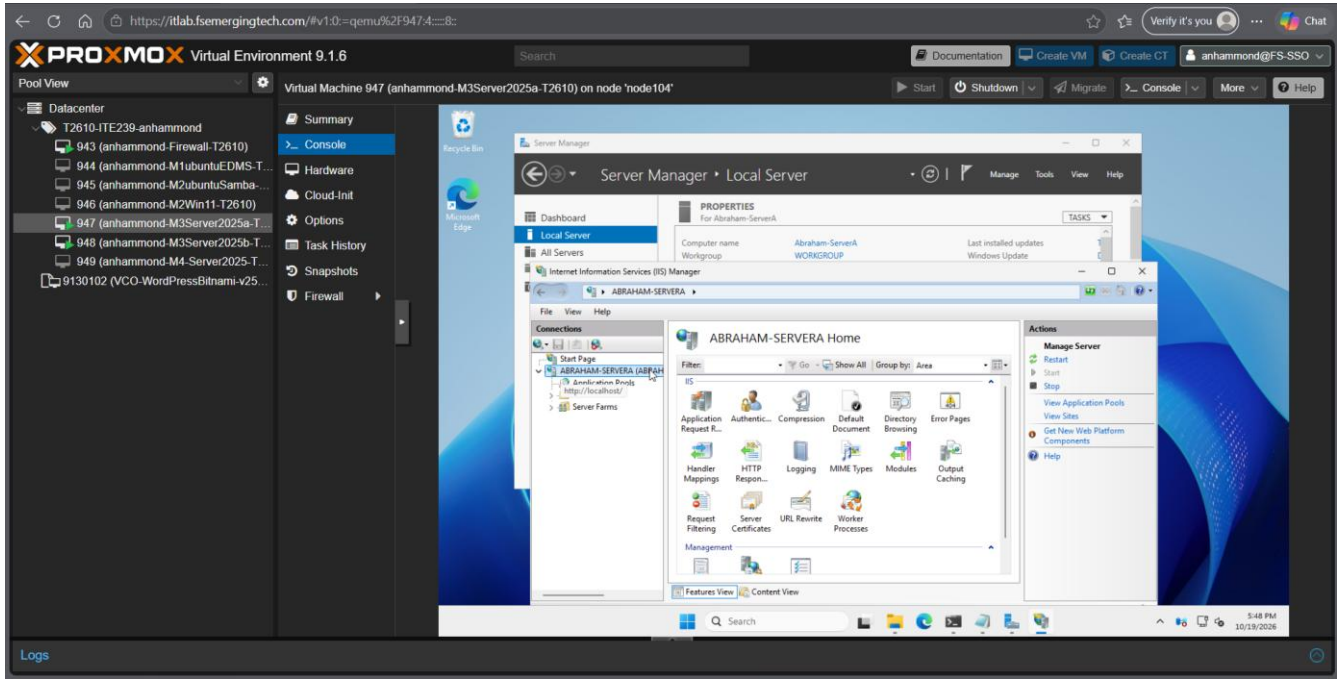


- After clicking the tab, you should see this folder appear that is highlighted in the picture above. You will have something similar with your own name that you set for the OS.

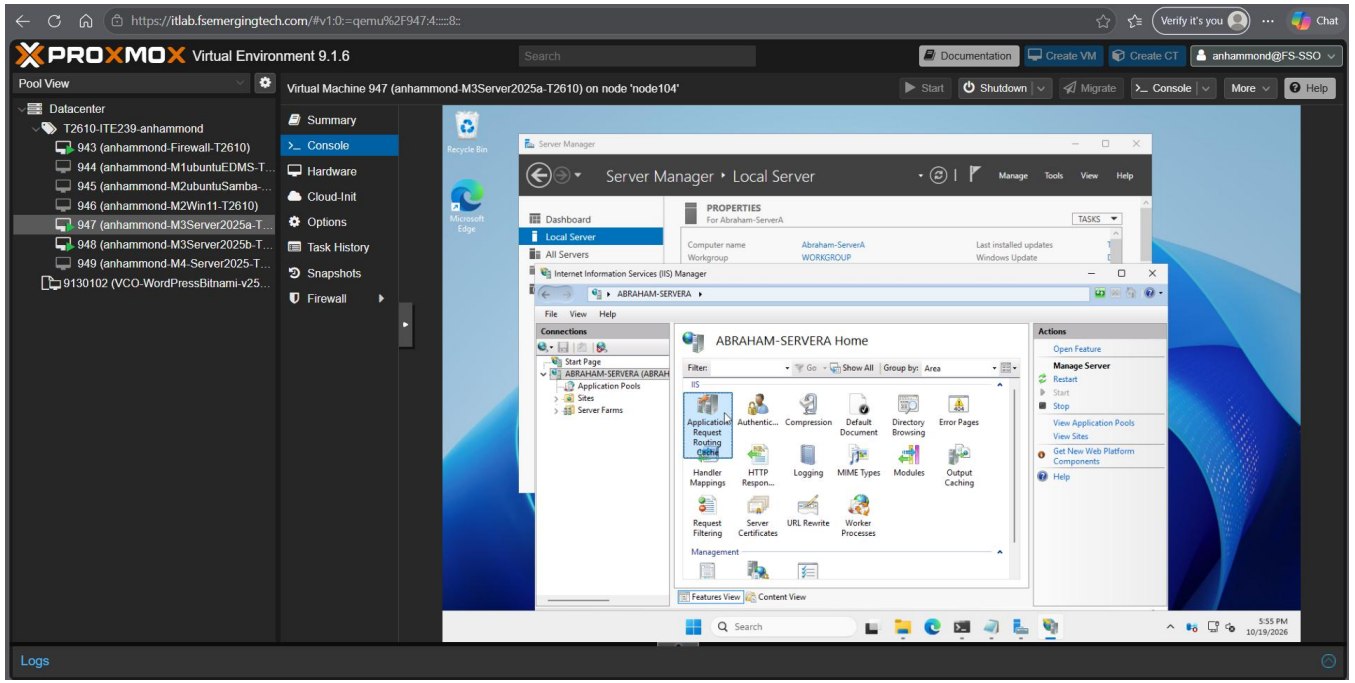


- Inside the folder, you should see the ARR application we downloaded. Please click on the highlighted feature shown in the picture above.

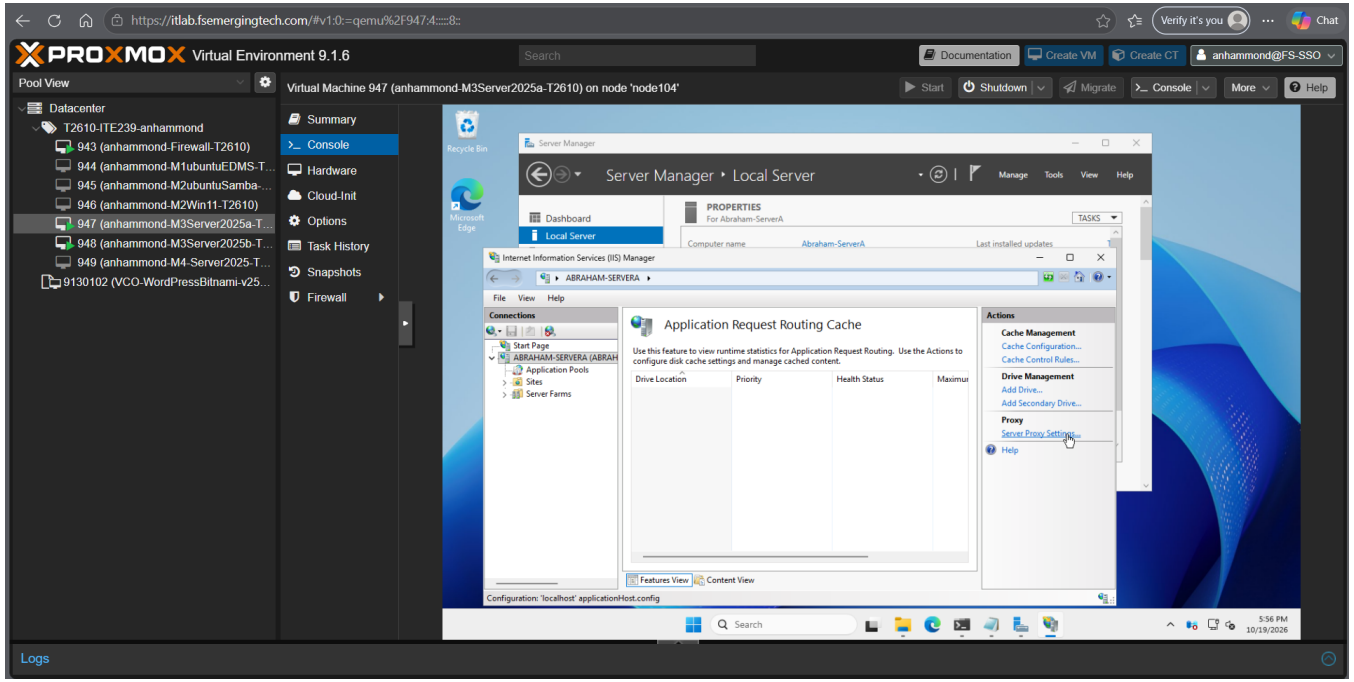


- You should see this page appear after clicking on the application. We want to look on the right side and click on “Server Proxy Settings”.

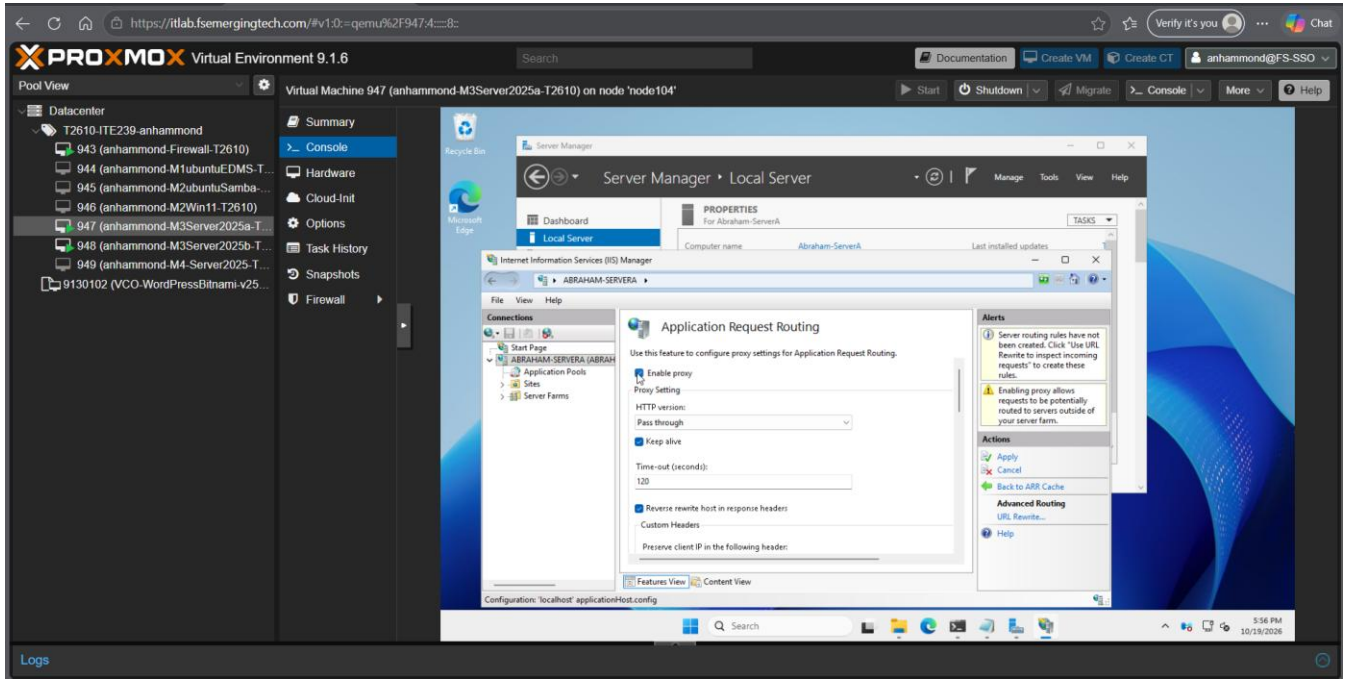


- This is the page you should see after clicking on it. Please enable proxy.

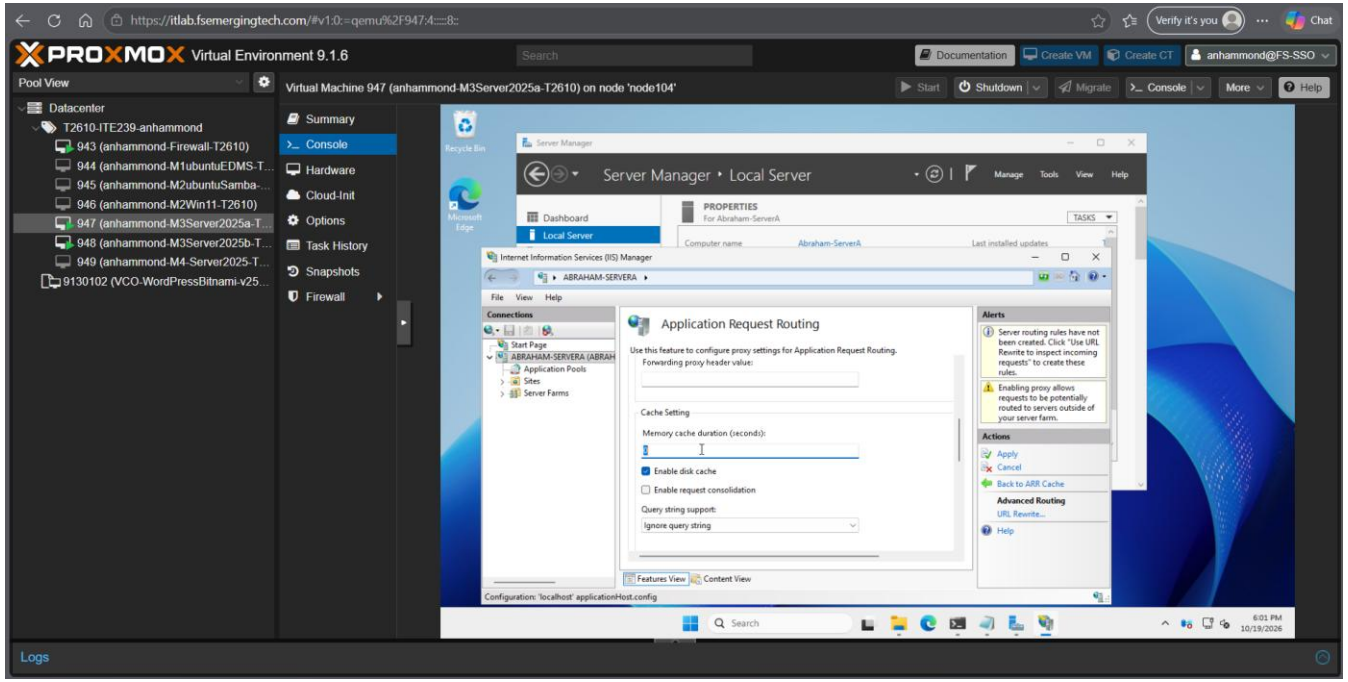


- You should have enabled proxy in the last step. Now in this step, we want to set the memory cache to zero.

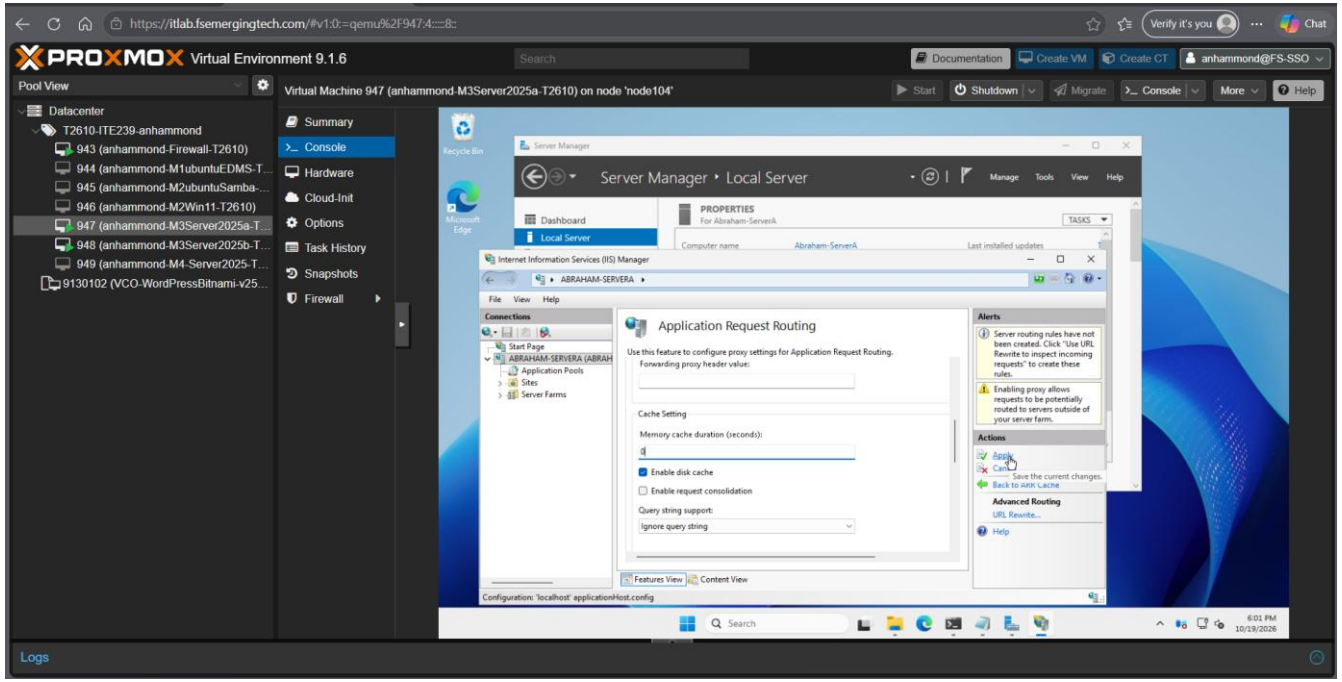


- Double check and see if you have enabled proxy and set the memory cache to zero. After confirming, click on apply on the right-hand side.

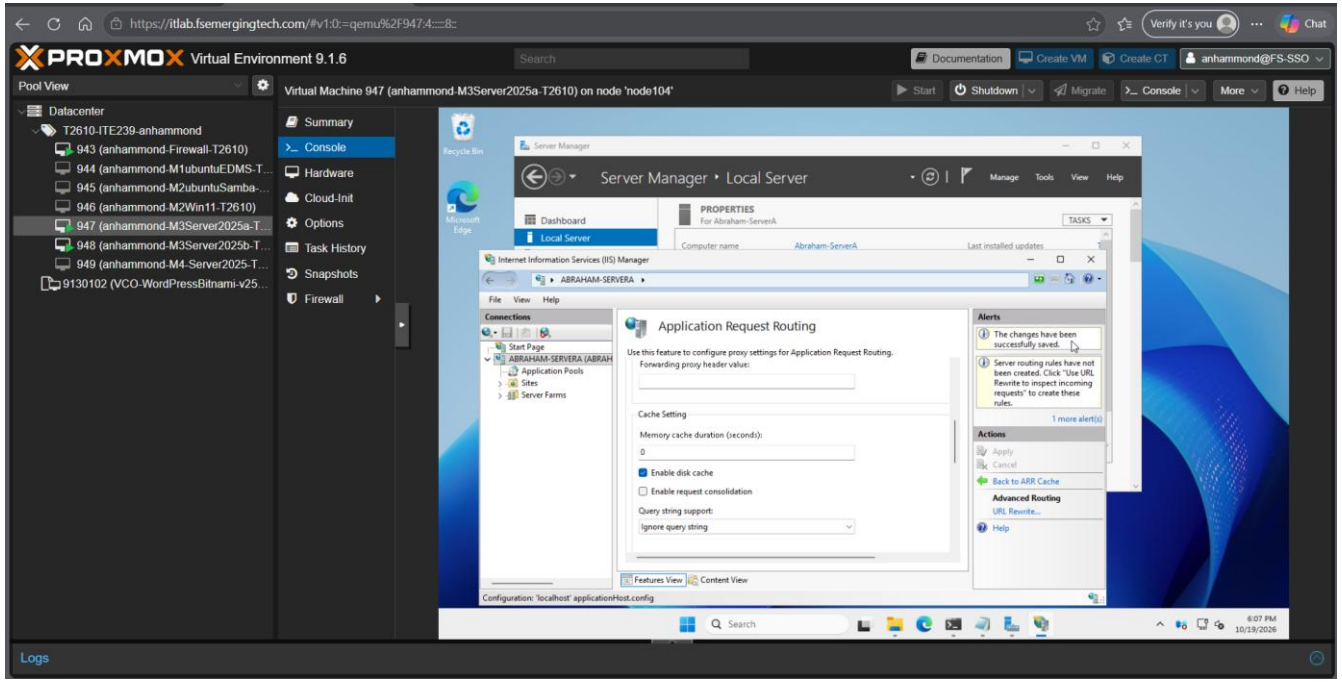


- Please double check and make sure you clicked apply. Once you've clicked apply, you should see confirmation letting you know that the changes have been made.

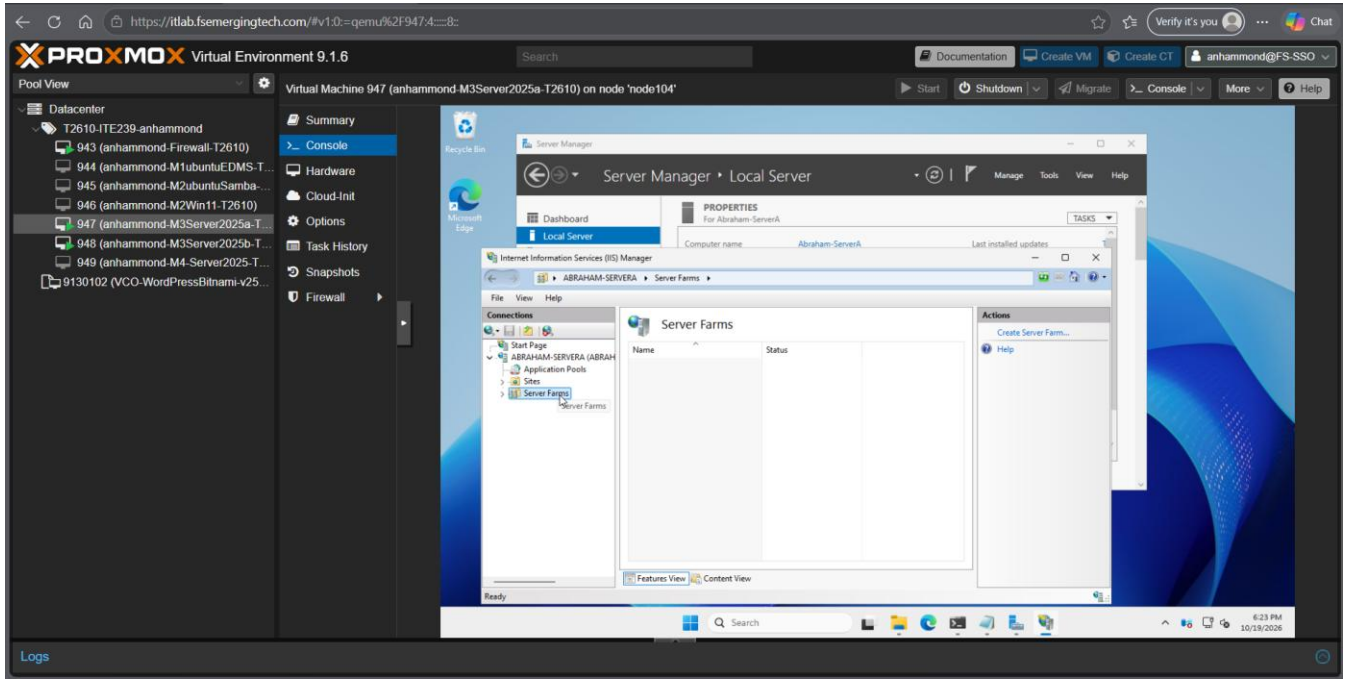


- Go back to the left-hand side of the page. You want to go down and look for server farms like the highlighted tab in the picture shown above.

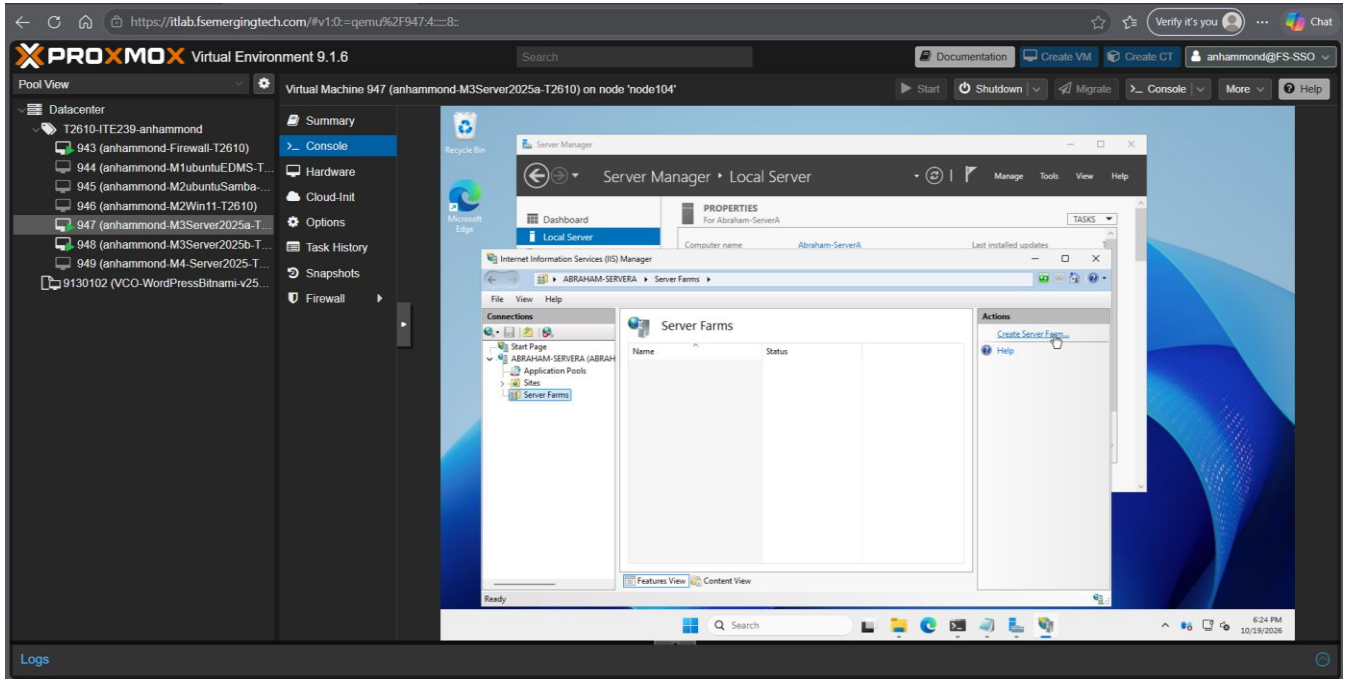


- Now that we have the server farm opened, this how it should look. On the right-hand side, there is a tab that says, “Create Server Farm”. Please click it.

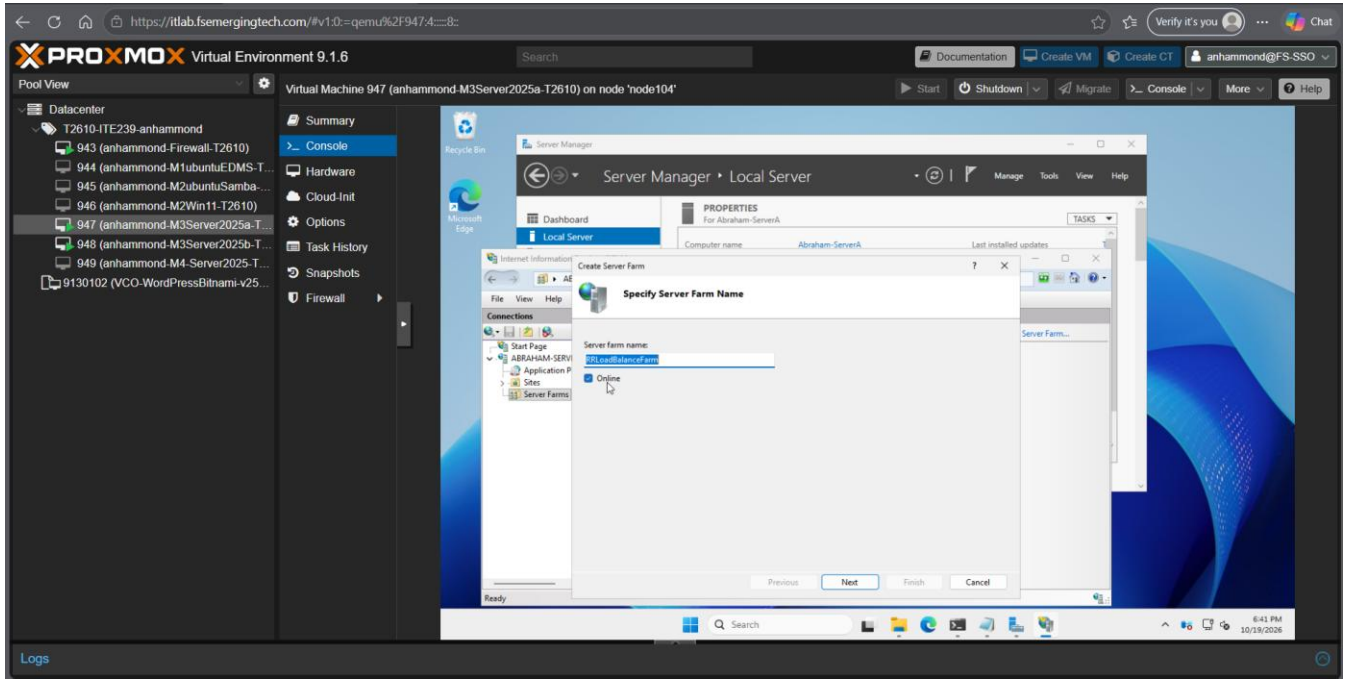


- You should see this page appear after clicking on the tab. Please type in the file name shown in the picture above. Make sure that you check online and hit next.

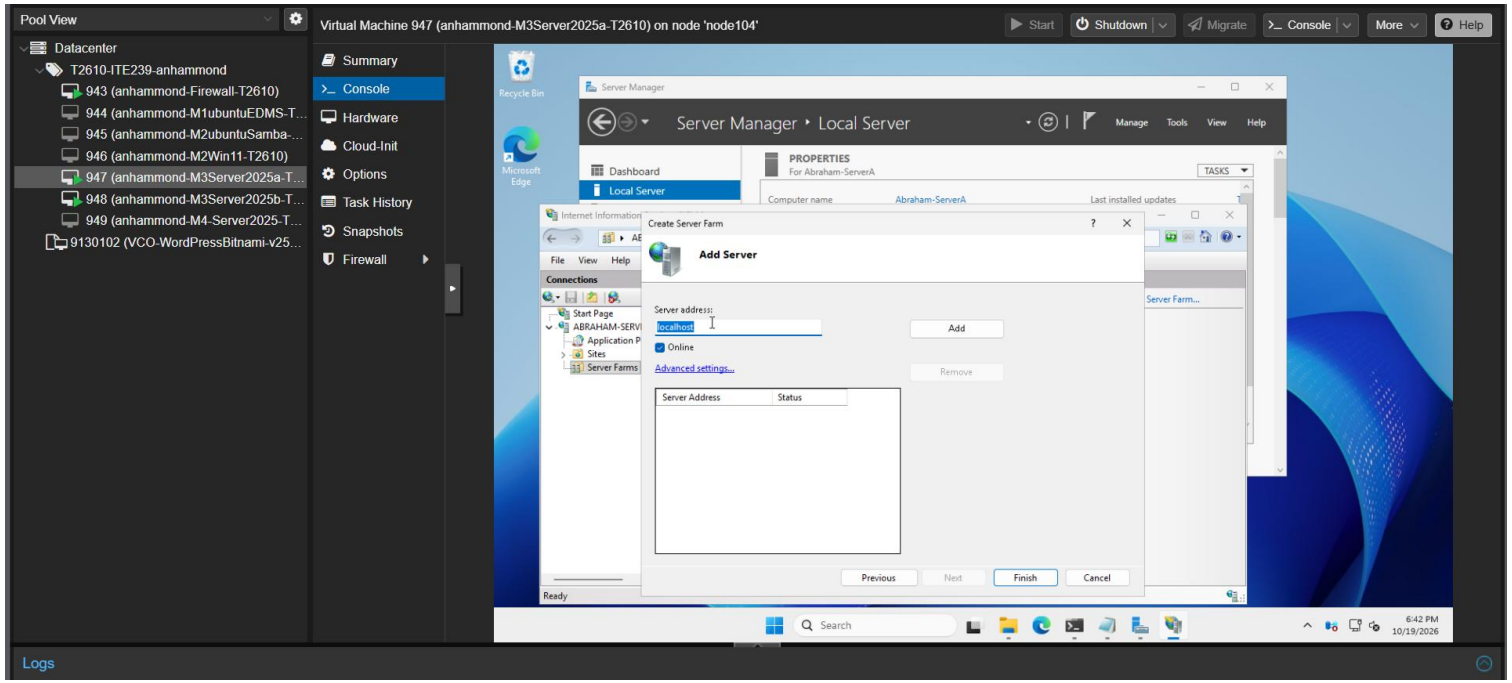


- Now we want to set the server address to “localhost”. Clicked on advanced settings afterwards.

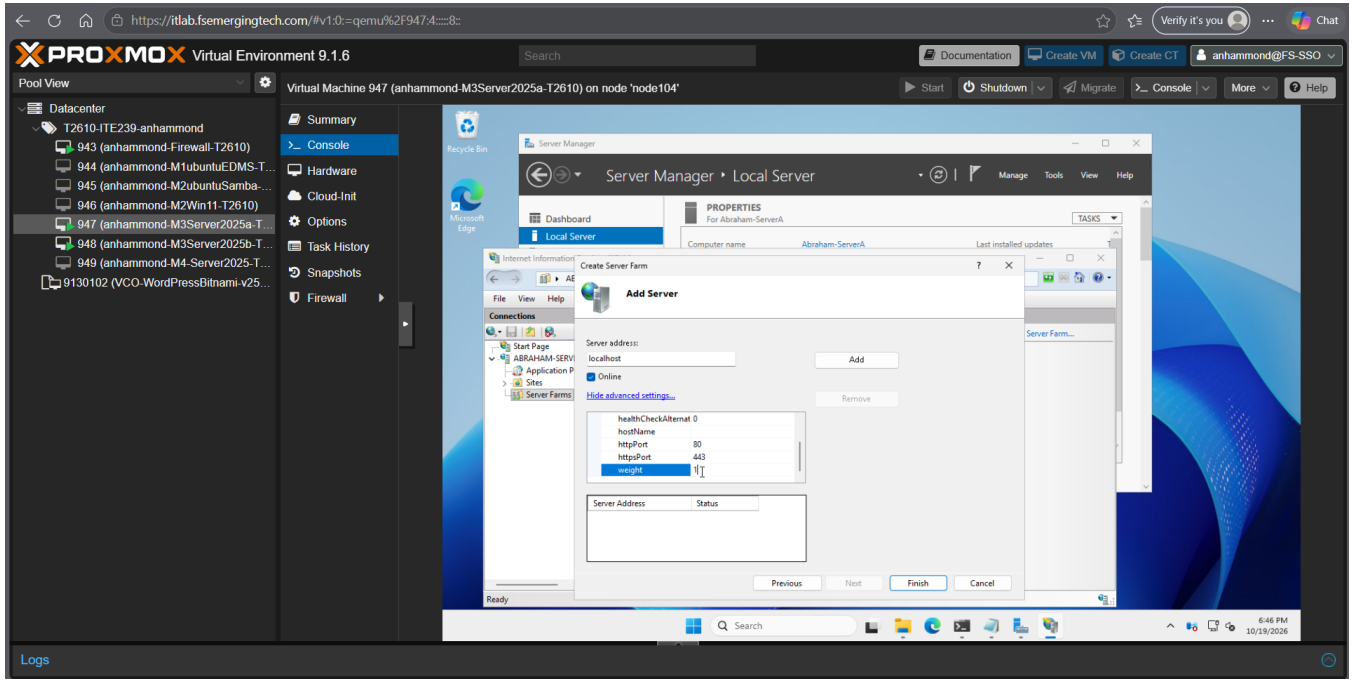


- In the advanced settings, you should get a Dropbox. Change the weighted tab to one.

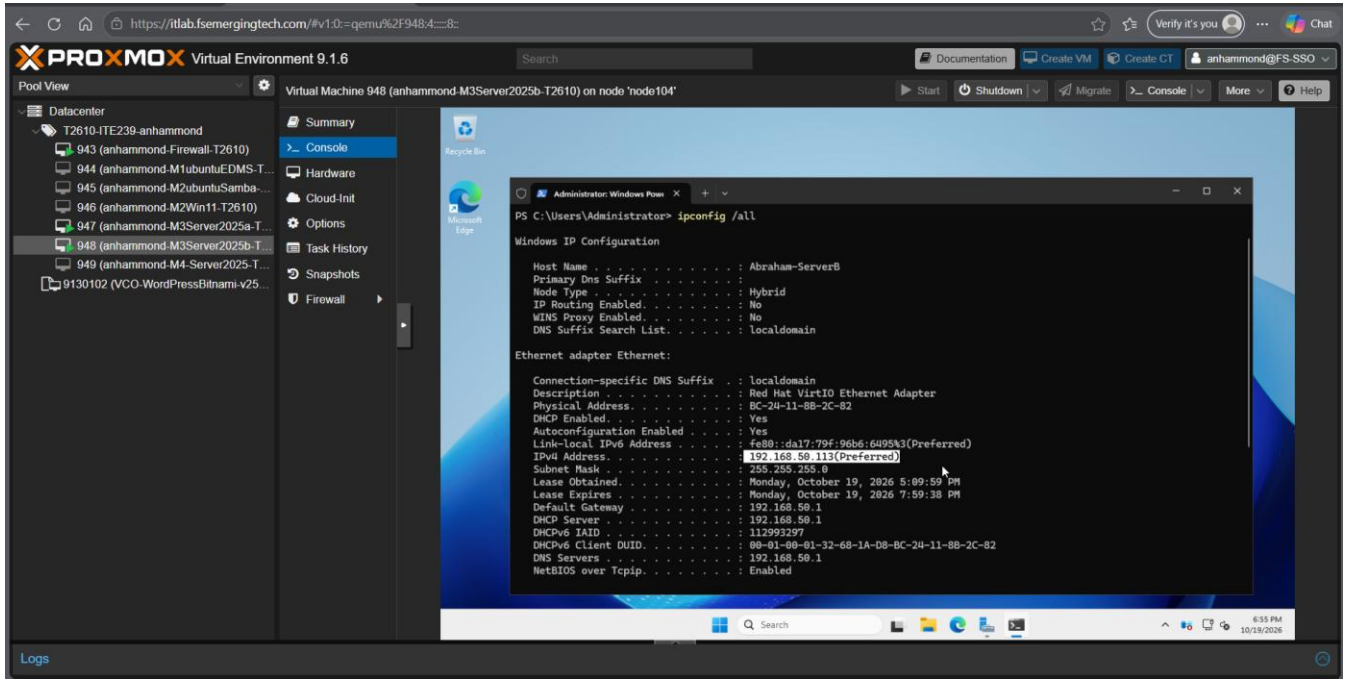


- Now let's go back to server B and go into command prompt. Type in ipconfig /all and press enter. You want to look for the Ip address like in the picture shown above. Your address may be different from mine.

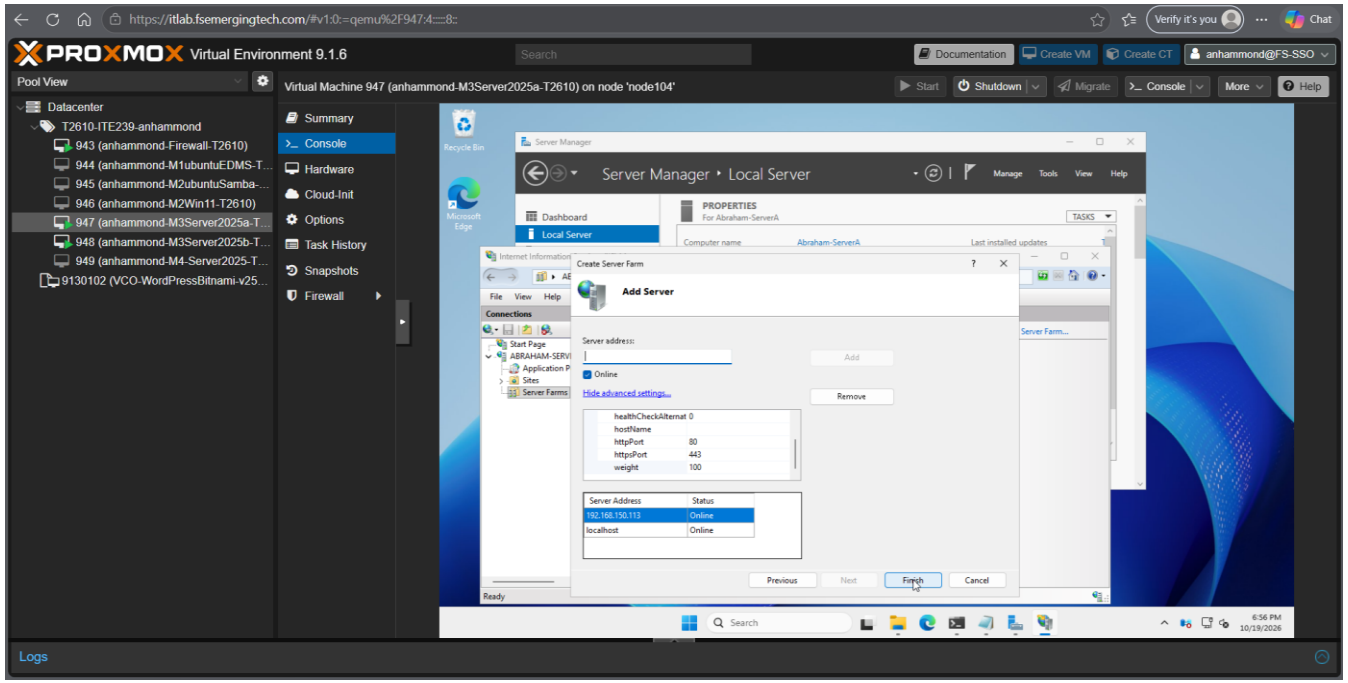


- Take the address from server B and go back to server A. Add another address and put in the Ip address that we got from server B. Go to advanced settings and set the weight to one on there before pressing add.

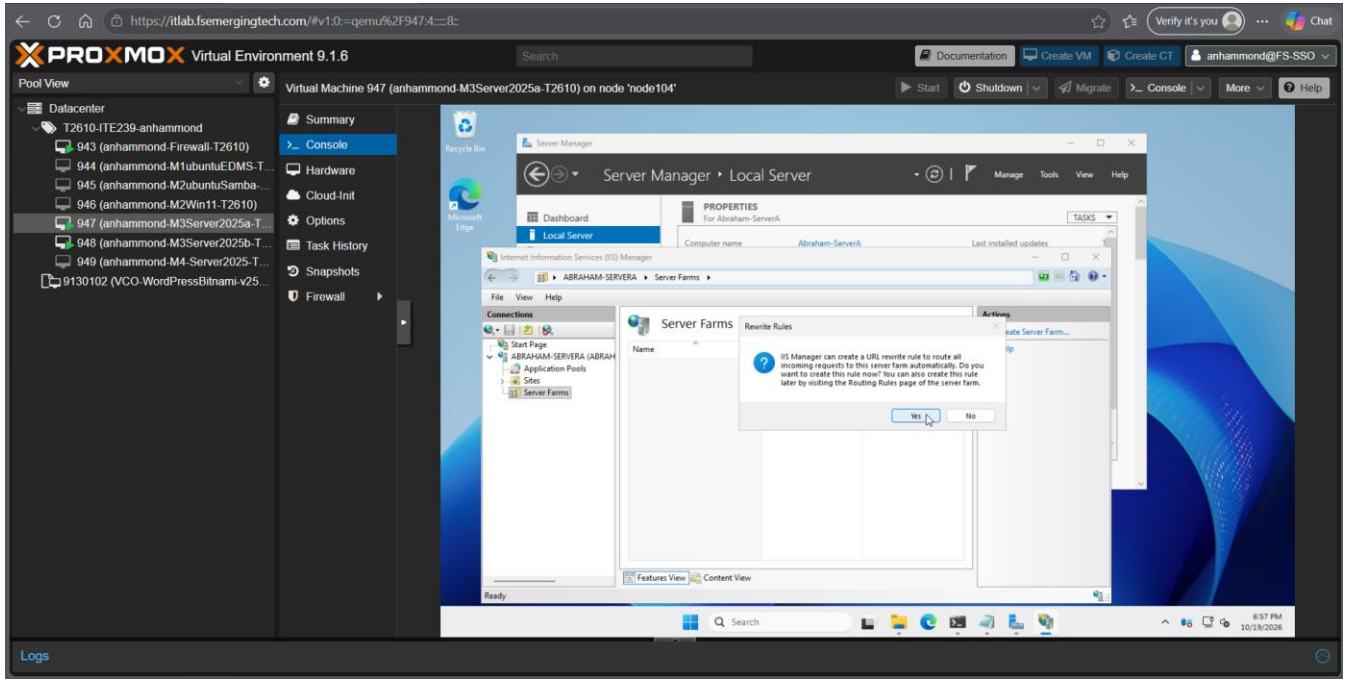


- After you finish add all the addresses needed, a pop-up message will appear. Press yes because you want to rewrite the rules that you have applied.

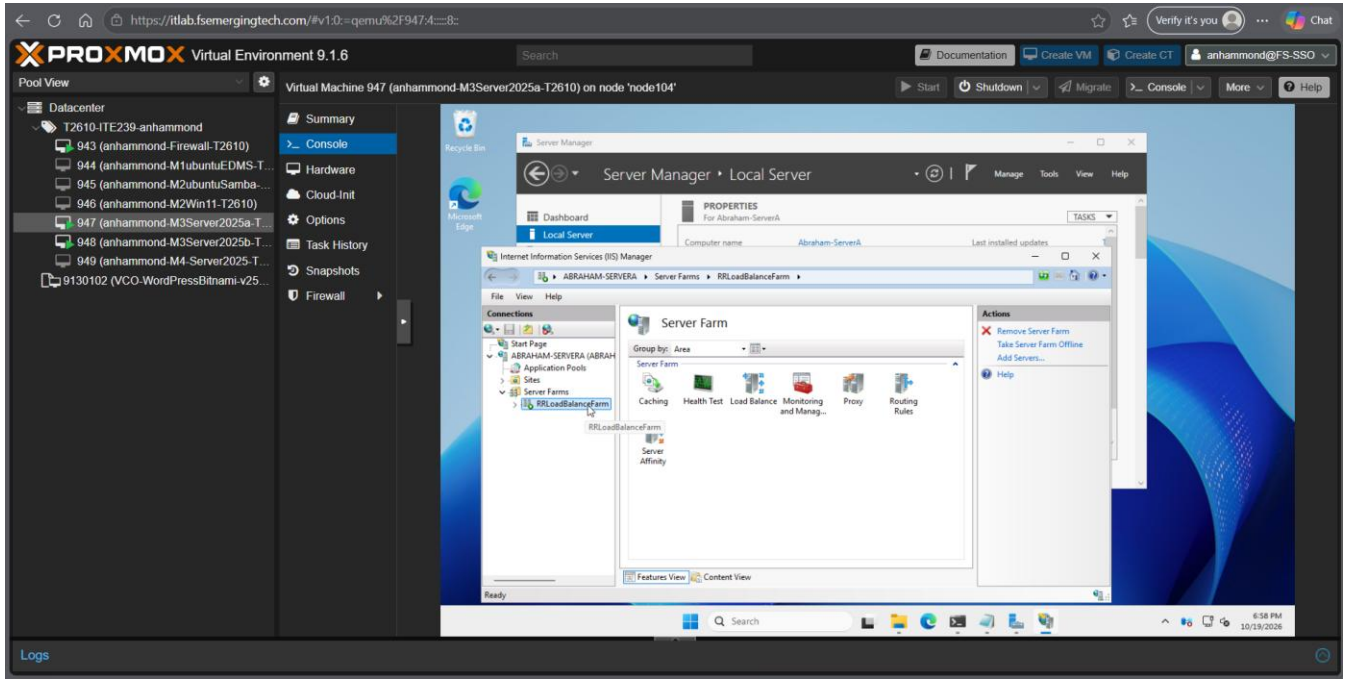


- Now you should see the new server farm we created on the left-hand side. Click on it to proceed to the next step.

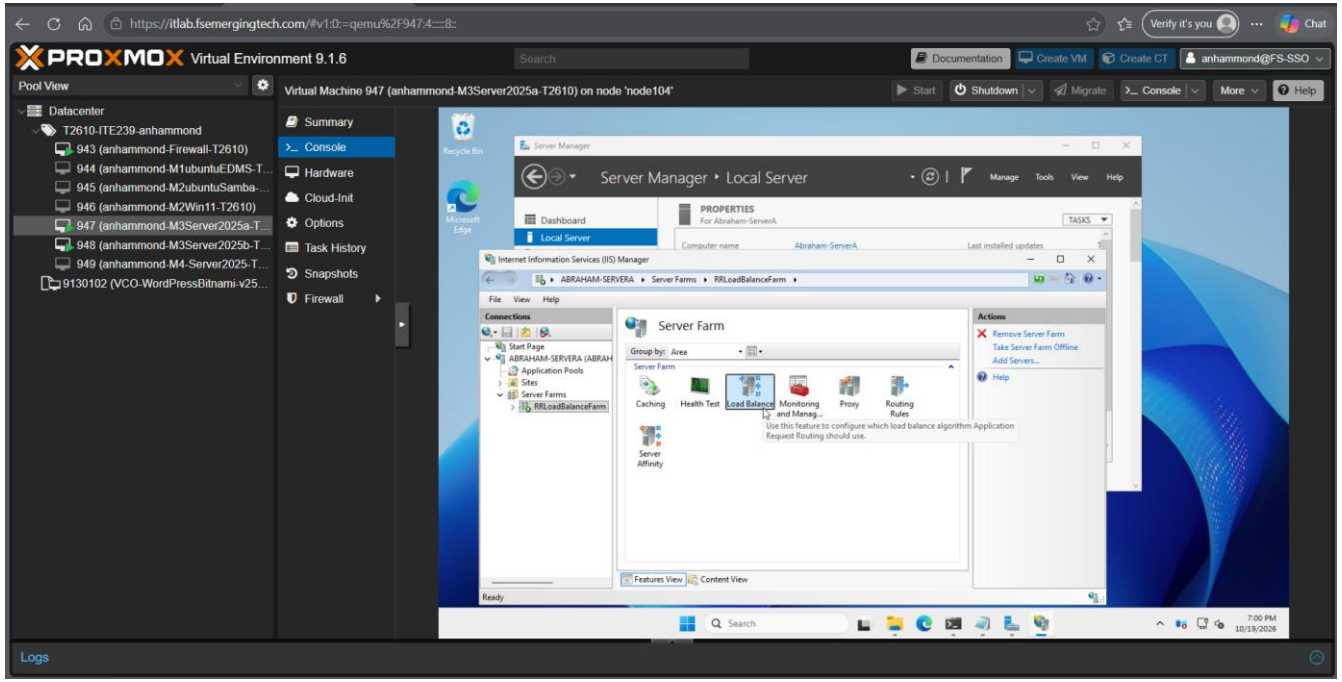


- We have this menu screen pop up after clicking on the server farm created. We want to look and click on load balancing.

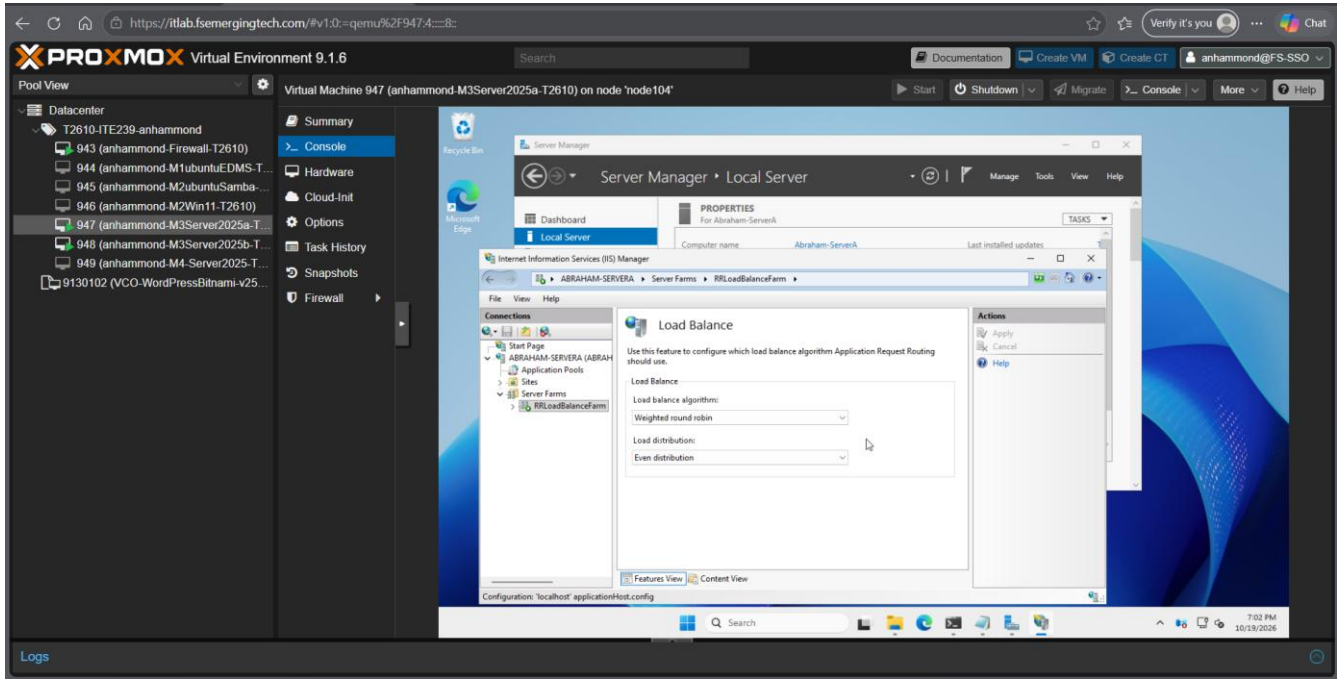


- You should get this page once you click on load balancing. Make sure your options are set to these settings in the picture shown above.

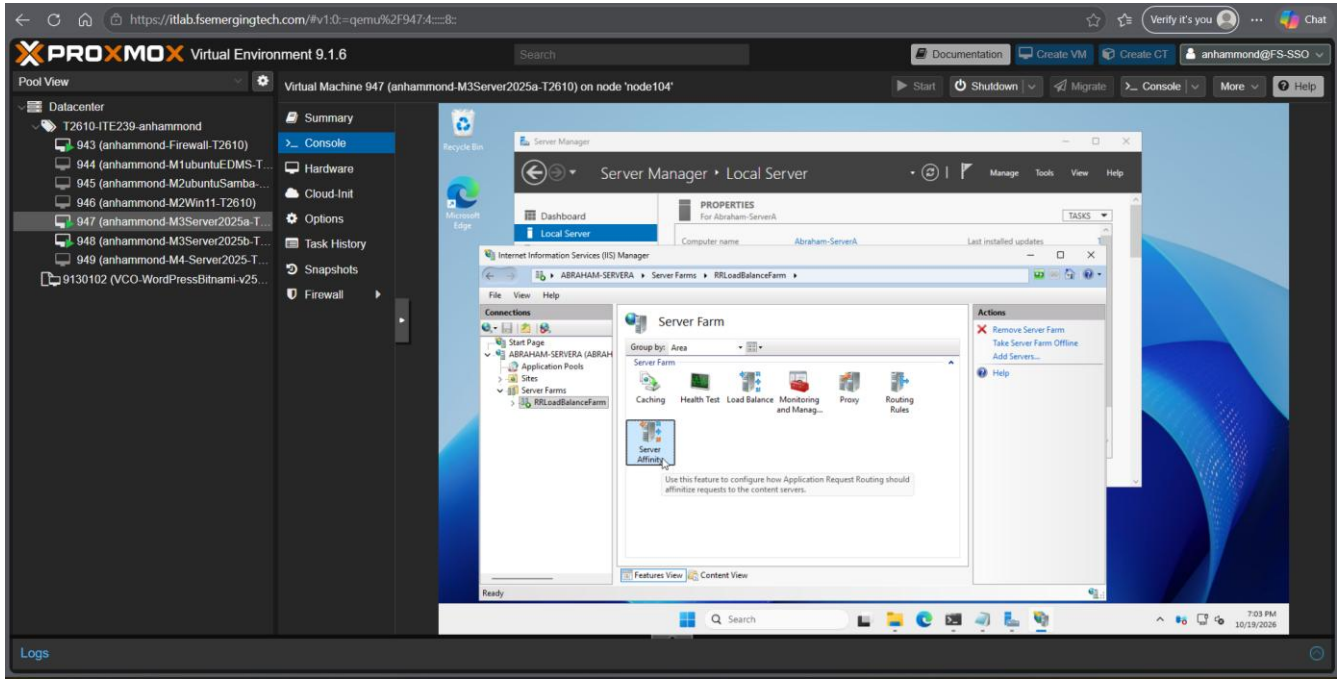


- Now we want to go back to the menu. Press server affinity for the next step.

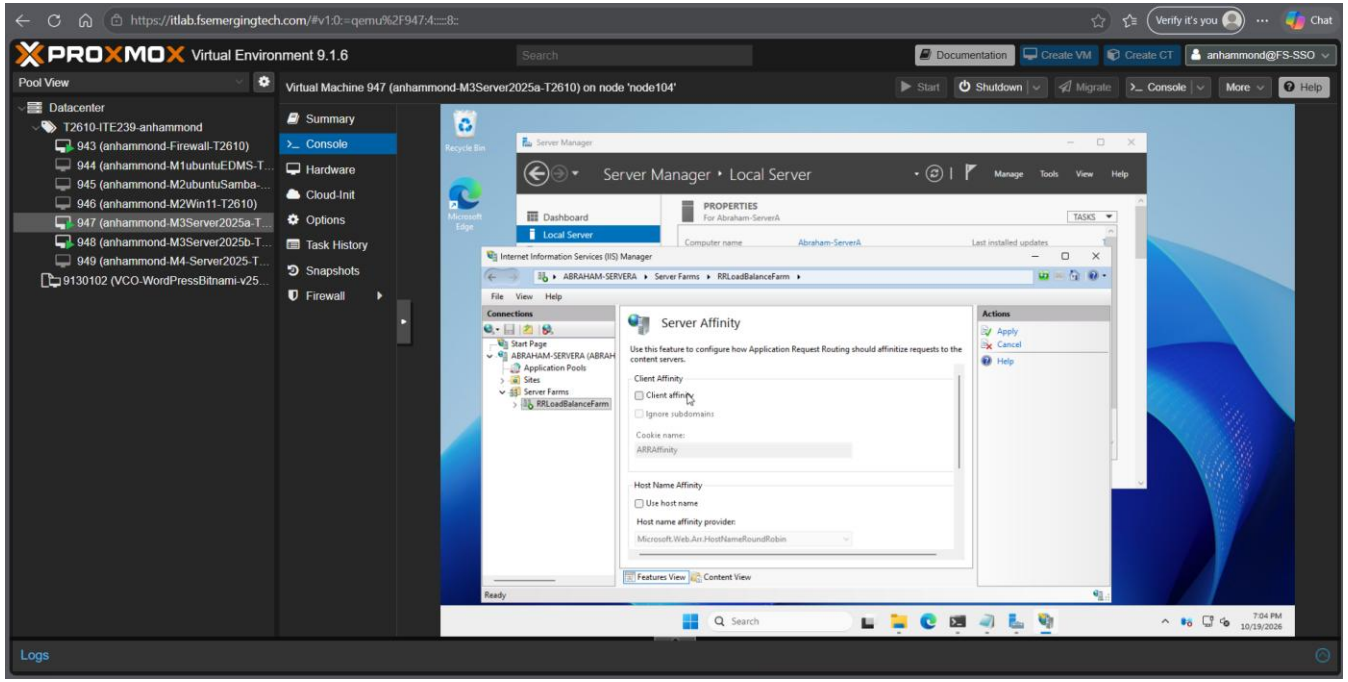


- This is the page you want to see after clicking on the application. Uncheck client affinity.

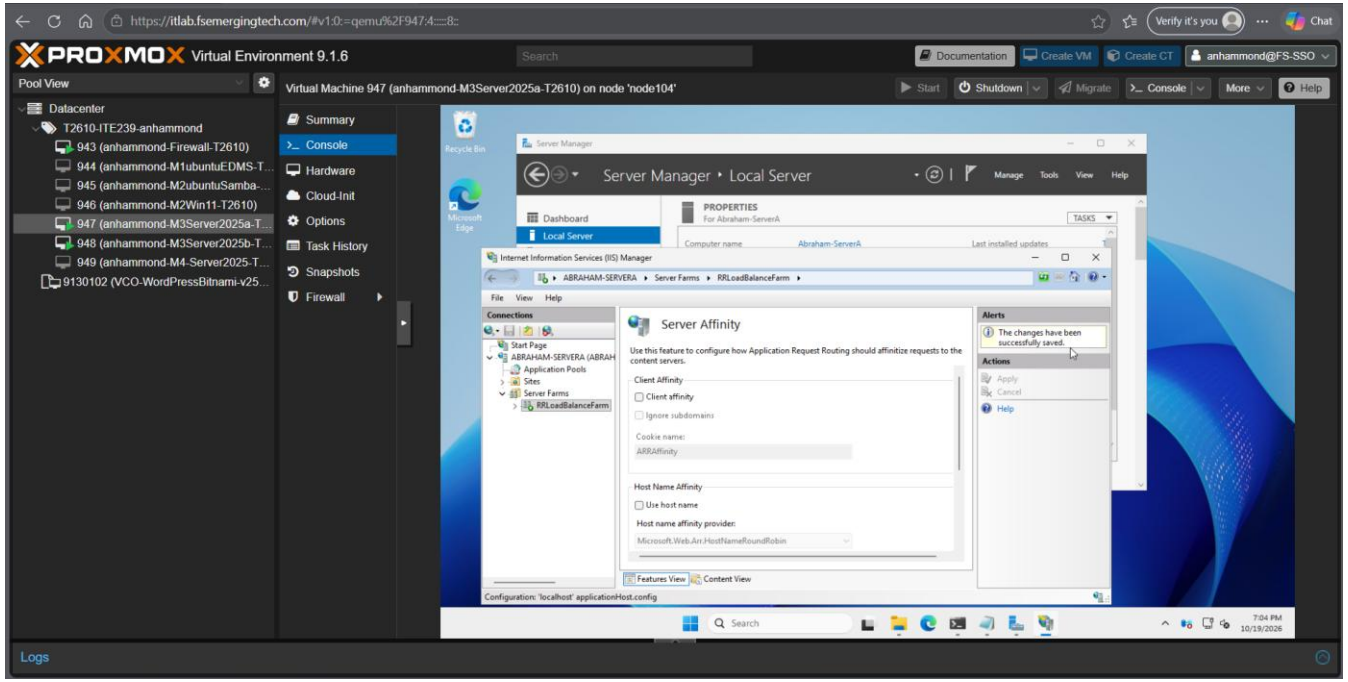


- Double check and make sure you have unchecked client affinity. Apply changes and you should get confirmation on the right-hand.

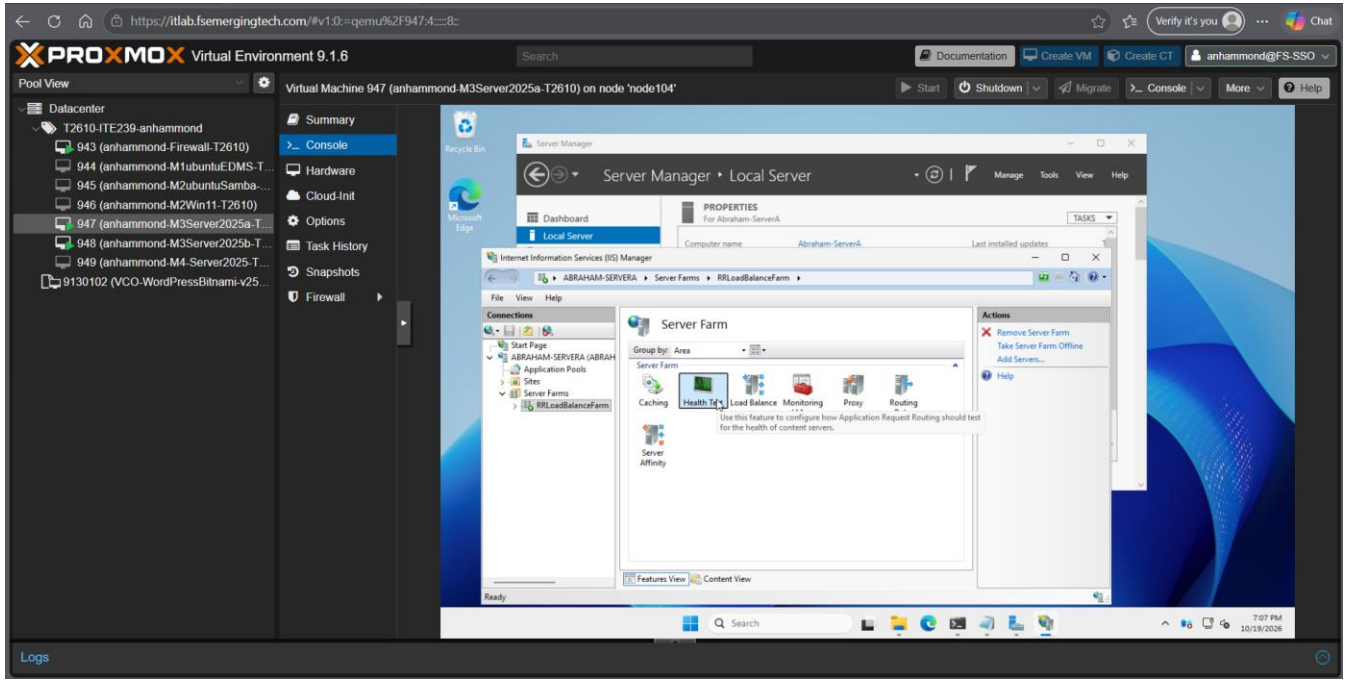


- Let’s go back to the menu within the server farm we created. Please click on health task next.

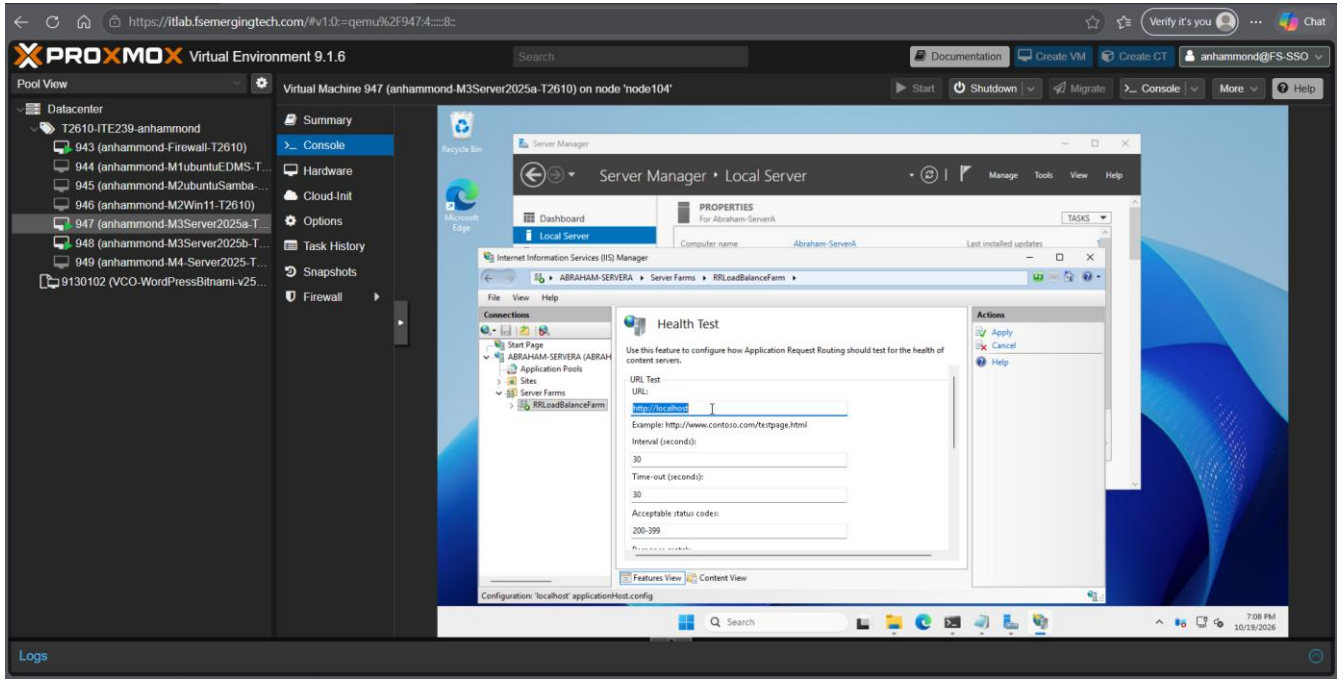


- You should have this page appear after clicking the application. Please type in the name in the URL shown in the picture above.

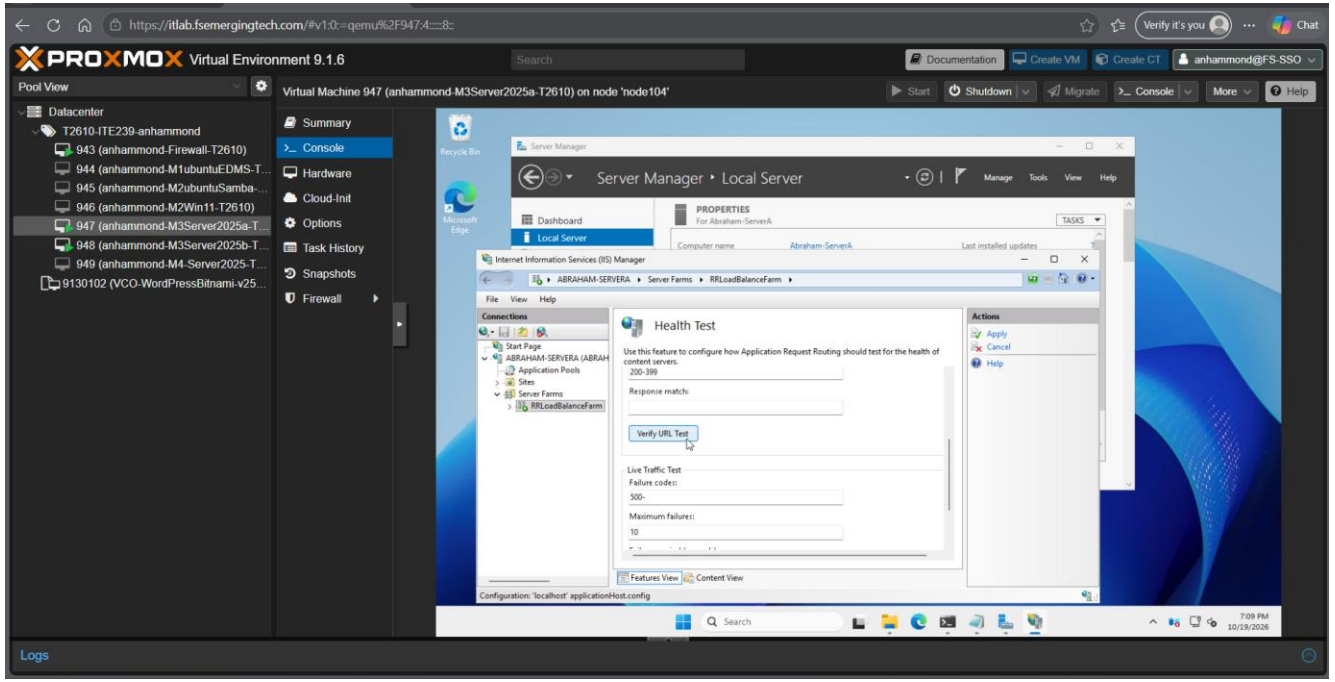

- Now you want to scroll down a little bit. You should see a “verify URL test” tab. Click on it.

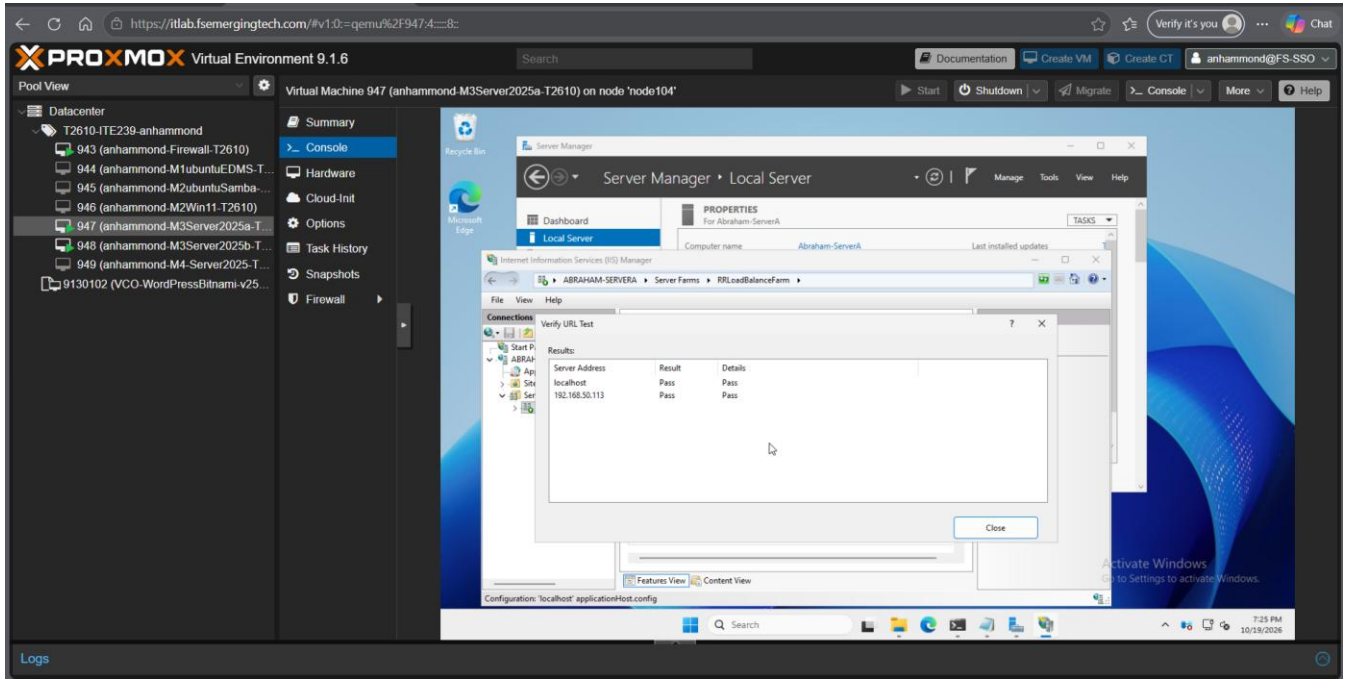


- This test page will then appear. It will test your addresses that you created. We want them to pass like in the picture shown above.

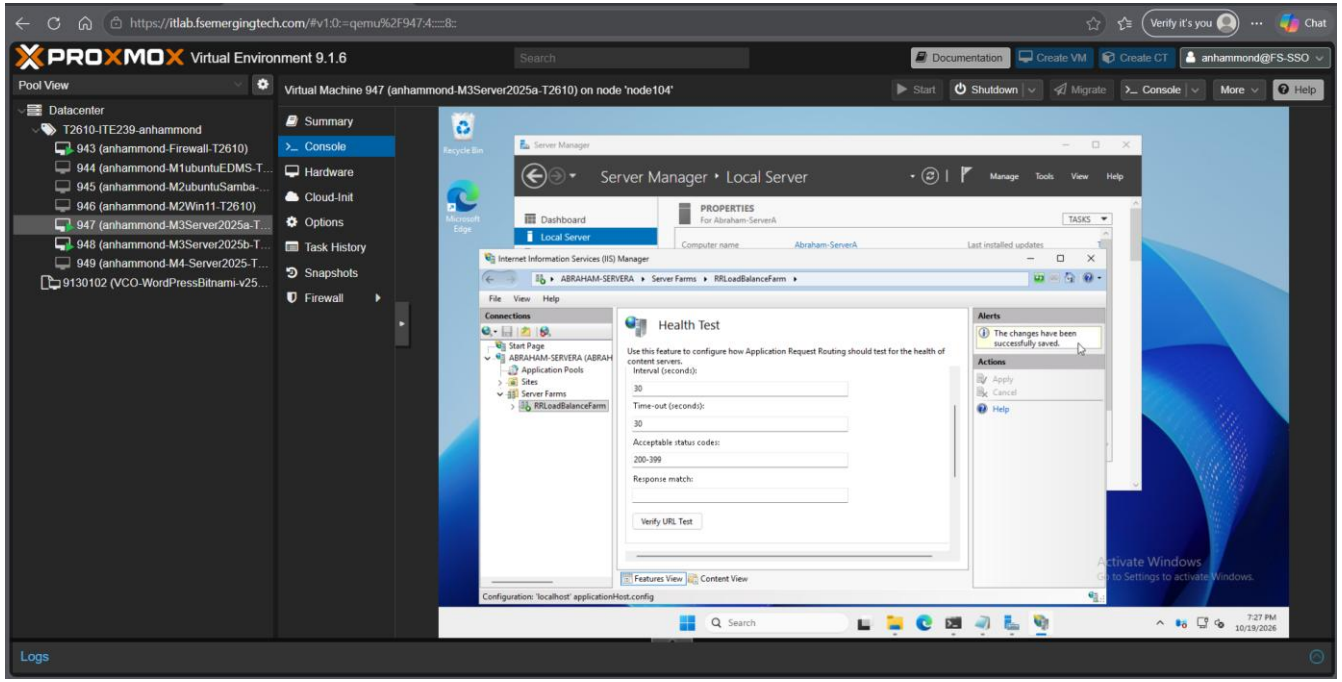

- After the test, apply the changes that have been made. You should get confirmation that it has been successfully completed on the right-hand side.


51

- Let’s go back to the menu. Next, we want to click on monitoring and management.

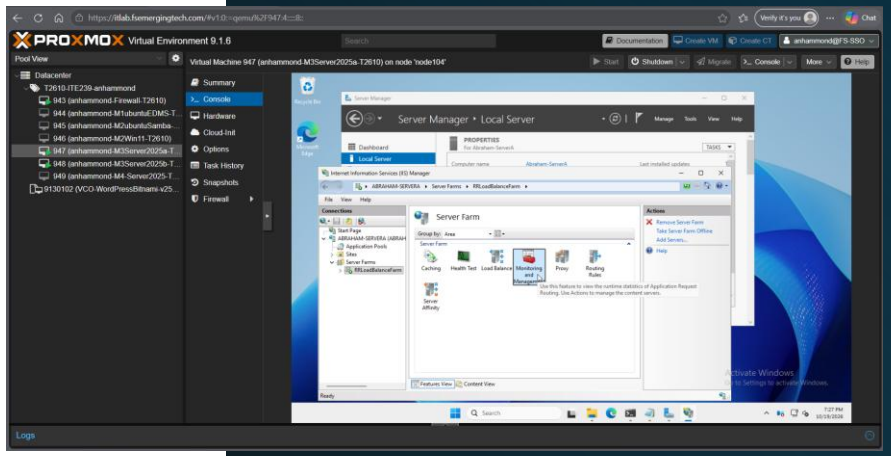


52


This is the page that shows up. We want to make sure that the addresses are available and healthy.

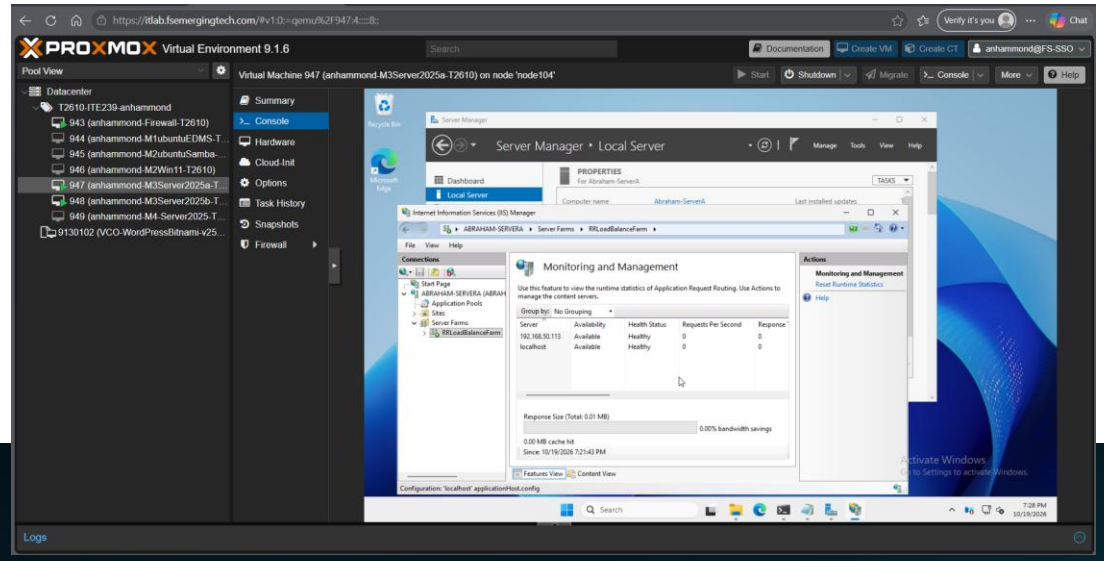

53

- Now in server A, go to Microsoft Edge/Firefox and type in http://localhost in the address bar. You should get this page. You will either see Node A or Node B. It doesn't matter which one you see, we just need to know that it works.

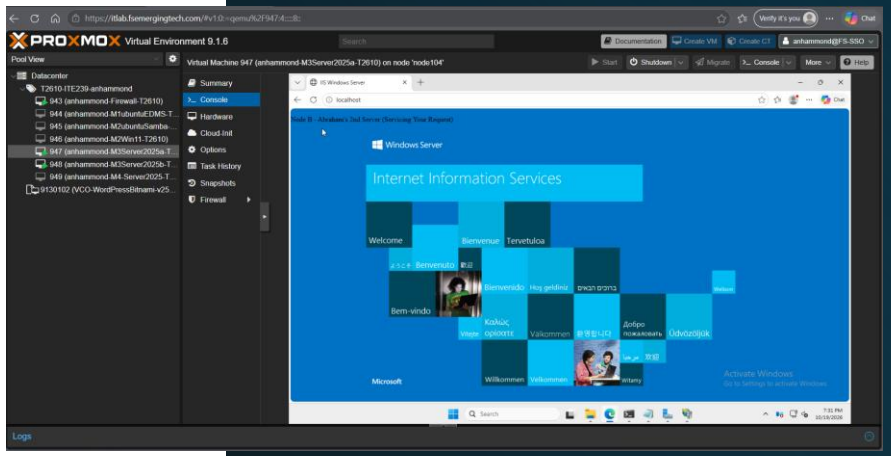

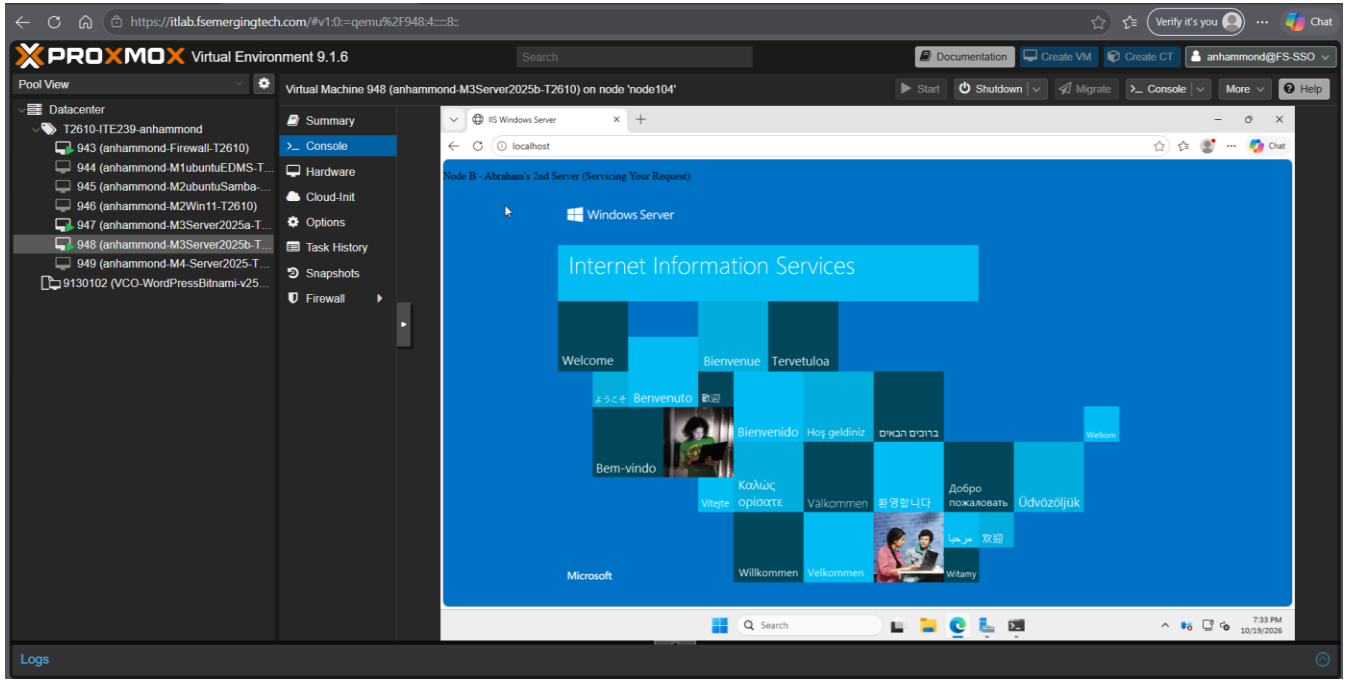

- Now let's go back to server B and do the same step on page 53. You should either get Node A or B. Once again, it does not matter which one you get. You have now completed this course.