


PC 0x00400010


X5 12

X6 7

OR 5, 5, 6

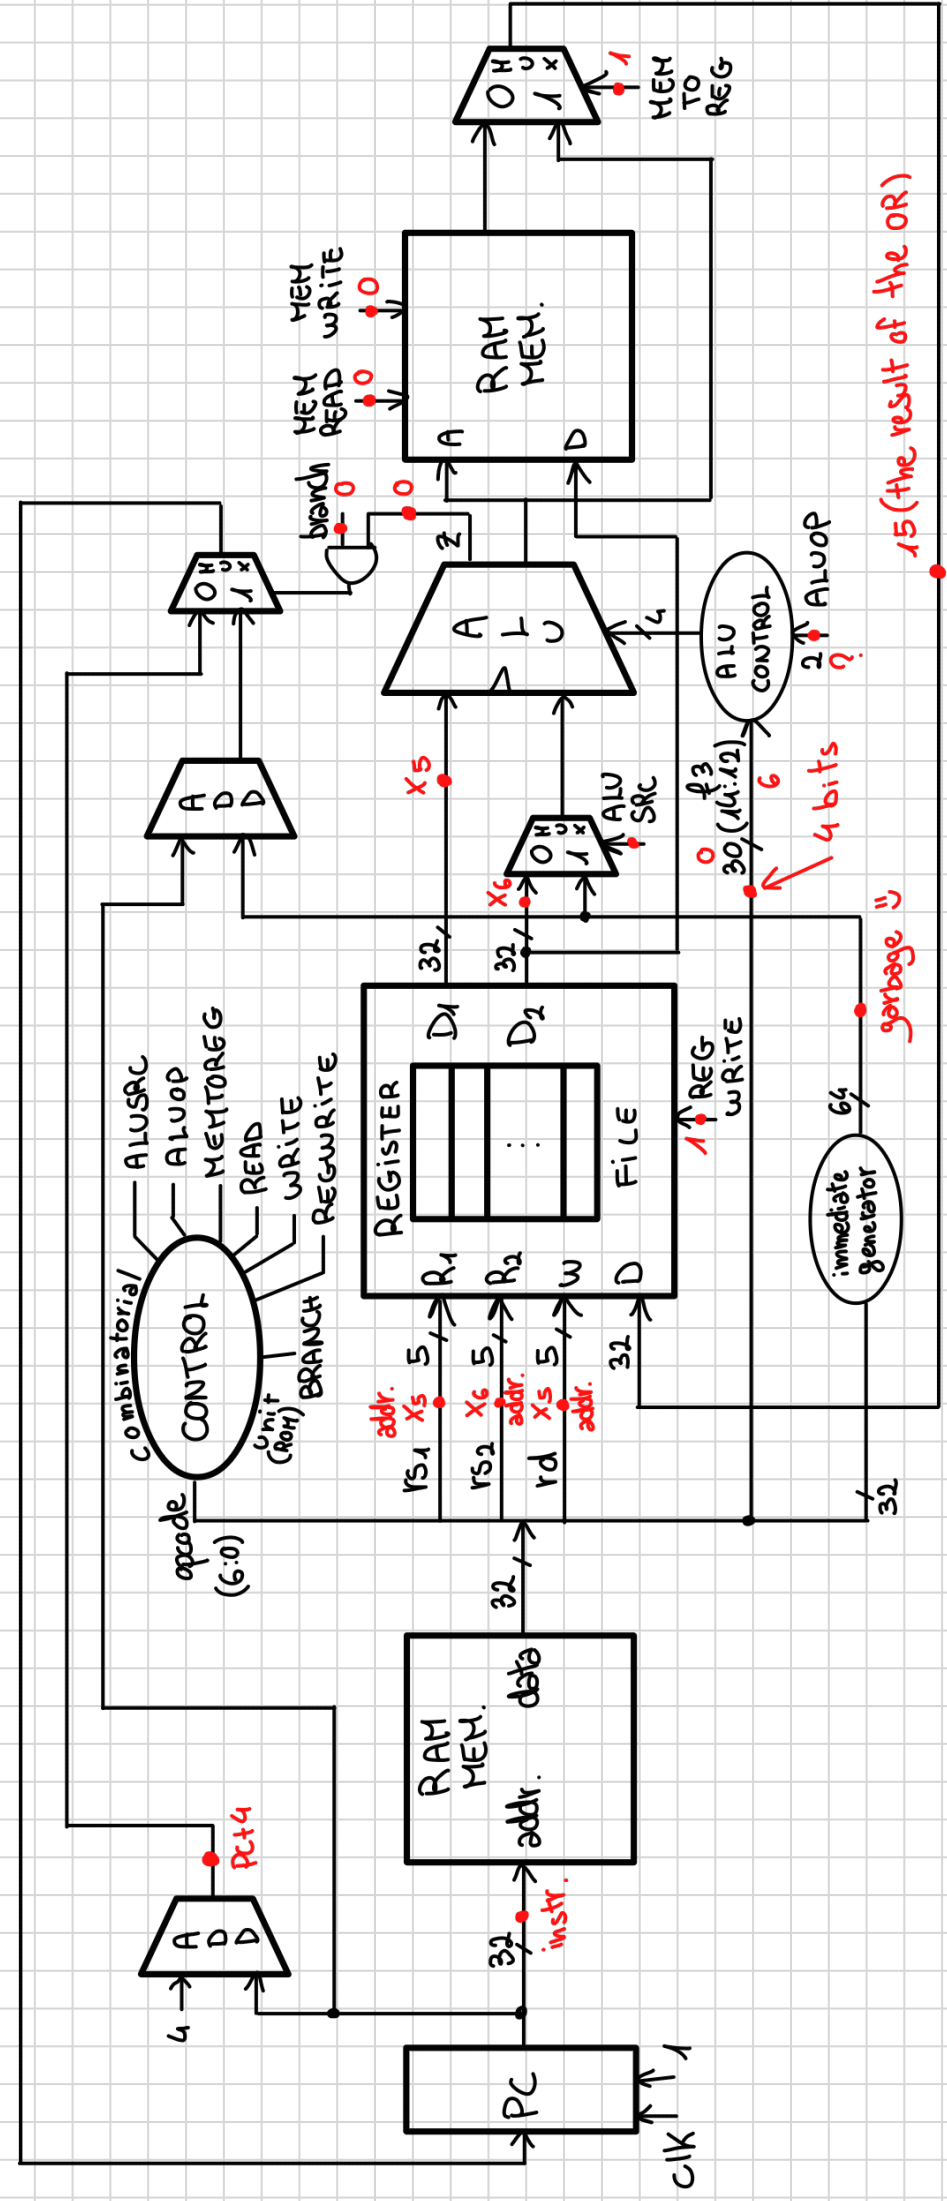

So, now we are storing the content of R[5] into the memory at the address found in R[6] with an offset of 12.

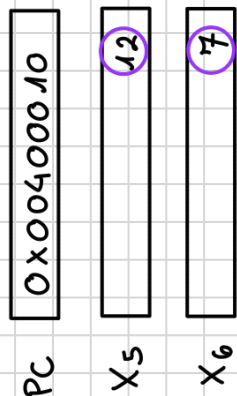

offset
Sw 5, 12(6)
rs2 rs1

