


Gst-plugins-gl / The gl elements

Wednesday, September 17, 2008

Main gl elements

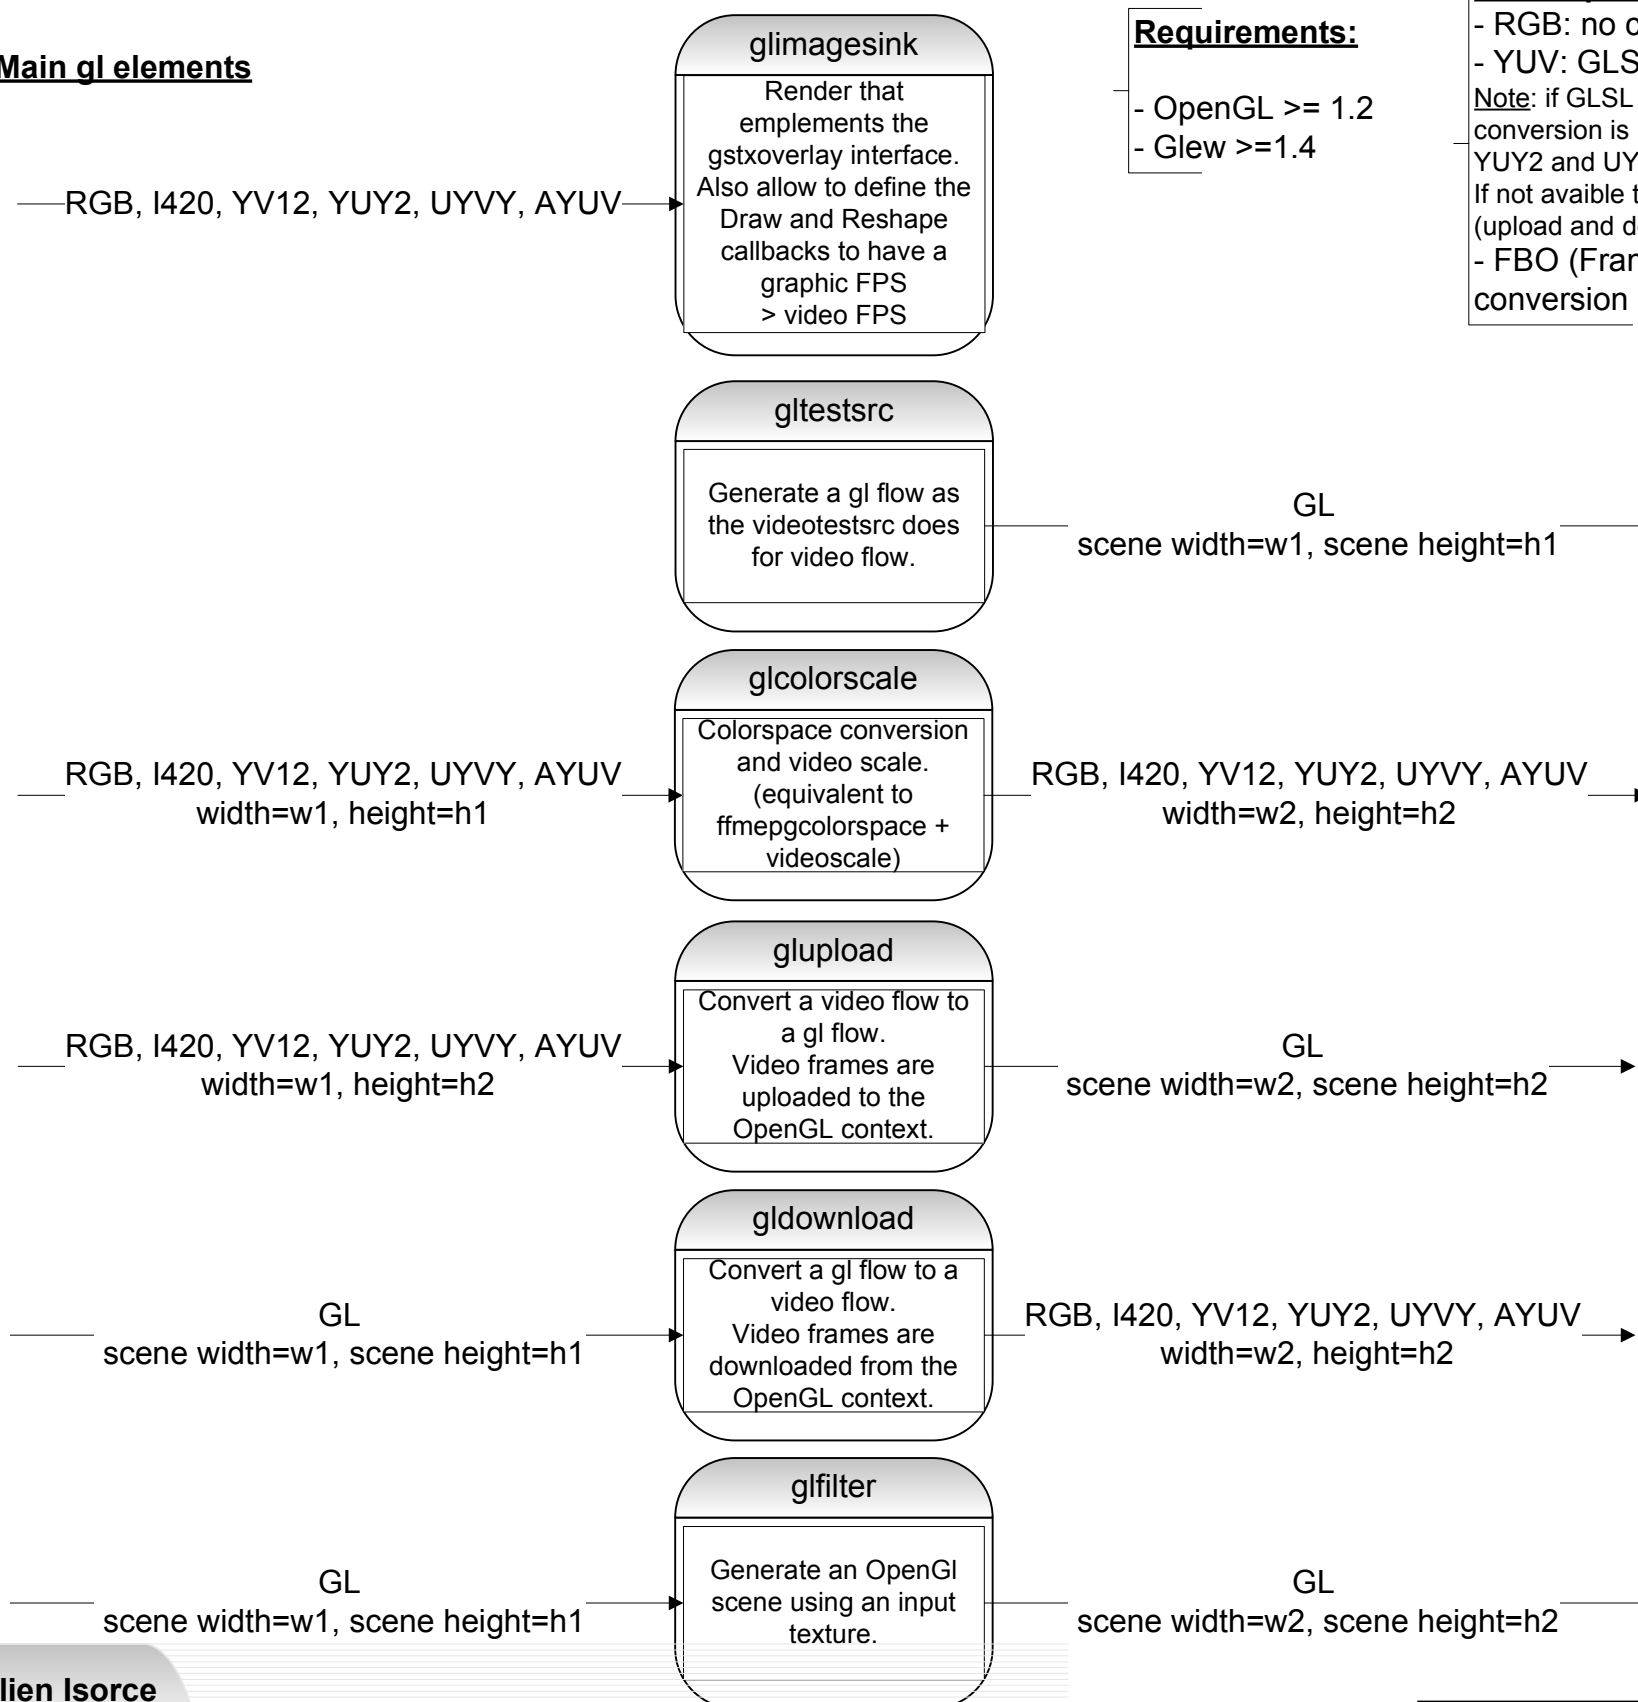


Requirements:

- OpenGL >= 1.2
- Glew >=1.4

Color space conversion:

- RGB: no conversion needed
- YUV: GLSL (OpenGL Shading Language)
Note: if GLSL is not available on your driver or OpenGL version, color space conversion is made through the GL_MESA_ycbcr_texture extension for upload YUY2 and UYVY only.
If not available too and for the other yuv formats, we plan to made the conversion (upload and download) through ColorMatrix (if ARB_imaging extension available)
- FBO (Frame Buffer Object) is used only when colorspace conversion is needed (no need with rgb and mesa_ycbcr)

Some glfilters

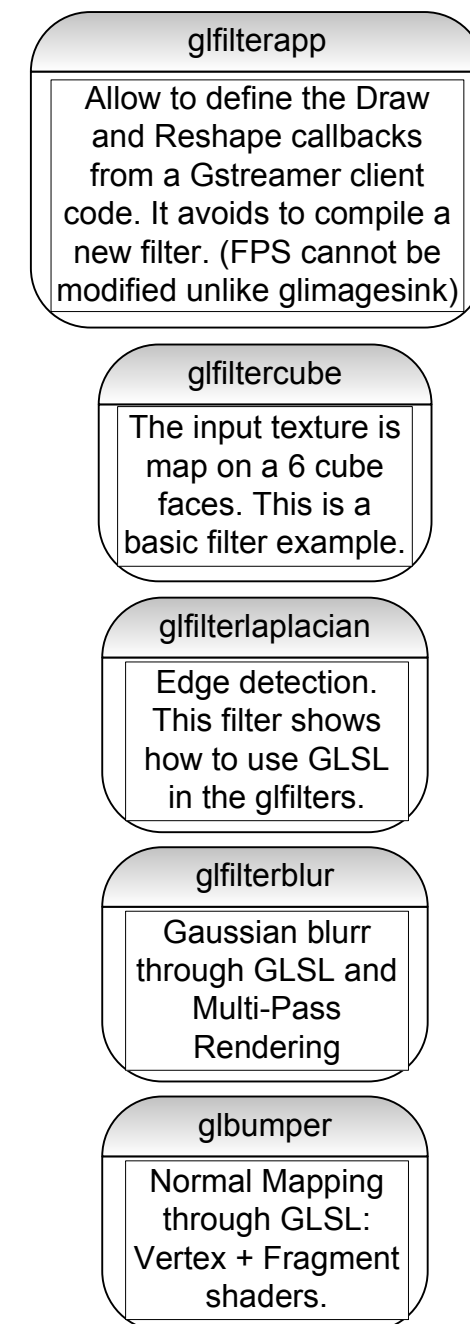


Gst-plugins-gl / Internal functioning

Wednesday, September 17, 2008

A GstGLDisplay represents an OpenGL context. A single glthread executes the OpenGL code from all the GstGLDisplays.

- The gl elements communicate with the glthread through a synchronised message loop system. So they need to post a message for their needs.
- A pool of textures is maintained by the glthread.

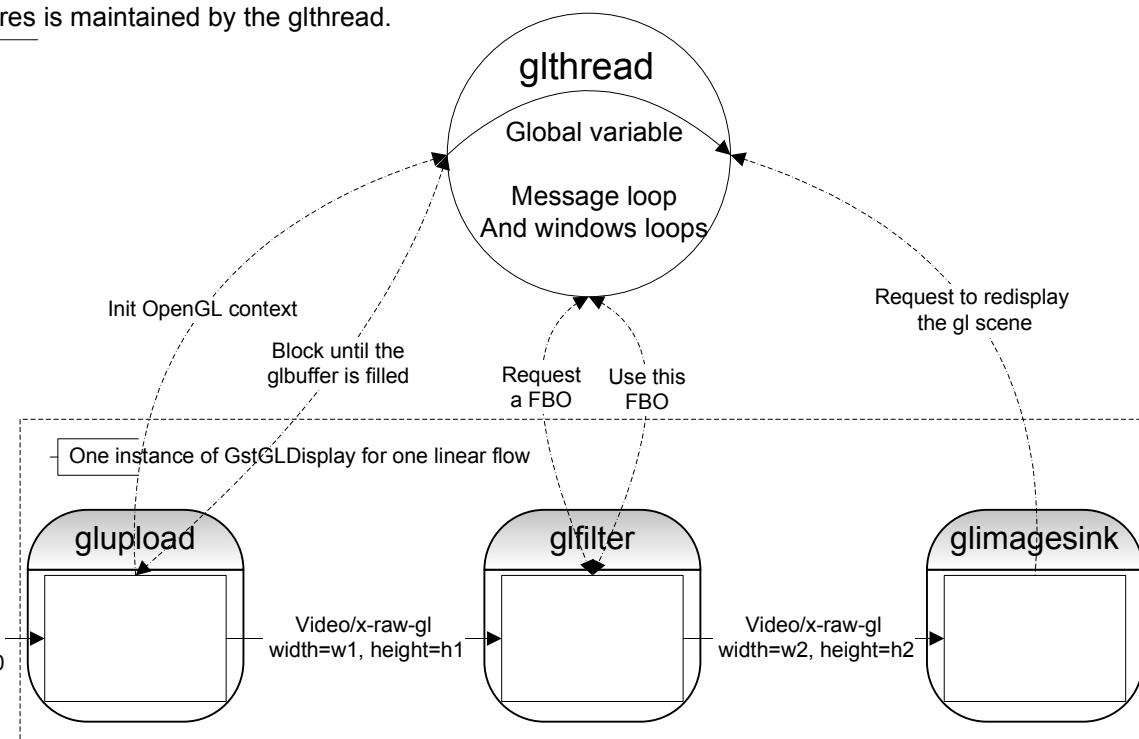

Init: A unique GstGLDisplay is made for one gl flow. The first one creates the glthread, and the last one destroys it. A map is also created to permit to the glthread to switch between the OpenGL contexts. A FBO is always made for ht colorspace conversion.

Gbuffer: A gbuffer contains a texture and its size. Note that there is no texture per color space, because colorspace conversion is made when creating the gbuffer. It means that the texture in the gbuffer is always rgb32.

Mini-freeglut: The freeglut codes has been minimized (about 90% removed code) and put into the gst-plugins-gl package (so you have not to install freeglut). It's usefull to manage several OpenGL contexts and switch between them. Moreover it's multiplatform. The code has been also modified in order to receive a window id given by the user (and so to implement the gstxoverlay interface).

Glew: « The OpenGL Extension Wrangler Library (GLEW) is a cross-platform open-source C/C++ extension loading library ». (<http://glew.sourceforge.net/>)

Pool of textures: The pool of texture is a simple queue that contains textures id. There is one pool for one GstGLDisplay. At the begining the pool is empty. When a new texture is needed, we first look at the pool. If the pool is empty we call glGenTextures. If not, we pop the queue to have a texture id. Then, rather than call glDeleteTextures on an outdated texture, we add it to the pool. At the end, when the GstGLDisplay is destroyed, each texture of the pool are popped and we call glDeleteTextures on it.

Scene size: The OpengGL scene size is selected in the caps « video/x-raw-gl, width=w, height=h ». Input and output caps can be differents for each gl elements.

