CNN comparison within each dataset

Each group uses its own held-out test split. Compare architectures within a group; the tasks differ across datasets.

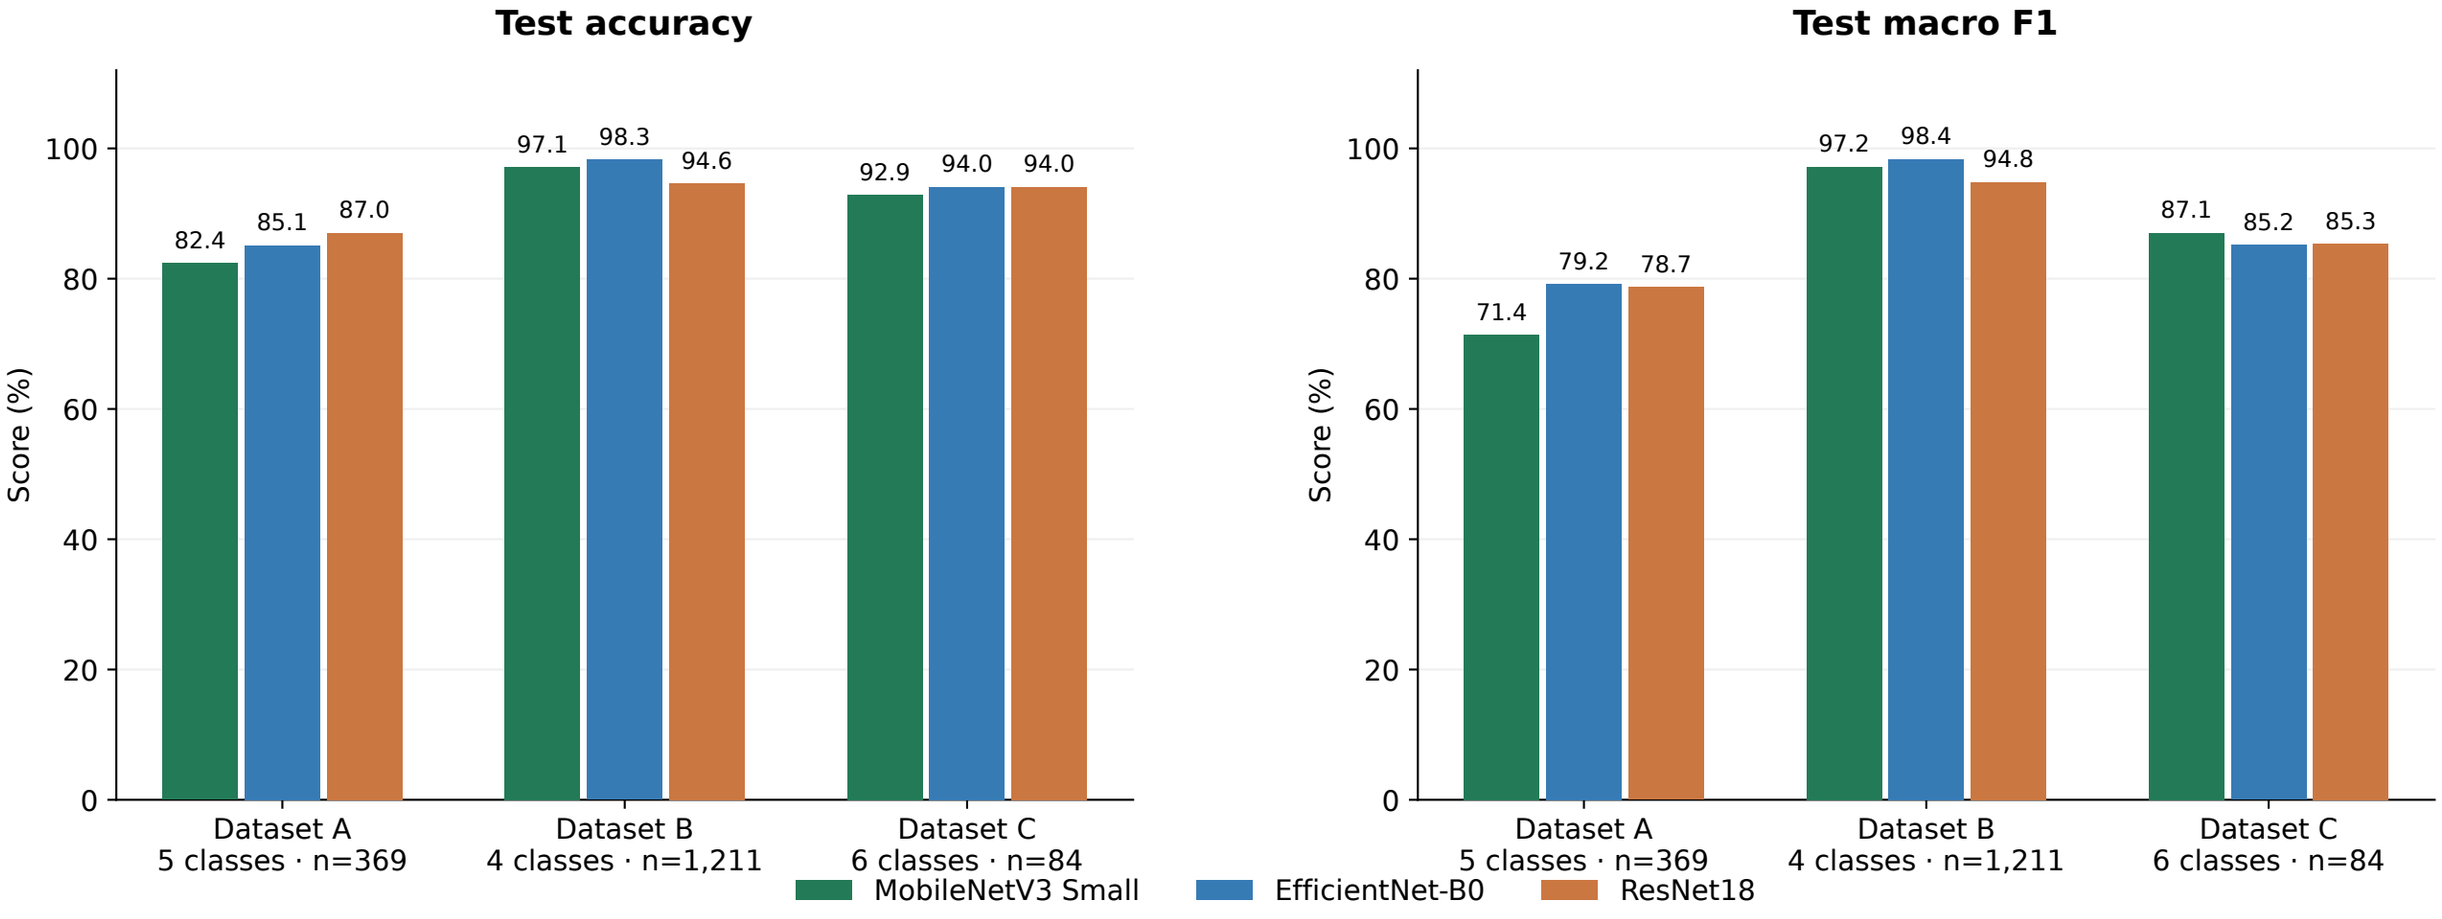

Recorded single runs; no uncertainty estimates. Scores do not establish real-world diagnostic accuracy.