DailyCom – Smart Ride Sharing for Daily Commutes

---

1. One-Line Idea

DailyCom is a web-based ride-sharing platform designed to help daily commuters create, find, and join shared rides efficiently.

---

2. Problem Statement

Daily commuters such as students and office workers often face difficulties in finding reliable and consistent ride-sharing options for their everyday travel.

Existing ride-sharing platforms mainly focus on one-time bookings and do not support recurring or community-based commuting effectively. This leads to:

- Increased travel costs
- Underutilized vehicle capacity
- Lack of coordination among commuters

---

3. Objectives

The main objectives of the system are:

- To enable users to create and join shared rides
- To reduce commuting costs by sharing rides
- To provide a simple and reliable platform for daily travel coordination
- To improve vehicle utilization and reduce traffic congestion

---

4. Core Features (MVP)

- User Registration and Login
- Create a Ride (source, destination, time, seats)
- View Available Rides
- Join a Ride (Booking system)
- View My Bookings

---

5. System Architecture

Frontend:

- HTML
- CSS

Backend:

- Django (Python)

Database:

- SQLite

Basic Flow:
User → Web Interface → Django Backend → Database

---

6. Data Models

User

- username
- email
- password

Ride

- driver (User)
- source
- destination
- time
- seats_available

Booking

- user (User)
- ride (Ride)
- status (Booked / Cancelled)

---

7. User Flow

1. User signs up or logs in
2. User creates a ride OR browses available rides
3. User selects a ride and books a seat
4. Booking is stored in the system
5. User can view their bookings

---

8. Current Progress

- Django project setup completed
- Basic pages created (Home, Create Ride)
- Authentication system implemented
- Initial UI developed

---

9. Limitations (Current System)

- No real-time updates
- No communication between users
- No payment integration
- Basic UI/UX

---

10. Future Enhancements

- Real-time chat between users
- Rating and review system
- Payment gateway integration
- Live location tracking
- AI-based ride matching (for research extension)

---

11. Next Steps (Action Plan)

- Fix template and CSS issues
- Complete ride listing functionality
- Implement booking system properly
- Build “My Bookings” page
- Improve UI design

---

12. Code Parts:

Templates:

1)Base.html:

```
{% load static %}
<!DOCTYPE html>
<html>
<head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <title>{% block title %}DailyCom{% endblock %}</title>
    <link rel="stylesheet" href="{% static 'css/style.css' %}">
</head>
```

```
<body>
    <nav>
        <div class="nav-inner">
            <a href="{% url 'home' %}" class="nav-brand">DailyCom</a>
            <div class="nav-links">
                {% if user.is_authenticated %}
                <span style="font-size: .9rem; font-weight: 500; color:
var(--muted); margin-right: 0.5rem;">Welcome, {{ user.username }}</span>
                <a href="{% url 'my_bookings' %}">My Bookings</a>
                <a href="{% url 'create_ride' %}" class="btn-nav"
style="border-radius: 8px; text-decoration: none;">Create Ride</a>
                <form action="{% url 'logout' %}" method="post"
style="display:inline; margin: 0; padding: 0;">
                    {% csrf_token %}
                    <button type="submit" class="btn-nav"
style="background: none; border: none; font-size: 0.9rem; font-weight:
500; color: var(--muted); padding: .35rem .7rem; border-radius: 8px;
cursor: pointer; font-family: inherit;">Logout</button>
                </form>
                {% else %}
                <a href="{% url 'login' %}">Login</a>
                <a href="{% url 'signup' %}" class="btn-nav"
style="border-radius: 8px; text-decoration: none;">Sign Up</a>
                {% endif %}
            </div>
        </div>
    </nav>

    <div class="container">
        {% block content %}
        {% endblock %}
    </div>
</body>
</html>
```

2) Home.html:

```
{% extends "base.html" %}


{% block content %}
```

```
<h1 class="page-title">Available Rides</h1>

{% if rides %}
    <div class="rides-list">
        {% for ride in rides %}
            <div class="card">
                <div class="card-info">
                    <div class="card-route">{{ ride.source }} &rarr; {{
ride.destination }}</div>
                    <span class="badge badge-info" style="background:
#e0f2fe; color: #0284c7;">📅 {{ ride.date }}</span>
                    <span class="badge {% if ride.seats_available > 0
%}badge-green{% else %}badge-red{% endif %}">
                        💺 {{ ride.seats_available }} seats left
                    </span>
                    <span class="badge">💰 ₹{{ ride.price }}</span>
                </div>
                <div class="card-action">
                    {% if user.is_authenticated %}
                        {% if ride.id in booked_rides %}
                            <button class="btn btn-booked"
disabled>Already Booked</button>
                        {% elif ride.seats_available > 0 %}
                            <a href="{% url 'book_ride' ride.id %}"
class="btn btn-primary">Book Ride</a>
                        {% else %}
                            <button class="btn btn-booked" disabled>Fully
Booked</button>
                        {% endif %}
                    {% else %}
                        <a href="{% url 'login' %}" class="btn
btn-outline">Login to Book</a>
                    {% endif %}
                </div>
            </div>
        {% endfor %}
    </div>
{% else %}
    <div class="empty">
        <h2>No rides available</h2>
```

```
        <p>Check back later or create a new ride!</p>
    </div>
{% endif %}
{% endblock %}
```

3)create_ride.html:

```
{% extends 'base.html' %}

{% block content %}
<div class="form-card">
    <h2>Create a Ride </h2>
    <form method="POST">
        {% csrf_token %}
        <div style="margin-bottom: 1.5rem;">
            {{ form.as_p }}
        </div>
        <button type="submit" class="btn btn-primary">Create Ride</button>
    </form>
</div>
{% endblock %}
```

4)my_bookings.html:

```
{% extends "base.html" %}

{% block content %}
<h2 class="page-title">My Bookings</h2>

<div class="table-wrap">
    <table>
        <thead>
  <tr>
    <th>Source</th>
    <th>Destination</th>
    <th>Date</th>
    <th>Price</th>
    <th>Action</th>
  </tr>
</thead>
<tbody>
  {% for booking in bookings %}
```

```
  <tr>
    <td>{{ booking.ride.source }}</td>
    <td>{{ booking.ride.destination }}</td>
    <td>{{ booking.ride.date }}</td>
    <td>₹{{ booking.ride.price }}</td>
    <td>
      <form method="POST" action="{% url 'cancel_booking' booking.id %}">
        {% csrf_token %}
        <button type="submit" class="btn btn-danger"
          onclick="return confirm('Cancel this booking?')">
          Cancel
        </button>
      </form>
    </td>
  </tr>
  {% empty %}
  <tr>
    <td colspan="5" class="empty">
      <p>No bookings yet.</p>
      <a href="{% url 'home' %}" class="btn btn-outline"
        style="margin-top: 1rem;">Browse Rides</a>
    </td>
  </tr>
  {% endfor %}
</tbody>
    </table>
</div>

{% endblock %}
```

Registration :

5)login.html:

```
{% extends "base.html" %}

{% block title %}Login - DailyCom{% endblock %}

{% block content %}
<div class="form-card">
    <h2>Login to DailyCom 🚗</h2>
```

```
    <form method="POST">
        {% csrf_token %}
        <div style="margin-bottom: 1.5rem;">
            {{ form.as_p }}
        </div>
        <button type="submit" class="btn btn-primary">Login</button>
    </form>
    <div class="form-footer">
        <p>Don't have an account? <a href="{% url 'signup' %}">Sign
Up</a></p>
    </div>
</div>
{% endblock %}
```

6)signup.html:

```
{% extends "base.html" %}

{% block title %}Sign Up - DailyCom{% endblock %}

{% block content %}
<div class="form-card">
    <h2>Create an Account 🚗</h2>
    <form method="POST">
        {% csrf_token %}
        <div style="margin-bottom: 1.5rem;">
            {{ form.as_p }}
        </div>
        <button type="submit" class="btn btn-primary">Sign Up</button>
    </form>
    <div class="form-footer">
        <p>Already have an account? <a href="{% url 'login'
%}">Login</a></p>
    </div>
</div>
{% endblock %}
```

CSS Part:

1)style.css:

```
/* ─── Google Fonts ──────────────────────────────────────────────── */
```

```
@import
url('https://fonts.googleapis.com/css2?family=Inter:wght@400;500;600;700&d
isplay=swap');

/* ─── Reset & Base ──────────────────────────────────────────── */
*,
*::before,
*::after {
    box-sizing: border-box;
    margin: 0;
    padding: 0;
}

:root {
    --primary: #4f46e5;
    --primary-dk: #3730a3;
    --accent: #06b6d4;
    --bg: #f8fafc;
    --surface: #ffffff;
    --border: #e2e8f0;
    --text: #1e293b;
    --muted: #64748b;
    --danger: #ef4444;
    --success: #22c55e;
    --radius: 12px;
    --shadow: 0 4px 24px rgba(79, 70, 229, .08);
}

body {
    font-family: 'Inter', sans-serif;
    background: var(--bg);
    color: var(--text);
    min-height: 100vh;
}

a {
    color: var(--primary);
    text-decoration: none;
}
```

```
a:hover {
    text-decoration: underline;
}

/* ─── Navbar ──────────────────────────────────────────────────────── */
nav {
    background: var(--surface);
    border-bottom: 1px solid var(--border);
    box-shadow: 0 1px 6px rgba(0, 0, 0, .06);
    position: sticky;
    top: 0;
    z-index: 100;
}

.nav-inner {
    max-width: 1100px;
    margin: 0 auto;
    padding: 0 1.5rem;
    height: 60px;
    display: flex;
    align-items: center;
    justify-content: space-between;
}

.nav-brand {
    font-size: 1.25rem;
    font-weight: 700;
    color: var(--primary);
    letter-spacing: -.5px;
}

.nav-links {
    display: flex;
    align-items: center;
    gap: 1rem;
}

.nav-links a {
    font-size: .9rem;
    font-weight: 500;
```

```
    color: var(--muted);
    padding: .35rem .7rem;
    border-radius: 8px;
    transition: background .15s, color .15s;
}

.nav-links a:hover {
    background: #f1f5f9;
    color: var(--text);
    text-decoration: none;
}

.nav-links .btn-nav {
    background: var(--primary);
    color: #fff !important;
    padding: .35rem .9rem;
}

.nav-links .btn-nav:hover {
    background: var(--primary-dk);
}

/* ─── Page container ──────────────────────────────────────────── */
.container {
    max-width: 1100px;
    margin: 2rem auto;
    padding: 0 1.5rem;
}

/* ─── Page Title ──────────────────────────────────────────────── */
.page-title {
    font-size: 1.75rem;
    font-weight: 700;
    margin-bottom: 1.5rem;
    color: var(--text);
}

/* ─── Cards ───────────────────────────────────────────────────── */
.card {
    background: var(--surface);
```

```
    border: 1px solid var(--border);
    border-radius: var(--radius);
    padding: 1.25rem 1.5rem;
    box-shadow: var(--shadow);
    margin-bottom: 1rem;
    display: flex;
    align-items: center;
    justify-content: space-between;
    flex-wrap: wrap;
    gap: .75rem;
    transition: transform .15s, box-shadow .15s;
}

.card:hover {
    transform: translateY(-2px);
    box-shadow: 0 8px 30px rgba(79, 70, 229, .12);
}

.card-info {
    display: flex;
    flex-wrap: wrap;
    gap: .5rem 1.5rem;
}

.card-route {
    font-size: 1.05rem;
    font-weight: 600;
    color: var(--text);
    width: 100%;
}

.badge {
    font-size: .78rem;
    font-weight: 500;
    padding: .2rem .6rem;
    border-radius: 999px;
    background: #ede9fe;
    color: var(--primary);
}
```

```
.badge-green {
    background: #dcfce7;
    color: #16a34a;
}

.badge-red {
    background: #fee2e2;
    color: #dc2626;
}

/* ─── Buttons ──────────────────────────────────────────────────── */
.btn {
    display: inline-block;
    padding: .5rem 1.1rem;
    border-radius: 8px;
    font-size: .875rem;
    font-weight: 600;
    cursor: pointer;
    transition: background .15s, transform .1s;
    border: none;
    text-decoration: none;
}

.btn:hover {
    transform: translateY(-1px);
    text-decoration: none;
}

.btn-primary {
    background: var(--primary);
    color: #fff;
}

.btn-primary:hover {
    background: var(--primary-dk);
    color: #fff;
}

.btn-outline {
    background: transparent;
```

```
    border: 1.5px solid var(--primary);
    color: var(--primary);
}

.btn-outline:hover {
    background: #ede9fe;
}

.btn-booked {
    background: #f1f5f9;
    color: var(--muted);
    cursor: default;
    font-size: .8rem;
}

/* ─── Forms ──────────────────────────────────────────────────── */
.form-card {
    background: var(--surface);
    border: 1px solid var(--border);
    border-radius: var(--radius);
    padding: 2rem;
    max-width: 480px;
    margin: 2rem auto;
    box-shadow: var(--shadow);
}

.form-card h2 {
    font-size: 1.4rem;
    font-weight: 700;
    margin-bottom: 1.5rem;
    color: var(--text);
}

.form-card p {
    margin-bottom: 1rem;
}

.form-card label {
    display: block;
    font-size: .85rem;
```

```
    font-weight: 600;
    color: var(--muted);
    margin-bottom: .3rem;
}

.form-card input[type="text"],
.form-card input[type="password"],
.form-card input[type="date"],
.form-card input[type="number"],
.form-card select {
    width: 100%;
    padding: .6rem .85rem;
    border: 1.5px solid var(--border);
    border-radius: 8px;
    font-size: .9rem;
    font-family: inherit;
    background: var(--bg);
    color: var(--text);
    transition: border-color .15s, box-shadow .15s;
}

.form-card input:focus,
.form-card select:focus {
    outline: none;
    border-color: var(--primary);
    box-shadow: 0 0 0 3px rgba(79, 70, 229, .12);
}

.form-card button[type="submit"] {
    width: 100%;
    margin-top: .75rem;
    padding: .7rem;
    background: var(--primary);
    color: #fff;
    border: none;
    border-radius: 8px;
    font-size: 1rem;
    font-weight: 600;
    cursor: pointer;
    transition: background .15s;
```

```
}

.form-card button[type="submit"]:hover {
    background: var(--primary-dk);
}

.form-footer {
    text-align: center;
    margin-top: 1rem;
    font-size: .875rem;
    color: var(--muted);
}
.btn-danger {
  background: var(--danger);
  color: #fff;
}
.btn-danger:hover {
  background: #dc2626;
  color: #fff;
}

/* ─── Table ──────────────────────────────────────────────────────── */
.table-wrap {
    background: var(--surface);
    border: 1px solid var(--border);
    border-radius: var(--radius);
    overflow: hidden;
    box-shadow: var(--shadow);
}

table {
    width: 100%;
    border-collapse: collapse;
}

th,
td {
    padding: .85rem 1.25rem;
    text-align: left;
    font-size: .9rem;
```

```
}

th {
    background: #f8f9ff;
    font-weight: 600;
    color: var(--muted);
    border-bottom: 1px solid var(--border);
    font-size: .8rem;
    text-transform: uppercase;
    letter-spacing: .04em;
}

tr:not(:last-child) td {
    border-bottom: 1px solid var(--border);
}

tr:hover td {
    background: #f8fafc;
}

/* ─── Empty state ──────────────────────────────────────────── */
.empty {
    text-align: center;
    padding: 3rem 1rem;
    color: var(--muted);
}

.empty p {
    margin-top: .5rem;
    font-size: .95rem;
}

/* ─── Alert / Messages ─────────────────────────────────────── */
.alert {
    padding: .75rem 1rem;
    border-radius: 8px;
    margin-bottom: 1rem;
    font-size: .9rem;
}
```

```
.alert-info {
    background: #dbeafe;
    color: #1e40af;
}

.alert-error {
    background: #fee2e2;
    color: #991b1b;
}
```

Backend Part:

Rides:

1) views.py:

```
from django.shortcuts import render, redirect, get_object_or_404
from django.contrib.auth.decorators import login_required
from django.contrib.auth.forms import UserCreationForm
from django.contrib.auth import login
from .models import Ride, Booking
from .forms import RideForm


def signup(request):
    if request.method == 'POST':
        form = UserCreationForm(request.POST)
        if form.is_valid():
            user = form.save()
            login(request, user)
            return redirect('home')
    else:
        form = UserCreationForm()
    return render(request, 'registration/signup.html', {'form':
form})


def home(request):
    rides = Ride.objects.all()

    booked_rides = []
    if request.user.is_authenticated:
        booked_rides = Booking.objects.filter(
```

```
            user=request.user
        ).values_list('ride_id', flat=True)

    return render(request, 'home.html', {
        'rides': rides,
        'booked_rides': booked_rides
    })


@login_required
def create_ride(request):
    if request.method == 'POST':
        form = RideForm(request.POST)
        if form.is_valid():
            ride = form.save(commit=False)
            ride.driver = request.user
            ride.save()
            return redirect('home')
    else:
        form = RideForm()

    return render(request, 'create_ride.html', {'form': form})


@login_required
def book_ride(request, ride_id):
    ride = get_object_or_404(Ride, id=ride_id)

    # Check if user already booked
    if Booking.objects.filter(ride=ride,
user=request.user).exists():
        return redirect('home')

    if ride.seats_available > 0:
        Booking.objects.create(
            ride=ride,
            user=request.user
        )
        ride.seats_available -= 1
        ride.save()
```

```
    return redirect('home')


@login_required
def my_bookings(request):
    bookings = Booking.objects.filter(user=request.user)

    return render(request, "my_bookings.html", {
        "bookings": bookings
    })

@login_required
def cancel_booking(request, booking_id):
    booking = get_object_or_404(Booking, id=booking_id,
user=request.user)
    if request.method == 'POST':
        booking.ride.seats_available += 1
        booking.ride.save()
        booking.delete()
    return redirect('my_bookings')
```

2) models.py:

```
from django.db import models
from django.contrib.auth.models import User


class Ride(models.Model):
    driver = models.ForeignKey(User, on_delete=models.CASCADE)
    source = models.CharField(max_length=100)
    destination = models.CharField(max_length=100)
    date = models.DateField()
    seats_available = models.IntegerField()
    price = models.DecimalField(max_digits=6, decimal_places=2)

    def __str__(self):
        return f"{self.source} to {self.destination}"
```

```
class Booking(models.Model):
    ride = models.ForeignKey(Ride, on_delete=models.CASCADE)
    user = models.ForeignKey(User, on_delete=models.CASCADE)
    booked_at = models.DateTimeField(auto_now_add=True)

    def __str__(self):
        return f"{self.user.username} booked {self.ride}"
```

3) forms.py:

```
from django import forms
from .models import Ride


class RideForm(forms.ModelForm):
    class Meta:
        model = Ride
        fields = ['source', 'destination', 'date',
'seats_available', 'price']
        widgets = {
            'date': forms.DateInput(attrs={'type': 'date'}),
        }
```

4) apps.py:

```
from django.apps import AppConfig


class RidesConfig(AppConfig):
    name = 'rides'
```

5) admin.py:

```
from django.contrib import admin
from .models import Ride, Booking

admin.site.register(Ride)
admin.site.register(Booking)
```

DailyCom:

1) wsgi.py:

```
"""
```

```
WSGI config for Dailycom project.

It exposes the WSGI callable as a module-level variable named
``application``.

For more information on this file, see
https://docs.djangoproject.com/en/6.0/howto/deployment/wsgi/
"""

import os

from django.core.wsgi import get_wsgi_application

os.environ.setdefault('DJANGO_SETTINGS_MODULE', 'Dailycom.settings')

application = get_wsgi_application()
```

2) urls.py:

```
from django.contrib import admin
from django.urls import path, include
from rides import views

# ADD THESE
from django.conf import settings
from django.conf.urls.static import static

urlpatterns = [
    path('admin/', admin.site.urls),
    path('', views.home, name='home'),
    path('create/', views.create_ride, name='create_ride'),
    path('accounts/', include('django.contrib.auth.urls')),
    path('accounts/signup/', views.signup, name='signup'),
    path('book/<int:ride_id>/', views.book_ride, name='book_ride'),
    path("my-bookings/", views.my_bookings, name="my_bookings"),
    path('cancel/<int:booking_id>/', views.cancel_booking,
name='cancel_booking'),
]

# ADD THIS
if settings.DEBUG:
```

```
    urlpatterns += static(
        settings.STATIC_URL,
        document_root=settings.STATICFILES_DIRS[0]
    )
```

3) settings.py :

```
"""
Django settings for Dailycom project.

Generated by 'django-admin startproject' using Django 6.0.2.

For more information on this file, see
https://docs.djangoproject.com/en/6.0/topics/settings/

For the full list of settings and their values, see
https://docs.djangoproject.com/en/6.0/ref/settings/
"""

from pathlib import Path

# Build paths inside the project like this: BASE_DIR / 'subdir'.
BASE_DIR = Path(__file__).resolve().parent.parent


# Quick-start development settings - unsuitable for production
# See https://docs.djangoproject.com/en/6.0/howto/deployment/checklist/

# SECURITY WARNING: keep the secret key used in production secret!
SECRET_KEY =
'django-insecure-k!z%+vsl(u-s%z_t-*n*gtaajch$*n)a(gd1^bt*v=gyx3ug^k'

# SECURITY WARNING: don't run with debug turned on in production!
DEBUG = True

ALLOWED_HOSTS = []


# Application definition
```

```
INSTALLED_APPS = [
    'django.contrib.admin',
    'django.contrib.auth',
    'django.contrib.contenttypes',
    'django.contrib.sessions',
    'django.contrib.messages',
    'django.contrib.staticfiles',
    'rides',
]

MIDDLEWARE = [
    'django.middleware.security.SecurityMiddleware',
    'django.contrib.sessions.middleware.SessionMiddleware',
    'django.middleware.common.CommonMiddleware',
    'django.middleware.csrf.CsrfViewMiddleware',
    'django.contrib.auth.middleware.AuthenticationMiddleware',
    'django.contrib.messages.middleware.MessageMiddleware',
    'django.middleware.clickjacking.XFrameOptionsMiddleware',
]

ROOT_URLCONF = 'Dailycom.urls'

TEMPLATES = [
    {
        'BACKEND': 'django.template.backends.django.DjangoTemplates',
        'DIRS': [BASE_DIR/'templates'],
        'APP_DIRS': True,
        'OPTIONS': {
            'context_processors': [
                'django.template.context_processors.request',
                'django.contrib.auth.context_processors.auth',
                'django.contrib.messages.context_processors.messages',
            ],
        },
    },
]

WSGI_APPLICATION = 'Dailycom.wsgi.application'
```

```
# Database
# https://docs.djangoproject.com/en/6.0/ref/settings/#databases

DATABASES = {
    'default': {
        'ENGINE': 'django.db.backends.sqlite3',
        'NAME': BASE_DIR / 'db.sqlite3',
    }
}


# Password validation
#
https://docs.djangoproject.com/en/6.0/ref/settings/#auth-password-validato
rs

AUTH_PASSWORD_VALIDATORS = [
    {
        'NAME':
'django.contrib.auth.password_validation.UserAttributeSimilarityValidator'
,
    },
    {
        'NAME':
'django.contrib.auth.password_validation.MinimumLengthValidator',
    },
    {
        'NAME':
'django.contrib.auth.password_validation.CommonPasswordValidator',
    },
    {
        'NAME':
'django.contrib.auth.password_validation.NumericPasswordValidator',
    },
]


# Internationalization
# https://docs.djangoproject.com/en/6.0/topics/i18n/
```

```
LANGUAGE_CODE = 'en-us'

TIME_ZONE = 'UTC'

USE_I18N = True

USE_TZ = True


# Static files (CSS, JavaScript, Images)
# https://docs.djangoproject.com/en/6.0/howto/static-files/

STATIC_URL = '/static/'
STATICFILES_DIRS = [BASE_DIR / "static"]
LOGIN_URL = '/accounts/login/'
LOGIN_REDIRECT_URL = '/'
LOGOUT_REDIRECT_URL = '/'
```

4) asgi.py :

```
"""
ASGI config for Dailycom project.

It exposes the ASGI callable as a module-level variable named
``application``.

For more information on this file, see
https://docs.djangoproject.com/en/6.0/howto/deployment/asgi/
"""

import os

from django.core.asgi import get_asgi_application

os.environ.setdefault('DJANGO_SETTINGS_MODULE', 'Dailycom.settings')

application = get_asgi_application()
```

VSCODE:

settings.json:

```
{
```

```
    "python.defaultInterpreterPath":
"${workspaceFolder}\\venv\\Scripts\\python.exe",
    "python.analysis.extraPaths": [
        "${workspaceFolder}\\venv\\Lib\\site-packages"
    ]
}
```

Manage.py:

```
#!/usr/bin/env python
"""Django's command-line utility for administrative tasks."""
import os
import sys


def main():
    """Run administrative tasks."""
    os.environ.setdefault('DJANGO_SETTINGS_MODULE', 'Dailycom.settings')
    try:
        from django.core.management import execute_from_command_line
    except ImportError as exc:
        raise ImportError(
            "Couldn't import Django. Are you sure it's installed and "
            "available on your PYTHONPATH environment variable? Did you "
            "forget to activate a virtual environment?"
        ) from exc
    execute_from_command_line(sys.argv)


if __name__ == '__main__':
    main()
```

For Database using db.sqlite3.

13. Folder Structure:

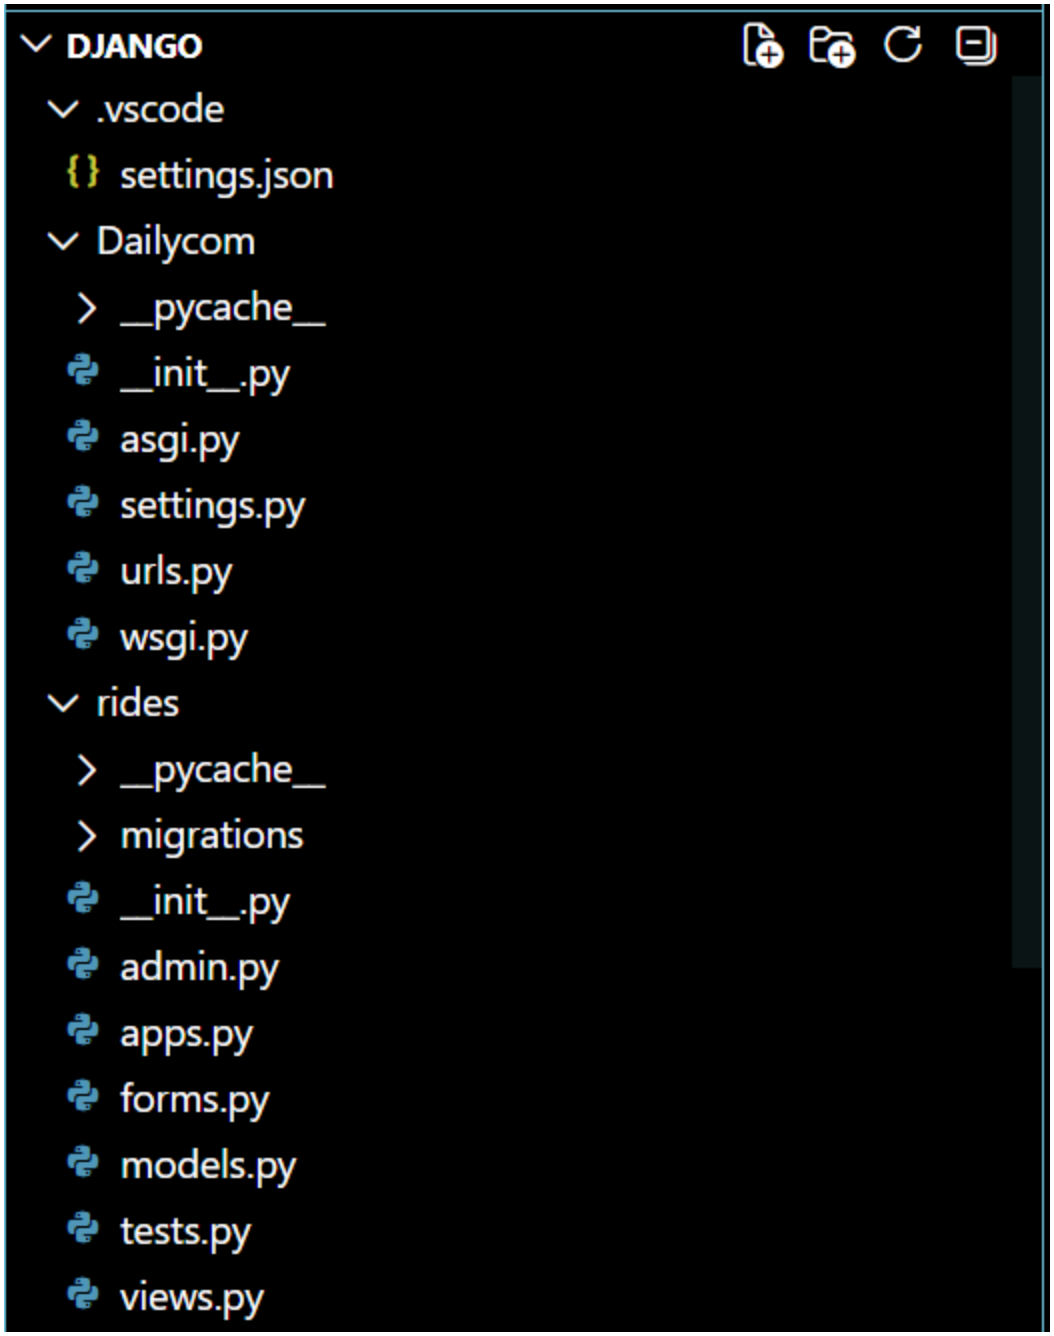
DJANGO
.vscode
settings.json
Dailycom
__pycache__
__init__.py
asgi.py
settings.py
urls.py
wsgi.py
rides
__pycache__
migrations
__init__.py
admin.py
apps.py
forms.py
models.py
tests.py
views.py

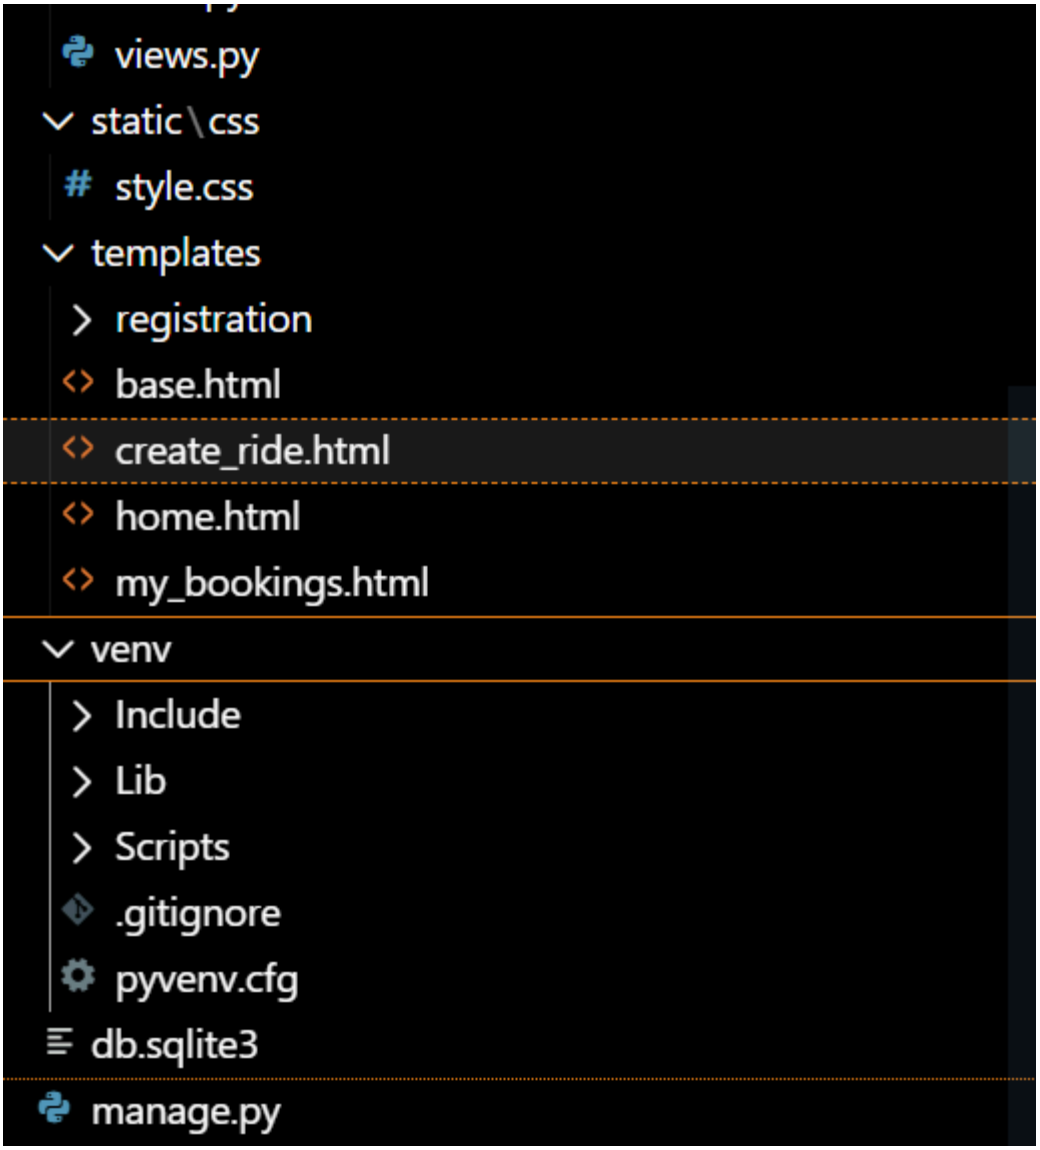
views.py
static\css
style.css
templates
registration
base.html
create_ride.html
home.html
my_bookings.html
venv
Include
Lib
Scripts
.gitignore
pyvenv.cfg
db.sqlite3
manage.py