



S


from Swagger
01 Upload
02 Validate
03 Generate
04 Export
Upload, validate, generate, review, and export — through one controlled Testleaf-themed workflow.
AI-powered
Spec-grounded
Postman & Excel export
STEP 1
Upload Swagger specification
Choose an OpenAPI YAML, YML, or JSON file, or import it from a link.
Import method
File Upload
Accept Link
Drop your Swagger file here
or click to browse
Maximum 5 MB · .yaml · .yml · .json


3 API testcases generated.
STEP 3
Generated API testcases
Grounded in the validated OpenAPI operations and schemas.
Groq LLM · Openai/Gpt-Oss-120b
Tokens Used · 2,631
Token Limit · 3,000
Cost · $0.0011
Clear
Total Testcases
3
Positive
1
Negative
1
Boundary
1
Search ID, endpoint, method, or title
All categories
ID METHOD ENDPOINT CATEGORY TITLE PRIORITY STATUS
TC-API-001 GET /booking/{id} positive Retrieve existing booking by valid ID High View
TC-API-002 GET /booking/{id} negative Retrieve non-existent booking returns 404 Medium View
TC-API-003 GET /booking/{id} boundary Retrieve booking with boundary ID value 0 Low View
Download results
Export the generated testcases and validated specification.
JSON
Excel
Swagger
Generate Postman



STEP 1
Upload Swagger specification
Choose an OpenAPI YAML, YML, or JSON file, or import it from a link.
Import method
File Upload
Accept Link
Specification URL
https://petstore3.swagger.io/api/v3/openapi.json
HTTP and HTTPS links to YAML, YML, or JSON specifications are supported.
Import from link

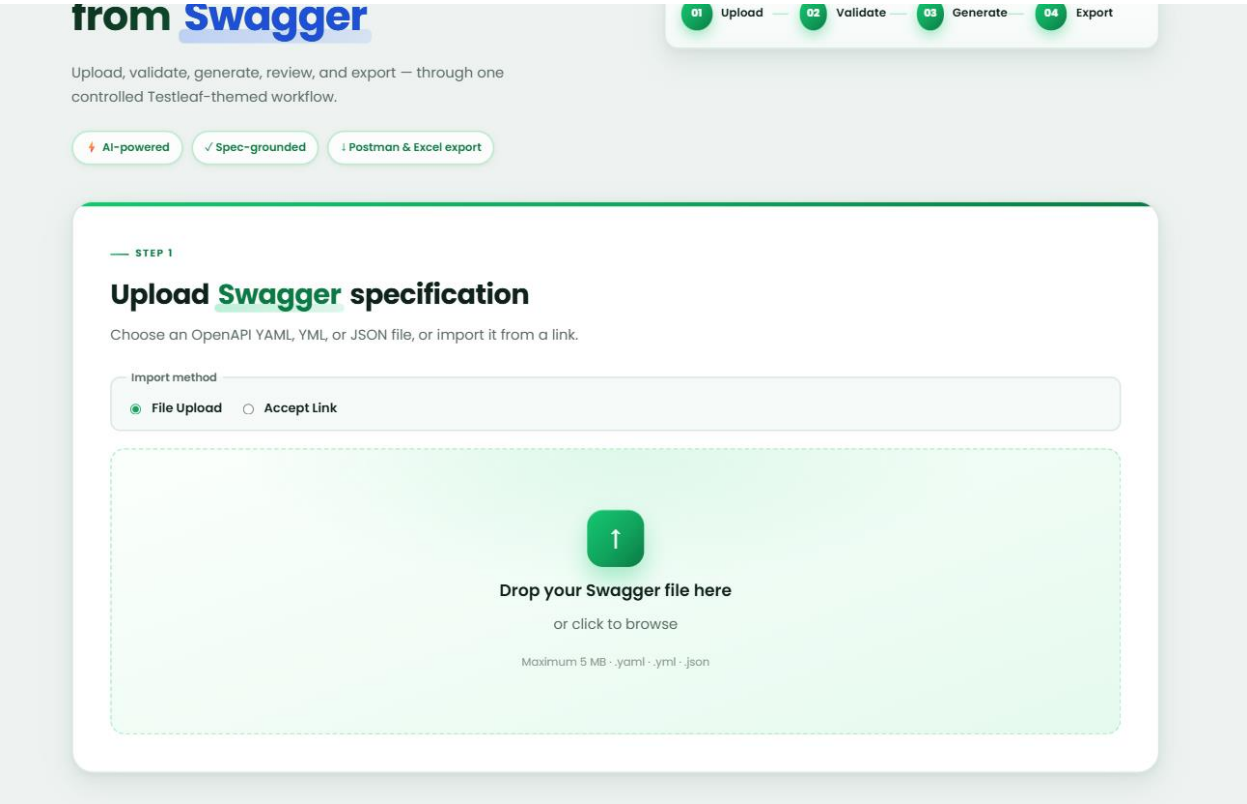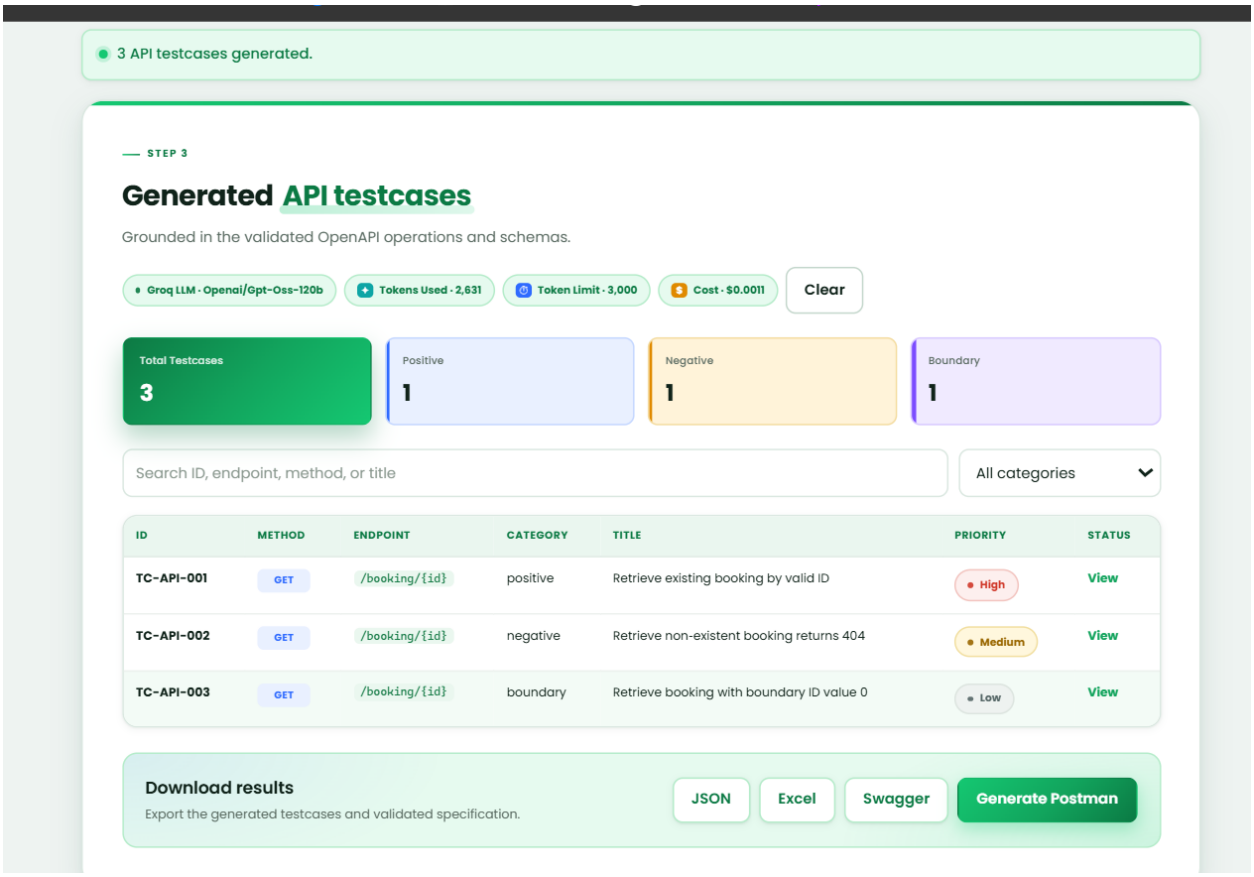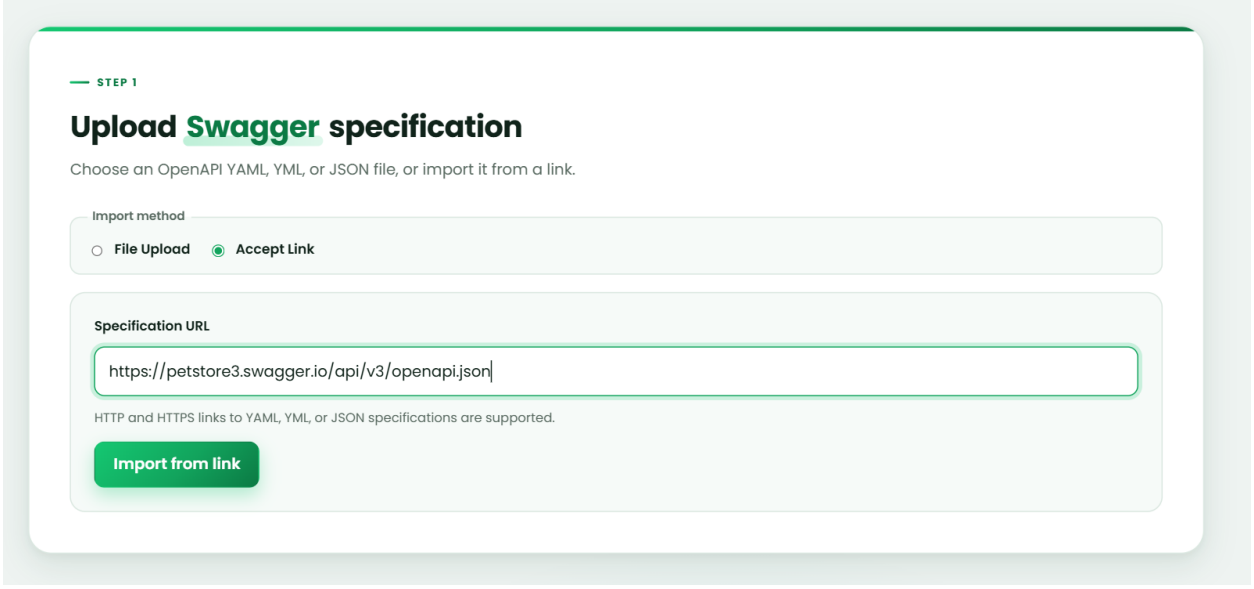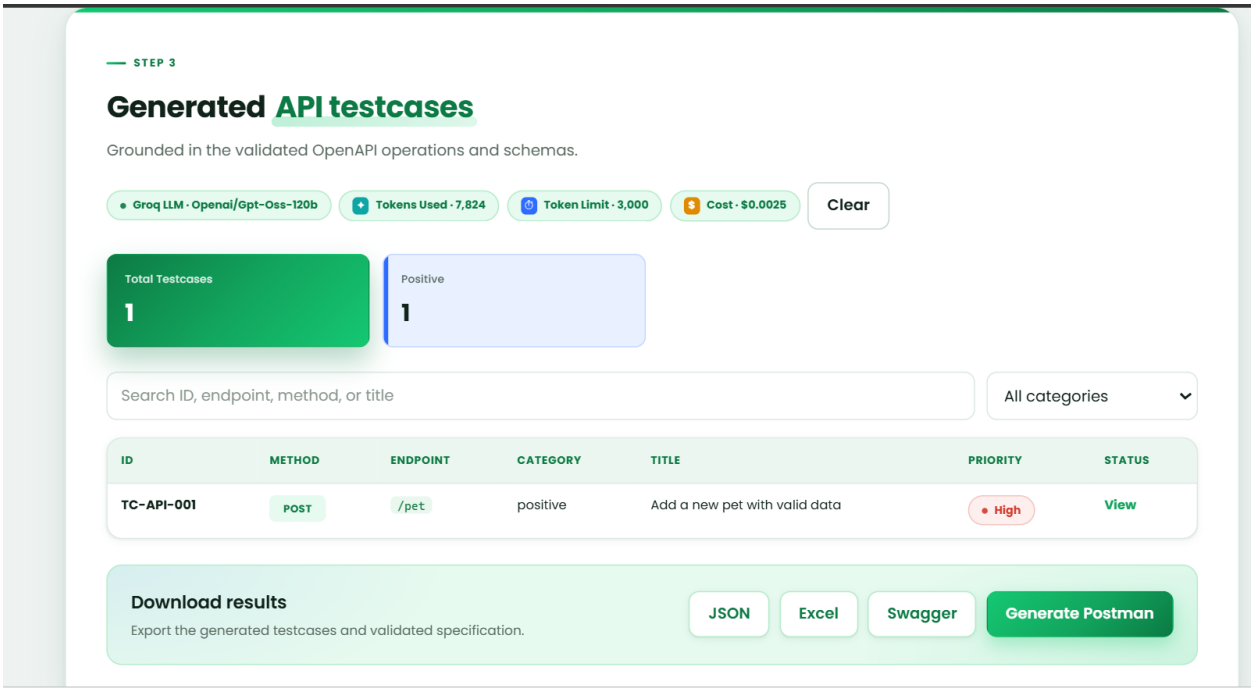



```
{
  "summary": {
    "total": 1
  },
  "testCases": [
    {
      "testCaseId": "TC-API-001",
      "operationId": "addPet",
      "endpoint": "/pet",
      "method": "POST",
      "category": "positive",
      "title": "Add a new pet with valid data",
      "priority": "High",
      "preconditions": [
        "API service is running."
      ],
      "headers": {
        "Content-Type": "application/json"
      },
      "pathParameters": {},
      "queryParameters": {},
      "requestBody": {
        "id": 123,
        "name": "Rex",
        "photoUrls": [
          "http://example.com/photo.jpg"
        ]
      },
      "steps": [
        "Send POST request to /pet with valid pet JSON.",
        "Verify response."
      ],
      "expectedStatusCode": 200,
      "expectedResult": "Pet is created and returned with HTTP 200.",
      "sourceReferences": [
        "paths./pet.post"
      ]
    }
  ]
}
```



Ln 1, Col 1 | 910 characters | Plain text

Assignment 2

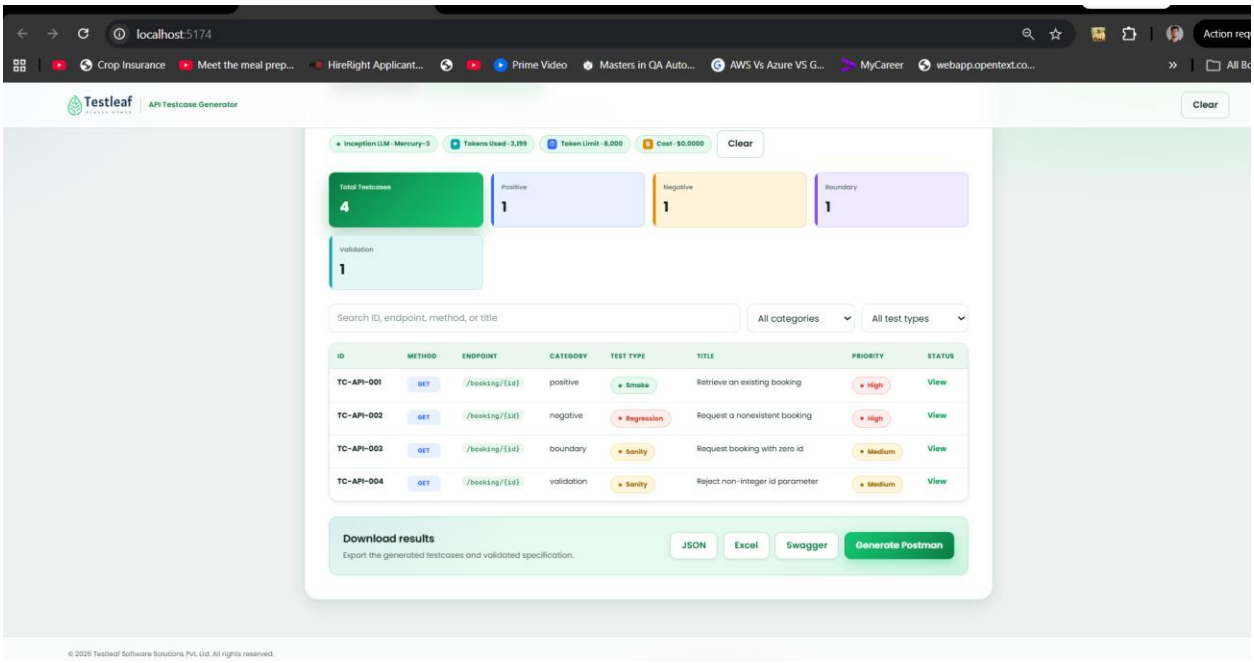

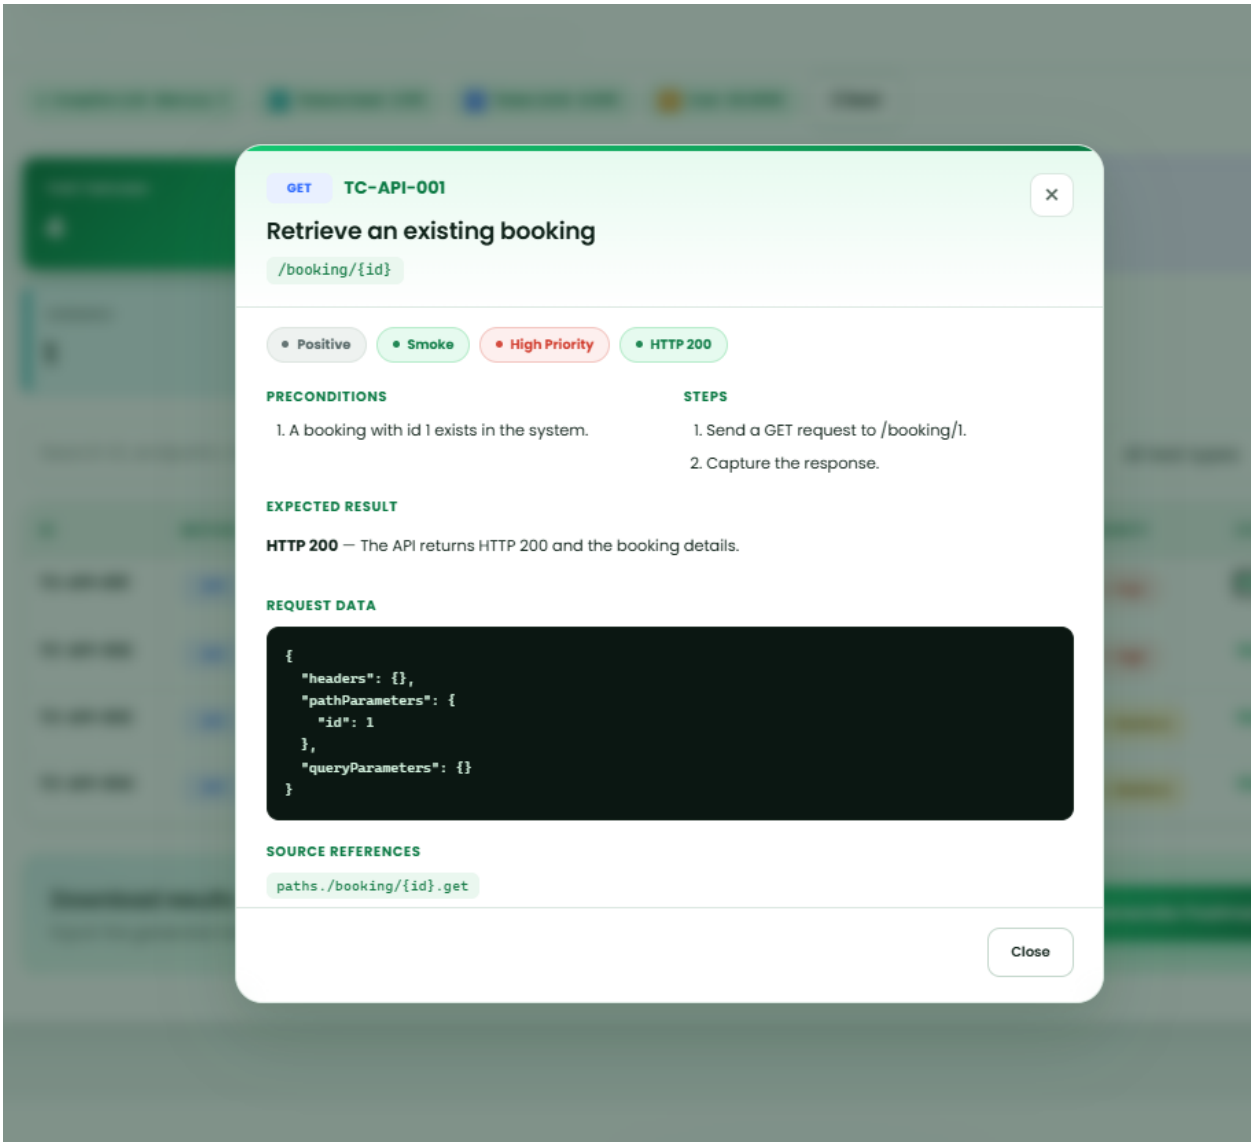

Test Case ID	Operation ID	Endpoint	HTTP Method	Category	Test Type	Title	Priority
TC-API-001		/booking/{id}	GET	positive	Smoke	Retrieve an existing booking	High
TC-API-002		/booking/{id}	GET	negative	Regression	Request a nonexistent booking	High
TC-API-003		/booking/{id}	GET	boundary	Sanity	Request booking with zero id	Medium
TC-API-004		/booking/{id}	GET	validation	Sanity	Reject non-integer id parameter	Medium

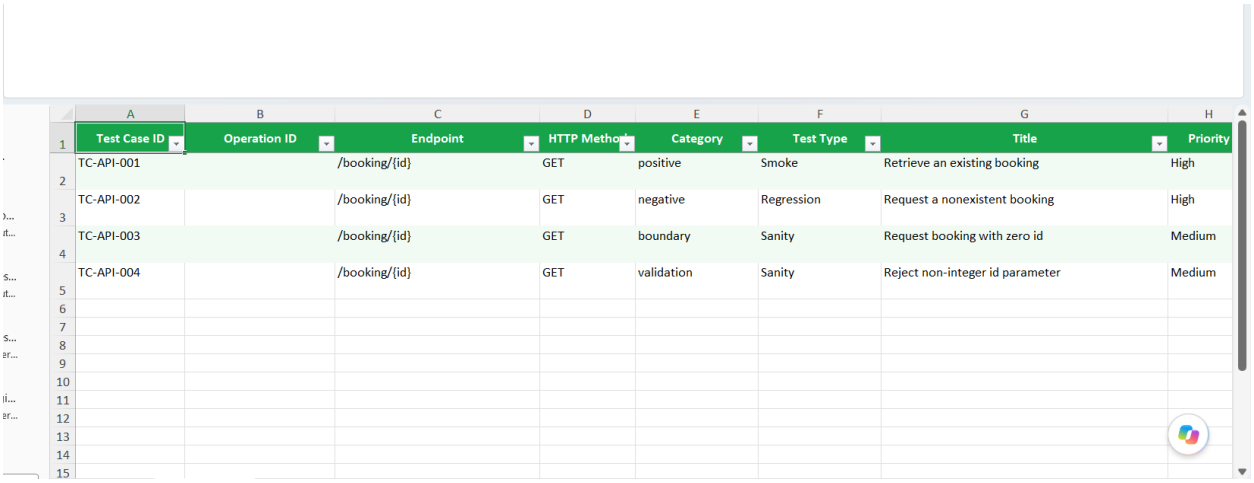

Test Case ID	Operation ID	Endpoint	HTTP Method	Category	Test Type	Title	Priority
TC-API-001		/booking/{id}	GET	positive	Smoke	Retrieve an existing booking	High
TC-API-002		/booking/{id}	GET	negative	Regression	Request a nonexistent booking	High
TC-API-003		/booking/{id}	GET	boundary	Sanity	Request booking with zero id	Medium
TC-API-004		/booking/{id}	GET	validation	Sanity	Reject non-integer id parameter	Medium

STEP 3

Generated API testcases

Grounded in the validated OpenAPI operations and schemas.

Groq LLM · Openai/Gpt-Oss-120b | Tokens Used · 2,835 | Token Limit · 3,000 | Cost · $0.0012 | Clear

Total Testcases	Positive	Negative	Boundary
7	1	1	1

Authentication	Authorization	Validation
1	1	1

Search ID, endpoint, method, or title


All categories

ID	METHOD	ENDPOINT	CATEGORY	TITLE	PRIORITY	STATUS
TC-API-001	GET	/booking/{id}	positive	Retrieve existing booking with valid ID	High	View
TC-API-002	GET	/booking/{id}	negative	Attempt to retrieve non-existent booking	High	View
TC-API-003	GET	/booking/{id}	boundary	Retrieve booking using boundary ID value 0	High	View
TC-API-004	GET	/booking/{id}	authentication	Access booking without authentication headers	Medium	View
TC-API-005	GET	/booking/{id}	authorization	Access booking with dummy Authorization token	Medium	View
TC-API-006	GET	/booking/{id}	validation	Retrieve booking using excessively large integer ID	Medium	View
TC-API-007	GET	/booking/{id}	error-handling	Retrieve booking with negative ID to test error handling	Medium	View

Download results

Export the generated testcases and validated specification.

JSON | Excel | Swagger | Generate Postman

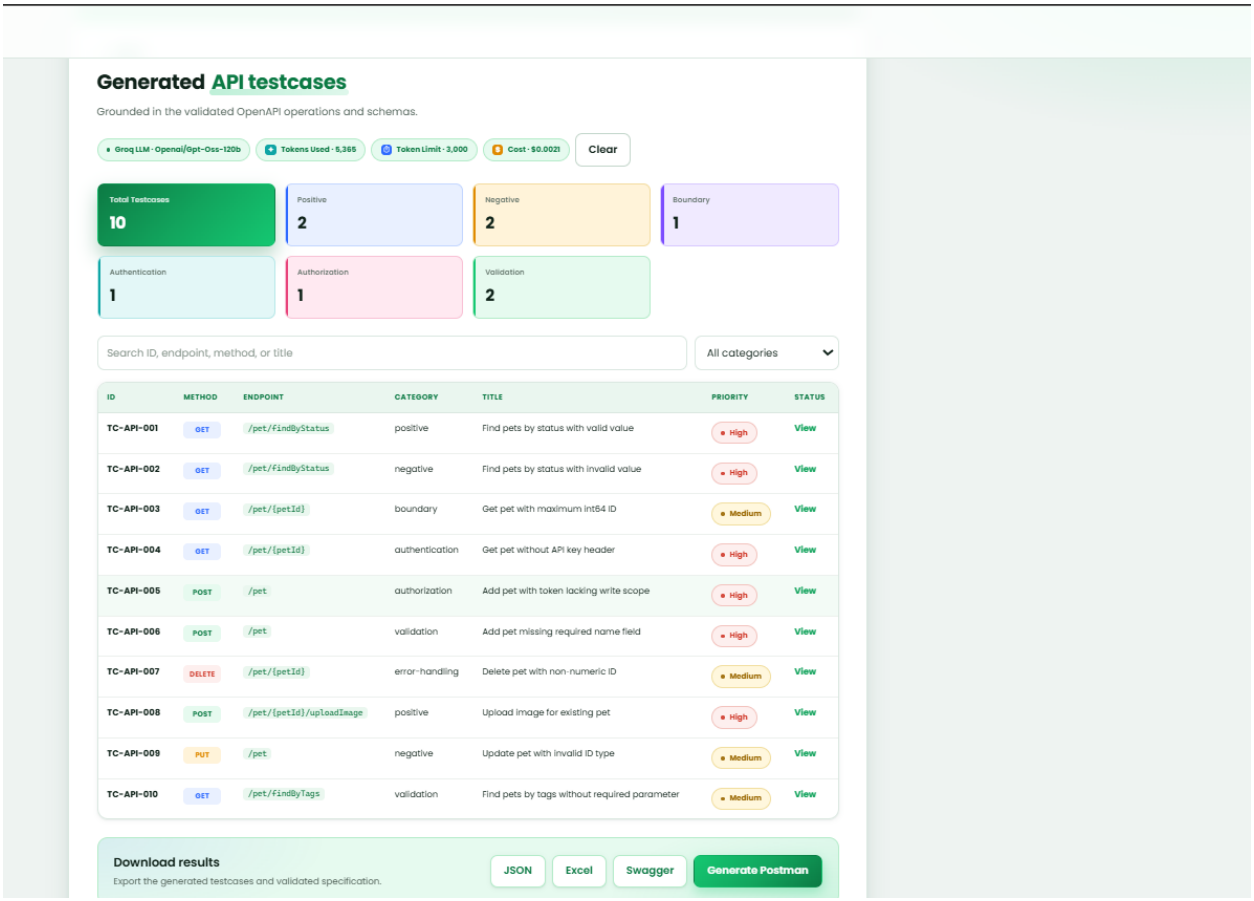
Generated API testcases
Grounded in the validated OpenAPI operations and schemas.
Groq LLM · Openai/Gpt-Oss-120b
Tokens Used · 5,365
Token Limit · 3,000
Cost · $0.0021
Clear
Total Testcases
10
Positive
2
Negative
2
Boundary
1
Authentication
1
Authorization
1
Validation
2
Search ID, endpoint, method, or title
All categories
ID METHOD ENDPOINT CATEGORY TITLE PRIORITY STATUS
TC-API-001 GET /pet/findByStatus positive Find pets by status with valid value High View
TC-API-002 GET /pet/findByStatus negative Find pets by status with invalid value High View
TC-API-003 GET /pet/{petId} boundary Get pet with maximum int64 ID Medium View
TC-API-004 GET /pet/{petId} authentication Get pet without API key header High View
TC-API-005 POST /pet authorization Add pet with token lacking write scope High View
TC-API-006 POST /pet validation Add pet missing required name field High View
TC-API-007 DELETE /pet/{petId} error-handling Delete pet with non-numeric ID Medium View
TC-API-008 POST /pet/{petId}/uploadImage positive Upload image for existing pet High View
TC-API-009 PUT /pet negative Update pet with invalid ID type Medium View
TC-API-010 GET /pet/findByTags validation Find pets by tags without required parameter Medium View
Download results
Export the generated testcases and validated specification.
JSON
Excel
Swagger
Generate Postman