

Introduction to Deep Learning for Scientists and Engineers

Abhijat Vatsyayan ¹

August 15, 2020

Summary

- 1 Introduction and plan
- 2 Notations
- 3 Fitting functions
- 4 Adding non-linearity
- 5 Multi dimensional inputs and outputs
- 6 Multi-layer networks with non-linearity
- 7 Using what we have seen so far
- 8 References

■ Part I

- Problem definition (rely on supervised learning)
- Compute graph and gradients
- A little about deep learning libraries.

■ Part II

- Need for different architectures
- Convolution networks
- Recurrent networks

■ Not covered

- Diagram of neurons firing and how it is supposed to work.
- Historical perspective
- Recent advances and the brave new world of ML everywhere
- Tutorial on a library like pytorch or keras

■ Expectation and whats next

Using vectors

$$x \in \mathbb{R}^n, y \in \mathbb{R}^m, w \in \mathbb{R}^{m \times n}$$

$$\begin{bmatrix} y_1 \\ y_2 \\ \vdots \\ y_m \end{bmatrix} = \begin{bmatrix} w_{11} & w_{12} & \dots & w_{1n} \\ w_{21} & w_{22} & \dots & w_{2n} \\ \vdots & \vdots & & \vdots \\ w_{m1} & w_{m2} & \dots & w_{mn} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix}$$
$$\vec{y} = w\vec{x}$$

Gradients

For $m = 2, n = 3$

$$y_1 = w_{11}x_1 + w_{12}x_2 + w_{13}x_3 \quad (1)$$

$$y_2 = w_{21}x_1 + w_{22}x_2 + w_{23}x_3 \quad (2)$$

$$\begin{bmatrix} \frac{\partial y_1}{\partial x_1} & \frac{\partial y_1}{\partial x_2} & \frac{\partial y_1}{\partial x_3} \\ \frac{\partial y_2}{\partial x_1} & \frac{\partial y_2}{\partial x_2} & \frac{\partial y_2}{\partial x_3} \end{bmatrix} = \begin{bmatrix} w_{11} & w_{12} & w_{13} \\ w_{21} & w_{22} & w_{23} \end{bmatrix} \quad (3)$$

$$\frac{d\vec{y}}{d\vec{x}} = w \quad (4)$$

Element wise operations

$$\sigma(x) = \frac{1}{1 + e^{-x}} \quad (5)$$

$$\frac{d}{dx}\sigma(x) = \sigma(x)(1 - \sigma(x)) \quad (6)$$

$$\sigma\left(\begin{bmatrix} z_1 \\ z_2 \\ \vdots \\ z_m \end{bmatrix}\right) = \begin{bmatrix} \sigma(z_1) \\ \sigma(z_2) \\ \vdots \\ \sigma(z_m) \end{bmatrix} \quad (7)$$

Computation graph

Partial derivatives of $f(x, y, z) = \sin(x^2y) + e^z$


$$\frac{\partial f}{\partial x} = 2xy \cos(x^2y) \quad (8)$$

$$\frac{\partial f}{\partial y} = x^2 \cos(x^2y) \quad (9)$$



$$\frac{\partial f}{\partial z} = e^z \quad (10)$$

Computation graph

Compute graph of $f(x, y, z) = \sin(x^2 y) + e^z$

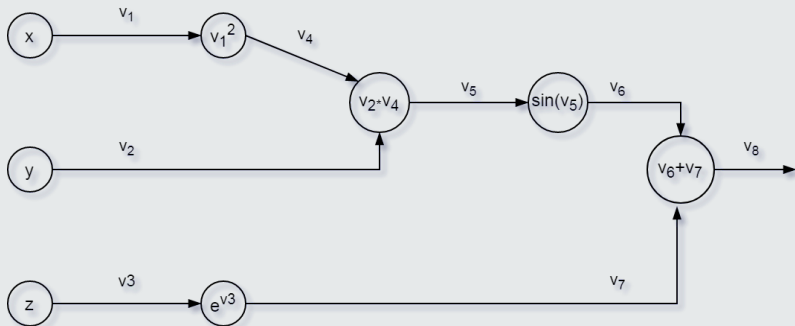

Unit operations (and a little bit of python)(??)

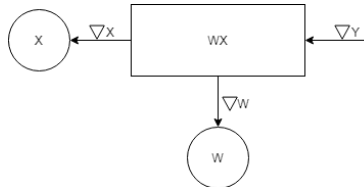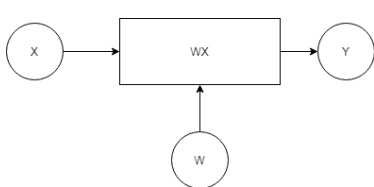

```


1 class MultiplicationLayer1D:
2     def __init__(self):
3         self.cache = {}
4
5     def forward(self, x, w):
6         self.cache['x'] = x
7         self.cache['w'] = w
8         return w * x
9
10    def backprop(self, incoming_grad):
11        x = self.cache['x']
12        w = self.cache['w']
13        return (w * incoming_grad,
14                x * incoming_grad)

```

```

1 class AdditionLayer:
2     def __init__(self):
3         self.cache = {}
4
5     def forward(self, x, w):
6         self.cache['x'] = x
7         self.cache['w'] = w
8         return w + x
9
10    def backprop(self, incoming_grad):
11        x_grad = incoming_grad
12        w_grad = incoming_grad
13        return x_grad, w_grad

```

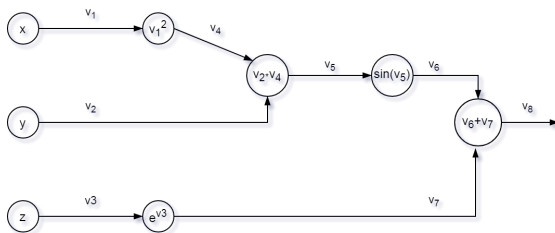

$$\begin{aligned}\frac{\partial v_8}{\partial z} &= \frac{\partial v_8}{\partial v_7} \frac{\partial v_7}{\partial v_3} \frac{\partial v_3}{\partial z} \\ &= 1 \cdot e^{v_3} \cdot 1\end{aligned}$$

$$\frac{\partial v_8}{\partial z} = \frac{\partial f}{\partial z} = e^{v_3} = e^z$$

$$\begin{aligned}\frac{\partial v_8}{\partial y} &= \frac{\partial v_8}{\partial v_6} \frac{\partial v_6}{\partial v_5} \frac{\partial v_5}{\partial v_2} \frac{\partial v_2}{\partial y} \\ &= 1 \cdot \cos(v_5) \cdot v^4 \cdot 1\end{aligned}$$

$$\begin{aligned}\frac{\partial f}{\partial y} &= \frac{\partial v_8}{\partial y} = \cos(v_5) v^4 \\ &= \cos(v_2 v_4) v_4 \\ &= \cos(v_1^2 y) v_1^2 \\ &= \cos(x^2 y) x^2\end{aligned}$$

Fitting a function to data

Description (supervised learning)

Given a set of data $(x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)$, can we find a function $y = f(x)$ that "fits" this data?

Questions

- What is this function $f(x)$?
- What does "fit" mean?
- How do we know this works?
- What kinds of problems can we solve?

More about $f(x)$

Class of functions

Starting with a function $f(x; \theta_1, \theta_2, \dots, \theta_n)$ where x is the input to the function and θ s are its parameters, we need to find the set of θ s that best "fits" the give data $(x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)$

Class of linear functions

Consider $f(x) = ax + b$. If we can say, with some confidence, that our data is linearly related, we need to find $\theta_1 = a$, $\theta_2 = b$ that *fits* the given data. We can also write it as $f(x; a, b) = ax + b$.

Preferred,

$$f(x; \theta_1, \theta_2) = \theta_1 x + \theta_2 \quad (11)$$

Fit

Mean squared Euclidean distance as one possible measure of fit

Let L_i be the squared Euclidean distance between the predicted value, $\hat{y}_i = f(x_i)$ and the actual, y_i . Then,

$$L_i = z_i^2 \quad (12)$$

$$z_i = y_i - f(x_i) \quad (13)$$

$$= y_i - \theta_1 x_i - \theta_2 \quad (14)$$

Minimizing L_i with respect to the parameters θ_1 and θ_2 ,

$$\frac{\partial L_i}{\partial \theta_1} = \frac{\partial z_i^2}{\partial z_i} \frac{\partial z_i}{\partial \theta_1} \quad (15)$$

$$\frac{\partial L_i}{\partial \theta_2} = \frac{\partial z_i^2}{\partial z_i} \frac{\partial z_i}{\partial \theta_2} \quad (16)$$

For n data points, mean loss is

$$L = \frac{1}{n} \sum_{i=1}^{i=n} L_i = \frac{1}{n} \sum_{i=1}^{i=n} (y_i - \theta_1 x_i - \theta_2)^2$$

In practice, we choose a much smaller subset of data, called a batch, compute mean loss over this batch and run optimization step using the gradient of loss (more on this later).

Two different spaces

- Space spanned x and y . Optimization tries to find the surface that best fits the data.
- Space spanned by θs . We minimize the loss function in this space.

Using sigmoid

Definition

$$\sigma(x) = \frac{1}{1 + e^{-x}} \quad (17)$$

$$\frac{d}{dx}\sigma(x) = \sigma(x)(1 - \sigma(x)) \quad (18)$$

Assuming a non-linear function (sigmoidal + affine prior)

Let our function be $y = \sigma(\theta_1 x + \theta_2)$.

Making a non-linear function

New function and the squared error

$$z = \sigma(\hat{y}) \quad (19)$$

$$\hat{y} = \theta_1 x + \theta_2 \quad (20)$$

Error L_i for the i th data point

$$L_i = (\sigma(\theta_1 x_i + \theta_2) - y_i)^2 \quad (21)$$

Finding best θ s

Minimizing L_i

$$L_i = \Delta_i^2 \quad (22)$$

$$\Delta_i = z_i - y_i \quad (23)$$

$$z_i = \sigma(\hat{y}_i) \quad (24)$$

$$\hat{y}_i = \theta_1 x_i + \theta_2 \quad (25)$$

$$\frac{\partial L_i}{\partial \theta_1} = \underbrace{\frac{\partial \Delta_i^2}{\partial \Delta_i} \frac{\partial \Delta_i}{\partial z_i} \frac{\partial z_i}{\partial \hat{y}_i}}_{\text{chain rule}} \frac{\partial \hat{y}_i}{\partial \theta_1} \quad (26)$$

$$\frac{\partial L_i}{\partial \theta_2} = \underbrace{\frac{\partial \Delta_i^2}{\partial \Delta_i} \frac{\partial \Delta_i}{\partial z_i} \frac{\partial z_i}{\partial \hat{y}_i}}_{\text{chain rule}} \frac{\partial \hat{y}_i}{\partial \theta_2} \quad (27)$$

Finding best θ s

Updates to θ_1 and θ_2

$$\frac{\partial L_i}{\partial \theta_1} = \underbrace{\frac{\partial \Delta_i^2}{\partial \Delta_i} \frac{\partial \Delta_i}{\partial z_i} \frac{\partial z_i}{\partial \hat{y}_i}}_{\text{chain rule}} \frac{\partial \hat{y}_i}{\partial \theta_1} \tag{28}$$

$$\frac{\partial L_i}{\partial \theta_2} = \underbrace{\frac{\partial \Delta_i^2}{\partial \Delta_i} \frac{\partial \Delta_i}{\partial z_i} \frac{\partial z_i}{\partial \hat{y}_i}}_{\text{chain rule}} \frac{\partial \hat{y}_i}{\partial \theta_2} \tag{29}$$

$$\theta_{1_{p+1}} = \theta_{1_p} - \eta \frac{\partial L_i}{\partial \theta_1} \tag{30}$$

$$\theta_{2_{p+1}} = \theta_{2_p} - \eta \frac{\partial L_i}{\partial \theta_2} \tag{31}$$

Finding best θ s

Updates to θ_1 and θ_2

$$\theta_{1_{p+1}} = \theta_{1_p} - \eta \frac{\partial L_i}{\partial \theta_1} \quad (32)$$

$$\theta_{2_{p+1}} = \theta_{2_p} - \eta \frac{\partial L_i}{\partial \theta_2} \quad (33)$$

Vectorized format

$$\vec{\theta}_{p+1} = \vec{\theta}_p - \eta \nabla_{\vec{\theta}} L \quad (34)$$

Using vectors

$$x \in \mathbb{R}^n, y \in \mathbb{R}^m, w \in \mathbb{R}^{m \times n}$$


$$\begin{bmatrix} y_1 \\ y_2 \\ \vdots \\ y_m \end{bmatrix} = \begin{bmatrix} w_{11} & w_{12} & \dots & w_{1n} \\ w_{21} & w_{22} & \dots & w_{2n} \\ \vdots & \vdots & & \vdots \\ w_{m1} & w_{m2} & \dots & w_{mn} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix} + \begin{bmatrix} b_1 \\ b_2 \\ \vdots \\ b_n \end{bmatrix}$$

For $m = 2, n = 3$

$$y_1 = w_{11}x_1 + w_{12}x_2 + w_{13}x_3 + b_1$$

$$y_2 = w_{21}x_1 + w_{22}x_2 + w_{23}x_3 + b_2$$

Mandatory network diagram

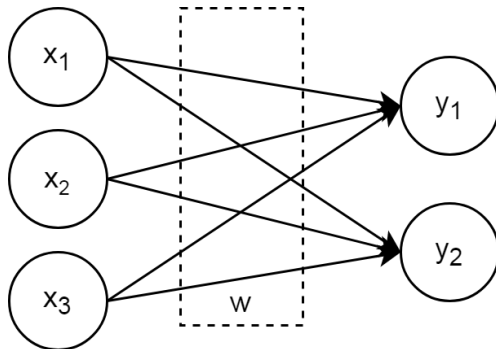

More layers

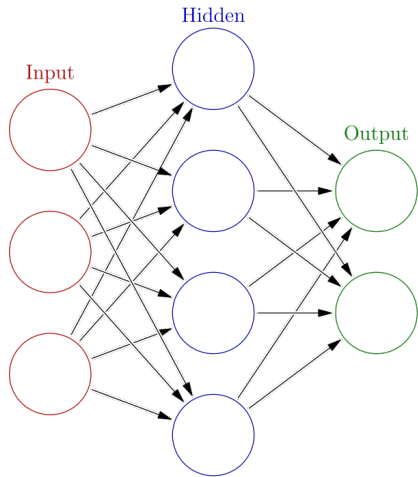


Image from https://en.wikipedia.org/wiki/Artificial_neural_network

Multiple layers

Layers (composition) of $ax + b$ style functions



$$y = \mathbb{W}x + b$$

$$z = \mathbb{U}y + c = \mathbb{U}(\mathbb{W}x + b) + c$$

$$= (\mathbb{U}\mathbb{W})x + (\mathbb{U}b + c) = \mathbb{V}x + d$$

Introducing non-linearity with element-wise sigmoid

$$y = \sigma(\mathbb{W}x + b)$$

$$z = \sigma(\mathbb{U}y + c)$$

What can these functions (neural networks) do?

A standard multilayer feed-forward network with a locally bounded piecewise continuous activation function can approximate any continuous function to any degree of accuracy if and only if the network's activation function is not a polynomial.

-Leshno et al., 1993

In particular, we show that arbitrary decision regions can be arbitrarily well approximated by continuous feed forward neural networks with only a single internal, hidden layer and any continuous sigmoidal nonlinearity.

-Cybenko, 1989

Multi-layer, feed forward, non-polynomial


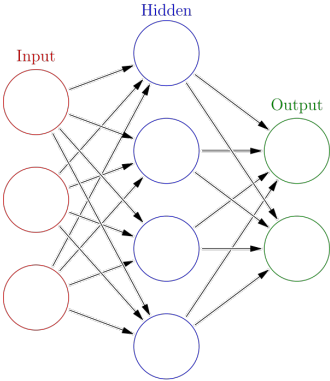



Image from https://en.wikipedia.org/wiki/Artificial_neural_network

Activation functions


$$f(x) = \frac{1}{1 + e^{-x}}$$




$$f(x) = \frac{e^x - e^{-x}}{e^x + e^{-x}}$$



$$f(x) = \max(x, 0)$$



$$f(x) = \begin{cases} x, & \text{if } x \geq 0 \\ 0.1x, & \text{otherwise} \end{cases}$$



Why now?

- Activation functions
- Initialization approaches
- New optimization algorithms*
- Architectures for better propagation of gradients
- Availability of massive amounts of data - generation + storage
- Advances in processor speeds and GPUs

Steps

- Settle on a class of function with parameters to be optimized.
- Define a secondary function - the loss function.
- Split data into training set, validation set and test set. Use randomization. For the following discussion, we ignore validation set.
- Initialize model weights (W 's or θ s), typically using small random numbers.
- Iterate over the data in batches
 - compute the predicted value
 - compute the loss
 - compute gradients
 - update parameters
- Keep track of loss and stop when loss stops decreasing.
- Compute loss for test set.


Python code

```
# Build the network
import core.np.Activations as act
import core.np.Loss as loss
from core.np.utils import to_one_hot
import core.np.Optimization as autodiff_optim
import core.np.regularization as reg
from core import info, debug, log_at_info
import time
import matplotlib.pyplot as plt

x_node = node.VarNode('x')
y_target_node = node.VarNode('yt')

linear1 = node.DenseLayer(x_node, 100, name="Dense-First")
relu1 = act.RelUNode(linear1, name="ReLU-First")
linear2 = node.DenseLayer(relu1, 200, name="Dense-Second")
relu2 = act.RelUNode(linear2, name="ReLU-Second")
linear3 = node.DenseLayer(relu2, 10, name="Dense-Third")

loss_node = loss.LogitsCrossEntropy(linear3, y_target_node, name="XEnt")
```



Learning, libraries etc.

Libraries

- Torch and Theano
- Tensorflow
- Keras
- Pytorch

Recommendations for those just starting

- 1** Build from scratch using numpy
 - Linear/Dense
 - Optimization, Regularization, Activations
 - Basic CNN and RNN
- 2** Pytorch


Next

Part II

- Autoencoders and PCA
- Convolution neural networks
- Recurrent neural networks
- Transfer learning
- GANs (possibly!)

References I



 Atilim Gunes Baydin, Barak A. Pearlmutter, and Alexey Andreyevich Radul, *Automatic differentiation in machine learning: a survey*, CoRR **abs/1502.05767** (2015).