


Mobile IDE / Agent App — Wireframe Documentation

v3

VS Code-inspired Dark Workbench design language applied · full-screen layouts

1. Main / Search & Agent Chat Screen

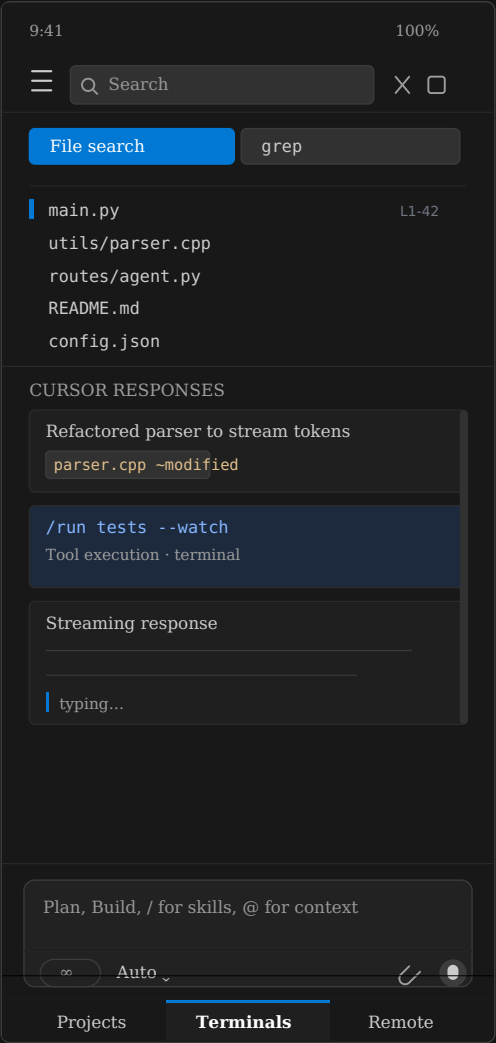


Documentation

- Surfaces: app frame & chrome use `bg.chrome #181818`; the conversation/results area uses `bg.canvas #1F1F1F`; cards/responses use `bg.elevated #222222` with `border.subtle`.
- Header: `≡ hamburger` (Codicon menu) + search input on `bg.input #313131` with `border.default`; close (x) and stop (square) icons in `fg.muted`.
- File search / grep toggle:** active segment uses `accent.primary #0078D4` fill with `fg.strong` text; inactive segment uses `bg.input`.
- Result list styled as sidebar tree rows (13px Inter / monospace for paths), `fg.default` text, active-line indicator bar in `accent.primary`, line-range badge in `fg.inactive`.
- Cursor responses panel:** each block follows AI panel language — file-edit badges use `ai.editedFileFg #E2C08D`; slash/tool-command blocks use `ai.commandBg #26477866` + `ai.commandFg #85B6FF` in monospace; streaming caret in `accent.primary`.
- Composer (matches reference):** rounded 8px card on `bg.elevated #222222`, `border.default`, placeholder "Plan, Build, / for skills, @ for context" in `fg.placeholder #989898`. Footer row inside composer holds an ∞ (context/length) pill, an **Auto** ↓ model selector, and attach/mic icons (Codicons, `fg.muted`, 16px).
- Bottom nav tabs: active tab (**Terminals** shown) gets `bg.canvas` background + 2px top border in `accent.primary` + `fg.strong` label; inactive tabs sit on `bg.chrome` with `fg.default`.
- Behavior — Projects tab, when searching:** agent window collapses to just the message/composer; the search/results area takes ~60vh.

- **Behavior — referencing files:** when in file-select (incl. full-file select on top), the agent panel takes ~60% and only the search bar stays visible at top. @ file-reference still works inside the composer.


2. Terminals Tab

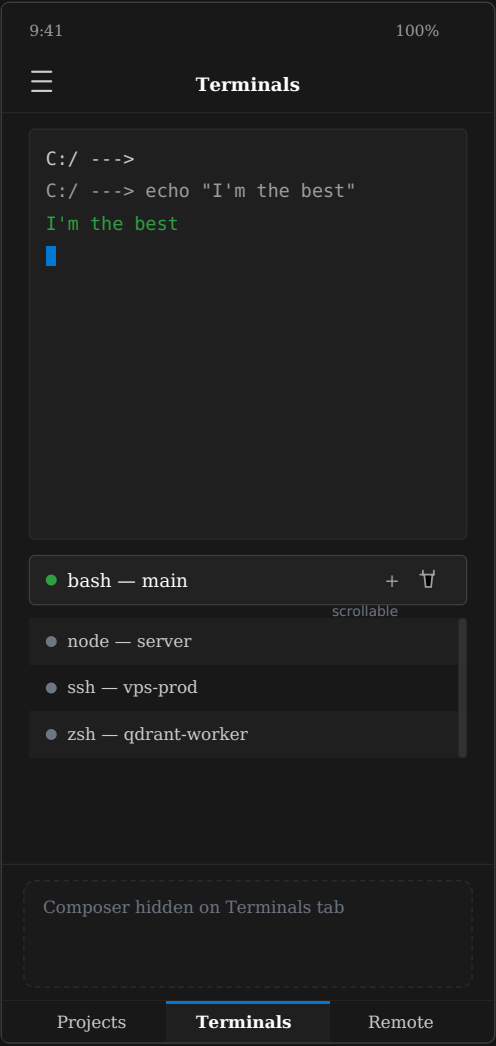


Documentation

- Terminal output region: `bg.canvas #1F1F1F`, monospace (Cascadia Code) 13px, `fg.default` for normal text, success/output lines in `status.success #2EA043`, blinking cursor block in `accent.primary`.
- **Selected Terminal bar:** `bg.elevated #222222` with `border.default`; live status dot in `status.success`; label in `fg.strong`; + (new) and trash (delete) Codicons in `fg.muted`, 16px.
- **Terminal list:** alternating row backgrounds (`bg.canvas` / `bg.chrome`) matching sidebar tree styling, status dot per session, scrollbar thumb in `bg.input`.
- Composer is hidden/dimmed on this tab (dashed placeholder in `border.subtle` / `fg.inactive`) — not part of the terminal workflow.
- **SSH behavior:** SSH-backed terminals supported with VS-Code-like add/delete controls. After SSH connects, terminal auto-cds into the current project directory.
- Bottom nav unchanged: active tab indicated with 2px `accent.primary` top border + `bg.canvas` fill.

3. Remote Tab — Screen + Controls (Trackpad tab vs Keyboard tab)

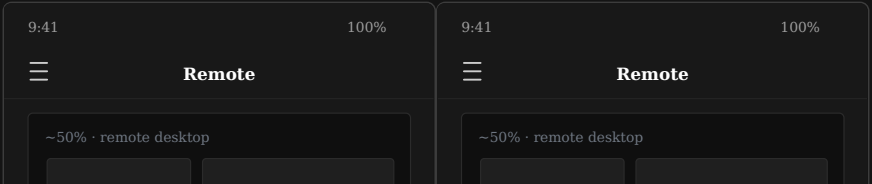


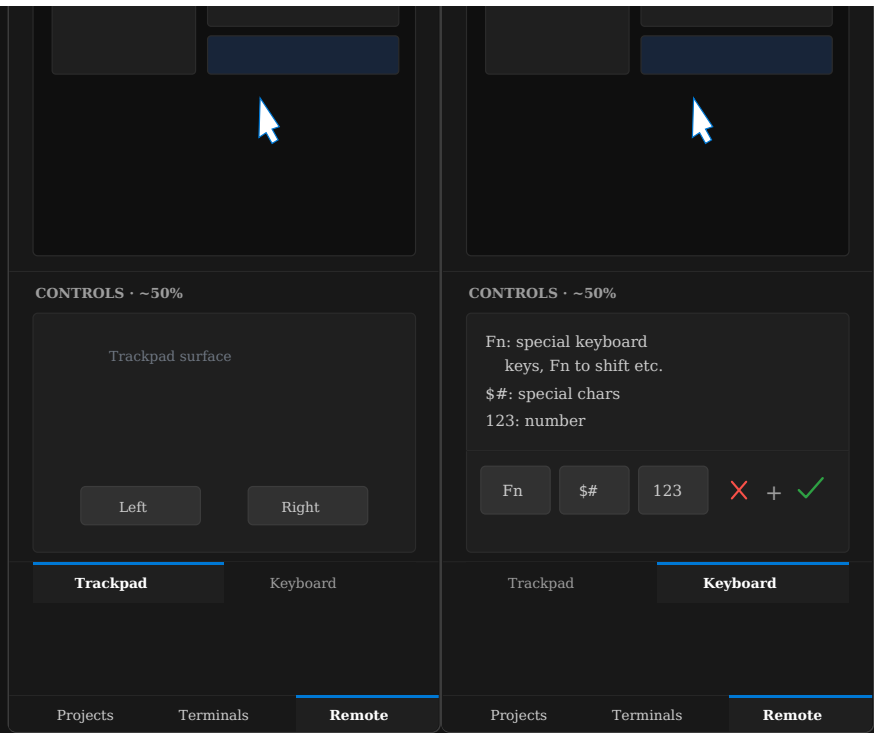


Documentation

- **Screen with pointer (top ~50%):** rendered on near-black `#0F0F0F` (deeper than canvas, to distinguish remote framebuffer from local chrome); remote window chrome mocked with `bg.canvas` rectangles and an `ai.commandBg` tinted panel; cursor arrow outlined in `accent.primary`.
- **Controls (bottom ~50%):** panel on `bg.canvas #1F1F1F` with `border.subtle`.
- **Trackpad tab (left):** trackpad surface fills the panel; **Left / Right** click buttons styled as secondary buttons (`bg.input` / `border.default`), hover `bg.input-hover`).
- **Keyboard tab (right):** reference text block in `fg.default`, then three key buttons (`Fn`, `$#` monospace, `123`) styled as secondary buttons on `bg.input`.
- **Action icons next to keys:** `x` (cancel staged input) in `status.error #F85149`; `+` (compose/add to combo) in `fg.muted`; `✓` (send keystroke to remote) in `status.success #2EA043` — mirrors the diff-preview color convention (added/success = green, destructive = red).
- **Sub-tabs (Trackpad | Keyboard):** active tab gets 2px `accent.primary` top border + `fg.strong` label, matching the main tab-strip pattern.
- **Input trigger flow:** interactions are staged; `x` discards staged input, `+` builds up a combo, `✓` dispatches the composed keystroke/input event to the remote session.

4. Hamburger Menu — Workspace Panel (FTP Navigator)

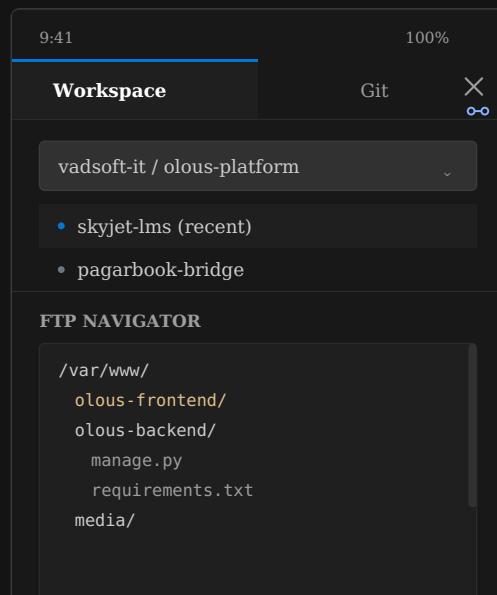


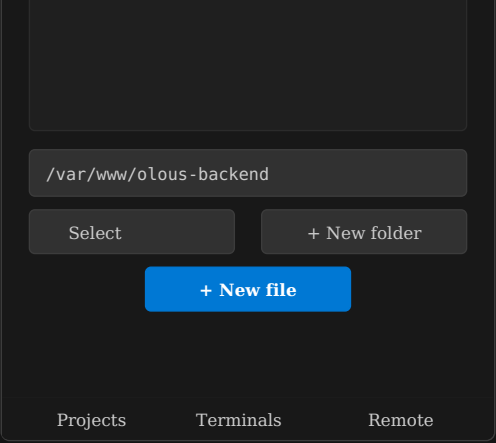

Documentation

- Full-screen panel opened via hamburger; top tab strip follows tab-strip rules: active **Workspace** tab gets `bg.canvas` fill + 2px `accent.primary` top border + `fg.strong` label; inactive **Git** tab on `bg.chrome` with `fg.muted` .
- `x` close icon top-right in `fg.muted` ; "git graph" shortcut icon rendered in `ai.commandFg #85B6FF` to hint at AI/graph affordance.
- **Current workspace selector:** dropdown styled as input — `bg.input #313131` , `border.default` , chevron in `fg.muted` .
- **Recent items list:** sidebar-row styling — alternating `bg.canvas` / `bg.chrome` , active/selected row marked with a small `accent.primary` dot.
- **FTP Navigator:** tree view on `bg.canvas` , monospace paths in `fg.default` , folders tinted with `ai.editedFileFg #E2C08D` for emphasis, files in `fg.muted` , scrollbar thumb in `bg.input` .
- **FTP Path field:** `bg.input` input showing the active remote path in monospace.
- **Action buttons:** `Select` and `+ New folder` are secondary buttons (`bg.input` / `border.default` , hover `bg.input-hover`); `+ New file` is the primary CTA in `accent.primary` with `fg.strong` text.

5. Hamburger Menu — Git Tab

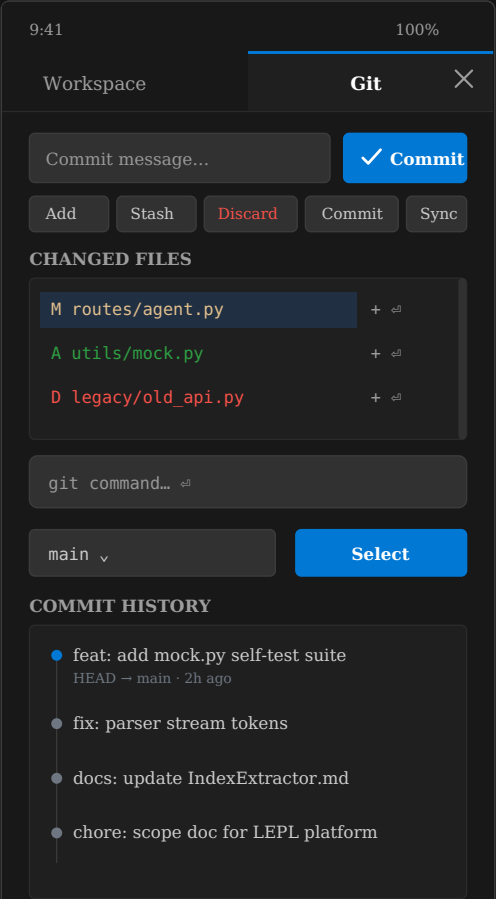

Documentation

- Tab strip: **Git** active (`bg.canvas` + 2px `accent.primary` top border + `fg.strong`); **Workspace** inactive (`bg.chrome` + `fg.muted`).
- **Commit message input:** `bg.input` / `border.default` , placeholder in `fg.placeholder` ; **Commit** is the primary CTA (`accent.primary` + `fg.strong` + check icon).
- **Quick actions row** (Add / Stash / Discard / Commit / Sync): secondary buttons on `bg.input` ; **Discard** labeled in `status.error #F85149` to signal destructive action.
- **Changed files list:** each row uses git-status letter + monospace path; modified (**M**) rows tinted with `ai.commandBg` and path in `ai.editedFileFg #E2C08D` ; added (**A**) in `status.success` ; deleted (**D**) in `status.error` — following the diff-preview convention (added=success, removed=error, modified=info/edited).
- Each file row has a `+ ↵` stage action in `fg.muted` ; list sits on `bg.canvas` with a `bg.input` scrollbar thumb.
- **Command input:** rounded 6px field on `bg.input` , monospace placeholder, ↵ to execute raw git commands.
- **Branch selector:** current branch shown in monospace on `bg.input` with chevron; **Select** is a primary CTA — pressing it triggers a branch switch.
- **Commit history:** vertical graph line in `border.default` ; HEAD commit dot in `accent.primary` , other commits in `fg.inactive #6E7681` ; subject text in `fg.default` , meta (hash/branch/time) in `fg.inactive` at 10px.