



What is next auth?

NextAuth is a library that lets you do **authentication** in Next.js

Can you do it w/o next-auth – Yes

Should you – Probably not!

Popular choices while doing auth include –

1. External provider –

1. <https://auth0.com/>

2. <https://clerk.com/>

3. Firebase auth

2. In house using cookies

3. NextAuth

[Back to home](#)

[Jump To ↗](#)

[◀ Prev](#)

[Next ▶](#)


[Go to Top ↑](#)




Why not use JWT + localStorage?

Next.js is slightly different from React + Express apps

Express app

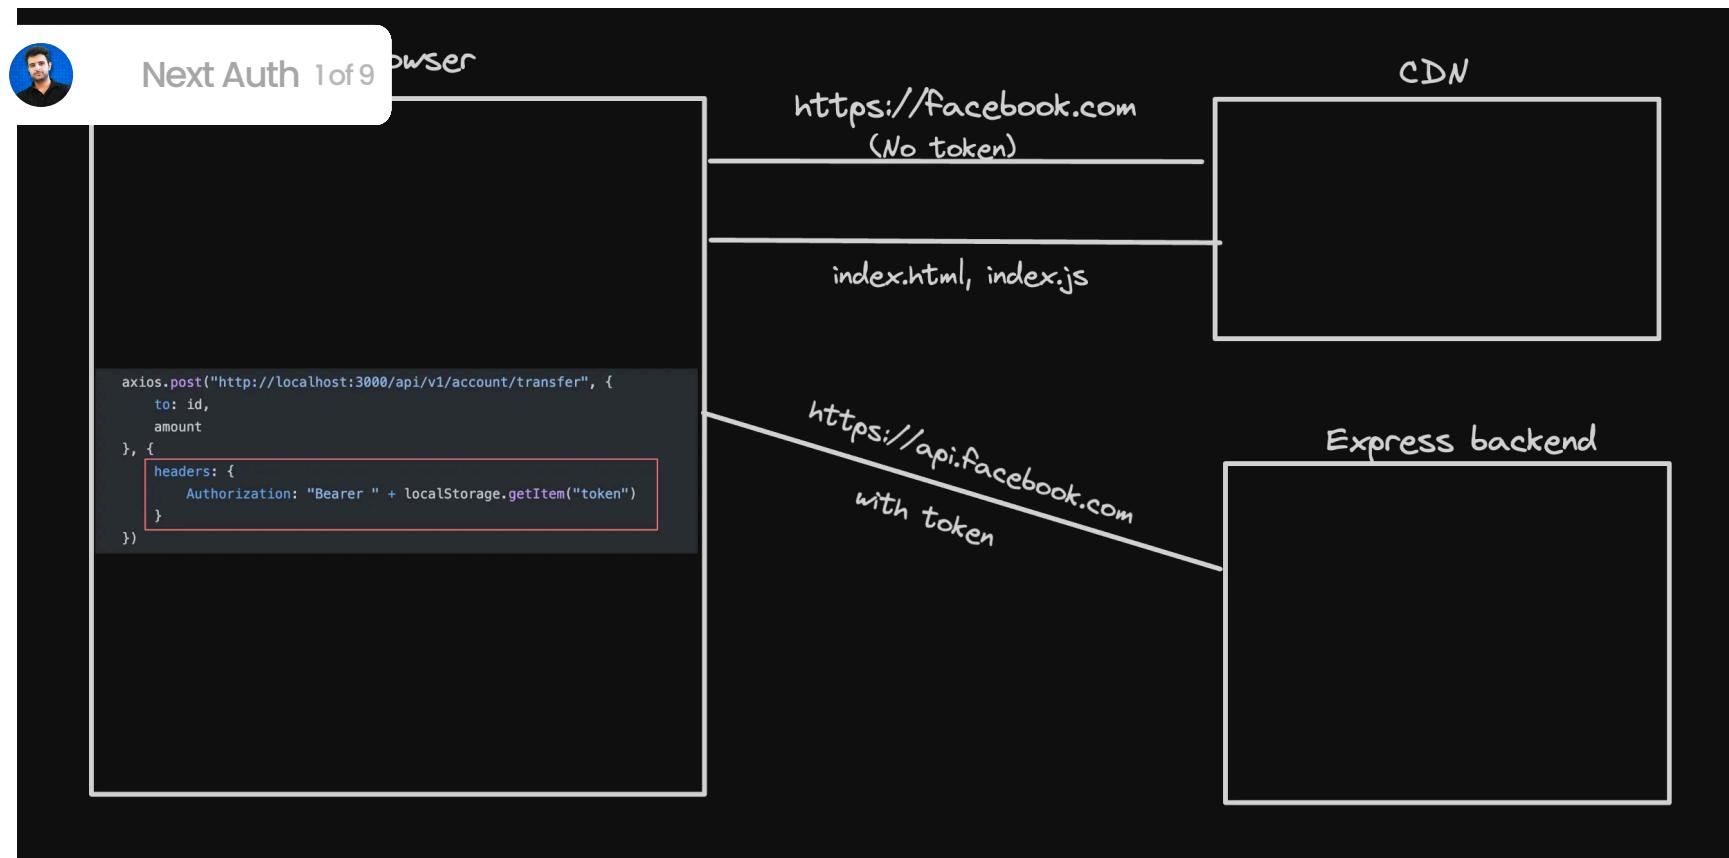

NextJS app

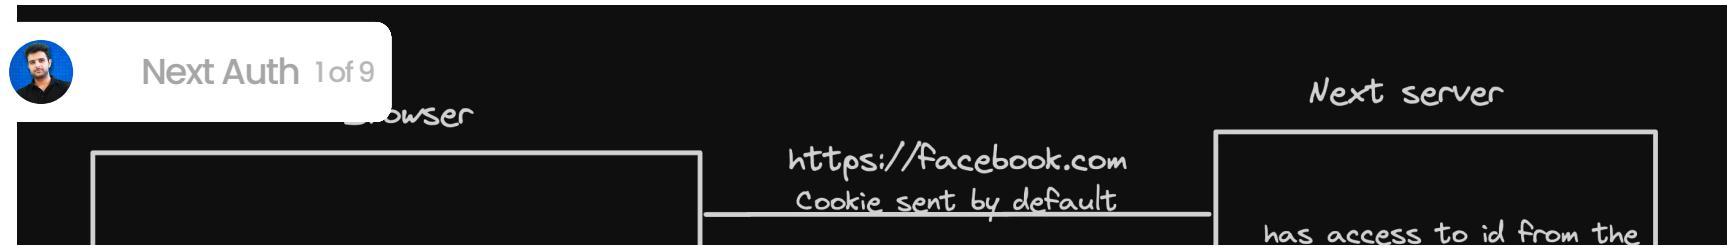

NextAuth

Nextjs lets you add **Authentication** to your Next.js app

1. It supports various **providers**
 1. Login with email
 2. Login with google
 3. Login with facebook
 4. ...



Next Auth 1 of 9

/pages/api/auth/[...nextauth].js

```
import NextAuth from 'next-auth'
import AppleProvider from 'next-auth/providers/apple'
import FacebookProvider from 'next-auth/providers/facebook'
import GoogleProvider from 'next-auth/providers/google'
import EmailProvider from 'next-auth/providers/email'

export default NextAuth({
  providers: [
    // OAuth authentication providers...
    AppleProvider({
      clientId: process.env.APPLE_ID,
      clientSecret: process.env.APPLE_SECRET
    }),
    FacebookProvider({
      clientId: process.env.FACEBOOK_ID,
      clientSecret: process.env.FACEBOOK_SECRET
    }),
    GoogleProvider({
      clientId: process.env.GOOGLE_ID,
      clientSecret: process.env.GOOGLE_SECRET
    }),
    // Passwordless / email sign in
    EmailProvider({
      server: process.env.MAIL_SERVER,
      from: 'NextAuth.js <no-reply@example.com>'
    })
  ]
})
```

Client (App)

/pages/_app.jsx

```
import { SessionProvider } from "next-auth/react"

export default function App({
  Component, pageProps: { session, ...pageProps }
}) {
  return (
    <SessionProvider session={session}>
      <Component {...pageProps}/>
    </SessionProvider>
  )
}
```

Client (Page)

/pages/index.js

```
import { useSession, signIn, signOut } from "next-auth/react"

export default function Component() {
  const { data: session } = useSession()
  if(session) {
    return <>
      Signed in as {session.user.email} <br/>
      <button onClick={() => signOut()}>Sign out</button>
    </>
  }
  return <>
    Not signed in <br/>
    <button onClick={() => signIn()}>Sign in</button>
  </>
}
```

Catch all routes

If you want to add a single route handler for





Next Auth 1 of 9

h/random

5. /api/auth/123
4. /api/auth/...

You can create a `catch all` route

1. Create a simple next.js app

```
npx create-next-app@latest
```

1. Create `app/api/auth/[...nextauth]/route.ts`

```
import { NextRequest, NextResponse } from "next/server"

export function GET(req: NextRequest) {
  return NextResponse.json({
    message: "Handler"
  })
}
```

1. Try going to a few endpoints

```
http://localhost:3000/api/auth/signin
http://localhost:3000/api/auth/123
```



Next Auth 1 of 9

ing the sub-route you're at

```
import { NextRequest, NextResponse } from "next/server"

export function GET(req: NextRequest, { params }: { params: { nextauth: string } }) {
  console.log(params.nextauth[0])
  return NextResponse.json({
    message: "Handler"
  })
}
```



Give NextAuth access to a catch-all



Next Auth 1 of 9

' 'next-auth.js.org/configuration/initialization#route-handlers-

1. Create `/api/auth/[...nextauth]/route.ts`

2. Install next-auth

`npm install next-auth`

1. Updated handler

```
import NextAuth from "next-auth"

const handler = NextAuth({
  ...
})

export { handler as GET, handler as POST }
```

1. Adding providers - There are three broad types of providers

1. OAuth (Login with google)
2. Email (Passwordless Email login via email OTP)
3. Credentials (your own strategy)

Let's them one by one



Credentials provider

This lets you create your own authentication strategy

For example

1. Email + Password
2. Phone number
3. Login with Metamask

Steps to follow

1. Add a credentials provider

```
import NextAuth from "next-auth"  
import CredentialsProvider from 'next-auth/providers/credentials';
```



```
      providers: [
        NextAuth 1 of 9 credentialsProvider({
          name: 'Credentials',
          credentials: {
            username: { label: 'email', type: 'text', placeholder: '' },
            password: { label: 'password', type: 'password', placeholder: '' },
          },
          async authorize(credentials: any) {

            return {
              id: "user1"
            };
          },
        })
      ],
      secret: process.env.NEXTAUTH_SECRET
    })

export { handler as GET, handler as POST }
```

1. Add NEXTAUTH_URL to .env

```
NEXTAUTH_URL=http://localhost:3000
NEXTAUTH_SECRET=password_nextauth
```

1. Update App.tsx to have a simple AppBar

```
"UserClient":
```



Next Auth 1 of 9

```
const Appbar = () => {
  return <div>
    <button onClick={() => signIn()}>Signin</button>
    <button onClick={() => signOut()}>Sign out</button>
  </div>
} Click
```

1. Add providers.tsx

```
'use client';
import React from 'react';
import { SessionProvider } from 'next-auth/react';

export const Providers = ({ children }: { children: React.ReactNode }) => {
  return (
    <SessionProvider>
      {children}
    </SessionProvider>
  );
};
```

1. Wrap layout with Providers

```
import { Providers } from "./provider";

export default function RootLayout({
  children
})
```



Next Auth 1 of 9

```
- - - - -en: React.ReactNode;  
    return (  
      <html lang="en">  
        <body className={inter.className}>  
          <Providers>  
            {children}  
          </Providers>  
        </body>  
      </html>  
    );  
  }
```

1. Get the user details in the top level `page.tsx` (client component)

```
"use client"  
  
import { useSession } from "next-auth/react";  
  
export default function Home() {  
  const session = useSession();  
  return (  
    <div>  
      {JSON.stringify(session.data?.user)}  
    </div>  
  );  
}
```



Next Auth 1 of 9 { getServerSession } from "next-auth"



```
async function getUser() {
  const session = await getServerSession();
  return session;
}

export default async function Home() {
  const session = await getUser();

  return (
    <div>
      {JSON.stringify(session?.user?.name)}
    </div>
  );
}
```

1. Get user in an api route (/api/user)

```
import { getServerSession } from "next-auth"
import { NextResponse } from "next/server";

export async function GET() {
  const session = await getServerSession();

  return NextResponse.json({
    name: session?.user?.name
  })
}
```





Next Auth 1 of 9

1. Persist more data (user id) (Ref <https://next-auth.js.org/getting-started/example#using-nextauthjs-callbacks>) (Ref <https://next-auth.js.org/configuration/callbacks>)

```
 callbacks: {
    jwt: async ({ user, token }: any) => {
        if (user) {
            token.uid = user.id;
        }
        return token;
    },
    session: ({ session, token, user }: any) => {
        if (session.user) {
            session.user.id = token.uid
        }
        return session
    },
},
```

1. Move auth config to `lib/auth.ts` <https://github.com/nextauthjs/next-auth/issues/7658#issuecomment-1683225019>

```
import CredentialsProvider from 'next-auth/providers/credentials';
```



Next Auth 1 of 9

```
  ^- credentialsProvider({
      name: 'Credentials',
      credentials: {
        username: { label: 'email', type: 'text', placeholder: '' },
        password: { label: 'password', type: 'password', placeholder: '' },
      },
      async authorize(credentials: any) {
        return {
          id: "user1",
          name: "asd",
          userId: "asd",
          email: "randomEmail"
        };
      },
    }),
  ],
  secret: process.env.NEXTAUTH_SECRET,
  callbacks: {
    jwt: async ({ user, token }: any) => {
      if (user) {
        token.uid = user.id;
      }
      return token;
    },
    session: ({ session, token, user }: any) => {
      if (session.user) {
        session.user.id = token.uid
      }
    }
  }
}
```



return session

Next Auth 1 of 9

```
  },  
}
```

Final code -

<https://github.com/100xdevs-cohort-2/week-16-auth-2>

Adding Google Provider

Ref <https://next-auth.js.org/providers/google>



Next Auth 1 of 9



Adding Github provider

Ref - <https://next-auth.js.org/providers/github>



Custom Signup page

What if you want to change how your signup page looks

1. Add `pages` to next auth

Ref - <https://github.com/code100x/cms/blob/main/src/lib/auth.ts#L207>

1. Add `app/signin/page.tsx`

Ref -

`page.tsx`



Next Auth 1 of 9

github.com/code100x/cms/blob/main/src/components/SignIn.tsx#L39

```
"use client"
import { signIn } from 'next-auth/react';
import { useRouter } from 'next/navigation';

export default function() {
  const router = useRouter();

  return <div>
    <button onClick={async () => {
      await signIn("google");
    }}>Login with google</button>

    <br />
    <button onClick={async () => {
      await signIn("github");
    }}>Login with Github</button>
    <br />
    <button onClick={async () => {
      const res = await signIn("credentials", {
        username: "",
        password: "",
        redirect: false,
      });
    }}>
```



Next Auth 1 of 9

```
    "Login with email</button>
```

```
  </ui>>  
}
```

Final code -

<https://github.com/100xdevs-cohort-2/week-16-live-4>