

# Optimization algorithms

**10/10 points (100%)**

Quiz, 10 questions

 **Congratulations! You passed!**[Next Item](#)1 / 1  
points

1.

Which notation would you use to denote the 3rd layer's activations when the input is the 7th example from the 8th minibatch?

☐  $a^{[8]\{3\}}(7)$ ☐  $a^{[3]\{7\}}(8)$ ☐  $a^{[8]\{7\}}(3)$ ☒  $a^{[3]\{8\}}(7)$ **Correct**1 / 1  
points

2.

Which of these statements about mini-batch gradient descent do you agree with?

☐ Training one epoch (one pass through the training set) using mini-batch gradient descent is faster than training one epoch using batch gradient descent.

☐ **You should implement mini-batch gradient descent without an explicit for-loop over different mini-batches, so that the algorithm processes all mini-batches at the same time (vectorization).**

# Optimization algorithms

Quiz, 10 questions



One iteration of mini-batch gradient descent (computing on a single mini-batch) is faster than one iteration of batch gradient descent.

**10/10 points (100%)**

**Correct**



1 / 1  
points

3.

Why is the best mini-batch size usually not 1 and not  $m$ , but instead something in-between?



If the mini-batch size is  $m$ , you end up with stochastic gradient descent, which is usually slower than mini-batch gradient descent.

**Un-selected is correct**



If the mini-batch size is 1, you end up having to process the entire training set before making any progress.

**Un-selected is correct**



If the mini-batch size is 1, you lose the benefits of vectorization across examples in the mini-batch.

**Correct**



If the mini-batch size is  $m$ , you end up with batch gradient descent, which has to process the whole training set before making progress.

**Correct**




points

## Optimization algorithms

**10/10 points (100%)**

Quiz, 10 questions

Suppose your learning algorithm's cost  $J$ , plotted as a function of the number of iterations, looks like this:

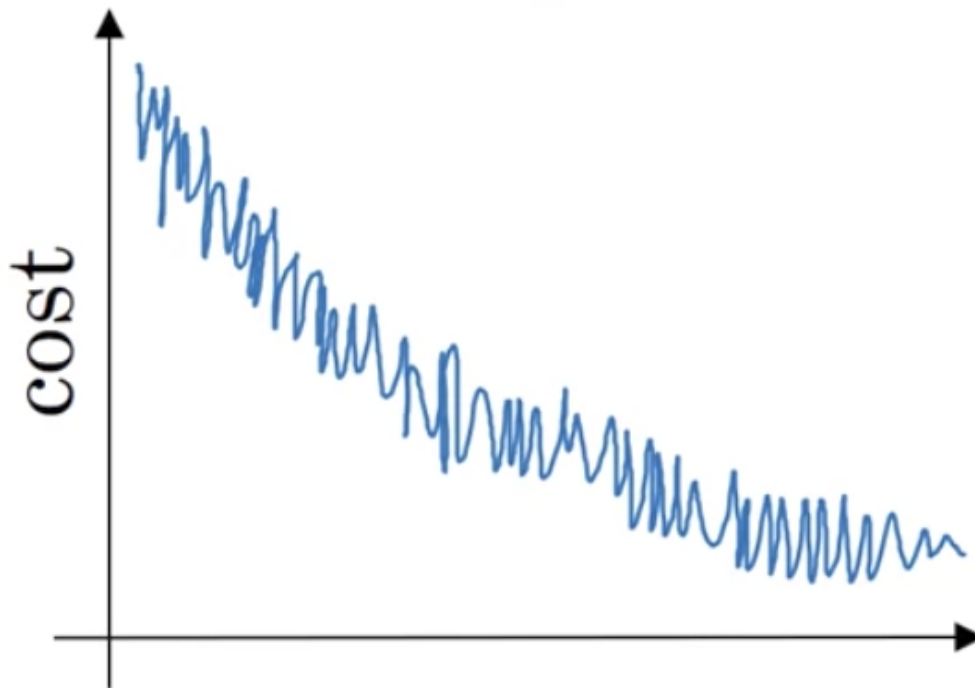

Which of the following do you agree with?

- ☐ Whether you're using batch gradient descent or mini-batch gradient descent, something is wrong.
- ☐ If you're using mini-batch gradient descent, something is wrong. But if you're using batch gradient descent, this looks acceptable.
- ☐ Whether you're using batch gradient descent or mini-batch gradient descent, this looks acceptable.
- ☒ If you're using mini-batch gradient descent, this looks acceptable. But if you're using batch gradient descent, something is wrong.

**Correct**

1 / 1  
points

## Optimization algorithms

10/10 points (100%)

Quiz, 10 questions

5.

Suppose the temperature in Casablanca over the first three days of January are the same:

Jan 1st:  $\theta_1 = 10^\circ C$

Jan 2nd:  $\theta_2 = 10^\circ C$

(We used Fahrenheit in lecture, so will use Celsius here in honor of the metric world.)

Say you use an exponentially weighted average with  $\beta = 0.5$  to track the temperature:  $v_0 = 0$ ,  $v_t = \beta v_{t-1} + (1 - \beta)\theta_t$ . If  $v_2$  is the value computed after day 2 without bias correction, and  $v_2^{corrected}$  is the value you compute with bias correction. What are these values? (You might be able to do this without a calculator, but you don't actually need one. Remember what is bias correction doing.)



$v_2 = 7.5, v_2^{corrected} = 10$



Correct



$v_2 = 7.5, v_2^{corrected} = 7.5$



$v_2 = 10, v_2^{corrected} = 10$



$v_2 = 10, v_2^{corrected} = 7.5$

1 / 1  
points

6.

Which of these is NOT a good learning rate decay scheme? Here,  $t$  is the epoch number.



$\alpha = e^t \alpha_0$



Correct



$\alpha = 0.95^t \alpha_0$

# Optimization algorithms

Quiz, 10 questions


10/10 points (100%)

1 / 1  
points

7.

You use an exponentially weighted average on the London temperature dataset. You use the following to track the temperature:

$v_t = \beta v_{t-1} + (1 - \beta)\theta_t$ . The red line below was computed using  $\beta = 0.9$ . What would happen to your red curve as you vary  $\beta$ ? (Check the two that apply)

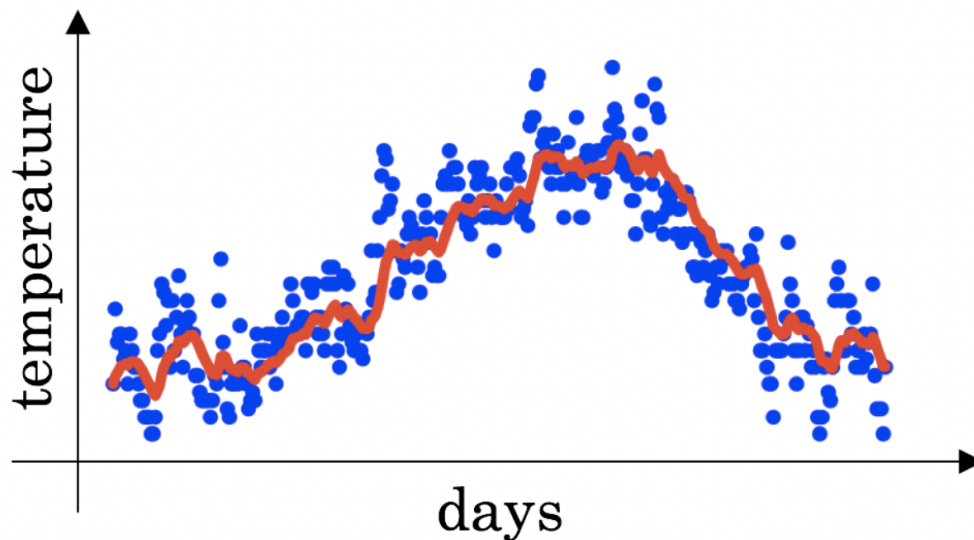Decreasing  $\beta$  will shift the red line slightly to the right.

Un-selected is correct

Increasing  $\beta$  will shift the red line slightly to the right.

Correct

True, remember that the red line corresponds to  $\beta = 0.9$ . In lecture we had a green line ( $\beta = 0.98$ ) that is slightly shifted to the right.

## Optimization algorithms

10/10 points (100%)

Quiz, 10 questions

☐ Decreasing  $\beta$  will create more oscillation within the red line.



**Correct**

True, remember that the red line corresponds to  $\beta = 0.9$ . In lecture we had a yellow line ( $\beta = 0.98$ ) that had a lot of oscillations.

☐ Increasing  $\beta$  will create more oscillations within the red line.




**Un-selected is correct**



1 / 1  
points

8.

Consider this figure:

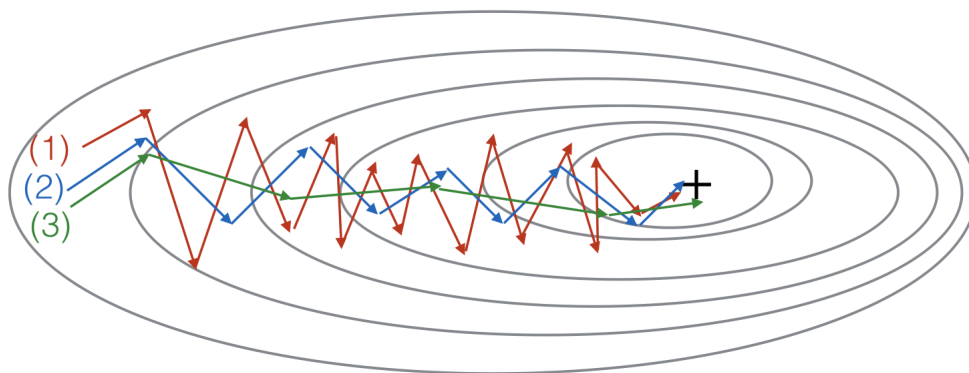

These plots were generated with gradient descent; with gradient descent with momentum ( $\beta = 0.5$ ) and gradient descent with momentum ( $\beta = 0.9$ ). Which curve corresponds to which algorithm?

- ☐ (1) is gradient descent. (2) is gradient descent with momentum (large  $\beta$ ). (3) is gradient descent with momentum (small  $\beta$ )
- ☒ (1) is gradient descent. (2) is gradient descent with momentum (small  $\beta$ ). (3) is gradient descent with momentum (large  $\beta$ )



**Correct**

# Optimization algorithms

Quiz, 10 questions

**10/10 points (100%)**

- ☐ (1) is gradient descent with momentum (small  $\beta$ ), (2) is gradient descent with momentum (small  $\beta$ ), (3) is gradient descent
- ☐ (1) is gradient descent with momentum (small  $\beta$ ). (2) is gradient descent. (3) is gradient descent with momentum (large  $\beta$ )

1 / 1  
points

9.

Suppose batch gradient descent in a deep network is taking excessively long to find a value of the parameters that achieves a small value for the cost function  $\mathcal{J}(W^{[1]}, b^{[1]}, \dots, W^{[L]}, b^{[L]})$ . Which of the following techniques could help find parameter values that attain a small value for  $\mathcal{J}$ ? (Check all that apply)

☐

Try better random initialization for the weights

**Correct**☐

Try using Adam

**Correct**☐

Try mini-batch gradient descent

**Correct**☐

Try initializing all the weights to zero

**Un-selected is correct**☐Try tuning the learning rate  $\alpha$ **Correct**

## Optimization algorithms

**10/10 points (100%)**

Quiz, 10 questions



points

10.

Which of the following statements about Adam is False?

- ☐ We usually use “default” values for the hyperparameters  $\beta_1, \beta_2$  and  $\epsilon$  in Adam ( $\beta_1 = 0.9, \beta_2 = 0.999, \epsilon = 10^{-8}$ )
- ☐ The learning rate hyperparameter  $\alpha$  in Adam usually needs to be tuned.
- ☐ Adam combines the advantages of RMSProp and momentum
- ☒ Adam should be used with batch gradient computations, not with mini-batches.

**Correct**