



GCloud :: Create *Secret object* **rix-api-value** with *Secret key* **rix_api_value** in GCP Secret Manager

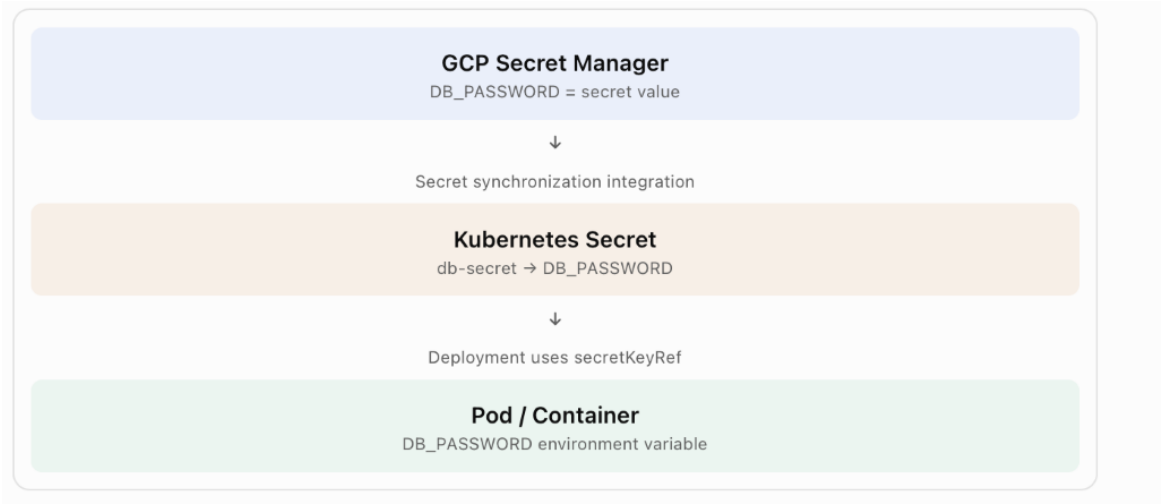

Terraform :: Set the value of the *Secret key* **rix_api_value** in GCP Secret Manager

```
data "google_secret_manager_secret_version" "rix_api_value" {
provider = google-beta
secret = "actual value"
```

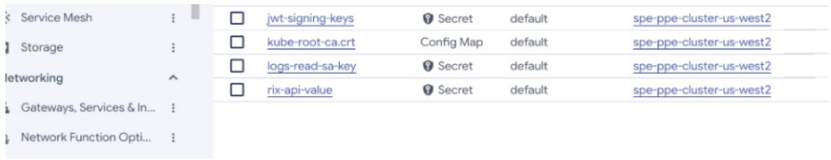

Terraform :: Create *Secret object* **rix-api-value** with *Secret key* **rix_api_value** in Kubernetes Secret

```
resource "kubernetes_secret" "rix-api-value" {
  metadata {
    name      = "rix-api-value"
    namespace = var.namespace
  }

  data = {
    "rix_api_value" = data.google_secret_manager_secret_version.rix_api_value.secret_data
  }
}
```

Deployment (spe-cd) (*Secret object* = Env variable in deployment yamls -> expose to pods)

This snippet defines an environment variable in a container and takes its value from a Kubernetes Secret:

YAML

```yaml
- name: rix-api-value          # Env var name the container sees
  valueFrom:
    secretKeyRef:
      name: rix-api-value      # Secret object name in the same namespace
      key: rix_api_value       # Entry (key) inside that Secret's data
```

- `name` (under `secretKeyRef`) is the Secret object, like you'd see with `kubectl get secret rix-api-value`.
- `key` is one entry inside that Secret. A Secret can hold several key/value pairs, and only this one is used.
- When the pod starts, the kubelet base64-decodes the value and sets it as the env var. The real value never appears in Git.

Underscore vs hyphen: Kubernetes treats `rix_api_value` (key) and `rix-api-value` (Secret name) as different strings, so they must match the live Secret exactly.

Use the **Env variable** in **properties**

application.rix.apiValue=${rix-api-value}