Assignment – 2 State Management
Module - 2

Name : Abhishek Gautam
Roll No: 62
Subject : Advanced Web Technology
Semester: I (AY 2026-27)
Batch : B

12. Write a program to demonstrate the ViewState.
Code:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm1.aspx.cs"
Inherits="State.WebForm1" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
        <div>
            <asp:Label ID="Label1" runat="server" Text="Enter Value :"></asp:Label>
   
            <asp:TextBox ID="TextBox1" runat="server"></asp:TextBox>
            <br />
       
            <asp:Button ID="Button1" runat="server" OnClick="Button1_Click" Text="Store" />
          
            <asp:Button ID="Button2" runat="server" OnClick="Button2_Click" Text="Display" />
            <br />
            <asp:Label ID="Label2" runat="server" Text="Label"></asp:Label>
        </div>
    </form>
</body>
</html>
```

Design:



Aspx.cs Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace State
```


```
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            ViewState["msg"] = TextBox1.Text;
        }

        protected void Button2_Click(object sender, EventArgs e)
        {
            Label2.Text += "You have entered" + ViewState["msg"].ToString();        }
    }
}
```

Output:

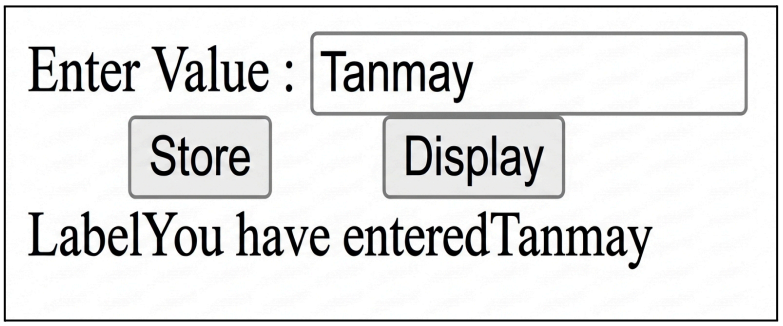


13. Write a program to demonstrate the Hidden Object.

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="HiddenField.aspx.cs"
Inherits="State.HiddenField" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
        <div>
            <asp:HiddenField ID="HiddenField1" runat="server" Value="Timscdr" />
            <br />
            <asp:Button ID="Button1" runat="server" OnClick="Button1_Click" PostBackUrl="~/HiddenField.aspx"
Text="Next" />
        </div>
    </form>
</body>
</html>
```

Design:

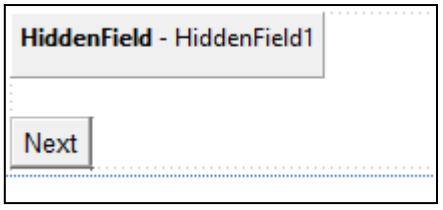

Aspx.cs:


```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace State
{
   public partial class HiddenField : System.Web.UI.Page
   {
      protected void Page_Load(object sender, EventArgs e)
      {

      }

      protected void Button1_Click(object sender, EventArgs e)
      {
         Response.Write(Request.Form["HiddenField1"].ToString());
      }
   }
}
```

Output:

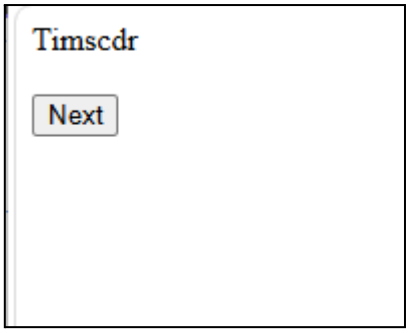

14. Write a program to demonstrate the Query String

Code:

QueryString.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="QuerySring.aspx.cs" Inherits="State.webform3"
%>


<!DOCTYPE html>


<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
   <title></title>
</head>
<body>
   <form id="form1" runat="server">
      <div>
          
         <asp:Label ID="Label1" runat="server" Text="Enter value"></asp:Label>
```

```
            
            <asp:TextBox ID="TextBox1" runat="server"></asp:TextBox>
            <br />
            
```

```
    {
        if (Request.QueryString["msg"] != null )
        {
            Response.Write(Request.QueryString["msg"].ToString());
        }
        else
        {
            Response.Redirect("QueryString.aspx");
        }
    }
  }
}
```

Output:

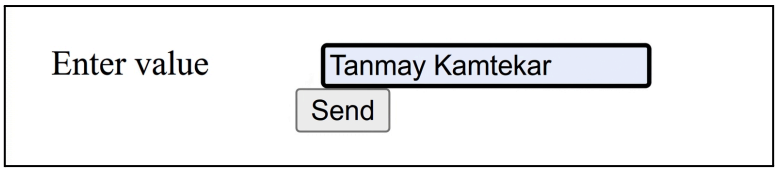

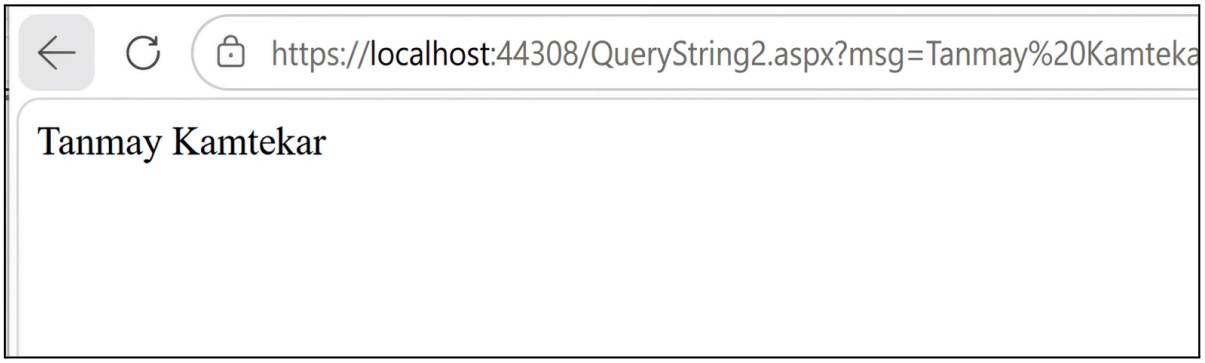

15. Create a web application to get following information from a user. Name, Age, height, Email, Gender. Validate the input by using prOutput:er validation control. If the gender is male then navigate to Male.aspx web page, and if the gender is female then navigate to Female.aspx. Then depending upon the gender and height of the individual suggest the ideal weight.
[Note : use cookies to pass information between pages]

Form.aspx.cs:
Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace web_app_Tk
{
   public partial class WebForm9 : System.Web.UI.Page
   {
      protected void Page_Load(object sender, EventArgs e)
      {

      }

      protected void RadioButton1_CheckedChanged(object sender, EventArgs e)
```

```
    {

    }

    protected void RadioButton2_CheckedChanged(object sender, EventArgs e)
    {

    }

    protected void Button1_Click(object sender, EventArgs e)
    {
        HttpCookie cookie = new HttpCookie("data");
        cookie.Values["name"] = TextBox1.Text;
        cookie.Values["age"] = TextBox2.Text;
        cookie.Values["height"] = TextBox3.Text;
        cookie.Values["email"] = TextBox4.Text;
        string gender = "";
        if (RadioButton1.Checked) { gender = "Male"; }
        if (RadioButton2.Checked) { gender = "Female"; }
        cookie.Values["gender"] = gender;
        Response.Cookies.Add(cookie);
        if (gender == "Male")
            Response.Redirect("~/male.aspx");
        else
            Response.Redirect("~/female.aspx");



    }
  }
}
```

male.aspx.cs:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace web_app_Tk
{
  public partial class WebForm10 : System.Web.UI.Page
  {
    protected void Page_Load(object sender, EventArgs e)
    {
        int weight = 0;
        string name = Request.Cookies["data"].Values["name"];
        string age = Request.Cookies["data"].Values["age"];
        string height = Request.Cookies["data"].Values["height"];
        string email = Request.Cookies["data"].Values["email"];
        if (int.Parse(height) == 150) { weight = 60; }
        if (int.Parse(height) == 160) { weight = 65; }
        if (int.Parse(height) == 170) { weight = 70; }
        if (int.Parse(height) == 180) { weight = 75; }
        if (int.Parse(height) == 190) { weight = 80; }
        Response.Write("Name : " + name +
```


```
            "<br/>Age : " + age +
            "<br/>Height : " + height +
            "<br/>Email : " + email +
            "<br/>Ideal Weight : " + weight);
        }
    }
}
```

female.aspx.cs:


```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;


namespace web_app_Tk
{
    public partial class female : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            int weight = 0;
            string name = Request.Cookies["data"].Values["name"];
            string age = Request.Cookies["data"].Values["age"];
            string height = Request.Cookies["data"].Values["height"];
            string email = Request.Cookies["data"].Values["email"];
            if (int.Parse(height) == 110) { weight = 50; }
            if (int.Parse(height) == 120) { weight = 55; }
            if (int.Parse(height) == 130) { weight = 60; }
            if (int.Parse(height) == 140) { weight = 65; }
            if (int.Parse(height) == 150) { weight = 70; }
            Response.Write("Name : " + name +
                "<br/>Age : " + age +
                "<br/>Height : " + height +
                "<br/>Email : " + email +
                "<br/>Ideal Weight : " + weight);
        }
    }
}
```

Design:

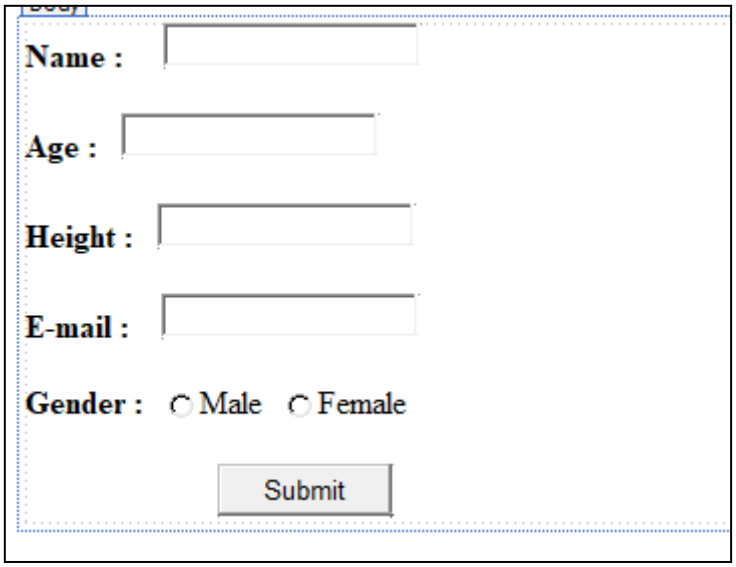

Output::

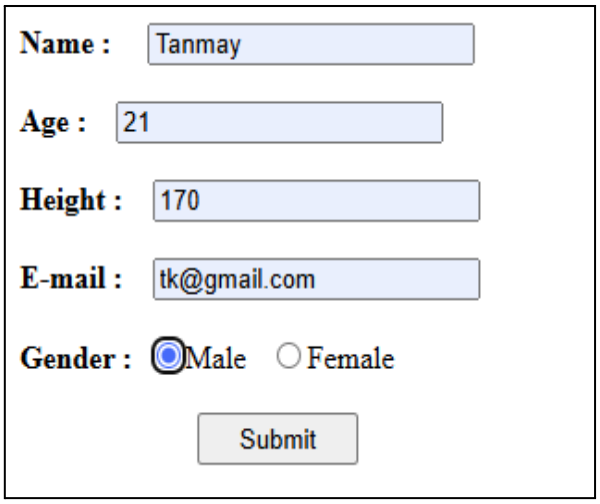

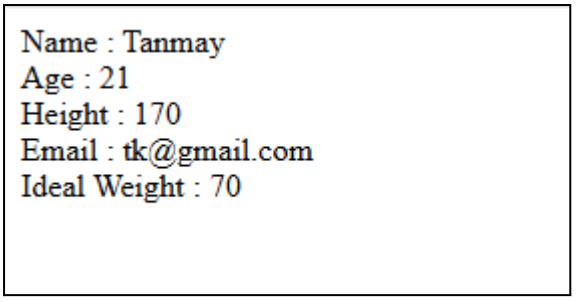

16. Write a program to demonstrate session state.
17. Write a program to count the number of live users in your web application.

Session_1.aspx.cs:
Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace web_app_Tk
{
   public partial class WebForm11 : System.Web.UI.Page
   {
      protected void Page_Load(object sender, EventArgs e)
      {


      }

      protected void Button1_Click(object sender, EventArgs e)
```


```
        {
            Session["Fname"] = TextBox1.Text;
            Session["Lname"] = TextBox2.Text;

            Response.Redirect("Session_2.aspx");
        }
    }
}
```

Design:

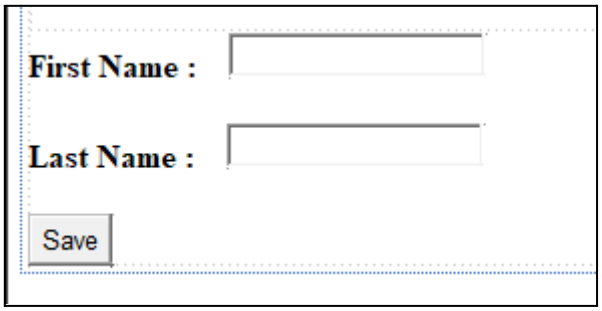

Output::

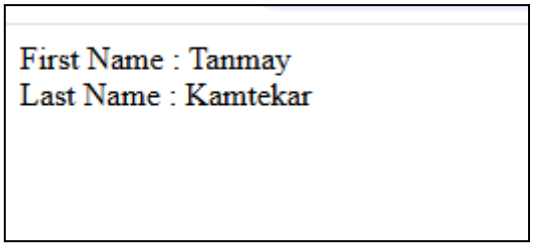

Session_2.aspx.cs:

Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace web_app_Tk
{
    public partial class WebForm12 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (Session["Fname"] !=null && Session["Lname"] != null)
            {
                string fname= Session["Fname"].ToString();
                string lname = Session["Lname"].ToString();

                Response.Write("First Name : " + fname +
                    "<br/> Last Name : " + lname);
            }
            else
            {
                Response.Redirect("Session_1.aspx");
            }
        }
    }
```

```
}
```

Global.asax:
Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.Security;
using System.Web.SessionState;

namespace web_app_Tk
{
   public class Global : System.Web.HttpApplication
   {

      protected void Application_Start(object sender, EventArgs e)
      {
         Application["sessioncount"] = 0;
      }

      protected void Session_Start(object sender, EventArgs e)
      {

         Application.Lock();
         int count = (int)Application["sessioncount"];
         Application["sessioncount"] = count + 1;
         Application.UnLock();
      }

      protected void Application_BeginRequest(object sender, EventArgs e)
      {

      }

      protected void Application_AuthenticateRequest(object sender, EventArgs e)
      {

      }

      protected void Application_Error(object sender, EventArgs e)
      {

      }

      protected void Session_End(object sender, EventArgs e)
      {
         Application.Lock();
         int count = (int)Application["sessioncount"];
         Application["sessioncount"] = count - 1;
         Application.UnLock();
      }

      protected void Application_End(object sender, EventArgs e)
      {
```

```
    }
  }
}
```

Application:

Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace web_app_Tk
{
  public partial class WebForm13 : System.Web.UI.Page
  {
    protected void Page_Load(object sender, EventArgs e)
    {
      Label1.Text = "Total Visitors = " + Application["sessioncount"].ToString();
    }
  }
}
```

Output::



18. Write a web application to display digital clock using ajax.
Aspx
Code:

```
<%@ Page Language="C#" AutoEventWireup="true"
  CodeBehind="WebForm14.aspx.cs"
  Inherits="web_app_Tk.WebForm14" %>

<!DOCTYPE html>
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
  <title>Timer Example</title>
</head>
<body>
  <form id="form1" runat="server">

    <asp:ScriptManager ID="ScriptManager1"
      runat="server" />

    <asp:UpdatePanel ID="UpdatePanel1"
      runat="server">

      <ContentTemplate>
```

```
            <asp:Label ID="Label1"
                runat="server" Text="" />

            <asp:Timer ID="Timer1"
                runat="server"
                Interval="1000"
                OnTick="Timer1_Tick" />
        </ContentTemplate>

        <Triggers>
            <asp:AsyncPostBackTrigger
                ControlID="Timer1"
                EventName="Tick" />
        </Triggers>

    </asp:UpdatePanel>

  </form>
</body>
</html>
```


aspx.cs:

```
using System;


namespace web_app_Tk
{
  public partial class WebForm14 : System.Web.UI.Page
  {
    protected void Page_Load(object sender, EventArgs e)
    {
    }

    protected void Timer1_Tick(object sender, EventArgs e)
    {
      Label1.Text = DateTime.Now.ToString();
    }
  }
}
```

Design:

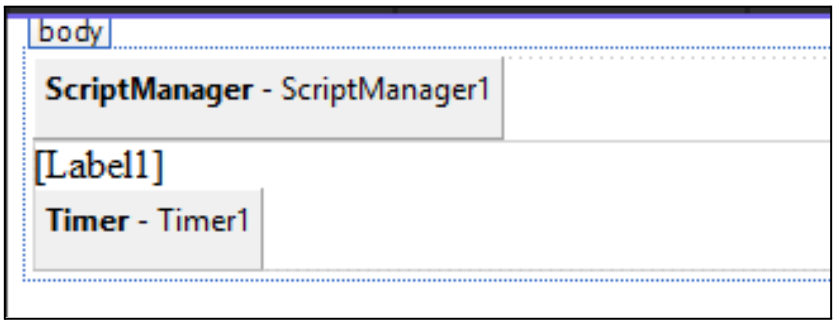

Output:

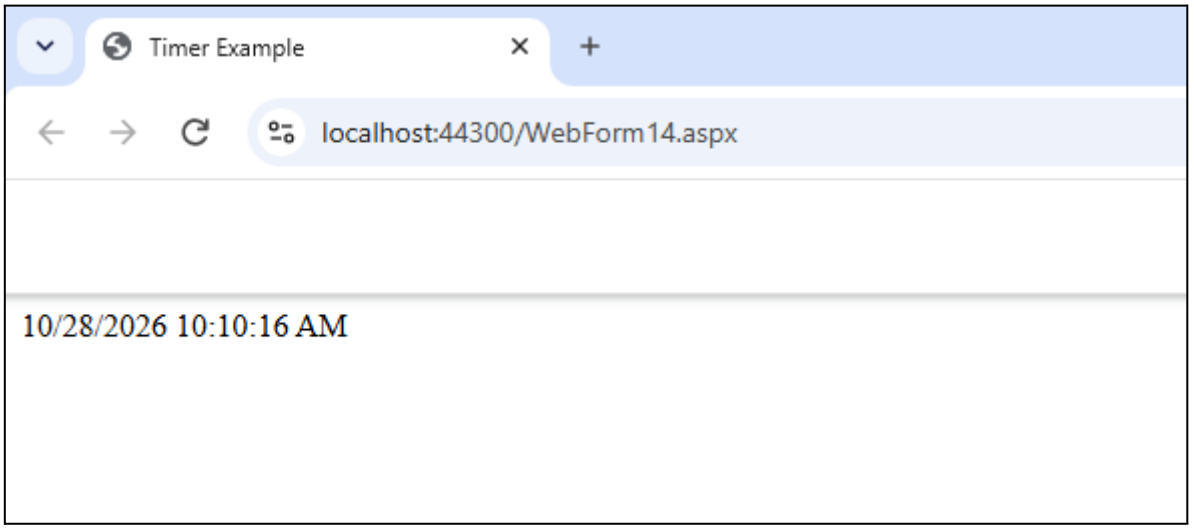

19. Write a web application to create an image slider using ajax.
Aspx:
Code:

```
<%@ Page Language="C#" AutoEventWireup="true"
    CodeBehind="WebForm15.aspx.cs"
    Inherits="web_app_Tk.WebForm15" %>

<!DOCTYPE html>
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title>Image Timer</title>
</head>
<body>
    <form id="form1" runat="server">
```

```
    <asp:ScriptManager ID="ScriptManager1"
      runat="server">
    </asp:ScriptManager>

    <asp:UpdatePanel ID="UpdatePanel1"
      runat="server">

      <ContentTemplate>

        <asp:Image ID="Image1"
          runat="server"
          Height="300px" />

        <asp:Timer ID="Timer1"
          runat="server"
          Interval="1000"
          OnTick="Timer1_Tick">
        </asp:Timer>

      </ContentTemplate>

      <Triggers>
        <asp:AsyncPostBackTrigger
          ControlID="Timer1"
          EventName="Tick" />
      </Triggers>

    </asp:UpdatePanel>


  </form>
</body>
</html>
```

aspx.cs:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace web_app_Tk
{
  public partial class WebForm15 : System.Web.UI.Page
  {
    static int i = 0;
    protected void Page_Load(object sender, EventArgs e)
    {
    }
    protected void Timer1_Tick(object sender, EventArgs e)
    {
      if (i == 0)
      {
        Image1.ImageUrl = "~/image/tata.jpg";
        i = 1;
      }
      else if (i == 1)
```


```
        {
            Image1.ImageUrl = "~/image/superman.png";
            i = 2;
        }
        else
        {
            Image1.ImageUrl = "~/image/porsche.jpg";
            i = 3;
        }}}}
```

Design:

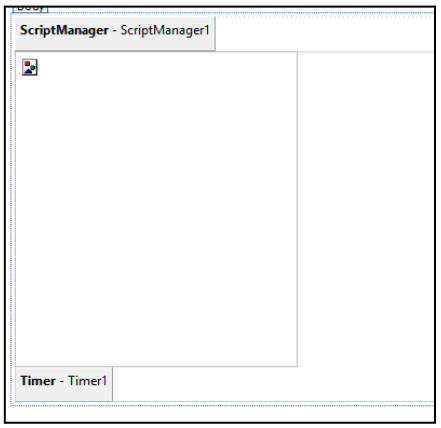

Output:



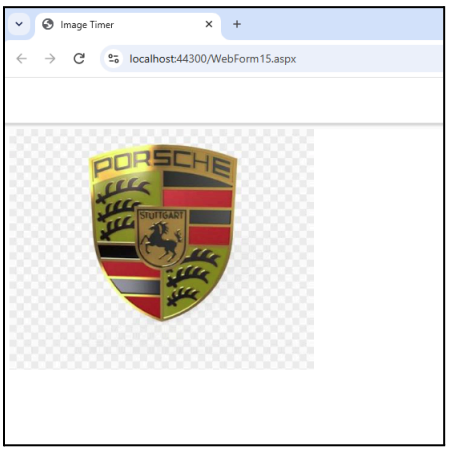

20. Write a program to select state and on the basis of state fill city information using ajax.

Code:aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm16.aspx.cs"
Inherits="web_app_Tk.WebForm16" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
        <div>
            <asp:ScriptManager ID="ScriptManager1" runat="server">
```

```
        </asp:ScriptManager>

        <asp:UpdatePanel ID="UpdatePanel1" runat="server">
           <ContentTemplate>
           <asp:DrOutputDownList ID="DrOutputDownList1"  runat="server" AutOutputostBack="True"
OnSelectedIndexChanged="DrOutputDownList1_SelectedIndexChanged">
            <asp:ListItem>Select State:</asp:ListItem>
              <asp:ListItem>Maharashtra</asp:ListItem>
              <asp:ListItem>Goa</asp:ListItem>
           </asp:DrOutputDownList>


              <br />

              <asp:DrOutputDownList ID="DrOutputDownList2" runat="server">
                 <asp:ListItem>Select City</asp:ListItem>
              </asp:DrOutputDownList>

              </ContentTemplate>

           <Triggers>
              <asp:AsyncPostBackTrigger ControlID="DrOutputDownList1"  EventName="SelectedIndexChanged" />
           </Triggers>




        </asp:UpdatePanel>


      </div>
   </form>
</body>
</html>
```

aspx.cs:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace web_app_Tk
{
   public partial class WebForm16 : System.Web.UI.Page
   {
      protected void Page_Load(object sender, EventArgs e)
      {

      }

      protected void DrOutputDownList1_SelectedIndexChanged(object sender, EventArgs e)
      {
         DrOutputDownList2.Items.Clear();
         if(DrOutputDownList1.SelectedItem.Text == "Maharashtra")
```


```
        {
            DrOutputDownList2.Items.Add("Mumbai");
            DrOutputDownList2.Items.Add("Pune");
            DrOutputDownList2.Items.Add("Nagpur");
        }
        if (DrOutputDownList1.SelectedItem.Text == "Goa")
        {
            DrOutputDownList2.Items.Add("Panaji");
            DrOutputDownList2.Items.Add("Bardez");
            DrOutputDownList2.Items.Add("Madgaon");
        }
    }
    protected void DrOutputDownList2_SelectedIndexChanged(object sender, EventArgs e)
    {

    }



  }
}
```


[Change the PostBack toTrue in drOutputdownlist 1]


Design:

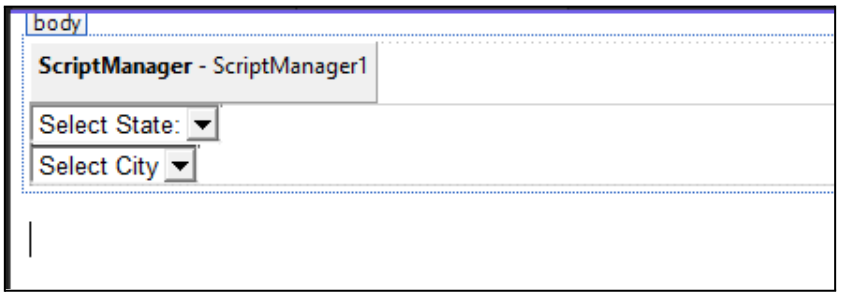

Output:

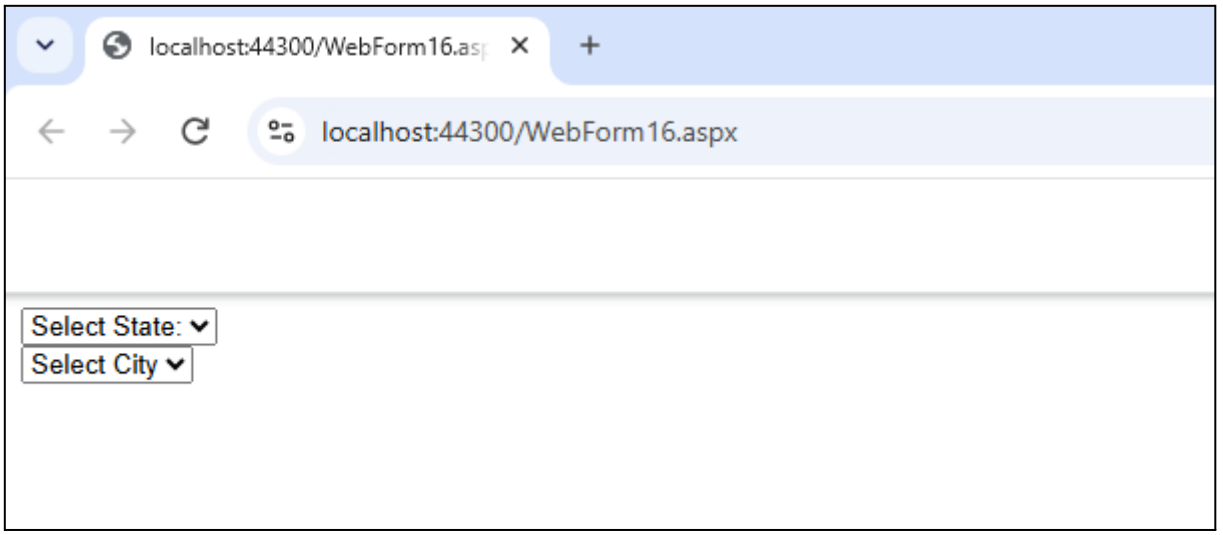

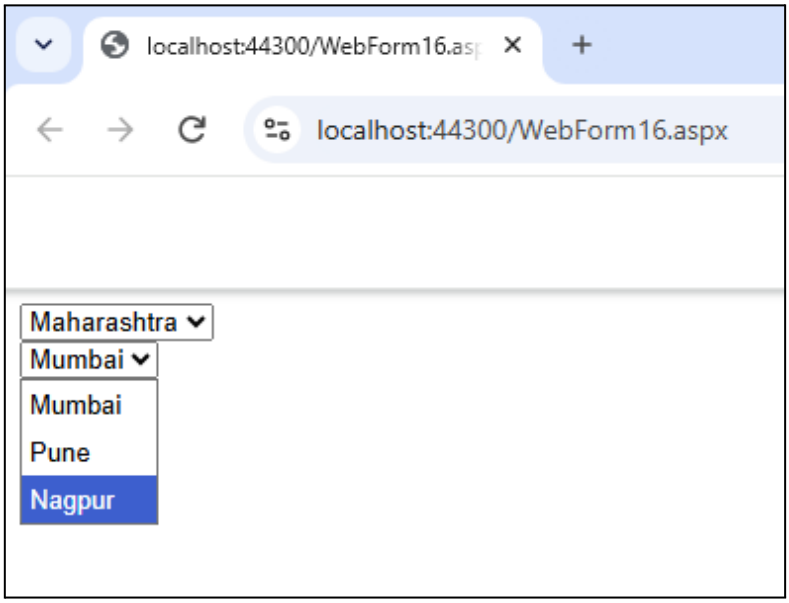

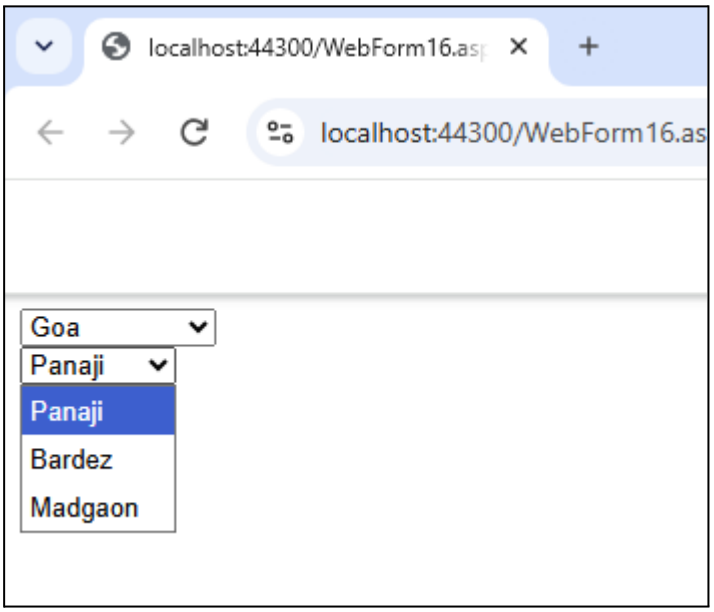

21. Write a web application to demonstrate page output caching.

Code:

Aspx:


```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm17.aspx.cs"
Inherits="web_app_Tk.WebForm17" %>
<%@ OutputCache Duration="10" VaryByParam="None"%>


<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
        <div>
            <h1> Outpur Caching</h1>
            <h2>At the tone, the time will be:
```

```
            <%= DateTime.Now.ToString() %>
        </h2>
    </div>
  </form>
</body>
</html>
```

Output:

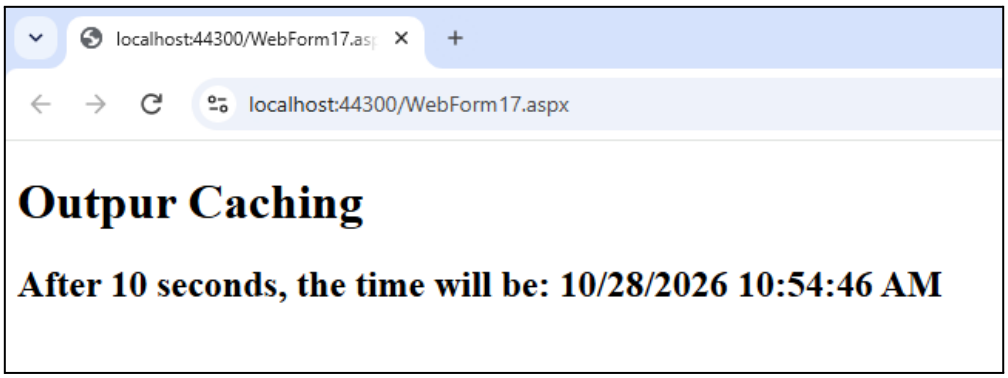

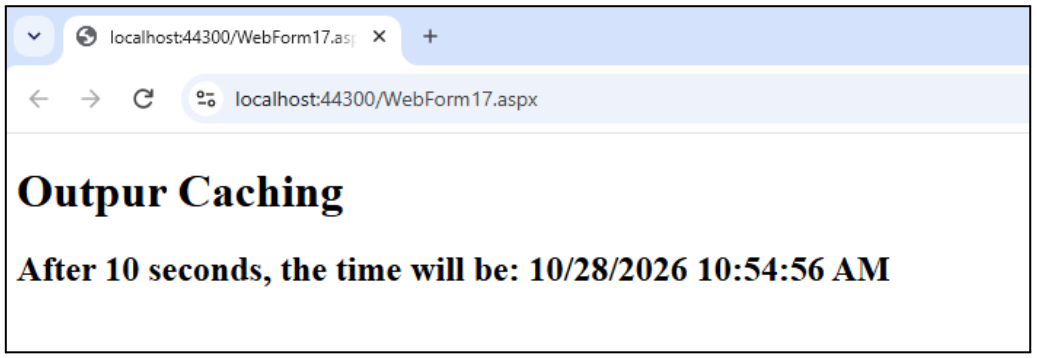

22. Write a web application to demonstrate data caching.

Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace web_app_Tk
{
    public partial class WebForm18 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }
```

```
    protected void Button1_Click(object sender, EventArgs e)
    {
        String cachedData= (string)Cache["CachedData"];
        if (cachedData == null)
        {
            cachedData = GetDataFromDatabase();
            Cache.Insert("CachedData", cachedData, null,
                DateTime.Now.AddSeconds(10),
                TimeSpan.Zero);

        }
    }

    private string GetDataFromDatabase()
    {
        return "Data retrieved at:" +
            DateTime.Now.ToString("hh:mm:ss");

    }
  }
}
```

Output:

