1. Write a program to upload your profile picture and display it in image control (file format should be .jpg, .jpeg or .png format)

Aim: To develop an ASP.NET Web Forms application that allows a user to upload a profile picture and display it in an Image control, accepting only .jpg, .jpeg, or .png files.

Objectives:

- To use the FileUpload control to select an image from the user's device.
- To validate the file extension before processing the upload.
- To display the uploaded image using an Image control.

Theory: ASP.NET Web Forms provides the FileUpload control for selecting files from a client computer. The HasFile property checks whether a file was selected, and the FileName property provides its name. The application should validate the extension (.jpg, .jpeg, or .png) before saving the file, and then set the Image control's ImageUrl to display it. File type and upload size should also be checked on the server for safer handling.

Code .aspx:

```
<%@ Page Language="C#" AutoEventWireup="true"
CodeBehind="WebForm1.aspx.cs"
Inherits="WebApplication2.WebForm1" %>


<!DOCTYPE html>


<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">
 <title></title>

</head>

<body>

 <form id="form1" runat="server">

 <div>

 <asp:FileUpload ID="FileUpload1" runat="server" />


<asp:Button ID="Button1" runat="server" Text="Uplload File"

OnClick="Button1_Click" /> <br />

<asp:Image ID="Image1" runat="server" />
```

```
<asp:Label ID="Label1" runat="server"></asp:Label>
</div>
</form>
</body>
</html>
```

Code .aspx.cs:

```
using System;
using System.Collections.Generic;
using System.IO;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;


namespace WebApplication2
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            try
            {
String filename = System.IO.Path.GetFileName(FileUpload1.FileName);
                String ext = Path.GetExtension(filename);
                if (ext.ToLower() == ".jpg")
                {
                    FileUpload1.SaveAs(Server.MapPath("~/image/") + filename);
                    Label1.Text = "File Uploaded";
                    Image1.ImageUrl = "~/image/" + filename;
                }
                if (ext.ToLower() == ".png")
                {
                    FileUpload1.SaveAs(Server.MapPath("~/image/") + filename);
                    Label1.Text = "File Uploaded";
                    Image1.ImageUrl = "~/image/" + filename;
                }
                if (ext.ToLower() == ".jpeg")
                {
```

```
                FileUpload1.SaveAs(Server.MapPath("~/image/") + filename);
                Label1.Text = "File Uploaded";
                Image1.ImageUrl = "~/image/" + filename;
            }
        }
        catch (Exception ex)
        {
        }
    }
  }
}
```

Output:

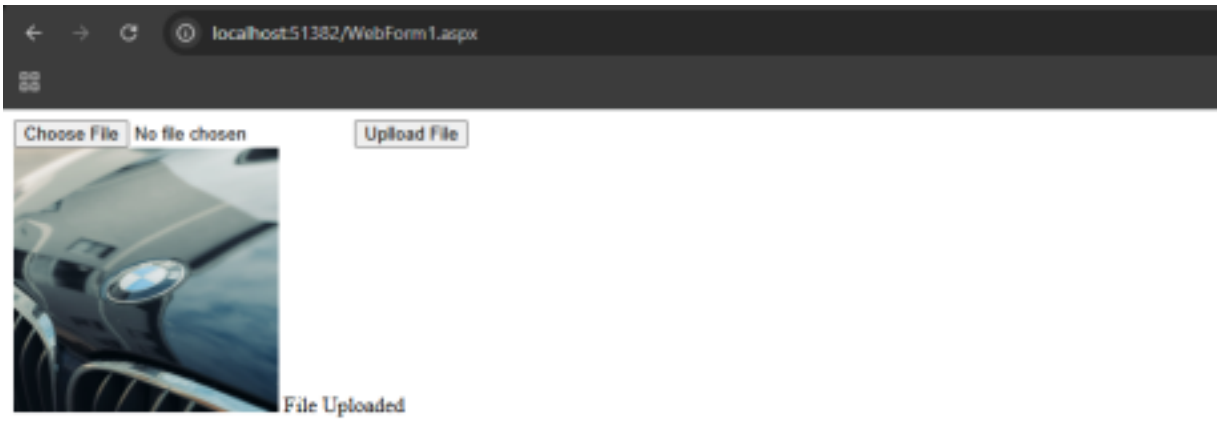

2. Write a program to demonstrate Ad Rotator Control.

Aim: To create an ASP.NET Web Forms application that displays rotating advertisements using the AdRotator control.

Objectives:

- To understand the purpose of the AdRotator control.
- To configure advertisement details such as image URL, navigation URL, alternate text, and impressions.
- To display advertisements that can change between page requests.

Theory: The AdRotator control displays advertisements selected from an advertisement data source, commonly an XML file. Each advertisement entry can specify an image, a destination URL, alternate text, and an impression weight. ASP.NET uses this information to select and display an advertisement. Clicking the advertisement can navigate the user to the configured URL.

Code .aspx:

```
<%@ Page Language="C#" AutoEventWireup="true"
CodeBehind="WebForm3.aspx.cs"
Inherits="WebApplication2.WebForm3" %>

<!DOCTYPE html>
```

```
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
 <title></title>
</head>
<body>
 <form id="form1" runat="server">
 <div>
 <asp:AdRotator ID="AdRotator1" runat="server"
DataSourceID="XmlDataSource1" KeywordFilter="Audi" />
 <asp:XmlDataSource ID="XmlDataSource1" runat="server"
DataFile="~/XMLFile1.xml"></asp:XmlDataSource>
 </div>
 </form>
</body>
</html>
```

XMLFile.xlm:

```
<?xml version="1.0" encoding="utf-8" ?>
<Advertisements>
        <Ad>
                <ImageUrl>~/image/im1.jpg</ImageUrl>
                <Width>200</Width>
                <Height>100</Height>
<NavigateUrl>https://www.ferrari.com/en-IN</NavigateUrl>
                <AlternateText>AD 1</AlternateText>
                <Impression>50</Impression>
                <Keyword>Vehicle</Keyword>
        </Ad>
        <Ad>
                <ImageUrl>~/image/im2.jpg</ImageUrl>
                <Width>200</Width>
                <Height>100</Height>
                <NavigateUrl>https://www.jaguar.com/en-us/index.html<
                /NavigateUrl> <AlternateText>AD 2</AlternateText>
                <Impression>50</Impression>
                <Keyword>Vehicle</Keyword>
        </Ad>
        <Ad>
                <ImageUrl>~/image/im3.jpg</ImageUrl>
                <Width>200</Width>
                <Height>100</Height>
                <NavigateUrl>https://myaudi.in/</NavigateUrl>
                <AlternateText>AD 3</AlternateText>
                <Impression>50</Impression>
                <Keyword>Audi</Keyword>
```

```
                </Ad>
                <Ad>
                        <ImageUrl>~/image/im4.jpg</ImageUrl>
                        <Width>200</Width>
                        <Height>100</Height>
                        <NavigateUrl>https://www.lamborghini.com/en-en<
                        /NavigateUrl> <AlternateText>AD
                        4</AlternateText>
                        <Impression>50</Impression>
                        <Keyword>Audi</Keyword>
                </Ad>
                <Ad>
                        <ImageUrl>~/image/im5.jpg</ImageUrl>
                        <Width>200</Width>
                        <Height>100</Height>
<NavigateUrl>https://www.bmw.in/en/index.html</NavigateUrl>
                        <AlternateText>AD 5</AlternateText>
                        <Impression>50</Impression>
                        <Keyword>Vehicle</Keyword>
                </Ad>
        </Advertisements>
```

Output:


Name: Abhishek Gautam Roll No. 62 Batch-B Sub: Advanced Web Technology Assignment-2

Laptop



TATA Car



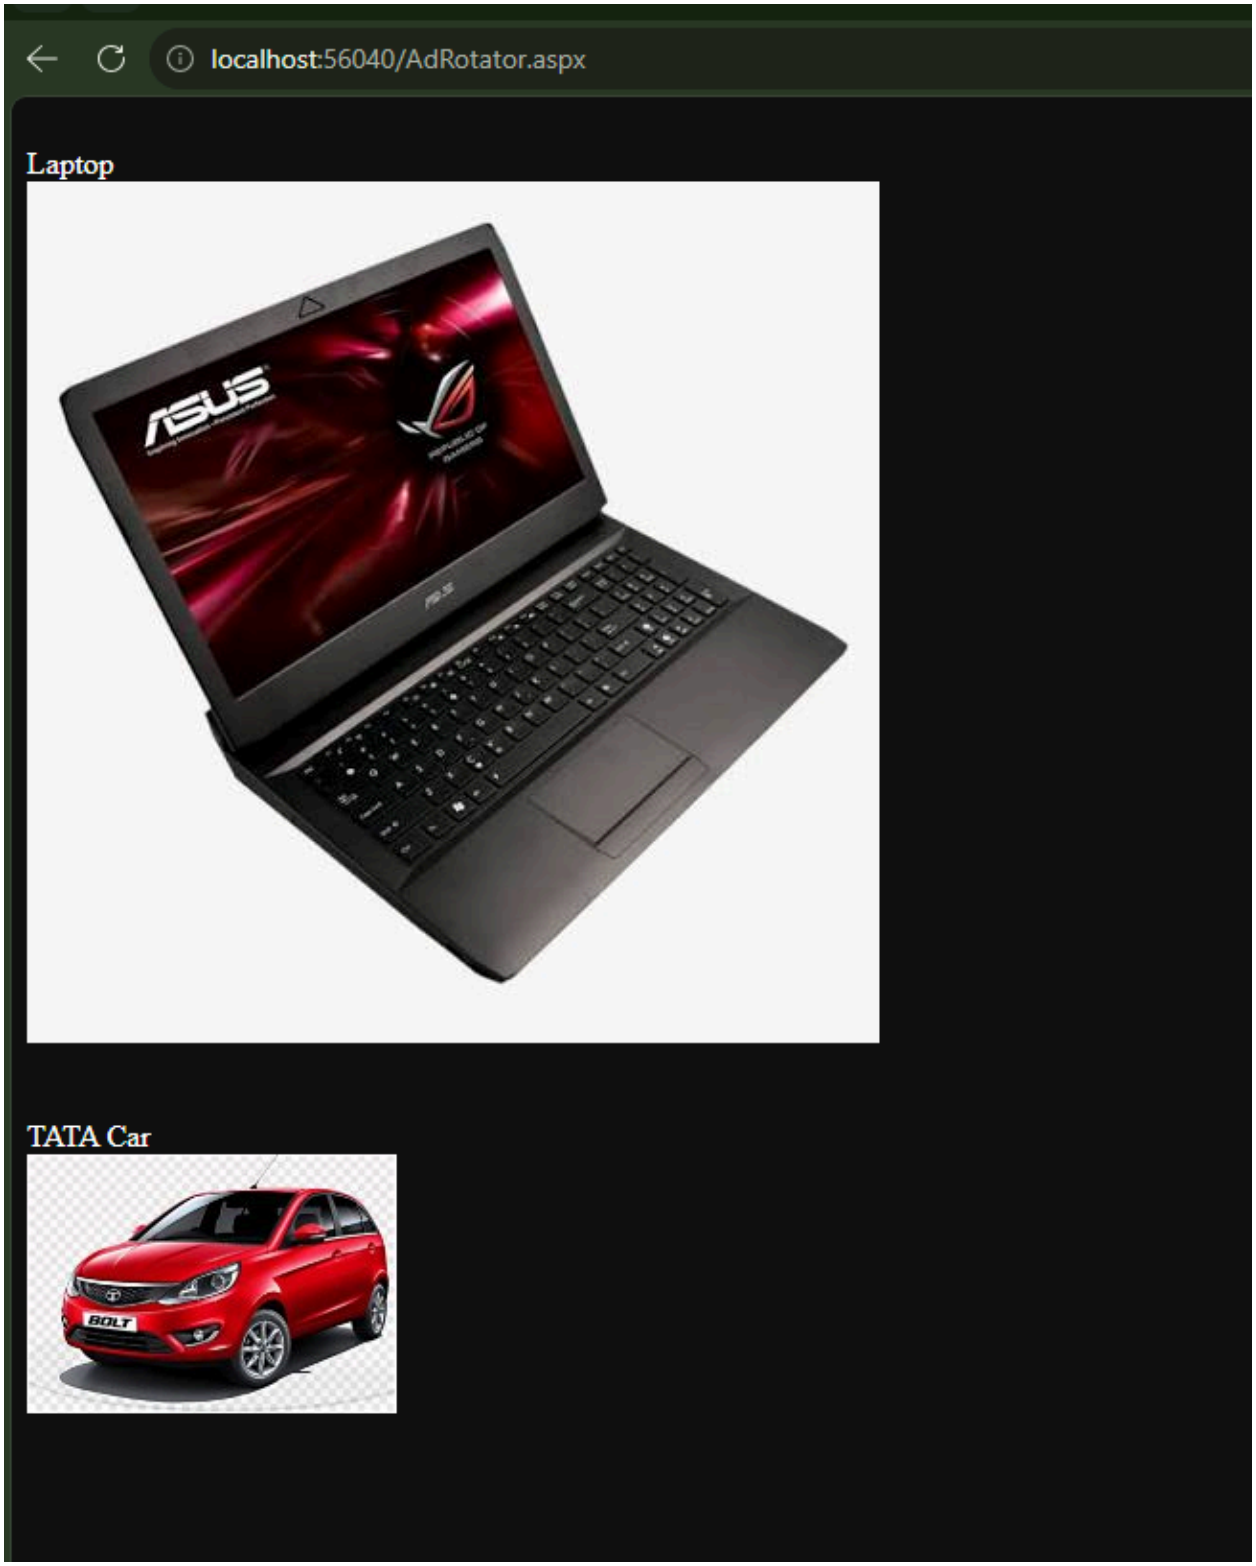

3. Write a program to demonstrate Navigation Controls.

Aim: To develop an ASP.NET Web Forms application that demonstrates navigation controls for moving between pages of a website.

Objectives:

- To understand ASP.NET navigation controls.
- To create a structured website navigation menu.
- To link website pages using a site map or configured navigation paths.

Theory: ASP.NET Web Forms includes navigation controls such as Menu, TreeView, and SiteMapPath. A Menu control displays navigation links, a TreeView presents hierarchical navigation, and SiteMapPath shows the user's current location in the website hierarchy. These controls can use a Web.sitemap file to define the site's page structure and navigation paths.

web.sitemap:

```
<?xml version="1.0" encoding="utf-8" ?>

<siteMap xmlns="http://schemas.microsoft.com/AspNet/SiteMap-File-1.0" >

 <siteMapNode url="Home.aspx" title="Home Page" description="my

Home Page"> <siteMapNode url="Abountus.aspx" title="About Us"

description="About Us" /> <siteMapNode url="Contactus.aspx"

title="Contact Us" description="Contact" />

        <siteMapNode url="Services.aspx" title="Services Page"

            description="Services"> <siteMapNode url="Service1.aspx"

            title="Service 1" description="Service1" />

<siteMapNode url="Service2.aspx" title="Service 1" description="Service2" />

        </siteMapNode>

 </siteMapNode>

</siteMap>
```

home.aspx:

```
<%@ Page Language="C#" AutoEventWireup="true"
CodeBehind="Home.aspx.cs" Inherits="WebApplication2.Home" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
   <title></title>
</head>
<body>
   <form id="form1" runat="server">
      <div>
         <asp:TreeView ID="TreeView1" runat="server"
         DataSourceID="SiteMapDataSource1"> </asp:TreeView>
         <asp:SiteMapDataSource ID="SiteMapDataSource1" runat="server" />
```

```
        </div>
    </form>
</body>
</html>
```

Output:



4. Write a program to demonstrate Calendar control and highlight all holidays of October 2026.

Aim: To create an ASP.NET application that displays a Calendar control and highlights holidays falling in October 2026.

Objectives:

- To display dates using the Calendar control.
- To use calendar events to identify and format specified holiday dates.
- To make holiday dates visually distinct from ordinary dates.

Theory: The ASP.NET Calendar control displays a monthly calendar and provides events such as DayRender that allow individual date cells to be customized. The program can compare each displayed
date with a list of October 2026 holidays and change the cell's background, text style, or other formatting when a match is found. The holiday list should be based on the relevant country or state calendar.

Code .aspx:

```
<%@ Page Language="C#" AutoEventWireup="true"
CodeBehind="WebForm1.aspx.cs"
Inherits="WebApplication4.WebForm1" %>


<!DOCTYPE html>


<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

 <title></title>
```

```
</head>

<body>

 <form id="form1" runat="server">

 <div>

 <asp:Calendar ID="Calendar1" runat="server" BackColor="White"
BorderColor="Black" DayNameFormat="Shortest" Font-Names="Times New Roman"
Font-Size="10pt" ForeColor="Black" Height="220px" NextPrevFormat="FullMonth"
OnDayRender="Calendar1_DayRender" TitleFormat="Month" Width="400px">

 <DayHeaderStyle BackColor="#CCCCCC" Font-Bold="True"
Font-Size="7pt" ForeColor="#333333" Height="10pt" />

 <DayStyle Width="14%" />

 <NextPrevStyle Font-Size="8pt" ForeColor="White" />

 <OtherMonthDayStyle ForeColor="#999999" />

 <SelectedDayStyle BackColor="#CC3333" ForeColor="White" />

 <SelectorStyle BackColor="#CCCCCC" Font-Bold="True"
Font-Names="Verdana" Font-Size="8pt" ForeColor="#333333" Width="1%"
/>

 <TitleStyle BackColor="Black" Font-Bold="True" Font-Size="13pt"
ForeColor="White" Height="14pt" />

 <TodayDayStyle BackColor="#CCCC99" />

 </asp:Calendar>

 </div>
 </form>

</body>

</html>
```

Code .aspx.cs:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;


namespace WebApplication4
{
    public partial class WebForm1 : System.Web.UI.Page
```

```
    {
        protected void Page_Load(object sender, EventArgs e)
        {


        }

        protected void Calendar1_DayRender(object sender,
        DayRenderEventArgs e) {
            DateTime d1 = new DateTime(2026, 10, 2);
            if (e.Day.Date.ToString() == d1.ToString())
            {
                e.Cell.Controls.Add(new LiteralControl("\nGandhi Jayanti "));
                e.Cell.BackColor=System.Drawing.Color.Pink;
                e.Cell.Font.Bold = true;
                e.Cell.ForeColor = System.Drawing.Color.Black;
            }
            DateTime d2 = new DateTime(2026, 10, 11);
            if (e.Day.Date.ToString() == d2.ToString())
            {
                e.Cell.Controls.Add(new LiteralControl("\nGhatsthapana "));
                e.Cell.BackColor = System.Drawing.Color.Pink;
                e.Cell.Font.Bold = true;
                e.Cell.ForeColor = System.Drawing.Color.Black;
            }
            DateTime d3 = new DateTime(2026, 10, 20);
            if (e.Day.Date.ToString() == d3.ToString())
            {
                e.Cell.Controls.Add(new LiteralControl("\nVijayadashmi "));
                e.Cell.BackColor = System.Drawing.Color.Pink;
                e.Cell.Font.Bold = true;
                e.Cell.ForeColor = System.Drawing.Color.Black;
            }
        }
    }
}
```

Output:

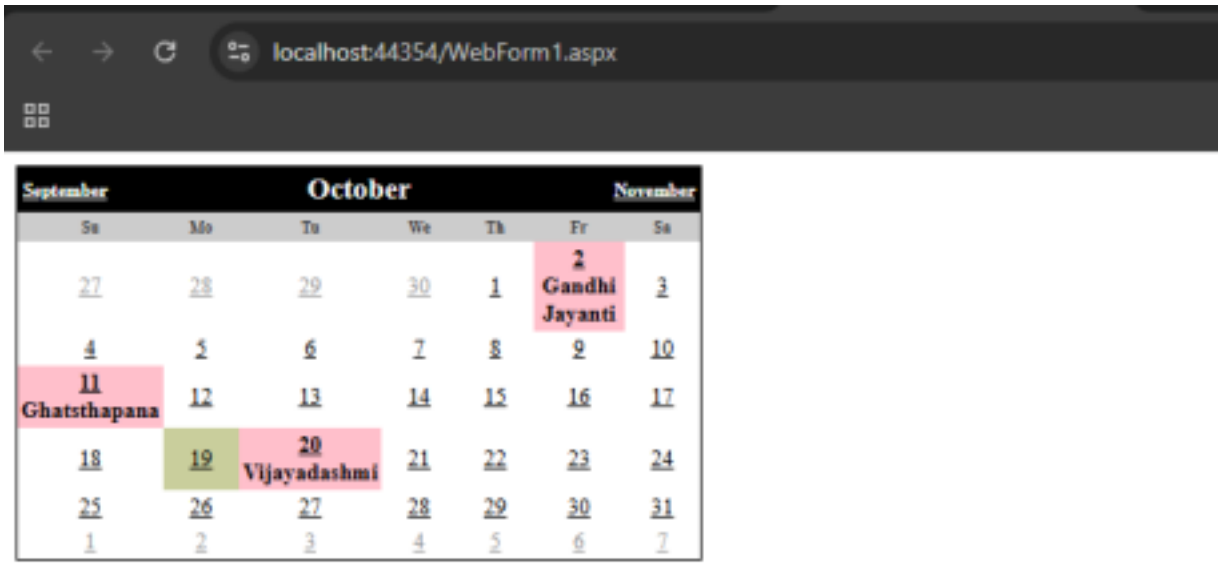

5. Create a registration form having the following UI.

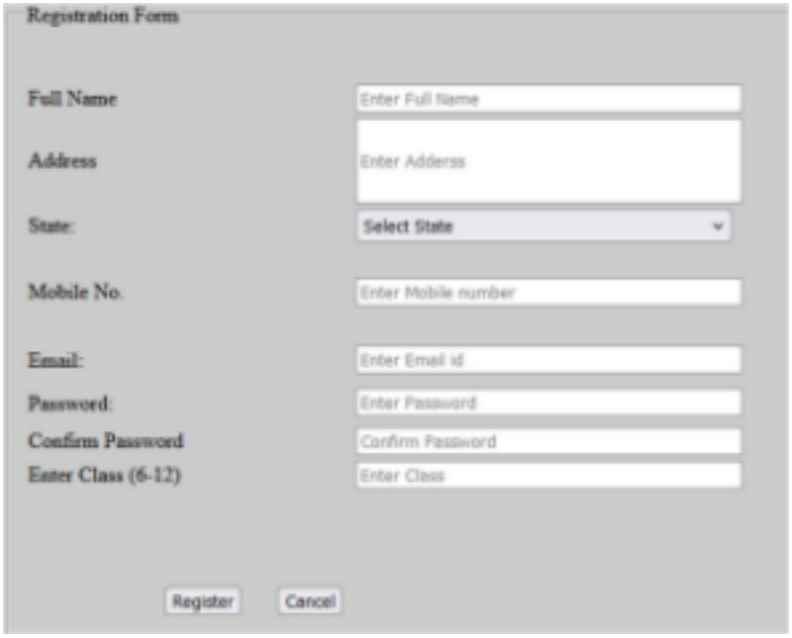

Aim: To design an ASP.NET registration form that collects user details, validates the entered data using ASP.NET validation controls, displays all validation errors through a ValidationSummary control, and shows “Successful registration” when validation succeeds.

Objectives:

- To create form fields for full name, address, state, mobile number, email, password, confirm password, and class (6–12).
- To make all fields mandatory using RequiredFieldValidator controls.
- To validate a 10-digit mobile number and a valid email address.
- To ensure the password contains at least 8 characters and matches the confirm password.
- To display validation errors using ValidationSummary and show a success message

only when the form is valid.

Theory: ASP.NET validation controls help check user input before form processing. RequiredFieldValidator ensures that a field is not empty; RegularExpressionValidator checks formats such as a 10-digit mobile number and an email address; CompareValidator checks whether the password and confirm-password values match; and CustomValidator or suitable server-side logic can enforce a minimum password length of 8 characters. ValidationSummary displays the validation messages together. In the Register button's server-side event, Page.IsValid should be checked before displaying “Successful registration.” The supplied appSettings entry disables unobtrusive validation mode. Note: the listed UI does not include an Email field, so an Email control must be added to apply the requested email validation.

Code .aspx:

```
<%@ Page Language="C#" AutoEventWireup="true"
CodeBehind="WebForm4.aspx.cs"
Inherits="WebApplication2.WebForm4" %>


<!DOCTYPE html>


<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

 <title></title>

 <style type="text/css">

 .auto-style1 {

 width: 672px;

 }

 </style>

 <script type="text/javascript">
 function MyValidation(src, args) {

 var input = document.getElementById('<%=TextBox5.ClientID

%>').value;  args.IsValid = input.lengh > 8;

 }


 </script>

</head>

<body>
```

```
<form id="form1" runat="server">
<div>
<table cellpadding="3" cellspacing="4" class="auto-style1">
<tr>
<td class="auto-style5" colspan="2">Full Name: </td>
<td class="auto-style11" colspan="2">
<asp:TextBox ID="TextBox1" runat="server"></asp:TextBox>
</td>
<td class="auto-style9" colspan="2">
<asp:RequiredFieldValidator ID="RequiredFieldValidator1" runat="server"
ControlToValidate="TextBox1" Display="Dynamic" ErrorMessage="Full name
is Mandiatory" ForeColor="#FF3300" ValidationGroup="Submit">Full name is
Mandiatory</asp:RequiredFieldValidator>
</td>
</tr>
<tr>
<td class="auto-style5" colspan="2">Address:</td>
<td class="auto-style11" colspan="2">
<asp:TextBox ID="TextBox2" runat="server"></asp:TextBox>
</td>
<td class="auto-style9" colspan="2">
<asp:RequiredFieldValidator ID="RequiredFieldValidator2" runat="server"
ControlToValidate="TextBox2" Display="Dynamic" ErrorMessage="Address Field
Cannot be empty"
ValidationGroup="Submit" ForeColor="#FF3300">Address
Field Cannot be empty</asp:RequiredFieldValidator>
</td>
</tr>
<tr>
<td class="auto-style5" colspan="2">State:</td>
<td class="auto-style11" colspan="2">
<asp:DropDownList ID="DropDownList1" runat="server">
</asp:DropDownList>
```

```
 </td>

 <td class="auto-style9" colspan="2">

 <asp:RequiredFieldValidator ID="RequiredFieldValidator3" runat="server"
ControlToValidate="DropDownList1" Display="Dynamic"
ErrorMessage="Select State" ValidationGroup="Submit"
ForeColor="#FF3300">Select State</asp:RequiredFieldValidator>

 </td>

 </tr>

 <tr>

 <td class="auto-style5" colspan="2">Mobile No.:</td>

 <td class="auto-style11" colspan="2">

 <asp:TextBox ID="TextBox3" runat="server"></asp:TextBox>

</td>

 <td class="auto-style9" colspan="2">

 <asp:RequiredFieldValidator ID="RequiredFieldValidator4" runat="server"
ControlToValidate="TextBox3" Display="Dynamic" ErrorMessage="Enter
Mobile Number" ValidationGroup="Submit" ForeColor="#FF3300">Enter
Mobile
Number</asp:RequiredFieldValidator>

 <br />

 <asp:RegularExpressionValidator ID="RegularExpressionValidator1" runat="server"
ControlToValidate="TextBox3" Display="Dynamic" ErrorMessage="Invalid Mobile
Number" ForeColor="#FF3300" ValidationExpression="\d{10}"
ValidationGroup="Submit">Invalid Mobile
Number</asp:RegularExpressionValidator>

 </td>
 </tr>

 <tr>

 <td class="auto-style5" colspan="2">Email:</td>

 <td class="auto-style11" colspan="2">

 <asp:TextBox ID="TextBox4" runat="server"></asp:TextBox>

</td>

 <td class="auto-style9" colspan="2">

 <asp:RequiredFieldValidator ID="RequiredFieldValidator5" runat="server"
ControlToValidate="TextBox4" Display="Dynamic" ErrorMessage="Email id
cannot be empty" ValidationGroup="Submit" ForeColor="#FF3300">Email id
```

```
cannot be
empty</asp:RequiredFieldValidator>

<br />

<asp:RegularExpressionValidator ID="RegularExpressionValidator2" runat="server"
ControlToValidate="TextBox4" Display="Dynamic" ErrorMessage="Input Valid
Email Id" ForeColor="#FF3300"
ValidationExpression="\w+([-+.']\w+)*@\w+([-.]\w+)*\.\w+([-.]\w+)*"
ValidationGroup="Submit">Input Valid Email Id</asp:RegularExpressionValidator>

</td>

</tr>

<tr>

<td class="auto-style5" colspan="2">Password</td>

<td class="auto-style11" colspan="2">

<asp:TextBox ID="TextBox5" runat="server"></asp:TextBox>

</td>

<td class="auto-style9" colspan="2">

<asp:RequiredFieldValidator ID="RequiredFieldValidator6" runat="server"
ControlToValidate="TextBox5" ErrorMessage="Enter Password"
ValidationGroup="Submit" ForeColor="#FF3300">Enter
Password</asp:RequiredFieldValidator>

<br />

<asp:CustomValidator ID="CustomValidator1" runat="server"
ClientValidationFunction="MyValidation" ControlToValidate="TextBox5"
Display="Dynamic" ErrorMessage="Enter Valid Password" ForeColor="#FF3300"
ValidationGroup="Submit">Enter Valid Password</asp:CustomValidator>

</td>
</tr>

<tr>

<td class="auto-style5" colspan="2">Confirm Password:</td>

<td class="auto-style11" colspan="2">

<asp:TextBox ID="TextBox6" runat="server"></asp:TextBox>

</td>

<td class="auto-style9" colspan="2">

<asp:RequiredFieldValidator ID="RequiredFieldValidator8" runat="server"
ControlToValidate="TextBox6" Display="Dynamic" ErrorMessage="Password
Does Not match" ValidationGroup="Submit" ForeColor="#FF3300">Password
```

```
Does Not
match</asp:RequiredFieldValidator>

 <br />

 <asp:CompareValidator ID="CompareValidator1" runat="server"
ControlToCompare="TextBox5" ControlToValidate="TextBox6"
Display="Dynamic" ErrorMessage="Password does Not Match"
ForeColor="#FF3300"
ValidationGroup="Submit">Password does Not

Match</asp:CompareValidator>  </td>

 </tr>

 <tr>

 <td class="auto-style5" colspan="2">Enter Class(6-12):</td>

 <td class="auto-style11" colspan="2">

 <asp:TextBox ID="TextBox7" runat="server"></asp:TextBox>

</td>

 <td class="auto-style9" colspan="2">

 <asp:RequiredFieldValidator ID="RequiredFieldValidator7" runat="server"
ControlToValidate="TextBox7" Display="Dynamic" ErrorMessage="Range Between
6-12" ValidationGroup="Submit" ForeColor="#FF3300">Range Between
6-12</asp:RequiredFieldValidator>

 <br />

 <asp:RangeValidator ID="RangeValidator1" runat="server" Display="Dynamic"
ErrorMessage="Enter Range between 6-12" ControlToValidate="TextBox7"
MaximumValue="12" MinimumValue="6" Type="Integer">Enter Range between
6-12</asp:RangeValidator>

 </td>

 </tr>
 <tr>

 <td class="auto-style7" colspan="2">

 <asp:ValidationSummary ID="ValidationSummary1" runat="server"
ValidationGroup="Submit" />

 </td>

 <td class="auto-style12" colspan="2"></td>

 <td class="auto-style10" colspan="2"></td>

 </tr>
```

```
<tr>
<td class="auto-style5" colspan="2">
<asp:Label ID="Label1" runat="server"></asp:Label>
</td>
<td class="auto-style11" colspan="2"></td>
<td class="auto-style9" colspan="2"></td>
</tr>
<tr>
<td class="auto-style4">
 </td>
<td class="auto-style4">
<asp:Button ID="Button1" runat="server" CssClass="auto-style3" Text="Submit"
ValidationGroup="Submit" OnClick="Button1_Click" />
</td>
<td class="auto-style4">
<asp:Button ID="Button2" runat="server" Text="Cancel"/>
</td>
<td class="auto-style4">
 </td>
<td class="auto-style4">
 </td>
<td class="auto-style4">
 </td>
</tr>
</table>
</div>
</form>
</body>
</html>
```

Code .aspx.cs:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;


namespace WebApplication2
{
    public partial class WebForm4 :
    System.Web.UI.Page {
        protected void Page_Load(object sender,
        EventArgs e) {

        }

        protected void Button1_Click(object sender,
        EventArgs e) {
            Label1.Text = "Data Entered Successfully";
        }

        protected void Button2_Click(object sender,
        EventArgs e) {
            TextBox1.Text = string.Empty;
            TextBox2.Text = string.Empty;
            TextBox3.Text = string.Empty;
            TextBox4.Text = string.Empty;
            TextBox5.Text = string.Empty;
            TextBox6.Text = string.Empty;
            TextBox7.Text = string.Empty;
        }
    }
}
```

Output:

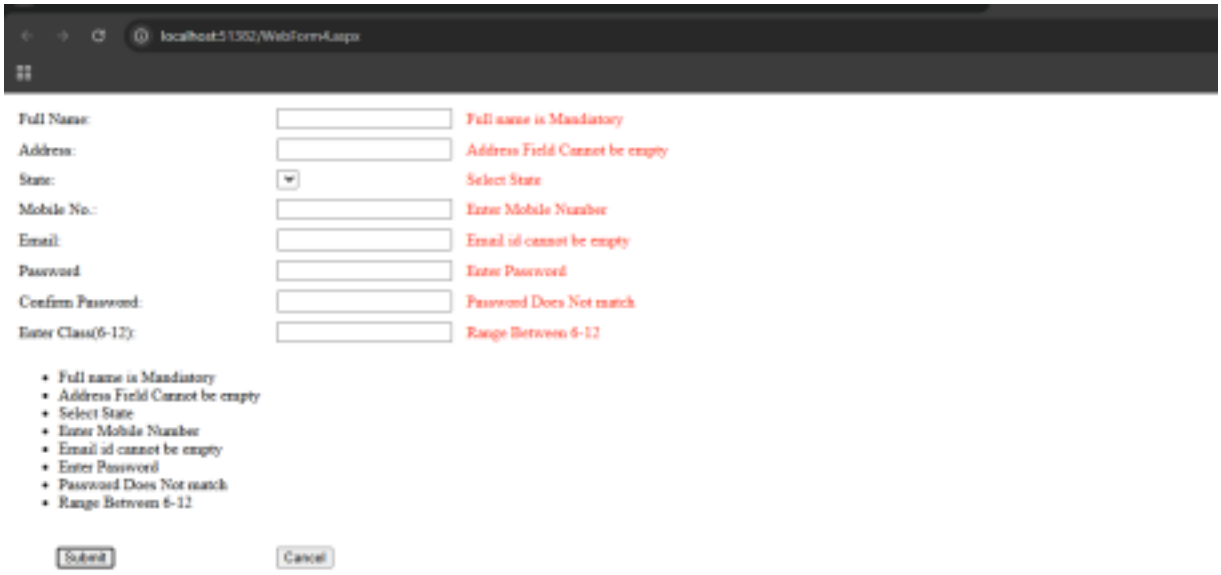

6. Write a program to demonstrate Master Page.

Aim: To develop an ASP.NET Web Forms application that demonstrates the use of a Master Page to provide a consistent layout across multiple web pages.

Objectives:

- To create a common layout containing shared elements such as a header, menu, and footer. • To use ContentPlaceHolder controls to define areas for page-specific content.
- To create content pages that use the same Master Page.

Theory: A Master Page defines the common structure and appearance of an ASP.NET website. It can contain shared elements such as logos, navigation menus, headers, and footers. ContentPlaceHolder controls mark the areas where individual content pages can insert their own content. This approach improves consistency and makes website-wide layout changes easier to maintain.

site1.master:

```
<%@ Master Language="C#" AutoEventWireup="true"
CodeBehind="Site1.master.cs" Inherits="WebApplication2.Site1" %>


<!DOCTYPE html>


<html>
<head runat="server">

 <title></title>

 <asp:ContentPlaceHolder ID="head" runat="server">

 </asp:ContentPlaceHolder>
```

```
</head>
<body>
 <form id="form1" runat="server">
 <div>
 <div style="background-color:aquamarine; color:white;
padding:10px;"> <h1>
 My Websit Header
 </h1>
 <a href="Homee.aspx" style="color:white;
margin-right:10px;">Home</a> <a href="About.aspx"
style="color:white;">About</a>
 </div>
 <div style="padding:20px;">
 <asp:ContentPlaceHolder ID="ContentPlaceHolder1"
runat="server"> </asp:ContentPlaceHolder>
 </div>

 <div style="background-color:#f1f1f1; text-align:center;
padding:10px;"> <p>All rights reserved.</p>
 </div>
 </div>
 </form>
</body>
</html>
```

homee.aspx:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Home.aspx.cs"
Inherits="WebApplication2.Home" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
```

```
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
        <div>
            <asp:TreeView ID="TreeView1" runat="server"
            DataSourceID="SiteMapDataSource1"> </asp:TreeView>
            <asp:SiteMapDataSource ID="SiteMapDataSource1" runat="server" />
        </div>
    </form>
</body>
</html>
```

about.aspx:

```
<%@ Page Title="" Language="C#" MasterPageFile="~/Site1.Master"
AutoEventWireup="true" CodeBehind="About.aspx.cs"
Inherits="WebApplication2.About" %>
<asp:Content ID="Content1" ContentPlaceHolderID="head" runat="server">
</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1"
    runat="server"> <h2>Welcome to my about page</h2>
 <p>This is about page content</p>
</asp:Content>
```

Output:

