ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

NAME:Abhishek Gautam

ROLL NO:62

SEMESTER:1 (AY 26-27)

BATCH:B

Q1 .)

Aim:To develop an ASP.NET application that displays a welcome message when the user clicks a Button control.

Objective:To understand the use of ASP.NET Button and Label controls and the Click event in C#.

Theory:ASP.NET Web Forms provides server controls such as Button and Label. A Button control raises a Click event when clicked. The event handler executes on the server and updates the Label control's Text property to display the welcome message.

Code:

WebForm1.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm1.aspx.cs"
Inherits="Assigment1.WebForm1" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
        <asp:Button ID="Button1" runat="server" BackColor="White" OnClick="Button1_Click"
Text="Click Me" />
        <br />
        <asp:Label ID="Label1" runat="server"></asp:Label>
        <div>
        </div>
```

```
    </form>
</body>
</html>
```

WebForm.aspx.cs


```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Assigment1
{
    public partial class WebForm1 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e) {
            Label1.Text = "Hello All";
        }
    }
}
```

Output:

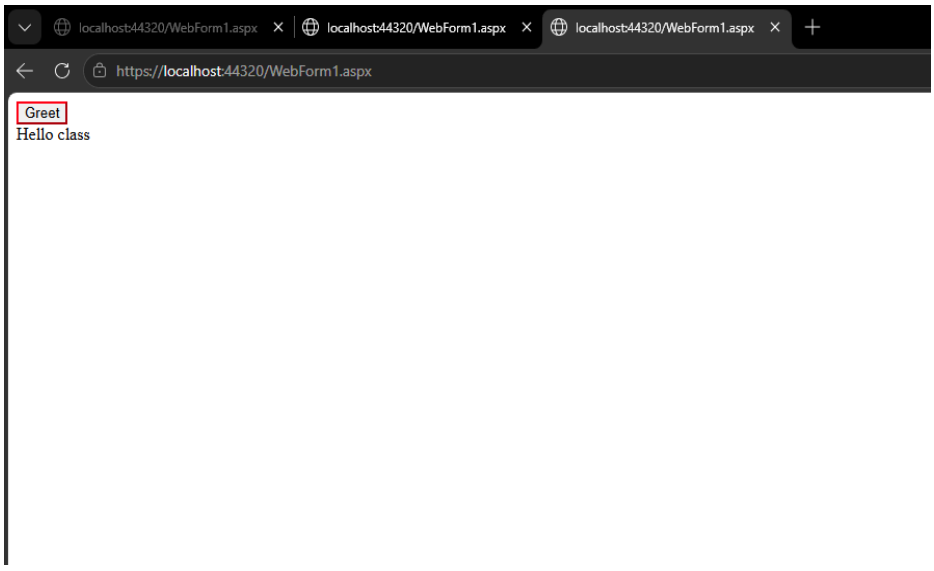

ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

Q2.)

Aim:To design a contact form that accepts user details and displays them in a Label control when the Register button is clicked.

Objective:To understand TextBox controls, Button click events, and displaying user-entered data using a Label.

Theory:A TextBox control accepts input from the user. The Text property retrieves the entered value. When the Button is clicked, the server-side event handler combines the entered details and assigns them to the Label control. The
 tag separates the displayed details into different lines.

Code:

WebForm2.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm2.aspx.cs"
Inherits="Assigment1.WebForm2" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
    <style type="text/css">
        .auto-style1 {
            width: 100%;
        }
        .auto-style2 {}
        .auto-style3 {
            width: 573px;
        }
    </style>
</head>
<body>

    <form id="form1" runat="server">
        <div>
            <table class="auto-style1">
                <tr>
                    <td class="auto-style2" colspan="2">
                        <asp:Label ID="Label6" runat="server" Text="Register Now"></asp:Label> </td>
                </tr>
                <tr>
```

```
            <td class="auto-style3">
                        <asp:Label ID="Label1" runat="server" Text="Name"></asp:Label>
            </td>
            <td>
              <asp:TextBox ID="TextBox1" runat="server"></asp:TextBox>
            </td>
          </tr>
          <tr>
            <td class="auto-style3">
                  <asp:Label ID="Label2" runat="server" Text="Email"></asp:Label>
            </td>
            <td>
              <asp:TextBox ID="TextBox2" runat="server"></asp:TextBox>
            </td>
          </tr>
          <tr>
            <td class="auto-style3">
              <asp:Label ID="Label3" runat="server" Text="Password"></asp:Label> </td>
            <td>
              <asp:TextBox ID="TextBox3" runat="server"></asp:TextBox>
            </td>
          </tr>
          <tr>
            <td class="auto-style3">
              <asp:Label ID="Label4" runat="server" Text="Mobile Number"></asp:Label> </td>
            <td>
              <asp:TextBox ID="TextBox4" runat="server"></asp:TextBox>
            </td>
          </tr>
          <tr>
            <td class="auto-style2" colspan="2">
                  <asp:Button ID="Button1" runat="server" OnClick="Button1_Click"
Text="Register" />
            </td>
          </tr>
        </table>
        <asp:Label ID="Label5" runat="server"></asp:Label>
      </div>
    </form>
</body>
</html>
```

WebForm2.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
```

ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

```
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Assigment1
{
    public partial class WebForm2 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {

        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            Label5.Text = "Name : " + TextBox1.Text + "<br>Email : " + TextBox2.Text + "<br>Mobile Number :
" + TextBox4.Text;
        }
    }
}
```

OUTPUT:



ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

Q3.)

Aim:To create three Button controls named Red, Green, and Blue and change the appearance of a Label using CSS classes.

Objective:To understand CSS classes, ASP.NET Button click events, and changing the CssClass property dynamically.

Theory:CSS classes define the appearance of HTML elements. In ASP.NET Web Forms, the CssClass property assigns a CSS class to a server control. When a button is clicked, the corresponding event handler changes the Label's text and CSS class.

Code:

WebForm3.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm3.aspx.cs"
Inherits="Assigment1.WebForm3" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
    <style type="text/css">
        .red_bg{
            background-color:red;
            color:white;
        }
        .green_bg{
            background-color:green;
            color:white;
        }
        .blue_bg{
            background-color:blue;
            color:white;
        }
    </style>
</head>
<body>
    <form id="form1" runat="server">
        <asp:Button ID="Button1" runat="server" BackColor="Red" ForeColor="White"
Height="26px" OnClick="Button1_Click" Text="Red" />
       
        <asp:Button ID="Button3" runat="server" BackColor="#66FF33" ForeColor="White"
OnClick="Button3_Click" Text="Green" />
       
```

```
        <asp:Button ID="Button2" runat="server" BackColor="#0066FF" ForeColor="White"
OnClick="Button2_Click" Text="Blue" />
        <br />
        <div>
            <asp:Label ID="Label1" runat="server"></asp:Label>
        </div>
    </form>
</body>
</html>
```

WebForm3.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Assigment1
{
    public partial class WebForm3 : System.Web.UI.Page {
        protected void Page_Load(object sender, EventArgs e) {

        }

        protected void Button1_Click(object sender, EventArgs e) {
            Label1.Text = "This is Red colour";
            Label1.Visible = true;
            Label1.CssClass = "red_bg";
        }

        protected void Button3_Click(object sender, EventArgs e) {
            Label1.Text = "This is Green colour";
            Label1.Visible = true;
            Label1.CssClass = "green_bg";
        }

        protected void Button2_Click(object sender, EventArgs e) {
            Label1.Text = "This is Blue colour";
            Label1.Visible = true;
            Label1.CssClass = "blue_bg";
        }
    }
            }
```

ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

Output:







ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

Q4.)

Aim:To develop an ASP.NET application that applies font effects such as font name, font size, bold, italic, and underline without using a Button control.

Objective:To understand DropDownList controls, CheckBox controls, AutoPostBack, and the Font properties of a Label.

Theory:The DropDownList control allows users to select an option from a list. By setting AutoPostBack=" True" , the page submits automatically when the selection changes. The SelectedIndexChanged event updates the font name and size. CheckBox controls enable or disable font effects such as bold, italic, and underline.

Code:

Webform4.apsx

.Aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm3.aspx.cs"
Inherits="Assignemt2.WebForm3" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
        <div>
            <asp:Label ID="Label1" runat="server" Text="Select State"></asp:Label>   
            <asp:DropDownList ID="DropDownList1" runat="server" AutoPostBack="true"
OnSelectedIndexChanged="DropDownList1_SelectedIndexChanged"> </asp:DropDownList>
            <br />
            <br />
            <asp:Label ID="Label2" runat="server" Text="Select City"></asp:Label>
   
            <asp:DropDownList ID="DropDownList2" runat="server">
            </asp:DropDownList>
        </div>
    </form>
</body>
</html>
```

ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Assignemt2
{
    public partial class WebForm3 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (!Page.IsPostBack)
            {
                DropDownList1.Items.Add("Maharashtra");
                DropDownList1.Items.Add("Gujrat");
                DropDownList1.Items.Add("Goa");
            }
        }

        protected void DropDownList1_SelectedIndexChanged(object sender, EventArgs e) {
            DropDownList2.Items.Clear();
            if (DropDownList1.SelectedItem.Text == "Maharashtra")
            {
                DropDownList2.Items.Add("Mumbai");
                DropDownList2.Items.Add("Pune");
                DropDownList2.Items.Add("Nagpur");
            }
            else if (DropDownList1.SelectedItem.Text == "Gujrat")
            {
                DropDownList2.Items.Add("Ahmedabad");
                DropDownList2.Items.Add("Gandinagar");
                DropDownList2.Items.Add("Rajkot");
            }
            else if (DropDownList1.SelectedItem.Text == "Goa")
            {
                DropDownList2.Items.Add("Panji");
                DropDownList2.Items.Add("Madgoa");
                DropDownList2.Items.Add("Thivim");
            }
        }
```

```
    }
}
```

Output:

Ass-2

code

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm4.aspx.cs"
Inherits="Assignment_1 .WebForm4" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1 999/xhtml">
```

ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

```
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1 " runat="server">
        <div>
            <asp:Label ID="Label2" runat="server" Text="Select
Font:"></asp:Label> <asp:DropDownList ID="DropDownList1"
runat="server"
AutoPostBack="True" Height="51 px"
OnSelectedIndexChanged="DropDownList1 _SelectedIndexChanged"
style="margin-left: 4px; margin-top: 0px" Width="245px">
<asp: ListItem>Calibri Light (Headings)</asp: ListItem>
<asp: ListItem>Times New Roman</asp: ListItem>
<asp: ListItem>Arial</asp: ListItem>
<asp:ListItem>Bahnschrift</asp:ListItem>
<asp: ListItem>Comic Sans MS</asp: ListItem>
<asp:ListItem>Symbol</asp:ListItem>
</asp:DropDownList>
        </div>
        <asp:Label ID="Label3" runat="server" Text="Font
Size:"></asp:Label> <asp:DropDownList ID="DropDownList2"
runat="server"
AutoPostBack="True"
OnSelectedIndexChanged="DropDownList2_SelectedIndexChanged"
style="margin-left: 5px">
```

```
<asp:ListItem>2</asp:ListItem>
<asp:ListItem>4</asp:ListItem>
<asp:ListItem>6</asp:ListItem>
<asp:ListItem>8</asp:ListItem>
<asp:ListItem>1 0</asp:ListItem>
<asp:ListItem>1 2</asp:ListItem>
<asp:ListItem>1 4</asp:ListItem>
<asp:ListItem>1 6</asp:ListItem>
<asp:ListItem>1 8</asp:ListItem>
<asp:ListItem>20</asp:ListItem>
</asp:DropDownList>
<br />
<br />
<asp:CheckBox ID="CheckBox1" runat="server"
AutoPostBack="True" Font-Bold="True"
OnCheckedChanged="CheckBox1 _CheckedChanged1 " Text="BOLD"
/>
<asp:CheckBox ID="CheckBox2" runat="server"
AutoPostBack="True" Font-Italic="True"
OnCheckedChanged="CheckBox2_CheckedChanged" Text="Italic"
/>
<asp:CheckBox ID="CheckBox3" runat="server" AutoPostBack="True"
Font-Underline="True"
OnCheckedChanged="CheckBox3_CheckedChanged" Text="UnderLine"
/>
<br />
<br />
<asp:Label ID="Label1" runat="server" Text="Ankit Katiyar - 104
MCA Batch-B"></asp:Label>
  </form>
</body>
</html>
```

ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

webform4.apsx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Assignment_1
{
  public partial class WebForm4 : System.Web.UI.Page
  {
    protected void Page_Load(object sender, EventArgs e)
    {

    }

    protected void DropDownList1 _SelectedIndexChanged(object sender,
    EventArgs e) {
      Label1 .Font.Name = DropDownList1 .SelectedItem.Text.ToString();
    }
```

```
    protected void DropDownList2_SelectedIndexChanged(object sender,
    EventArgs e) {
        Label1 .Font.Size = Convert.ToInt32
        (DropDownList2.SelectedItem.Text.ToString());
    }

    protected void CheckBox1_CheckedChanged1(object sender,
    EventArgs e) +
        if (CheckBox1 .Checked)
        {
            Label1 .Font.Bold = true;
        }
        else
        {
            Label1 .Font.Bold = false;
        }
    }

    protected void CheckBox2_CheckedChanged(object sender,
    EventArgs e) {
        if (CheckBox2.Checked)
   {
            Label1 .Font.Italic = true;
        }
        else
        {
            Label1 .Font.Italic = false;
        }
        }


    protected void CheckBox3_CheckedChanged(object sender,
    EventArgs e)
```

ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

```
        if (CheckBox3.Checked)

            Label1 .Font.Underline = true;

        else

            Label1 .Font.Underline= false;
        }

    }
  }
}
```

ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

Output



5.)

Aim:To design a web application that accepts a user's name, breakfast selection, and delivery time and confirms the selection using one Label control.

Objective:To understand TextBox, CheckBox, RadioButton, and Button controls and how to combine selected values into a confirmation message.

Theory:A TextBox accepts the user's name. CheckBox controls allow the user to select one or more breakfast items, while RadioButton controls allow the user to choose a delivery time. On clicking the Place Order button, the selected values are collected and displayed in a Label.

Code:

Webform5.apsx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm5.aspx.cs"
Inherits="Assignment_1 .WebForm5" %>

<!DOCTYPE html>



<html xmlns="http://www.w3.org/1 999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1 " runat="server">
        <div>
            <asp:Label ID="Label1 " runat="server" Text="Please Enter
Your Name: "></asp:Label>
 <asp:TextBox ID="TextBox1" runat="server"
OnTextChanged="TextBox1_TextChanged"
Width="292px"></asp:TextBox>
```

```
        </div>
         <asp:Label ID="Label2" runat="server" Text="What would you
 like for breakfast?"></asp:Label>
 <br />
 <asp:CheckBox ID="CheckBox1 " runat="server"
OnCheckedChanged="CheckBox1 _CheckedChanged" Text="Apple "
/>
 <br />
 <asp:CheckBox ID="CheckBox2" runat="server" Text="Banana"
OnCheckedChanged="CheckBox2_CheckedChanged"
/>
 <br />
 <asp:CheckBox ID="CheckBox3" runat="server"
OnCheckedChanged="CheckBox3_CheckedChanged"
 Text="Eggs" /> <br />
 <asp:CheckBox ID="CheckBox4" runat="server"
OnCheckedChanged="CheckBox4_CheckedChanged"
Text="Cereals" />
 <br />
 <asp:Label ID="Label3" runat="server" Text="Delivery
Time:"></asp:Label>
 <br />
 <asp:RadioButton ID="RadioButton1" runat="server" Text="Now"
OnCheckedChanged="RadioButton1_CheckedChanged"
/>
 <br />
 <asp:RadioButton ID="RadioButton2" runat="server" Text="Later"
OnCheckedChanged="RadioButton2_CheckedChanged"
/>
 <br />
 <br />
 <asp:Button ID="Button1 " runat="server"
OnClick="Button1 _Click" Text="Place Order" />
 <br />
 <br />
 <asp:Label ID="Label4" runat="server"></asp:Label>

    </form>
</body>
</html>
```

webform5.apsx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Assignment_1
{
    public partial class WebForm5 : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
```

```
}

protected void TextBox1_TextChanged(object sender, EventArgs e)
{

}

protected void CheckBox1_CheckedChanged(object sender, EventArgs e)
{

}

protected void CheckBox2_CheckedChanged(object sender, EventArgs e)
{

}

protected void CheckBox3_CheckedChanged(object sender, EventArgs e)
{

}

protected void CheckBox4_CheckedChanged(object sender, EventArgs e)
{

}

protected void RadioButton1_CheckedChanged(object sender, EventArgs e)
{

}

protected void RadioButton2_CheckedChanged(object sender, EventArgs e)
{


}

protected void Button1 _Click(object sender, EventArgs e)
{
String name = TextBox1.Text;
   String food = " ";
   String time = " ";
   if (RadioButton1 .Checked)
   {
      time = RadioButton1.Text;
   }
   else
   {
      time = RadioButton2.Text;
   }
   if (CheckBox1 .Checked)
   {
      food += CheckBox1.Text + ",";
   }
   if (CheckBox2.Checked)
```

```
        {
            food += CheckBox2.Text + ",";
        }
        if (CheckBox3.Checked)
        {
            food += CheckBox3.Text + ",";
        }
        if (CheckBox4.Checked)
        {
            food += CheckBox4.Text + ",";
        }
        Label4.Text = "Thank you for your order " + name + ",<br/>" +
      "You have ordered " + food.TrimEnd(' ', ',') +
      " as your breakfast, <br/>Your order will be prepared " + time;

    }
  }
}
```

Output:

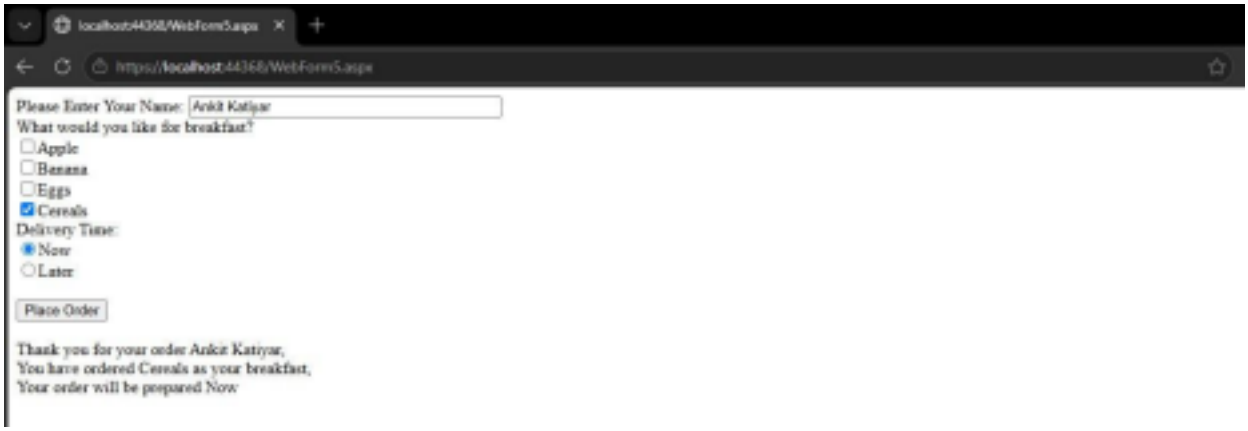

Q6.)

Aim:To write an ASP.NET program to demonstrate Postback.

Objective:To understand how an ASP.NET Web Forms page sends data to the server and processes a server-side event.

Theory:Postback occurs when a Web Forms page submits data back to the same page on the server. For example, clicking a Button with a server-side click event causes a postback. ASP.NET processes the request, executes the event handler, and returns the updated page to the browser.

The following is a simple demonstration using a Button and a Label. The click count is maintained in ViewState so it persists across postbacks.

ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

Code:

Weform6.aspx

```
<%@ Page Language="C#" AutoEventWireup="true"
CodeBehind="WebForm6.aspx.cs"  Inherits="Assignment_1.WebForm6" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1 999/xhtml">
<head runat="server">
   <title></title>
</head>
<body>
   <form id="form1" runat="server">
      <div>
         <asp:Label ID="Label1" runat="server" Text="Select State:"></asp:Label>
<asp:DropDownList ID="DropDownList1" runat="server"
AutoPostBack="True"
OnSelectedIndexChanged="DropDownList1_SelectedIndexChanged">
</asp:DropDownList>
<br />
<br />
<asp:Label ID="Label2" runat="server" Text="Select City:"></asp:Label>
<asp:DropDownList ID="DropDownList2" runat="server"
            AutoPostBack="True"
            OnSelectedIndexChanged="DropDownList2_SelectedIndexChanged">
         </asp:DropDownList>
      </div>
  </form>
</body>
</html>
```

webform6.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Assignment_1
{
   public partial class WebForm6 : System.Web.UI.Page
   {
      protected void Page_Load(object sender, EventArgs e)

         {
            if (!Page.IsPostBack)
            {
               DropDownList1.Items.Add("Maharastra");
```

```
            DropDownList1.Items.Add("Gujrat");
            DropDownList1.Items.Add("Goa");
        }

    }

    protected void DropDownList1_SelectedIndexChanged(object sender, EventArgs e)

    {
        DropDownList2.Items.Clear();
        if (DropDownList1.SelectedItem.Text == "Maharastra")
        {
            DropDownList2.Items.Add("Mumbai");
            DropDownList2.Items.Add("Pune");
            DropDownList2.Items.Add("New Bombay");
        }
        else if (DropDownList1.SelectedItem.Text == "Gujrat")
        {
            DropDownList2.Items.Add("Vadodara");
            DropDownList2.Items.Add("Surat");
            DropDownList2.Items.Add("Ahemdabad");
        }
        else if (DropDownList1.SelectedItem.Text == "Goa")
        {
            DropDownList2.Items.Add("Panji");
            DropDownList2.Items.Add("Madhgaon");
            DropDownList2.Items.Add("Margao");
        }

    }

    protected void DropDownList2_SelectedIndexChanged(object sender, EventArgs e)
    {
    }
  }
}
```

Output:



ADVANCED WEB TECHNOLOGIES
ASSIGNMENT 1

