
ER diagram | Start with the patient

A simplified relationship map. The following pages show all 36 tables in readable sections.

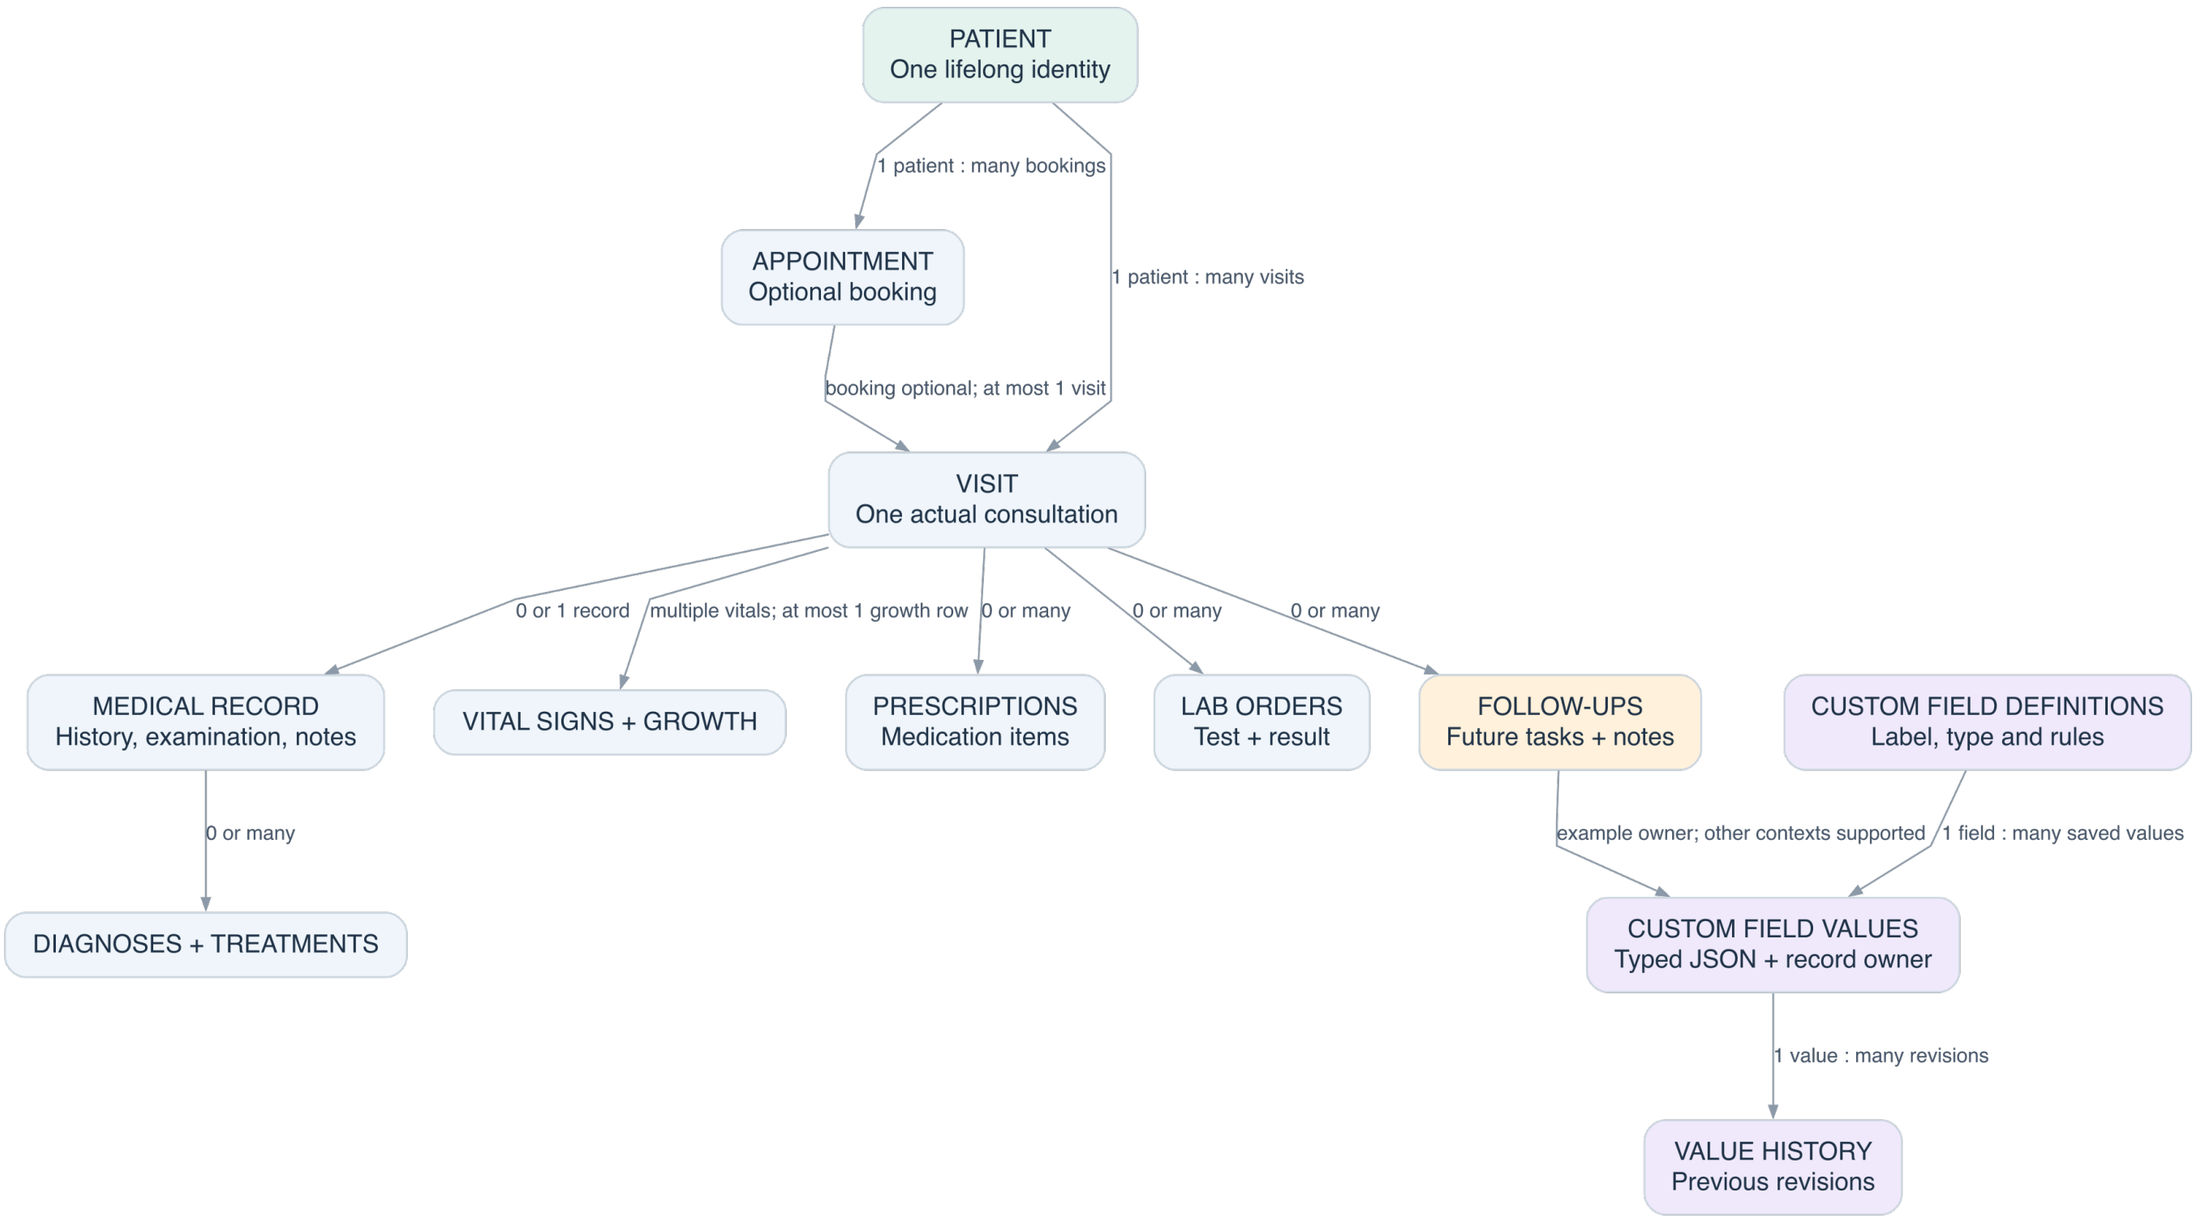


Visits record consultations. Follow-ups record tasks originating from a visit; returning for a consultation creates another visit.

This overview omits staff, identity, audit and questionnaire tables for clarity. They are included on the detailed pages.

ER diagram | Staff and audit

7 tables. Role and permission records describe the access model; authentication is not implemented in the current website.

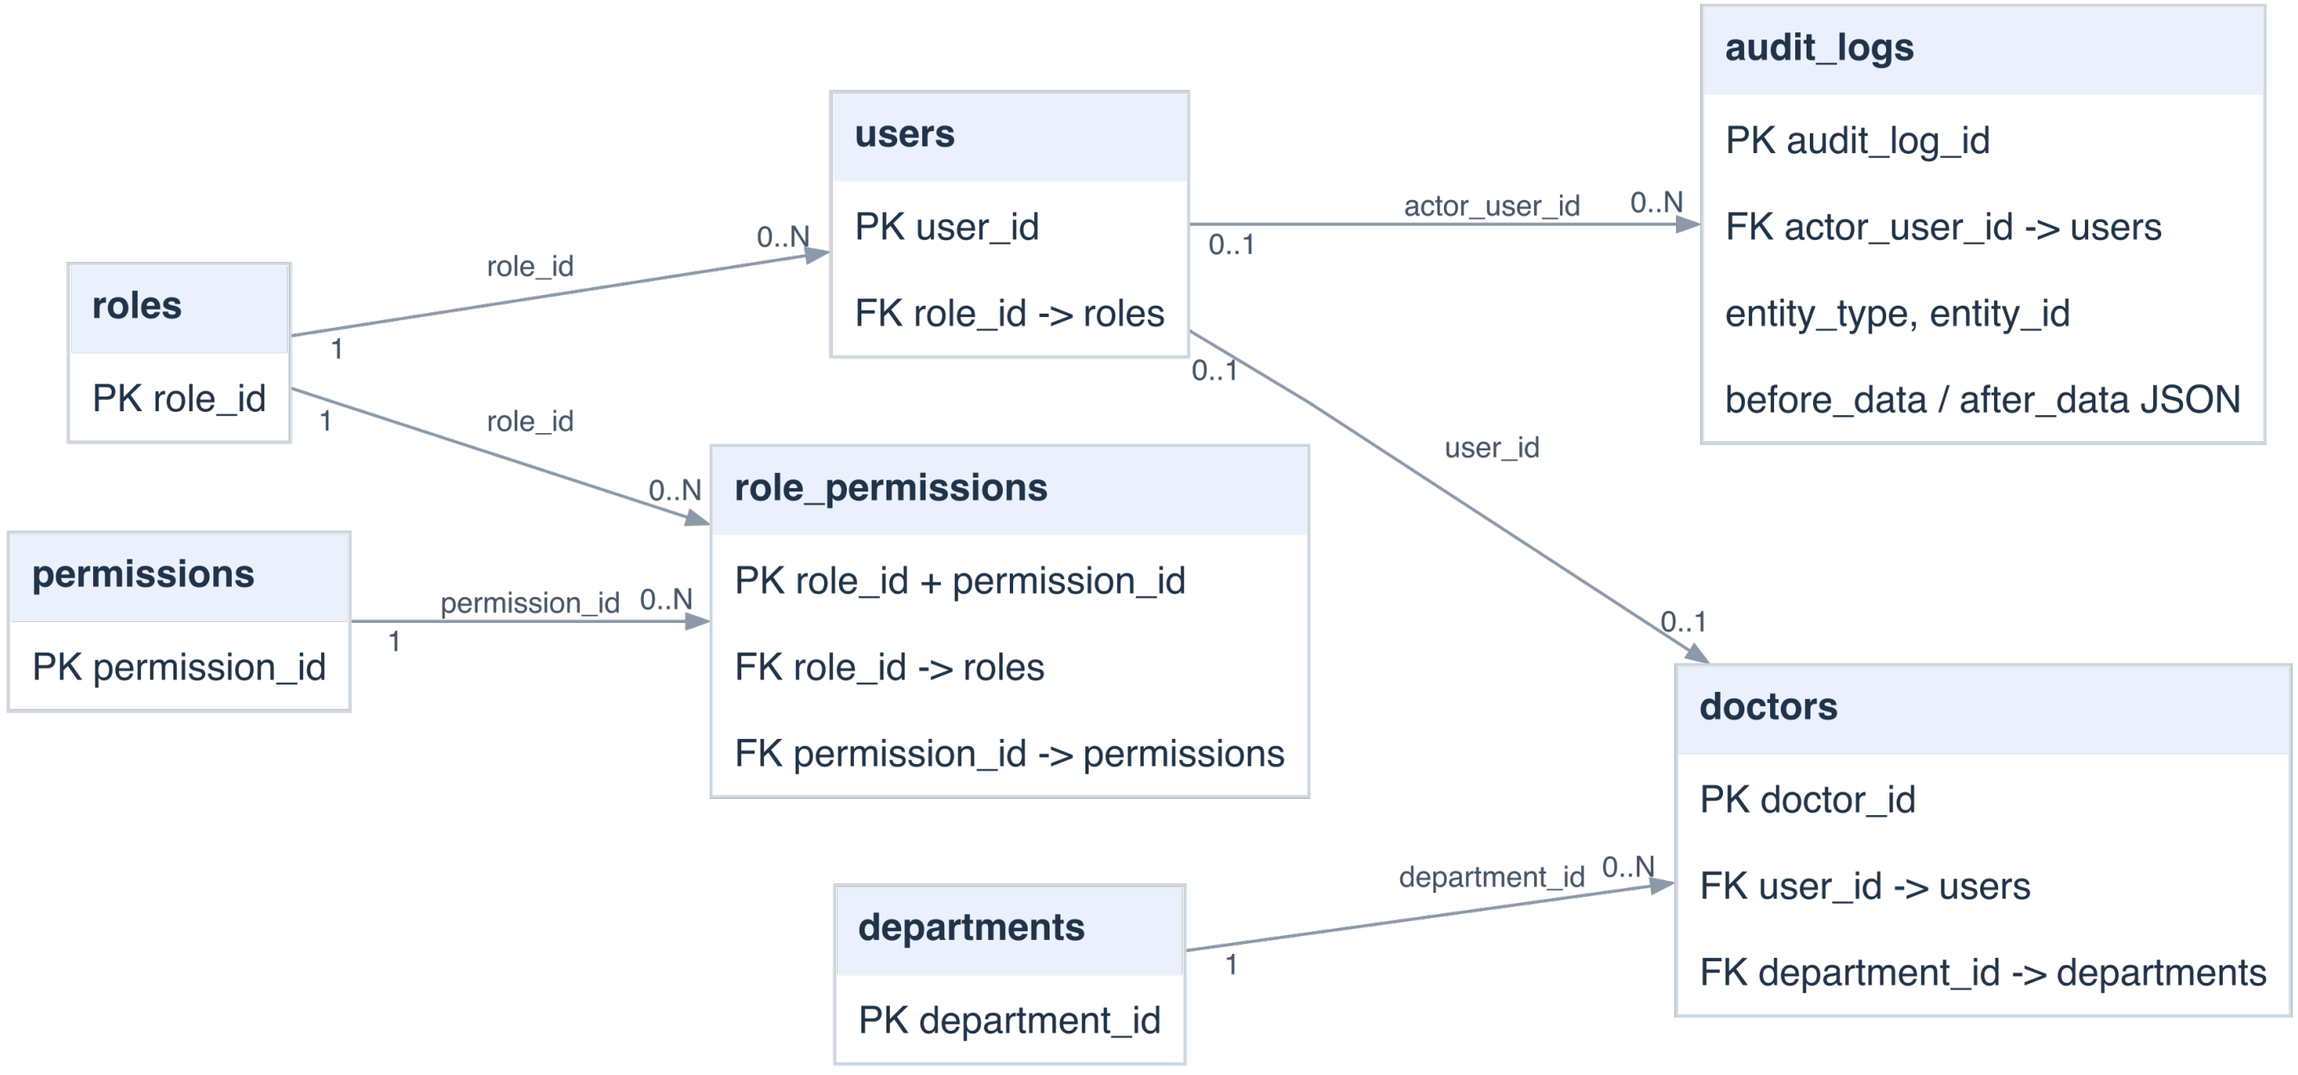


PK = primary key. FK = foreign key. Edge numbers describe how many records can exist at each end.

Example: a role can have many users; a doctor can reference zero or one user, and a user can have at most one doctor profile.

ER diagram | Patient identity and safety

7 patient tables, plus referenced doctors and users. The patient-guardian bridge supports many-to-many relationships.

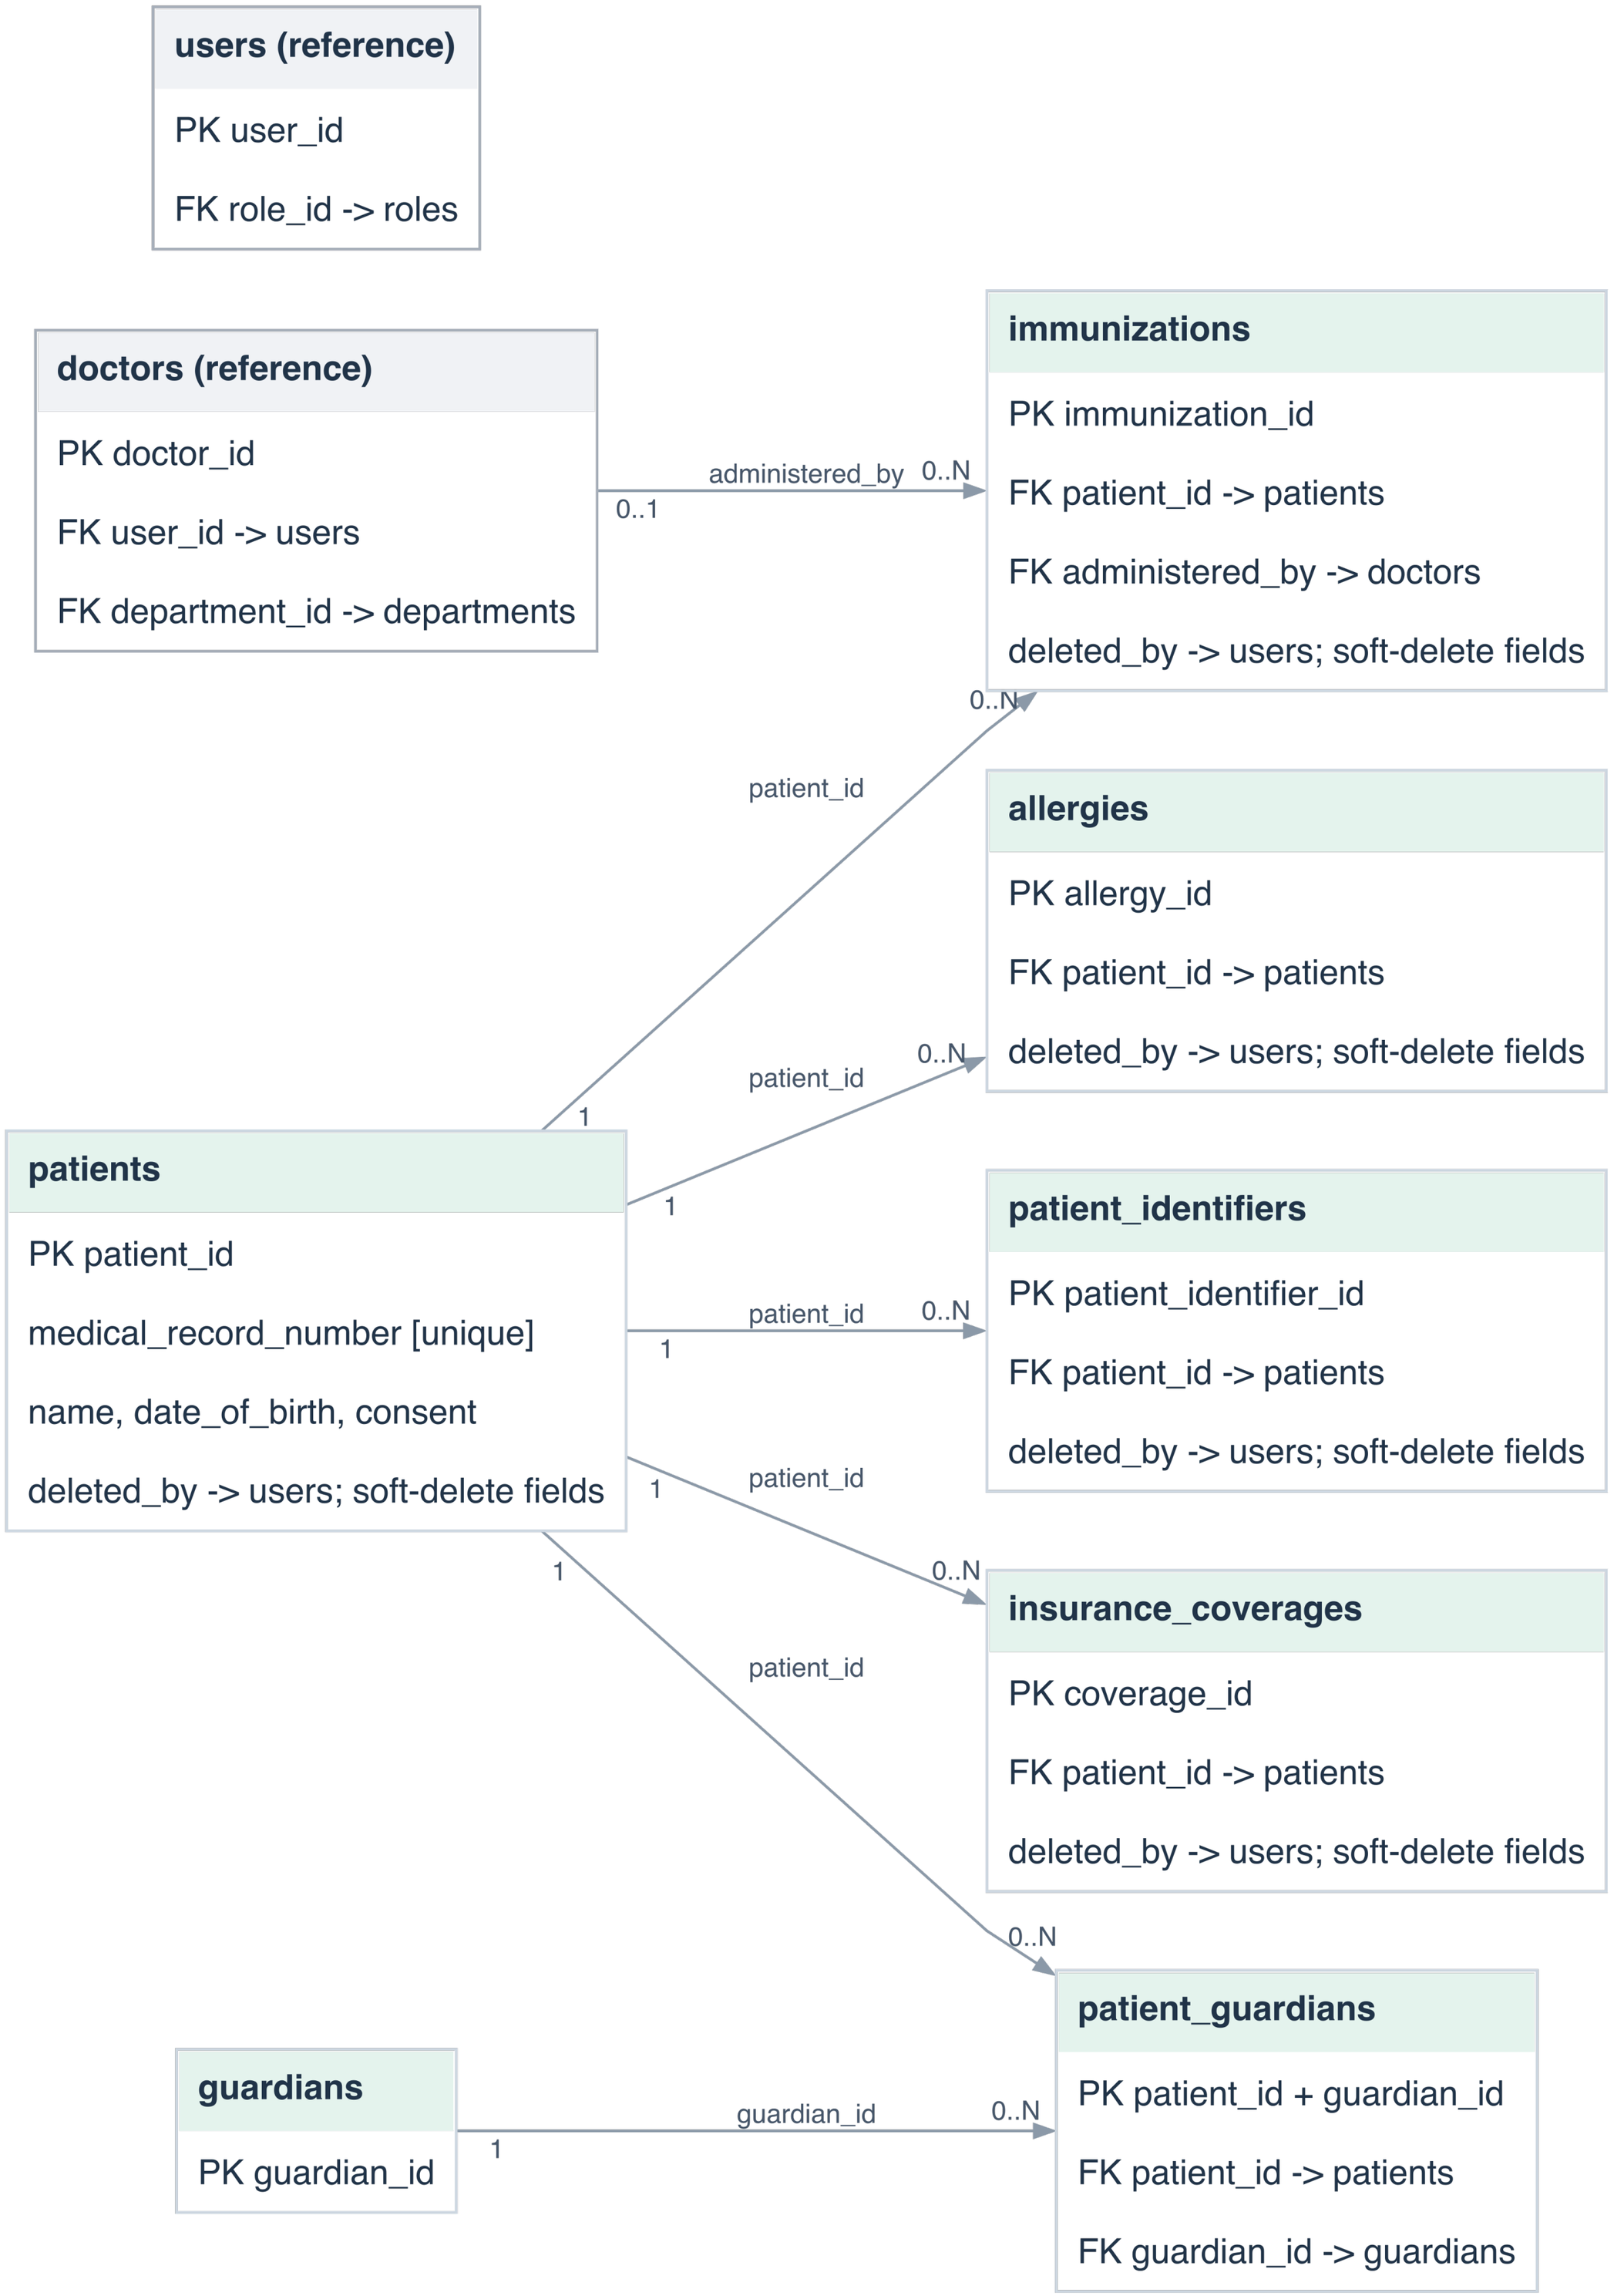


Reference boxes repeat tables owned by another section; they are not extra tables.

Soft-delete columns retain records. The deleted_by relationship points to users; repeated deletion arrows are omitted for readability.

ER diagram | Consultations and observations

7 tables, plus referenced patients, doctors and users.

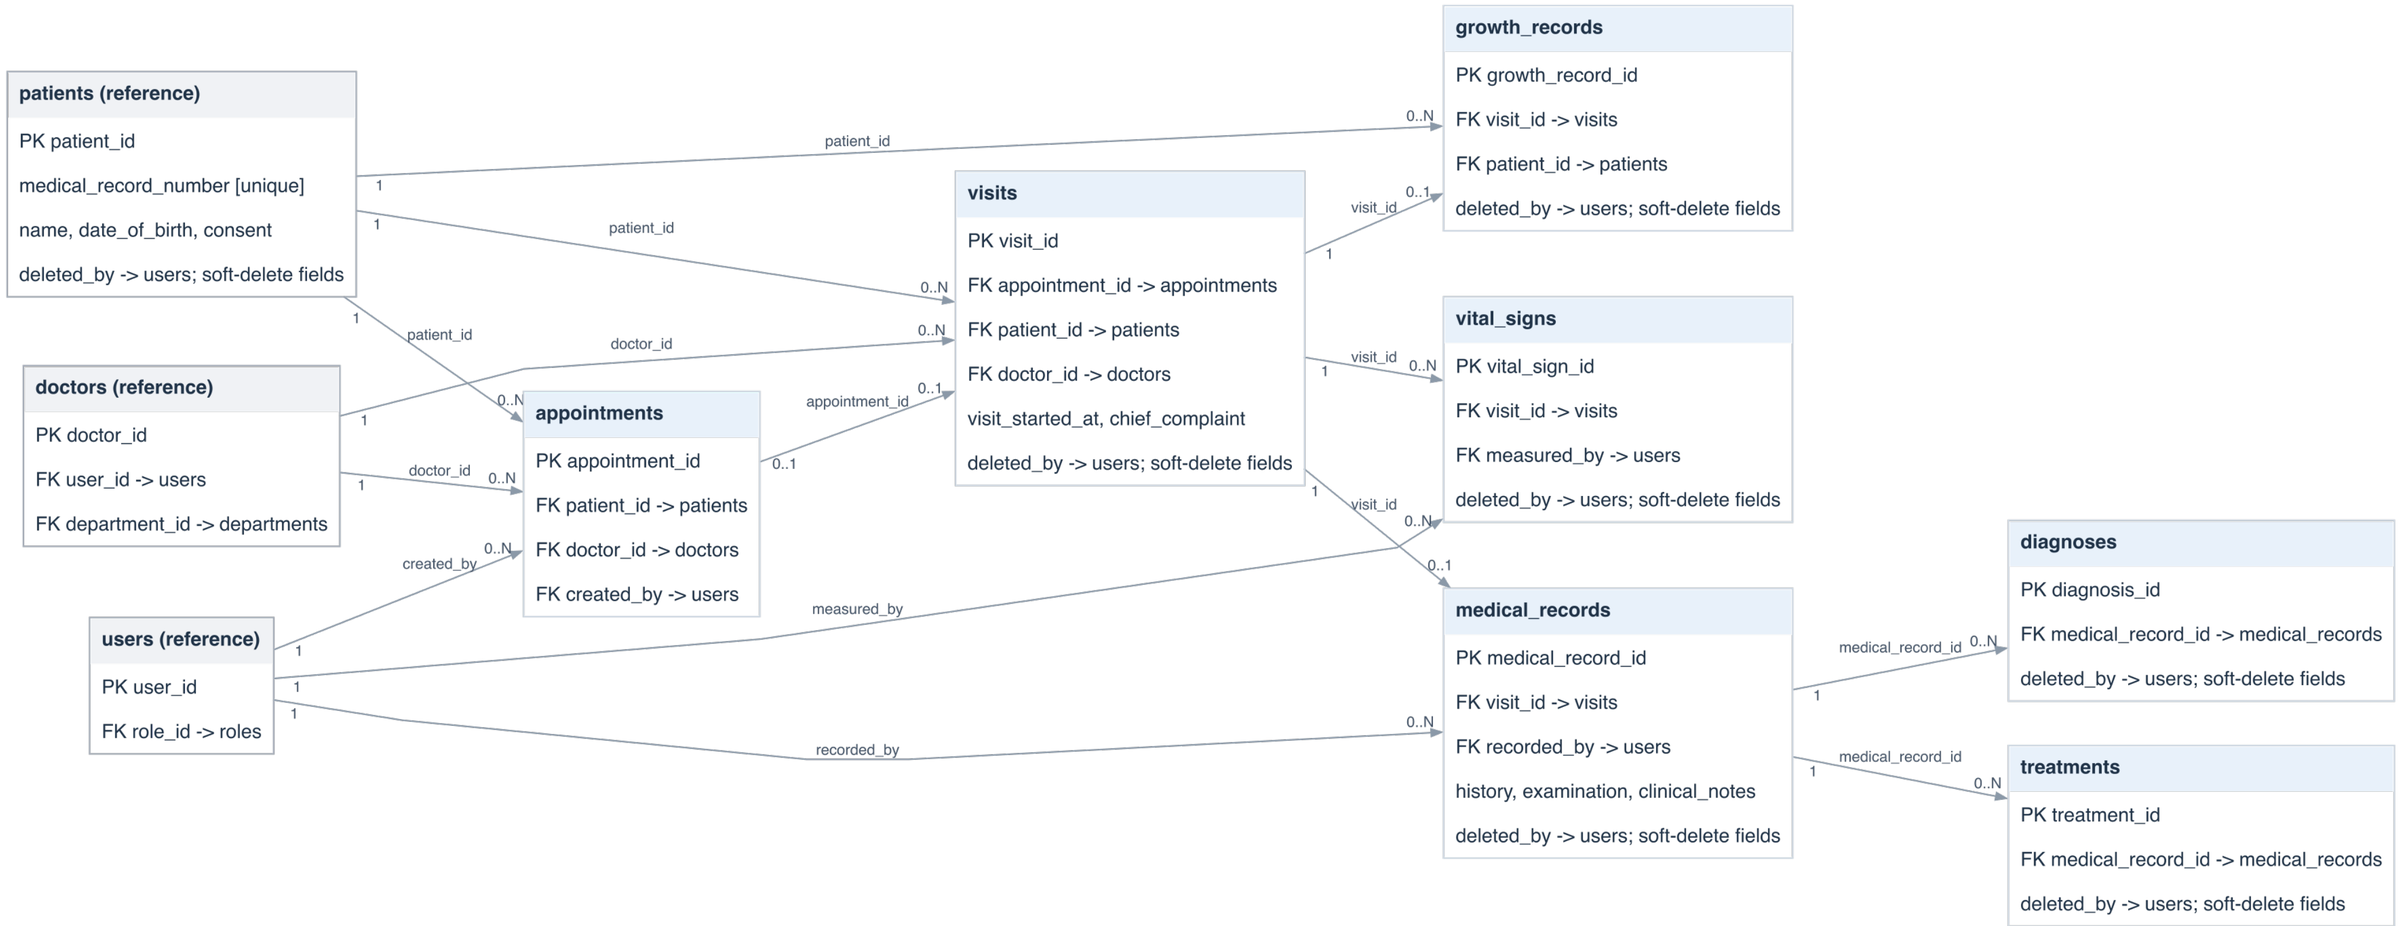


A visit can exist without an appointment. UNIQUE visit_id allows at most one medical record and one growth record per visit.

A visit can have several vital-sign measurements. A medical record can have several diagnoses and treatment records.

ER diagram | Prescriptions, labs and follow-ups

8 tables, plus referenced visits, patients, doctors, appointments and users.

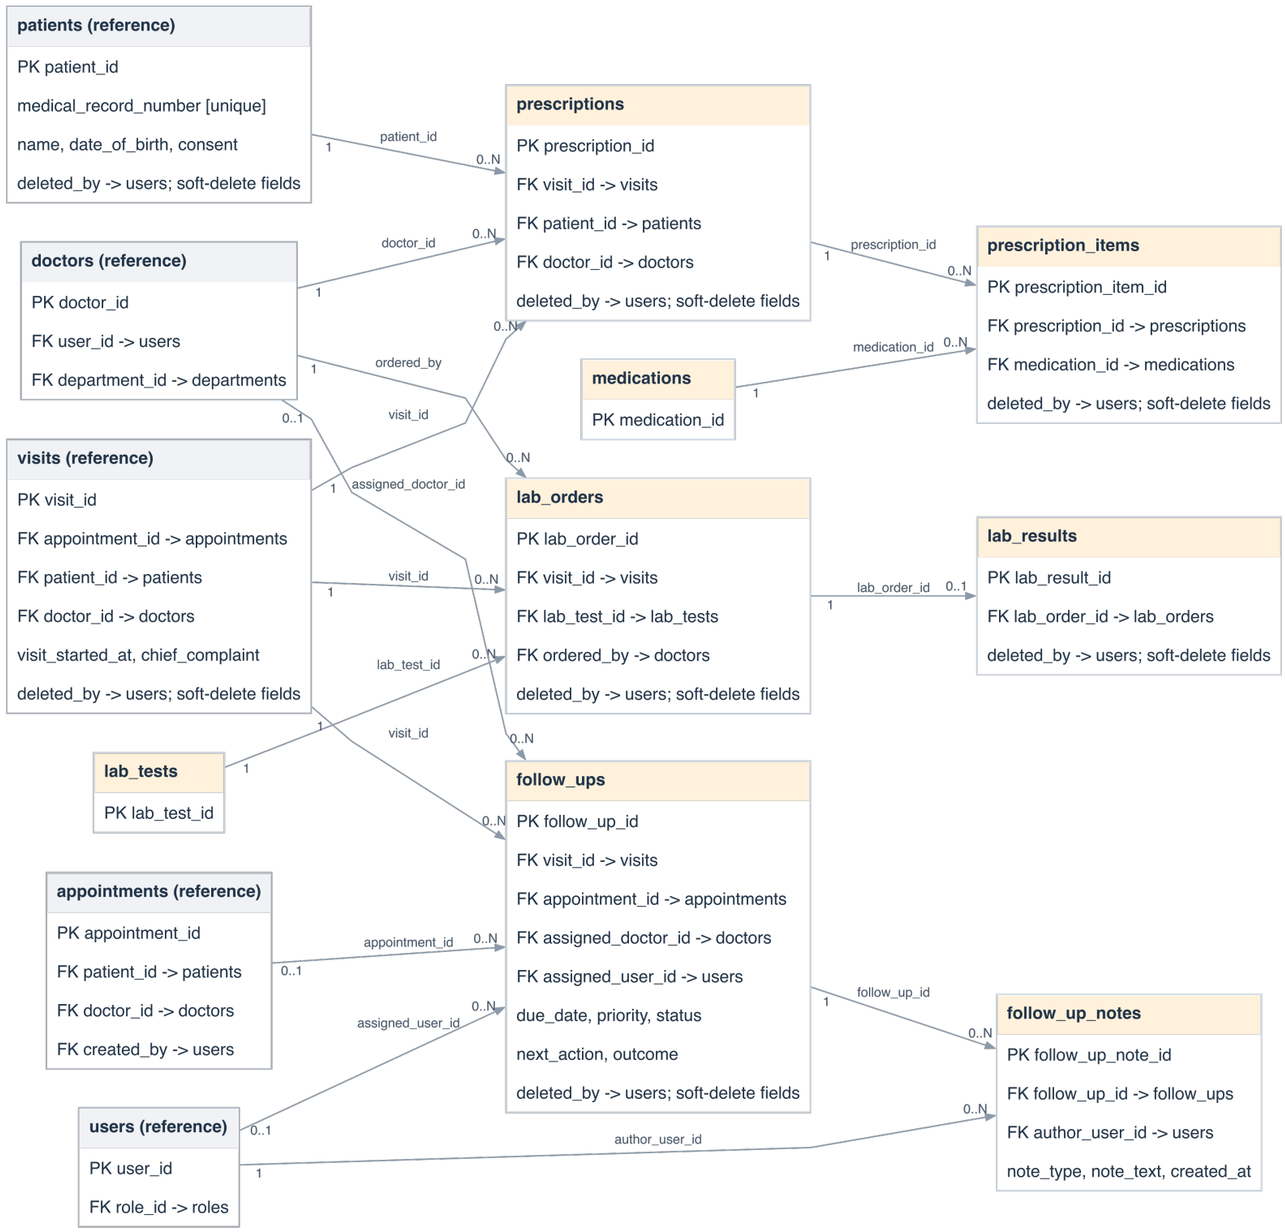


Prescription items reference a medication catalogue. Lab orders reference a test catalogue and may have one result.

follow_ups.visit_id points to the originating visit. appointment_id is optional; no completed_visit_id exists in the current schema.

ER diagram | Active custom fields

3 tables, plus referenced users. Clinical owners are listed as foreign keys inside the value table.

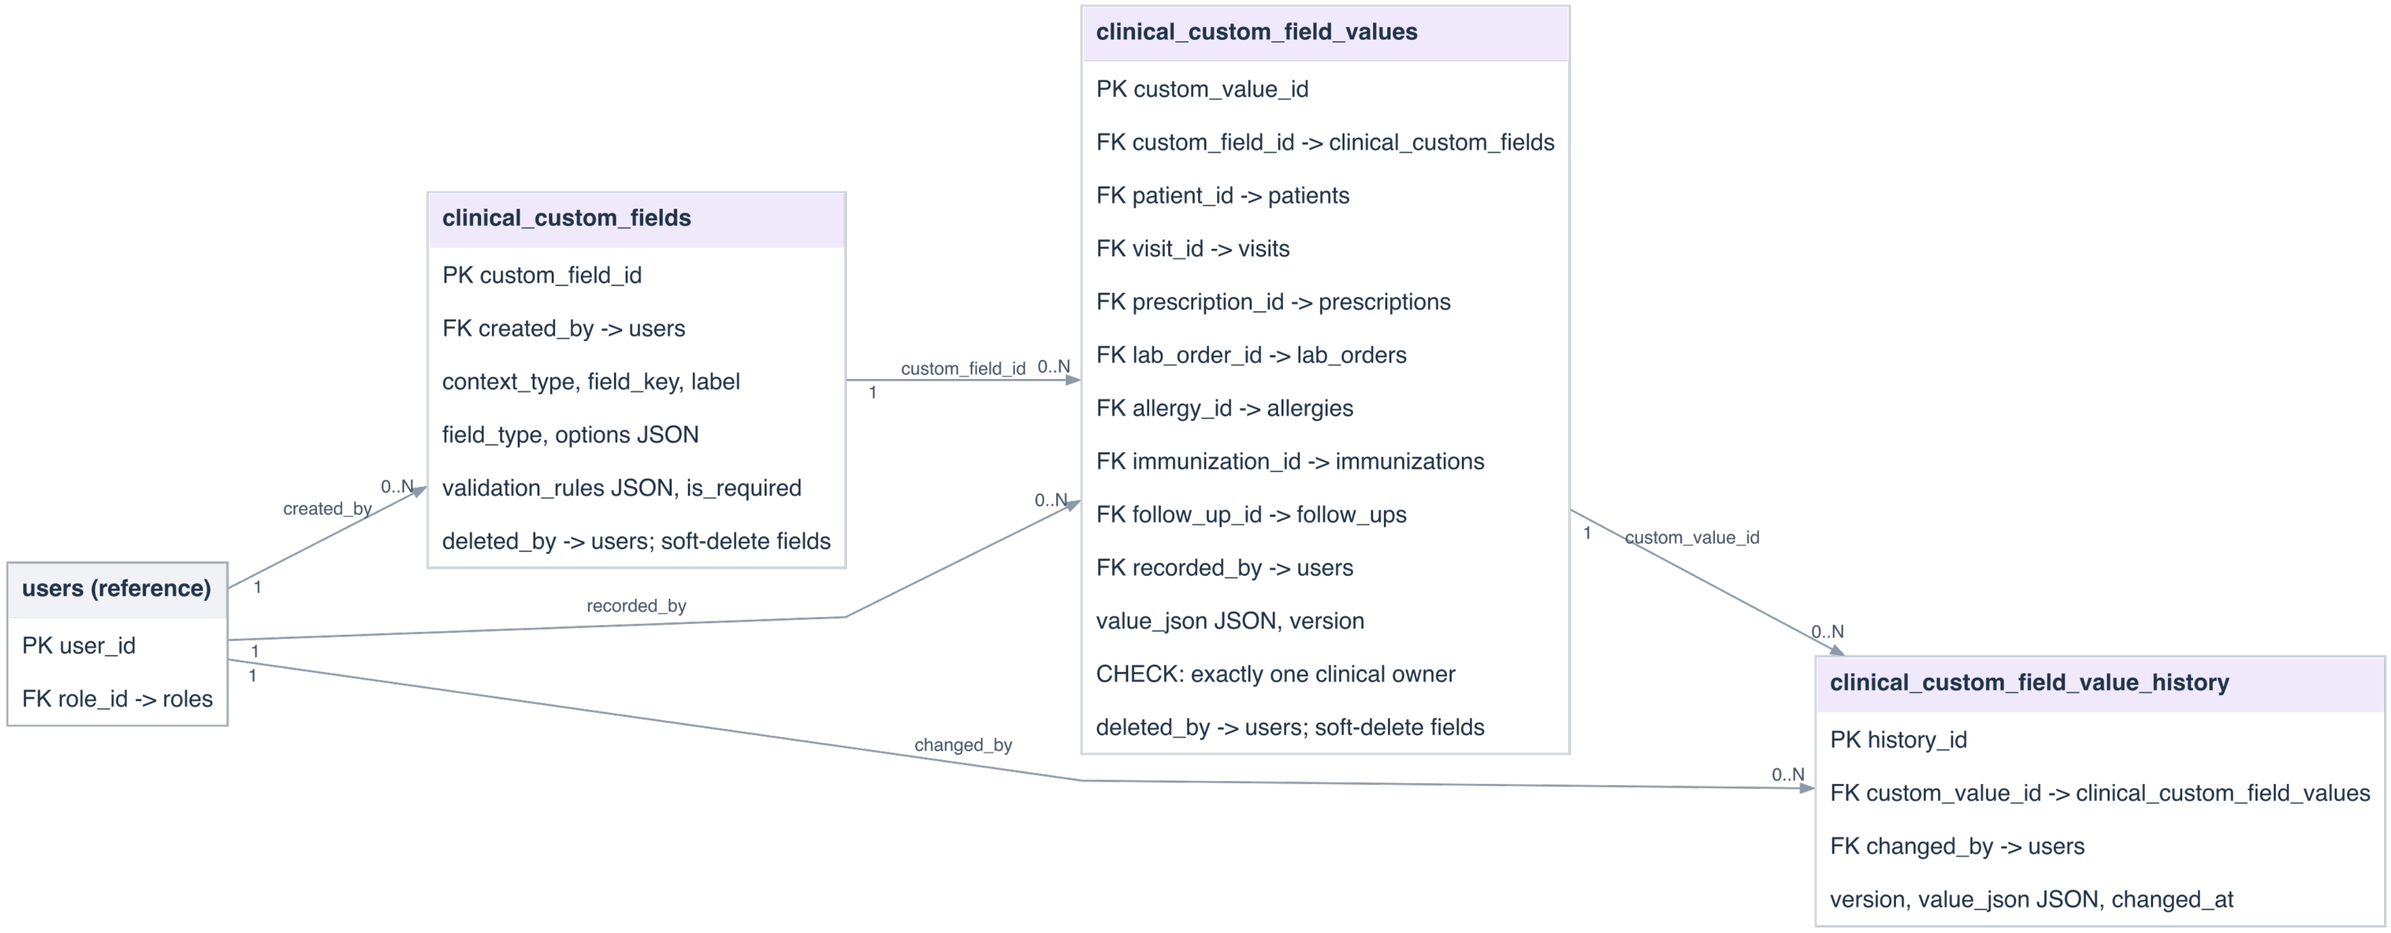


Active website: clinical_custom_fields -> clinical_custom_field_values -> clinical_custom_field_value_history.

Exactly one of patient, visit, prescription, lab order, allergy, immunization or follow-up owns each value. Owner-table arrows are omitted; the exact foreign keys are listed inside the value table.

CHECK enforces one owner. Triggers ensure the owner matches context_type; the API validates the answer against field_type and validation_rules.

ER diagram | JSON questionnaire tables

4 tables, plus referenced visits and users. Database evaluation model; no current questionnaire UI or API.

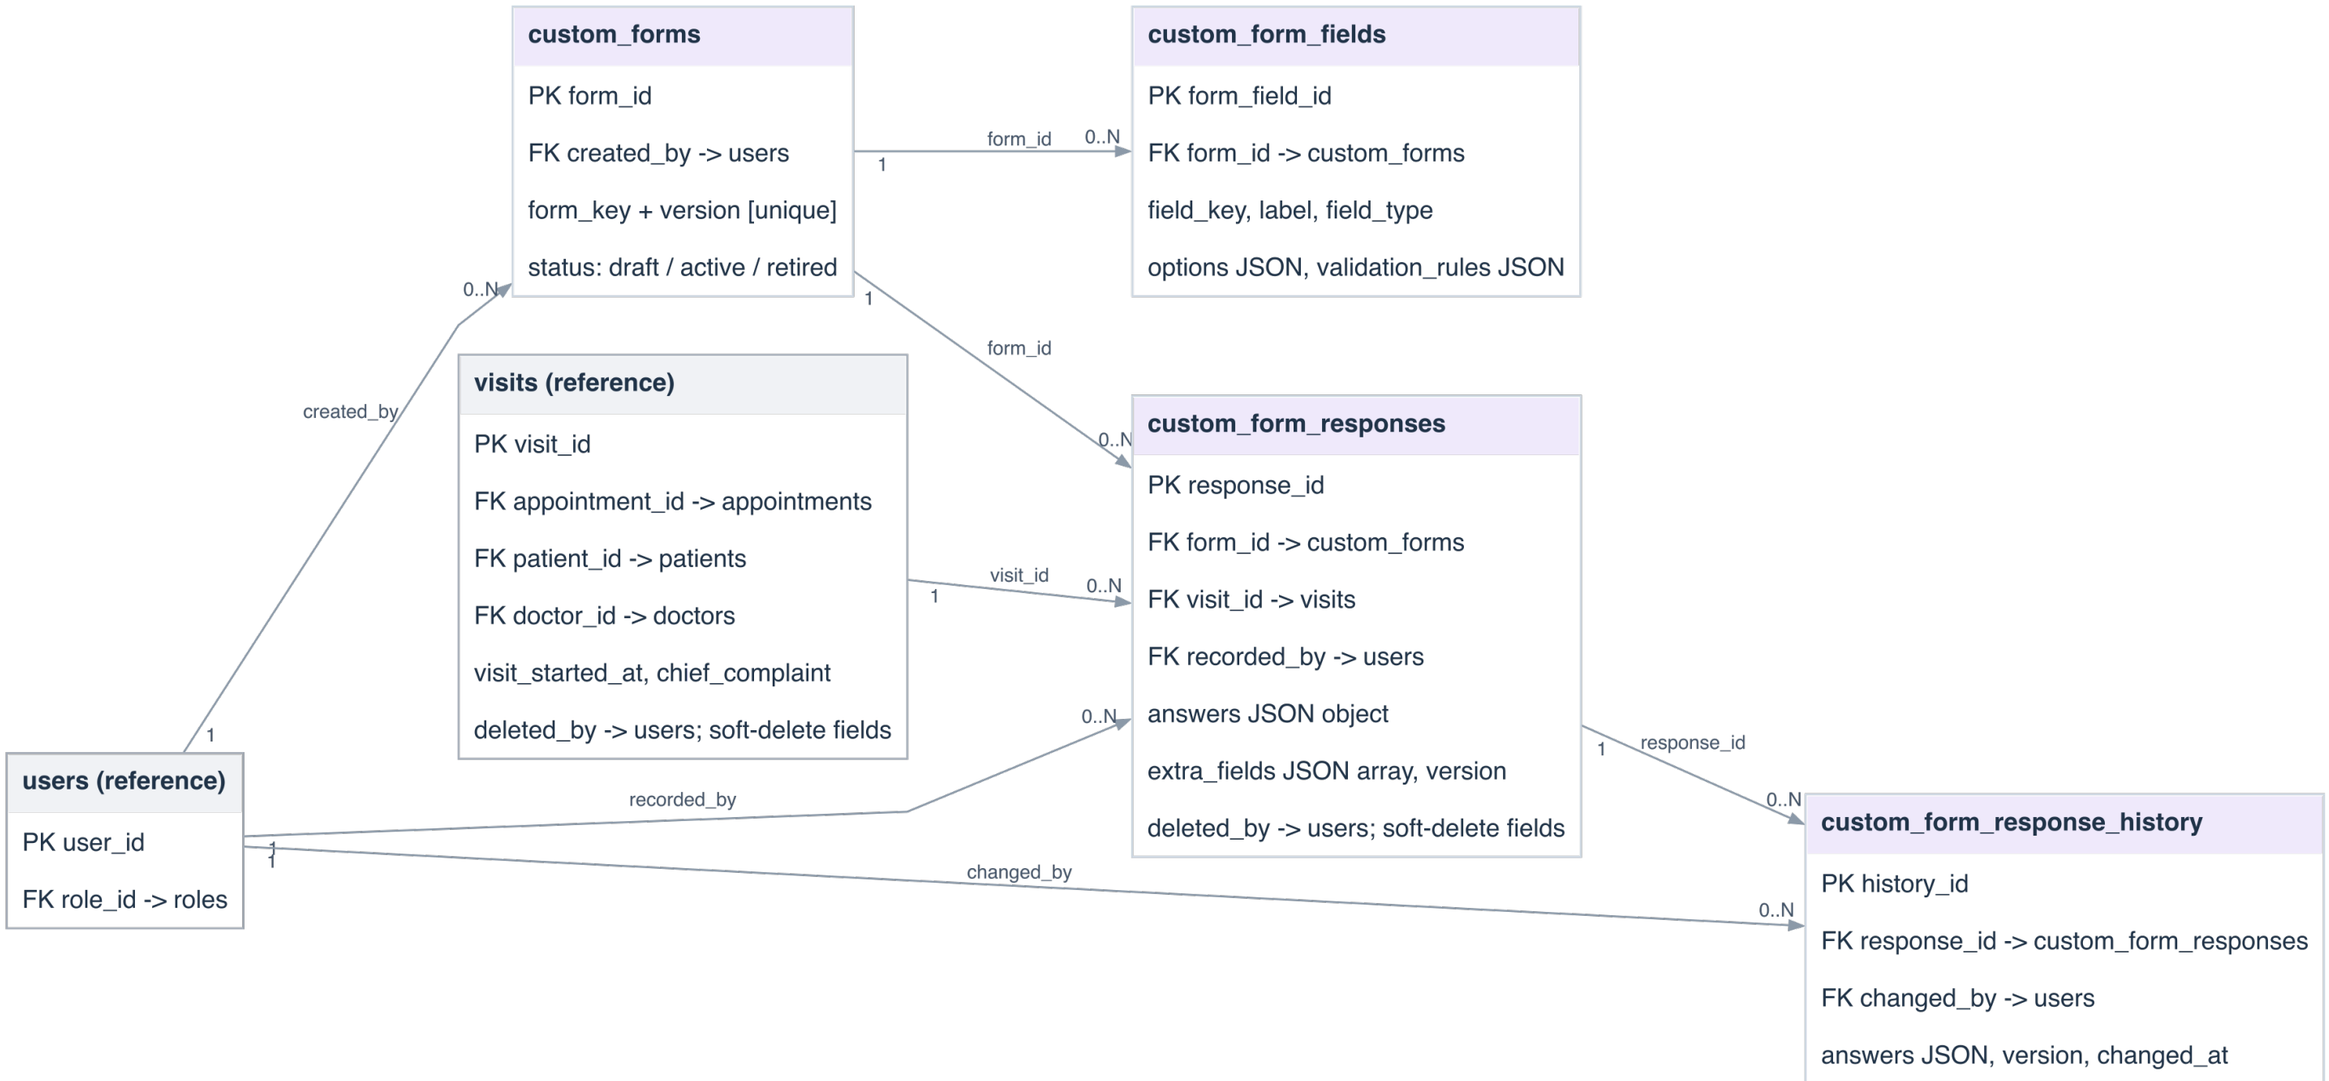


custom_forms identifies a template version. custom_form_fields holds its questions; answers are stored together in each response JSON object.

UNIQUE (visit_id, form_id) prevents duplicate responses to one template version for one visit. History is linked to the response and revision number.

ER diagram | Complete foreign-key map

All 36 tables and every declared foreign key, including repeated author/deletion references. Zoom this appendix or open its SVG.

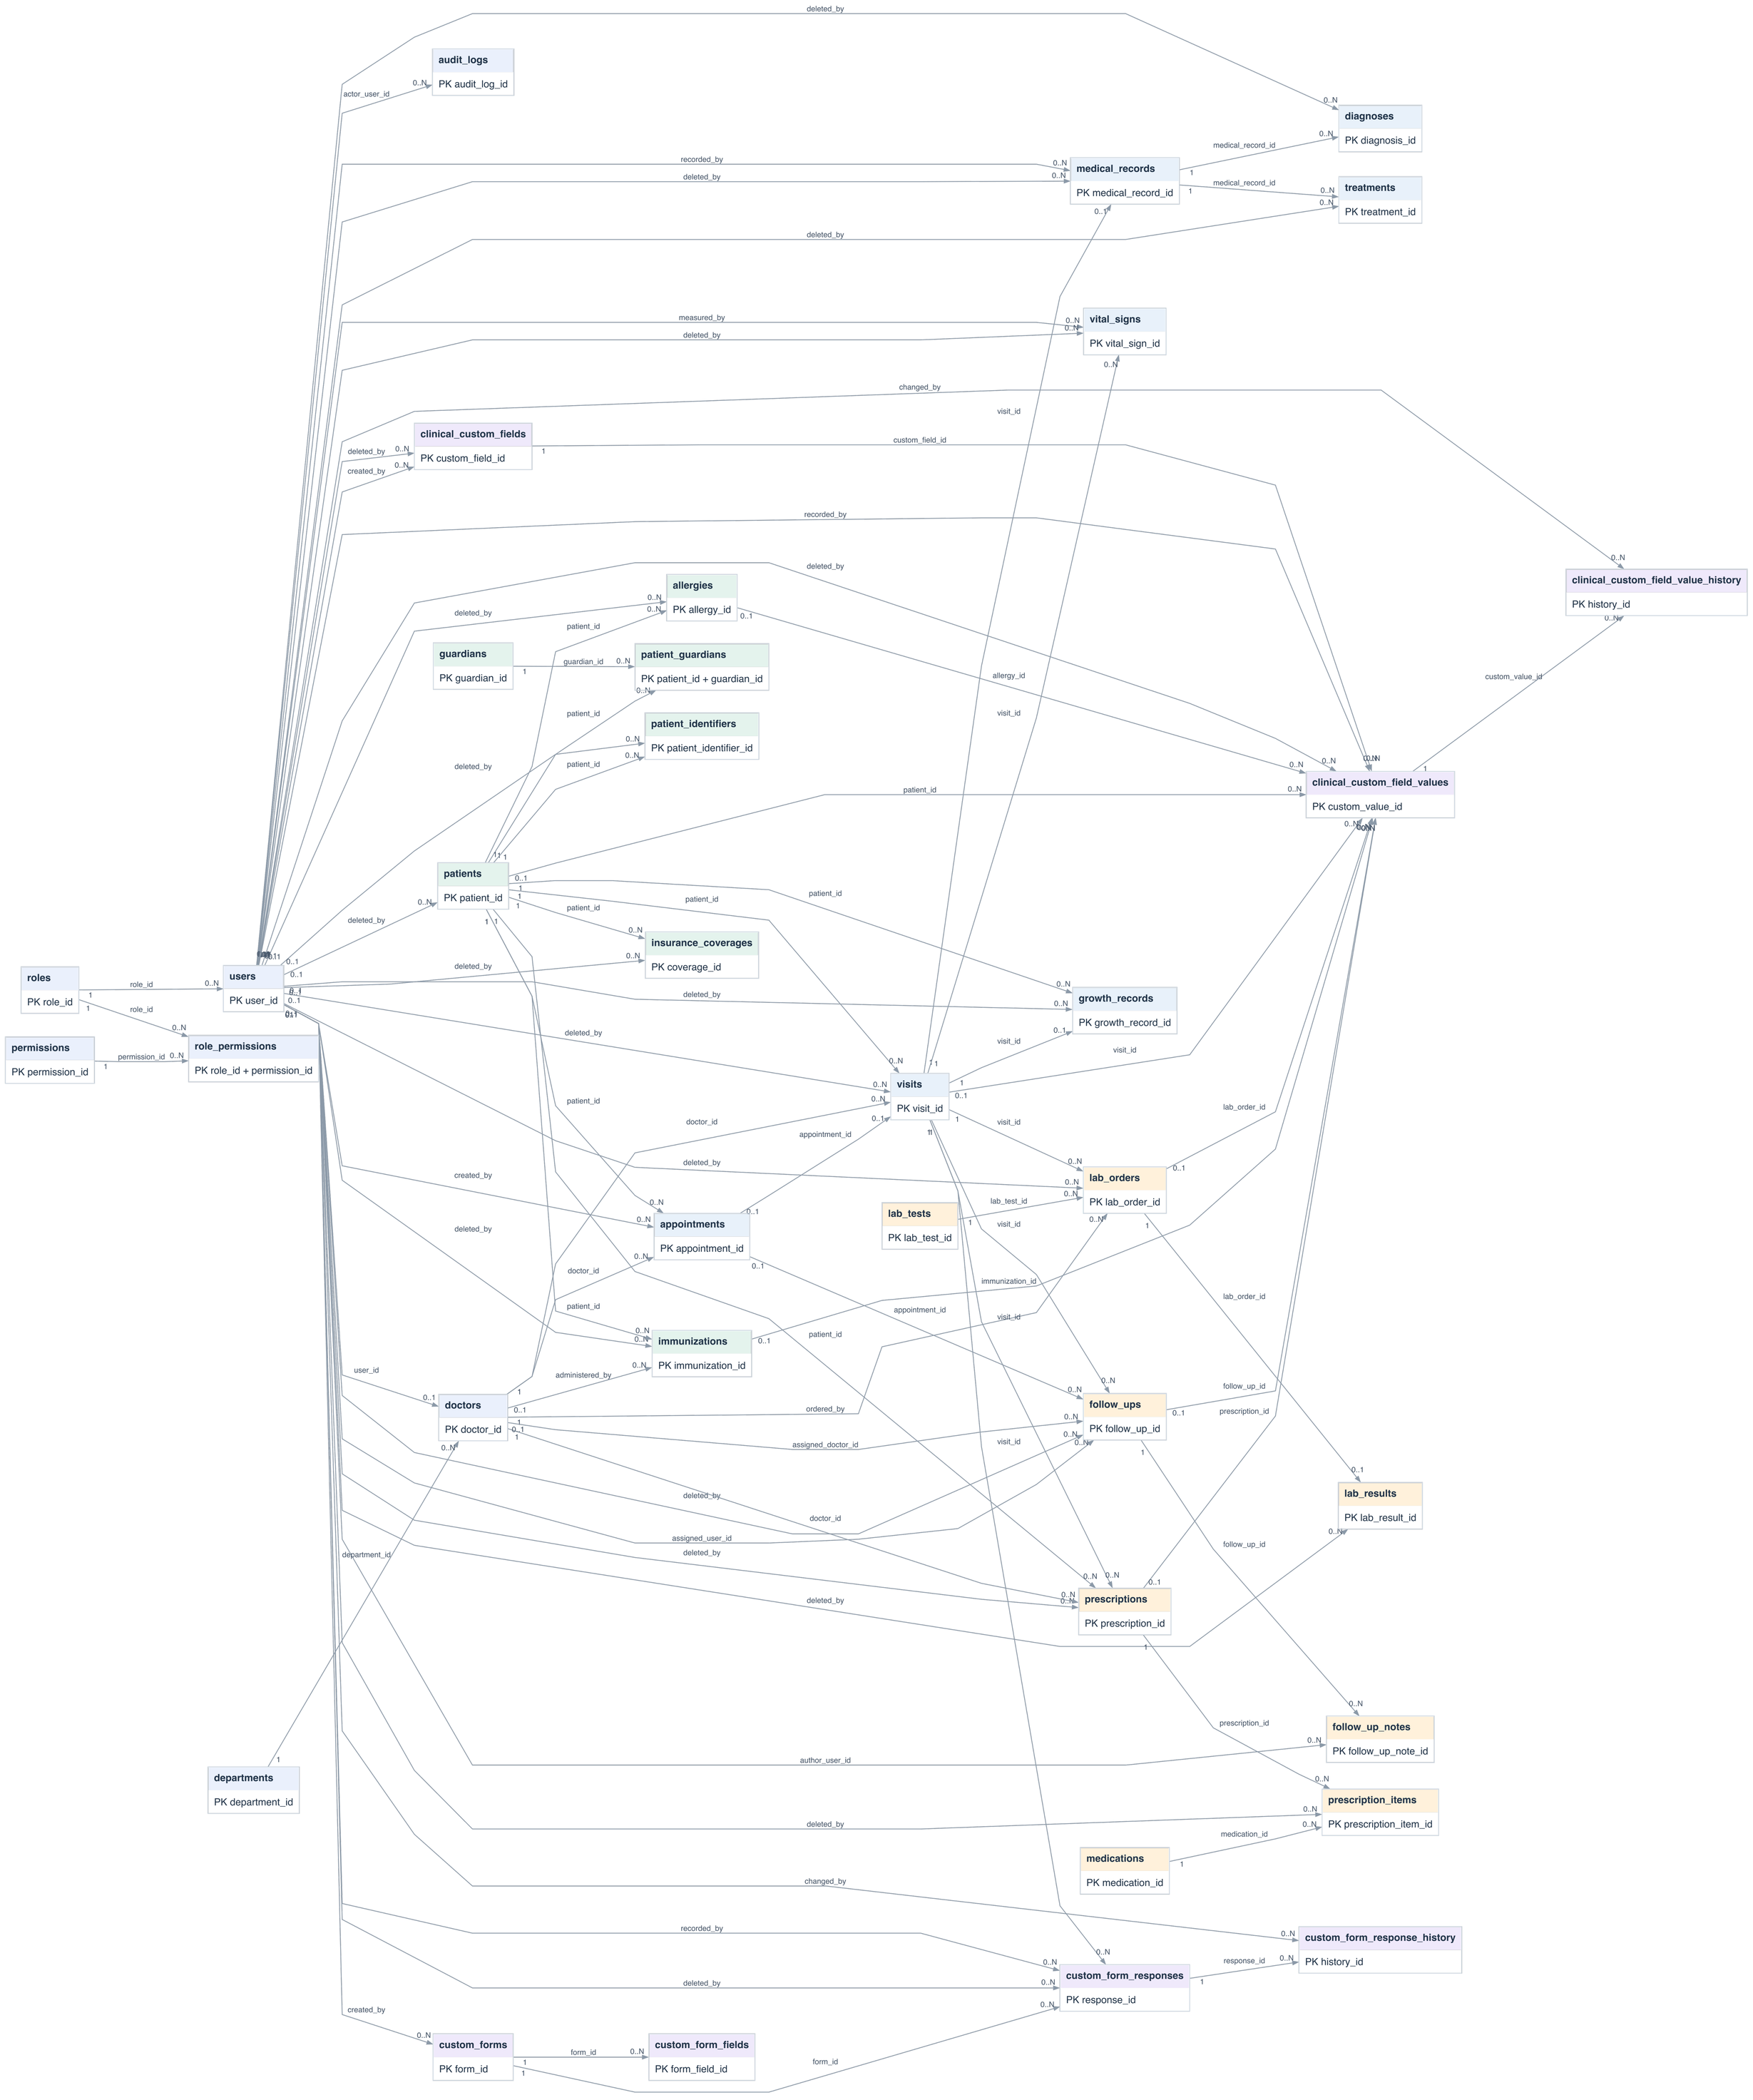

Arrows run from the referenced parent table to the child table carrying the labelled foreign-key column.

1 or 0..1 at the parent end indicates whether the child must reference a parent. 0..N or 0..1 at the child end shows how many children a parent may have.