


Database Entity–Relationship Model


47 tables · 68 foreign keys · 6 modules · SQLite / Cloudflare D1

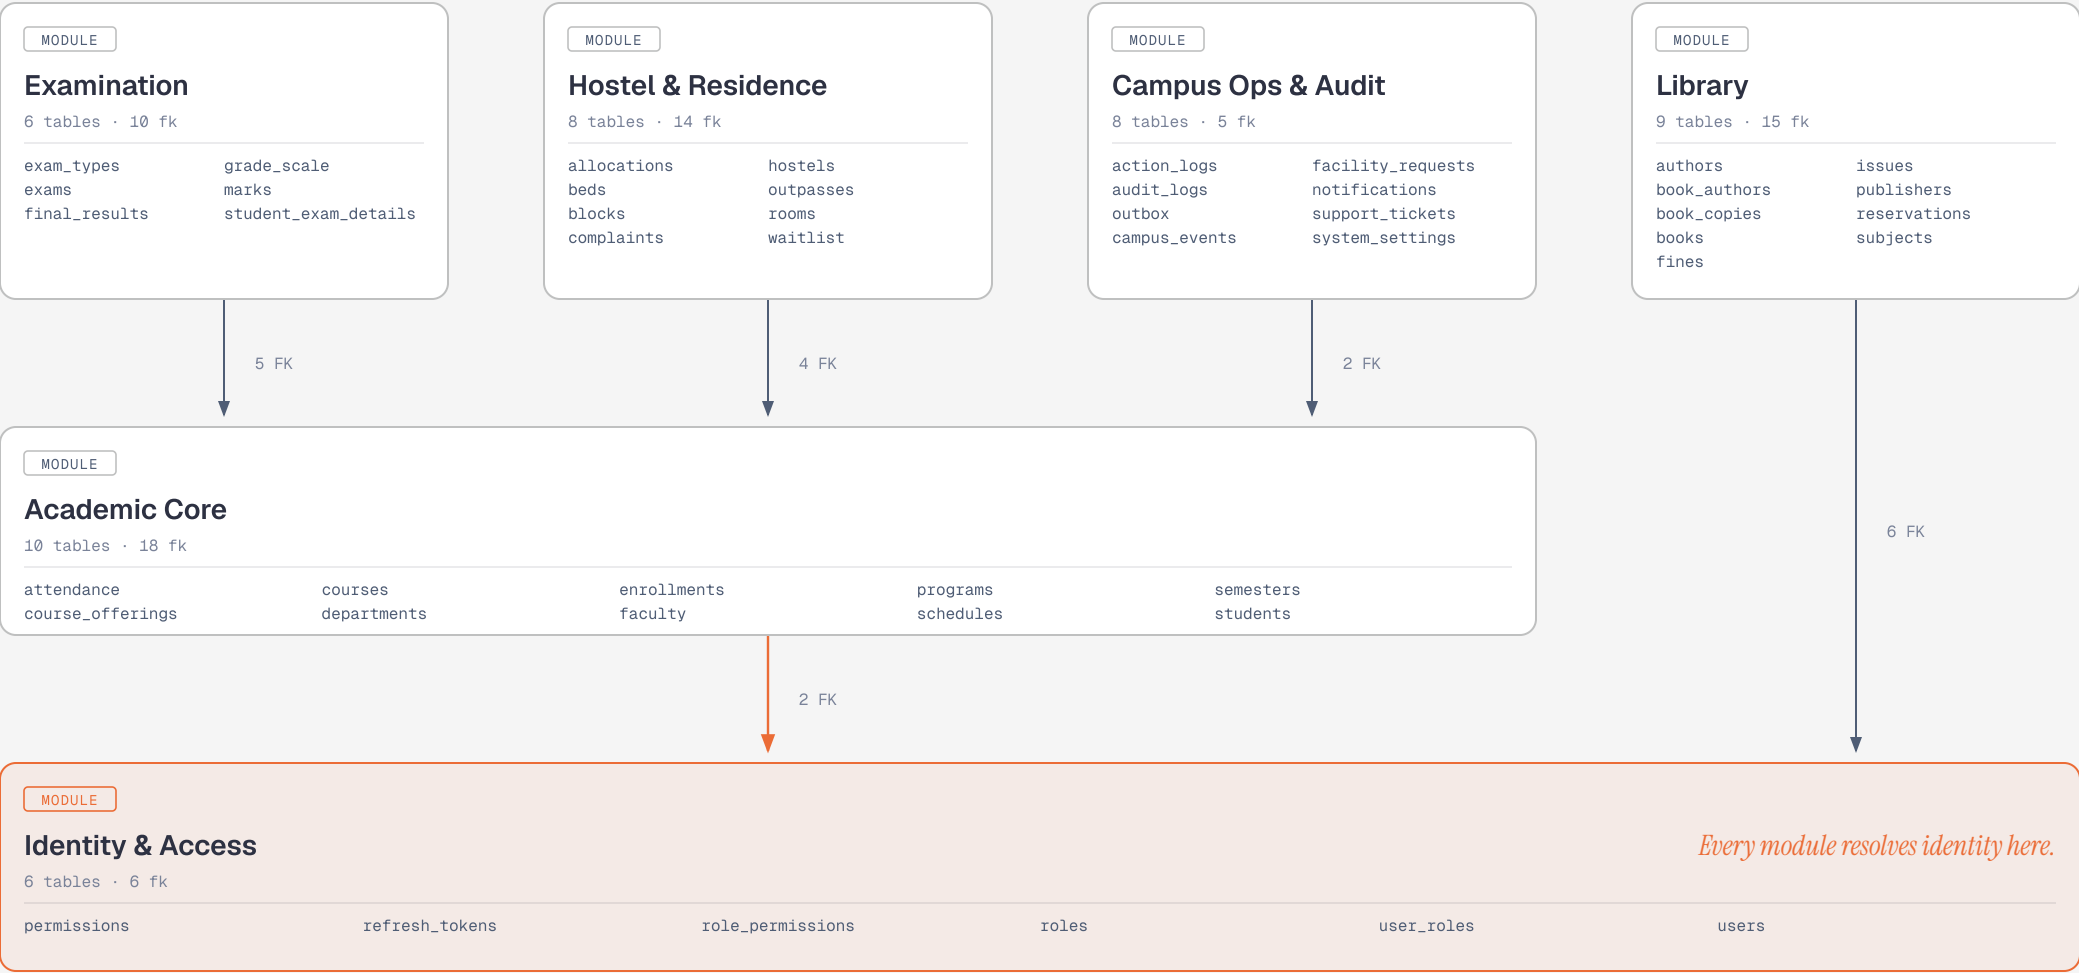

Dependencies run one way — downward. Nothing in the identity layer knows the modules above it.

Identity & Access


6 tables · 6 internal relationships · 0 cross-module references

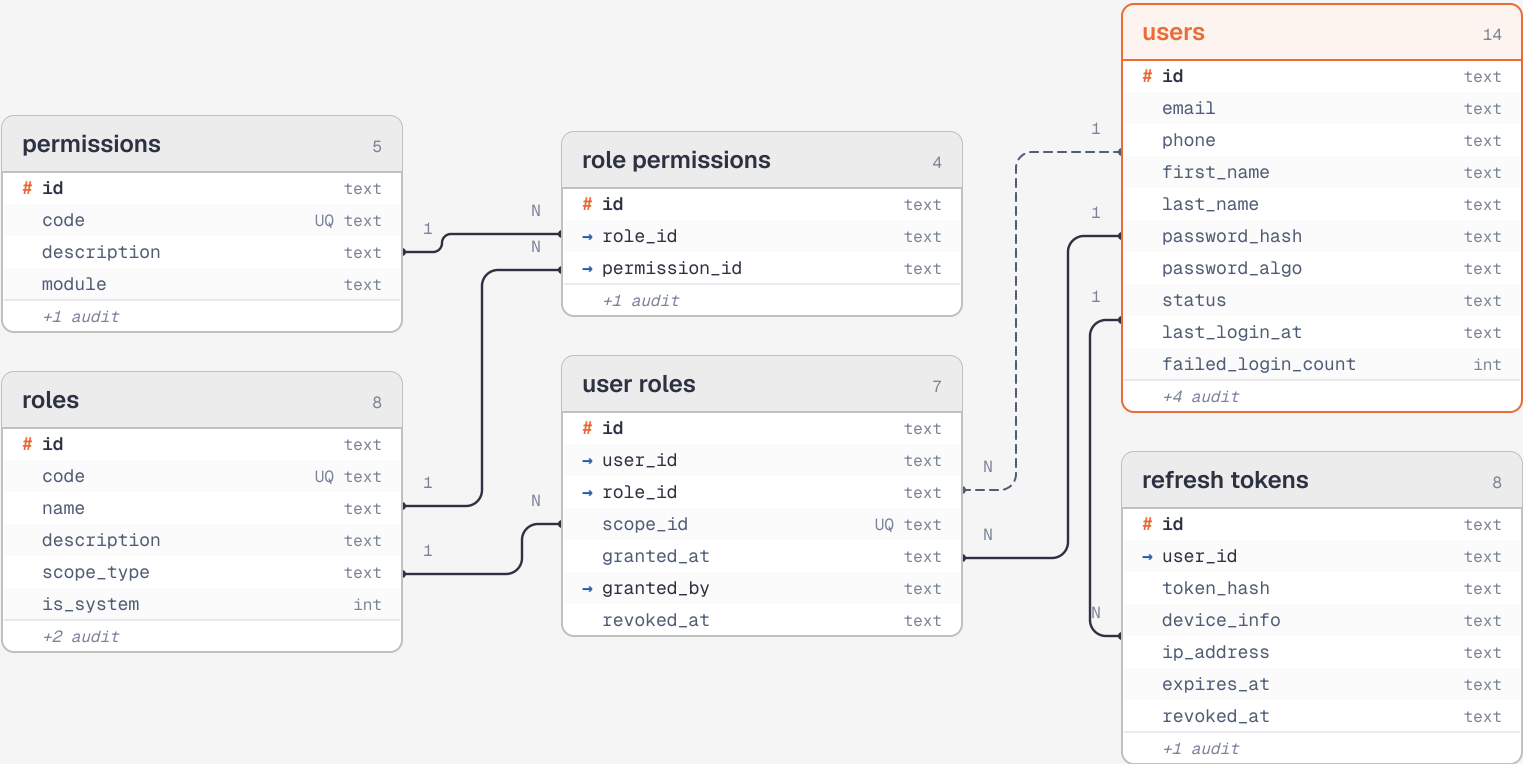

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ↗ cross-module ref

Academic Core


10 tables · 16 internal relationships · 2 cross-module references

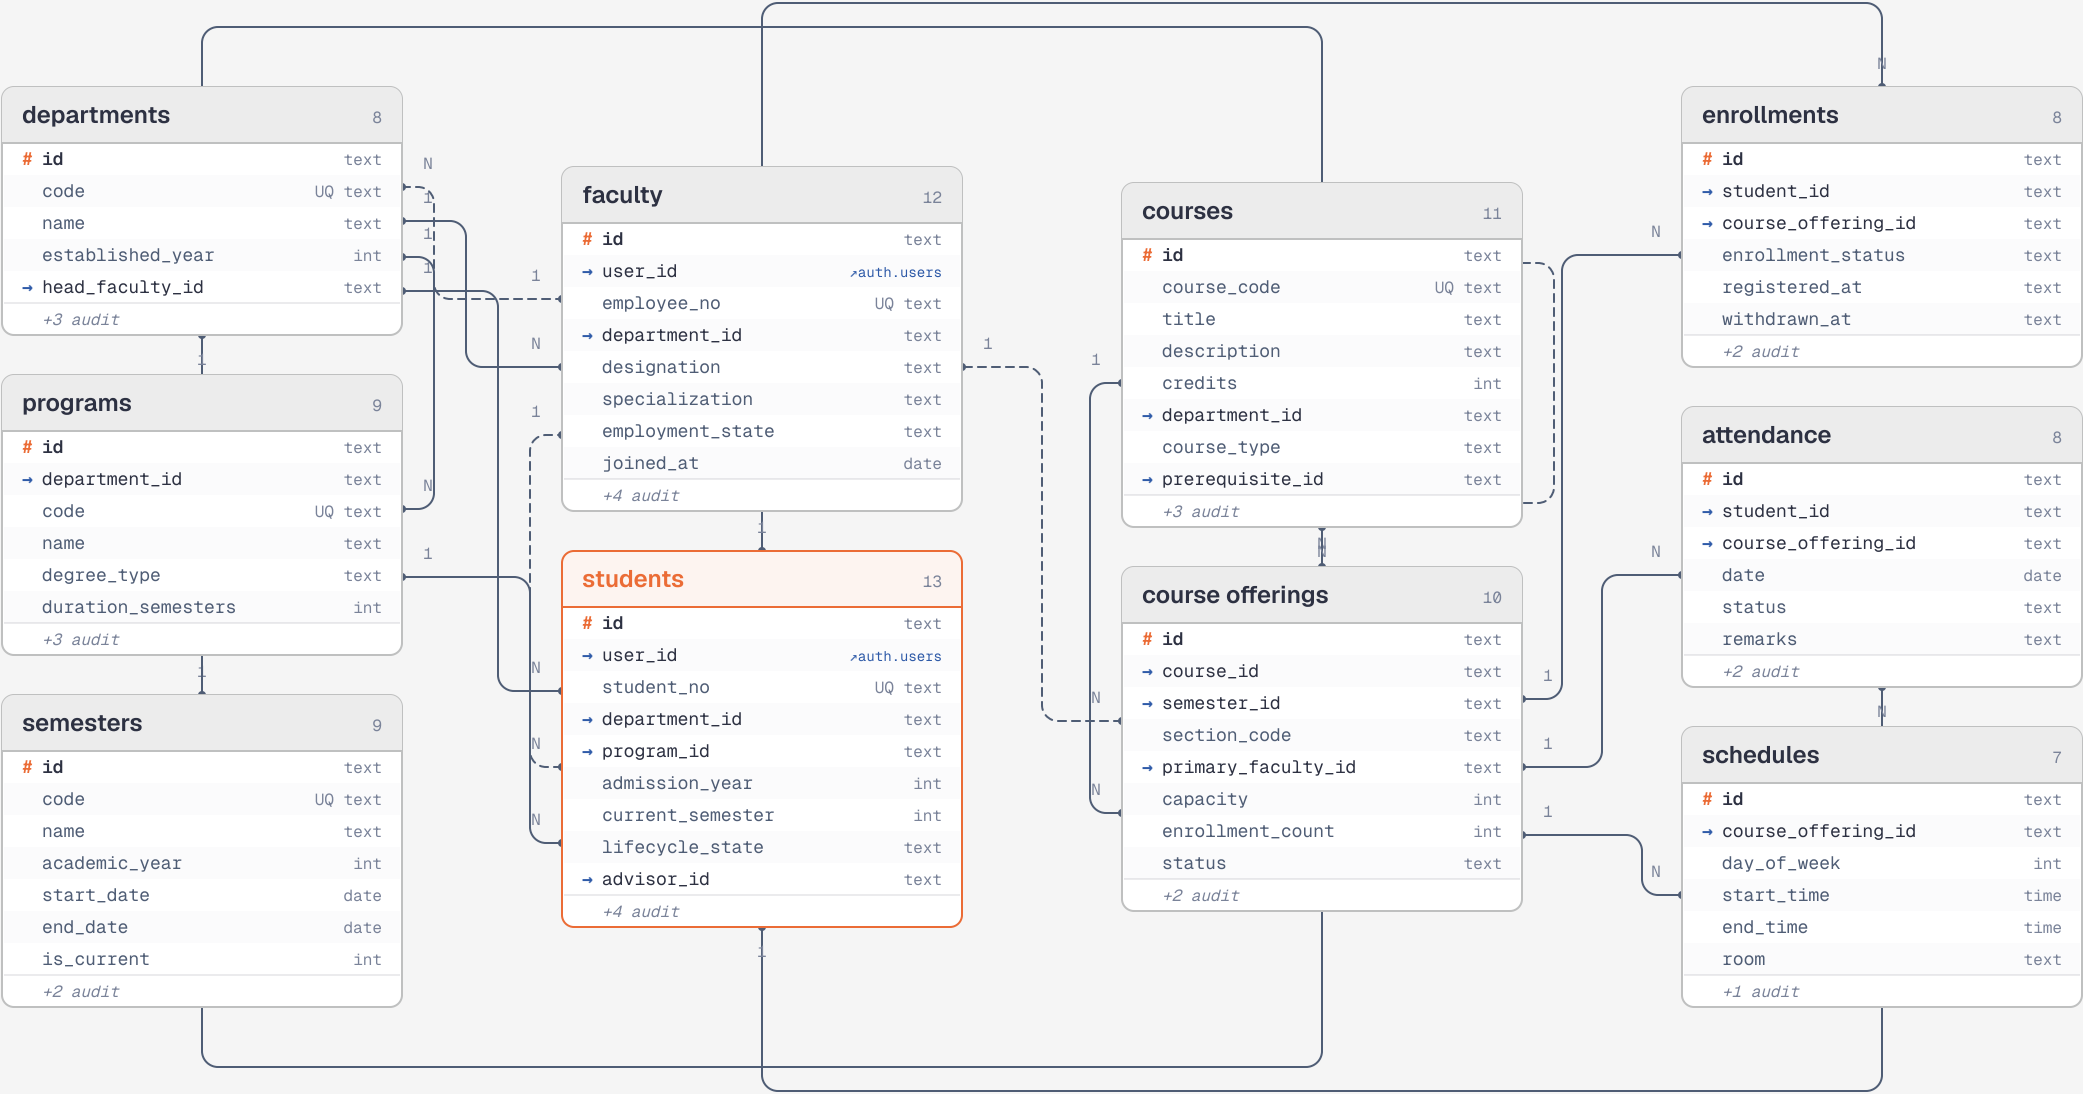

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key → cross-module ref

Examination


6 tables · 3 internal relationships · 7 cross-module references

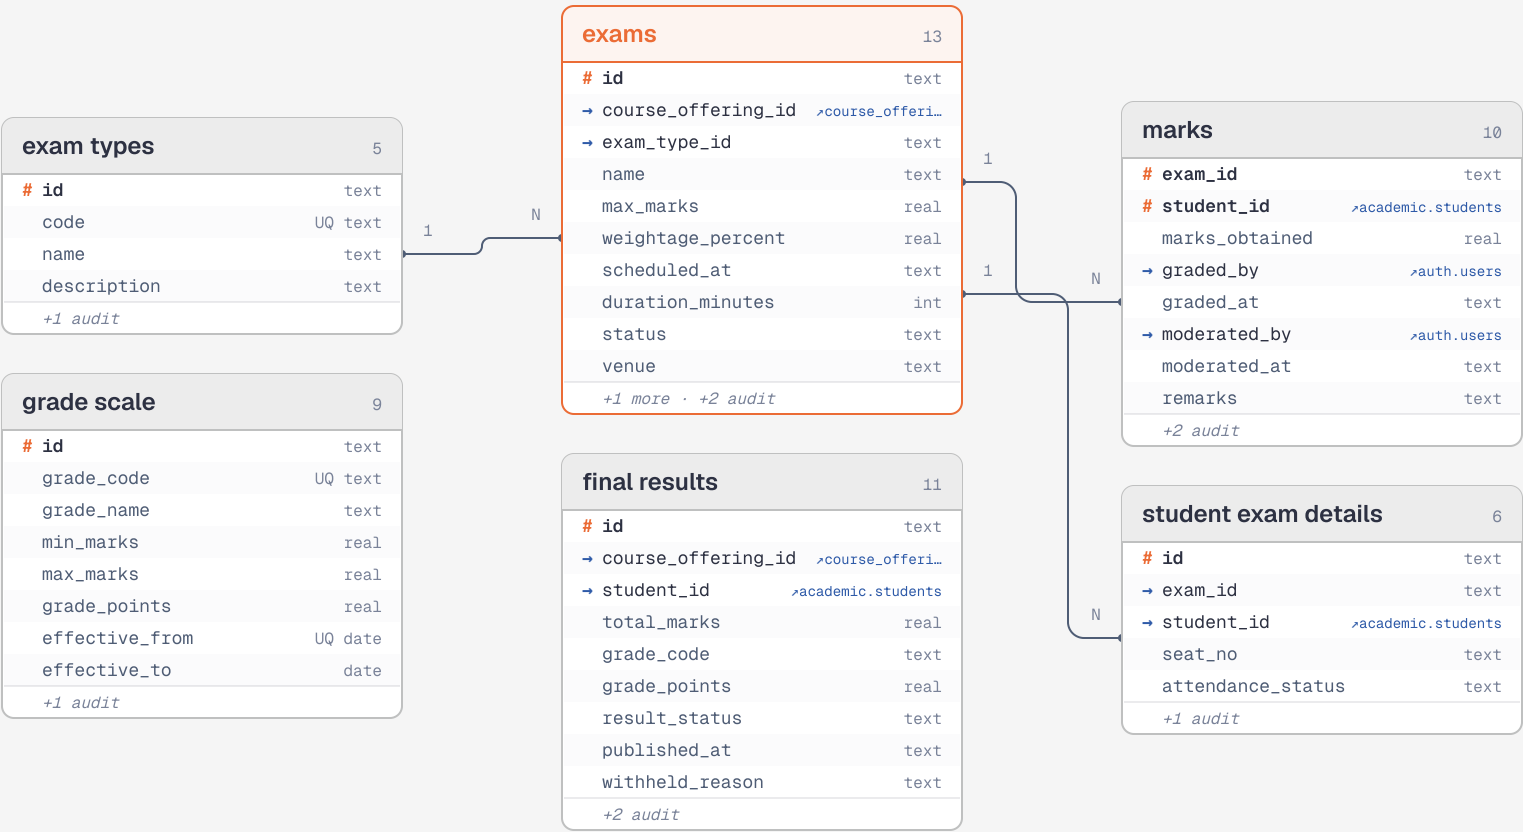

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ↗ cross-module ref

Hostel & Residence


8 tables · 6 internal relationships · 8 cross-module references

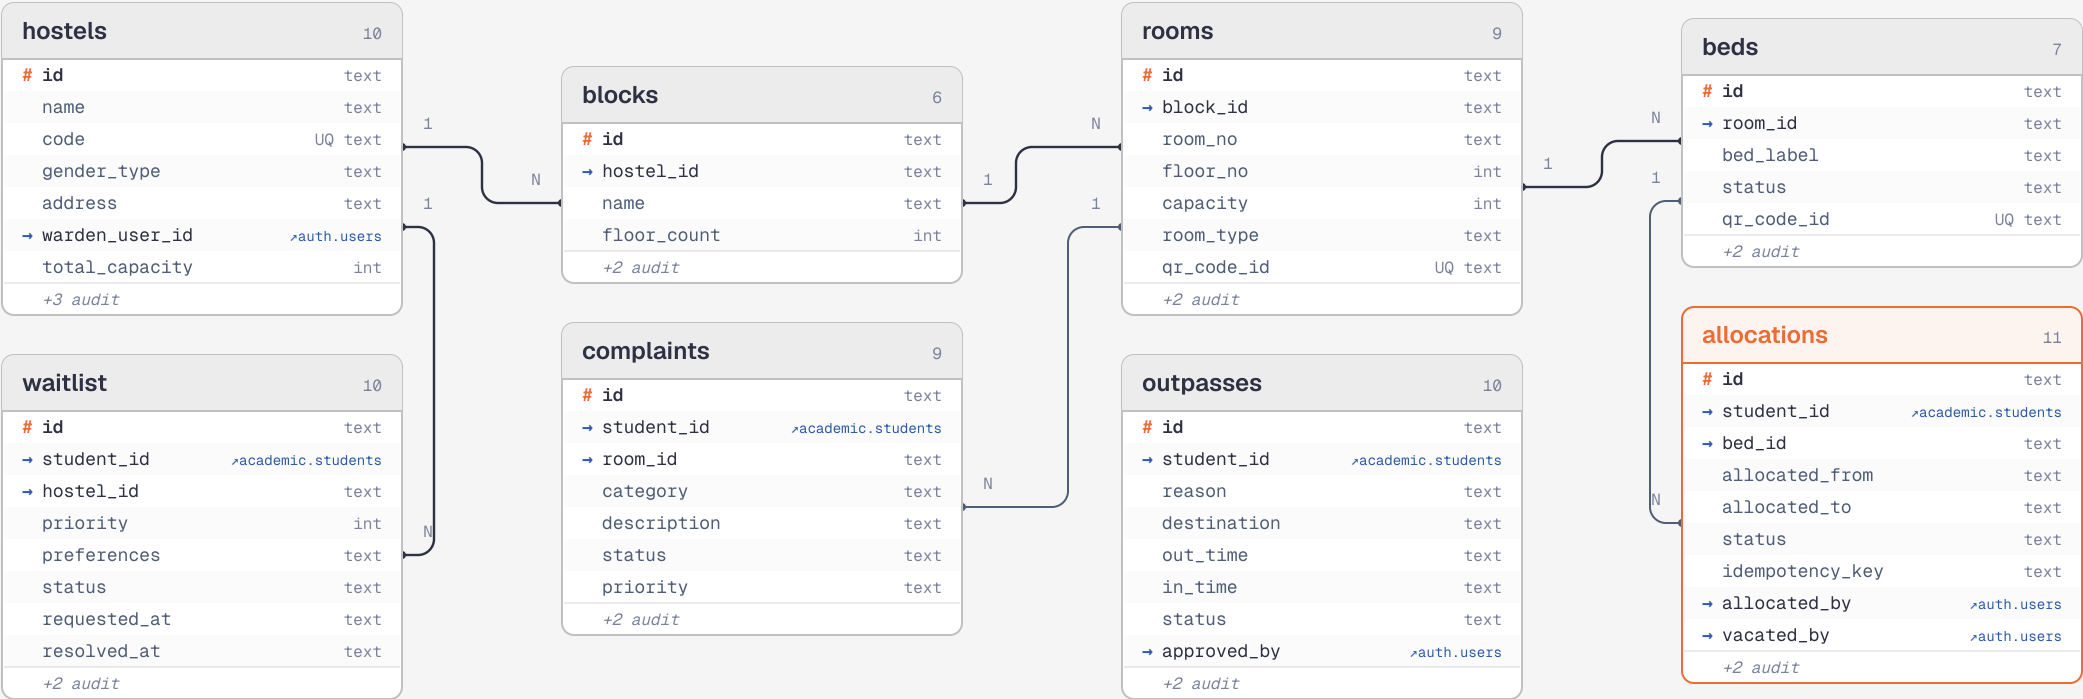

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ➤ cross-module ref

Library

9 tables · 9 internal relationships · 6 cross-module references

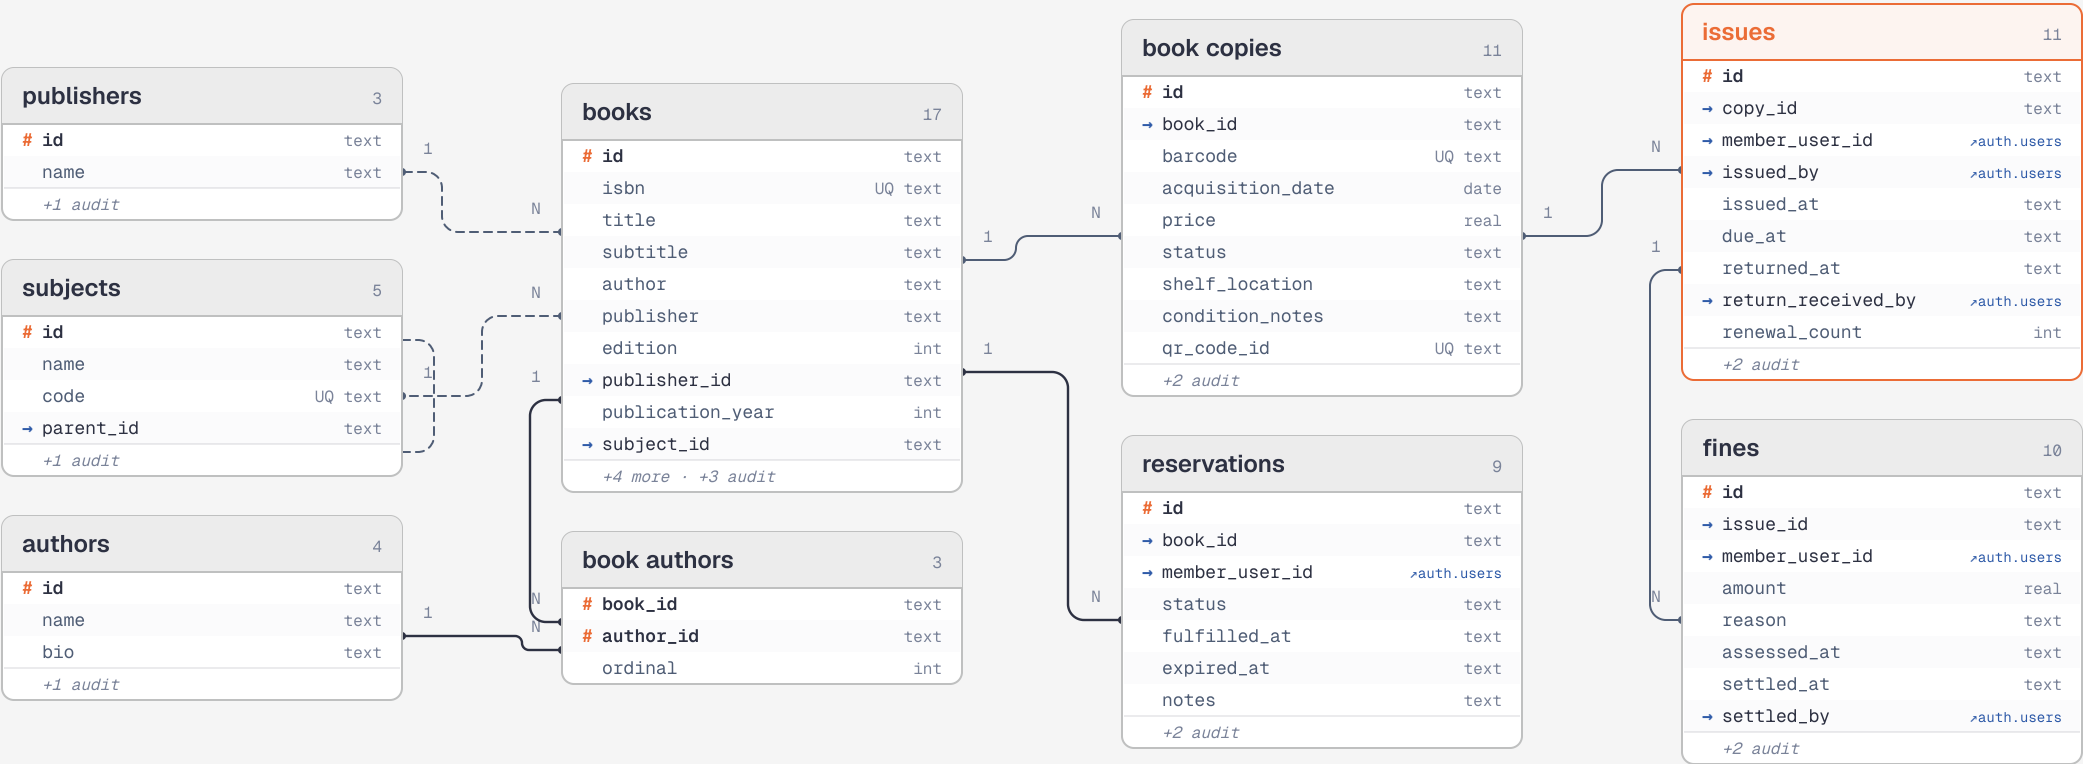

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ➤ cross-module ref

Campus Ops, Audit & Admin

8 tables · 0 internal relationships · 5 cross-module references

support tickets		core · 11
# id	text	
→ student_id	↗academic.students	
→ faculty_id	↗academic.faculty	
title	text	
description	text	
category	text	
status	text	
priority	text	
→ assigned_to	↗auth.users	
+2 audit		

notifications		core · 8
# id	text	
→ user_id	↗auth.users	
title	text	
message	text	
type	text	
is_read	int	
link	text	
+1 audit		

facility requests		core · 8
# id	text	
facility_name	text	
→ requester_id	↗auth.users	
request_date	date	
purpose	text	
status	text	
+2 audit		

campus events		core · 10
# id	text	
title	text	
description	text	
location	text	
start_time	text	
end_time	text	
organizer	text	
category	text	
+2 audit		

system settings		core · 4
# id	text	
setting_key	UQ text	
setting_value	text	
+1 audit		

action logs		admin · 4
# id	text	
action	text	
user_id	text	
+1 audit		

audit logs		audit · 10
id	text	
table_name	text	
record_pk	text	
operation	text	
old_values	text	
new_values	text	
changed_by	text	
changed_at	text	
request_id	text	
source_module	text	

outbox		audit · 7
# id	text	
aggregate_type	text	
aggregate_id	text	
event_type	text	
payload	text	
published_at	text	
+1 audit		

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ↗ cross-module ref