
Database Entity–Relationship Model

47 tables · 68 foreign keys · 6 modules · libSQL (Turso)

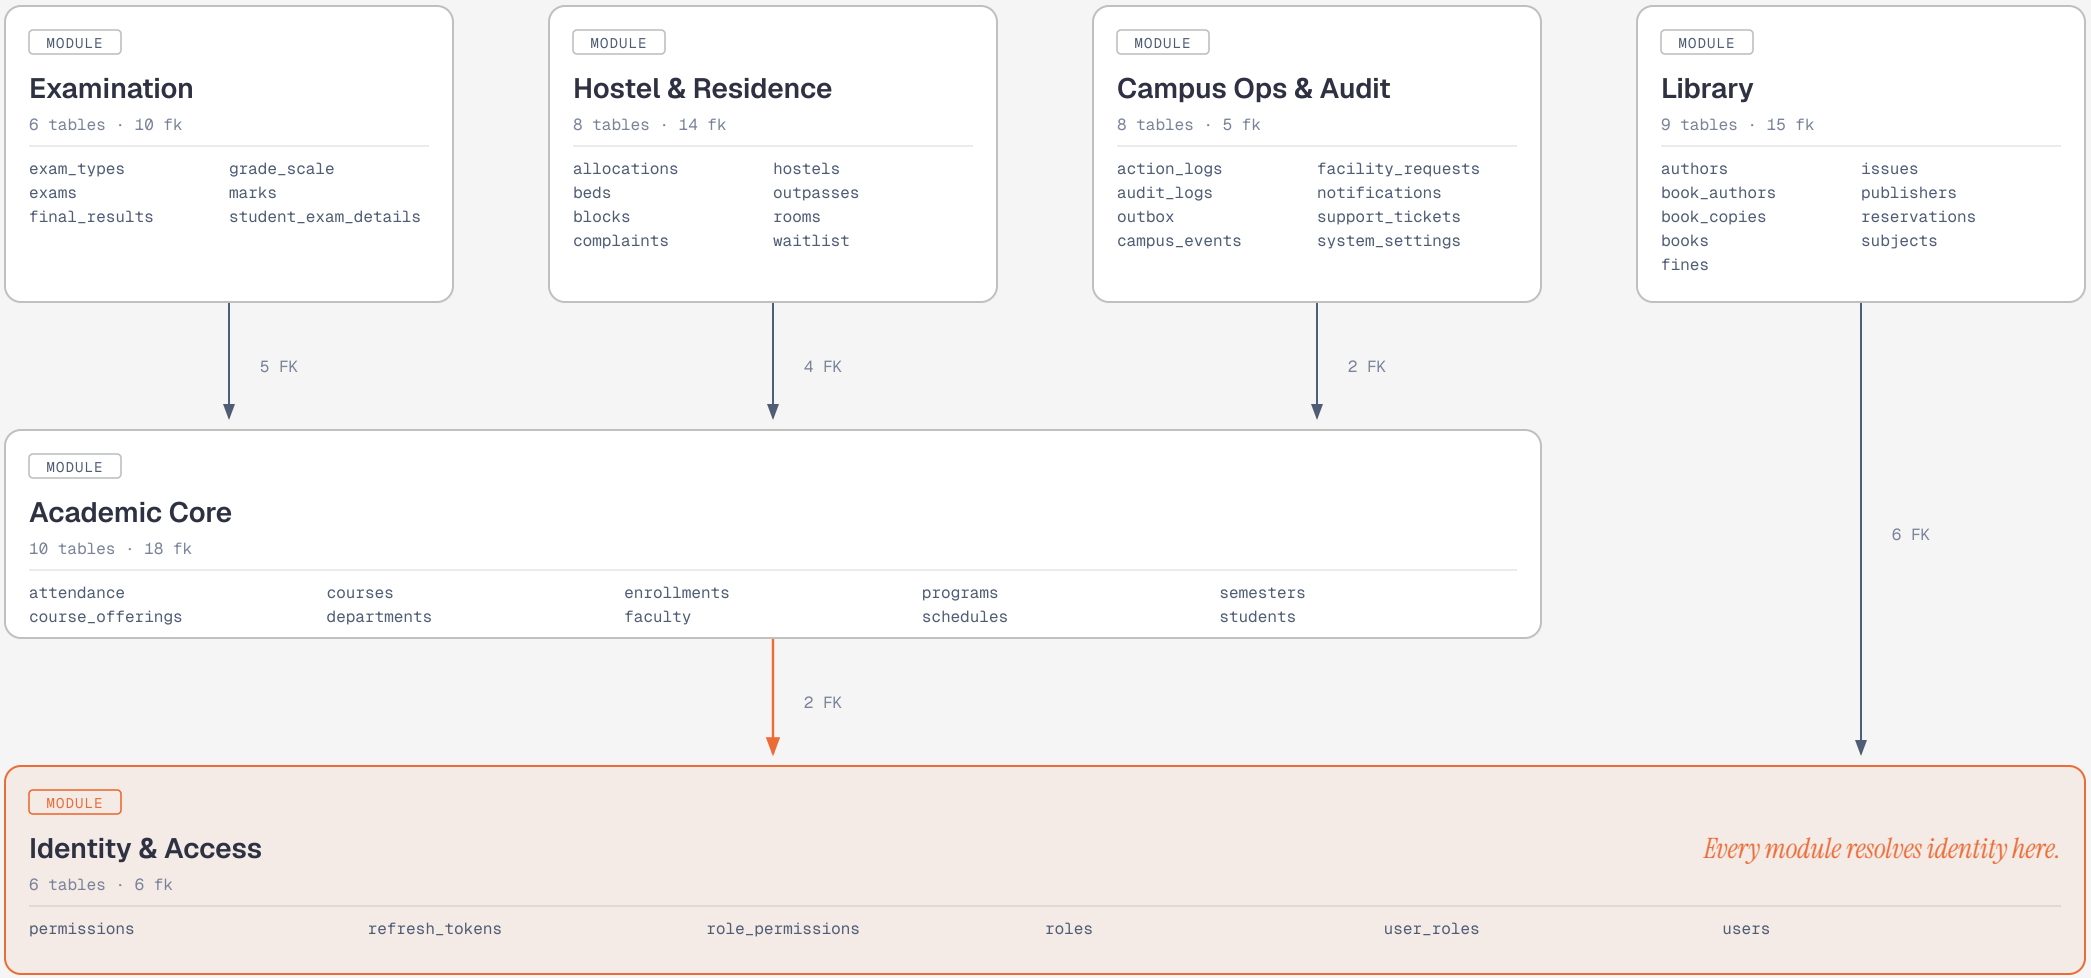


Dependencies run one way — downward. Nothing in the identity layer knows the modules above it.

LEGEND — primary dependency — module dependency

Identity & Access


6 tables · 6 internal relationships · 0 cross-module references

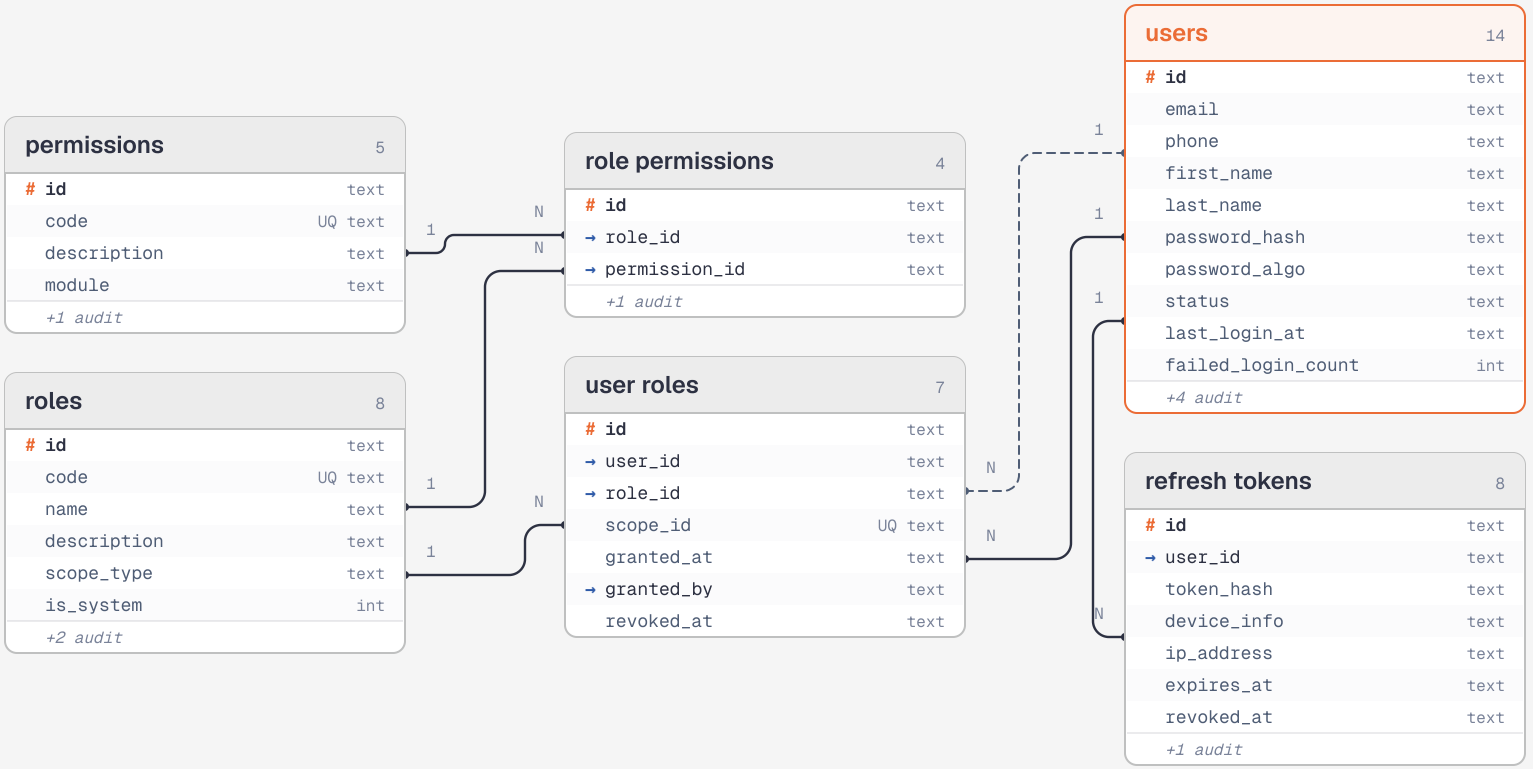

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ↗ cross-module ref

Academic Core


10 tables · 16 internal relationships · 2 cross-module references

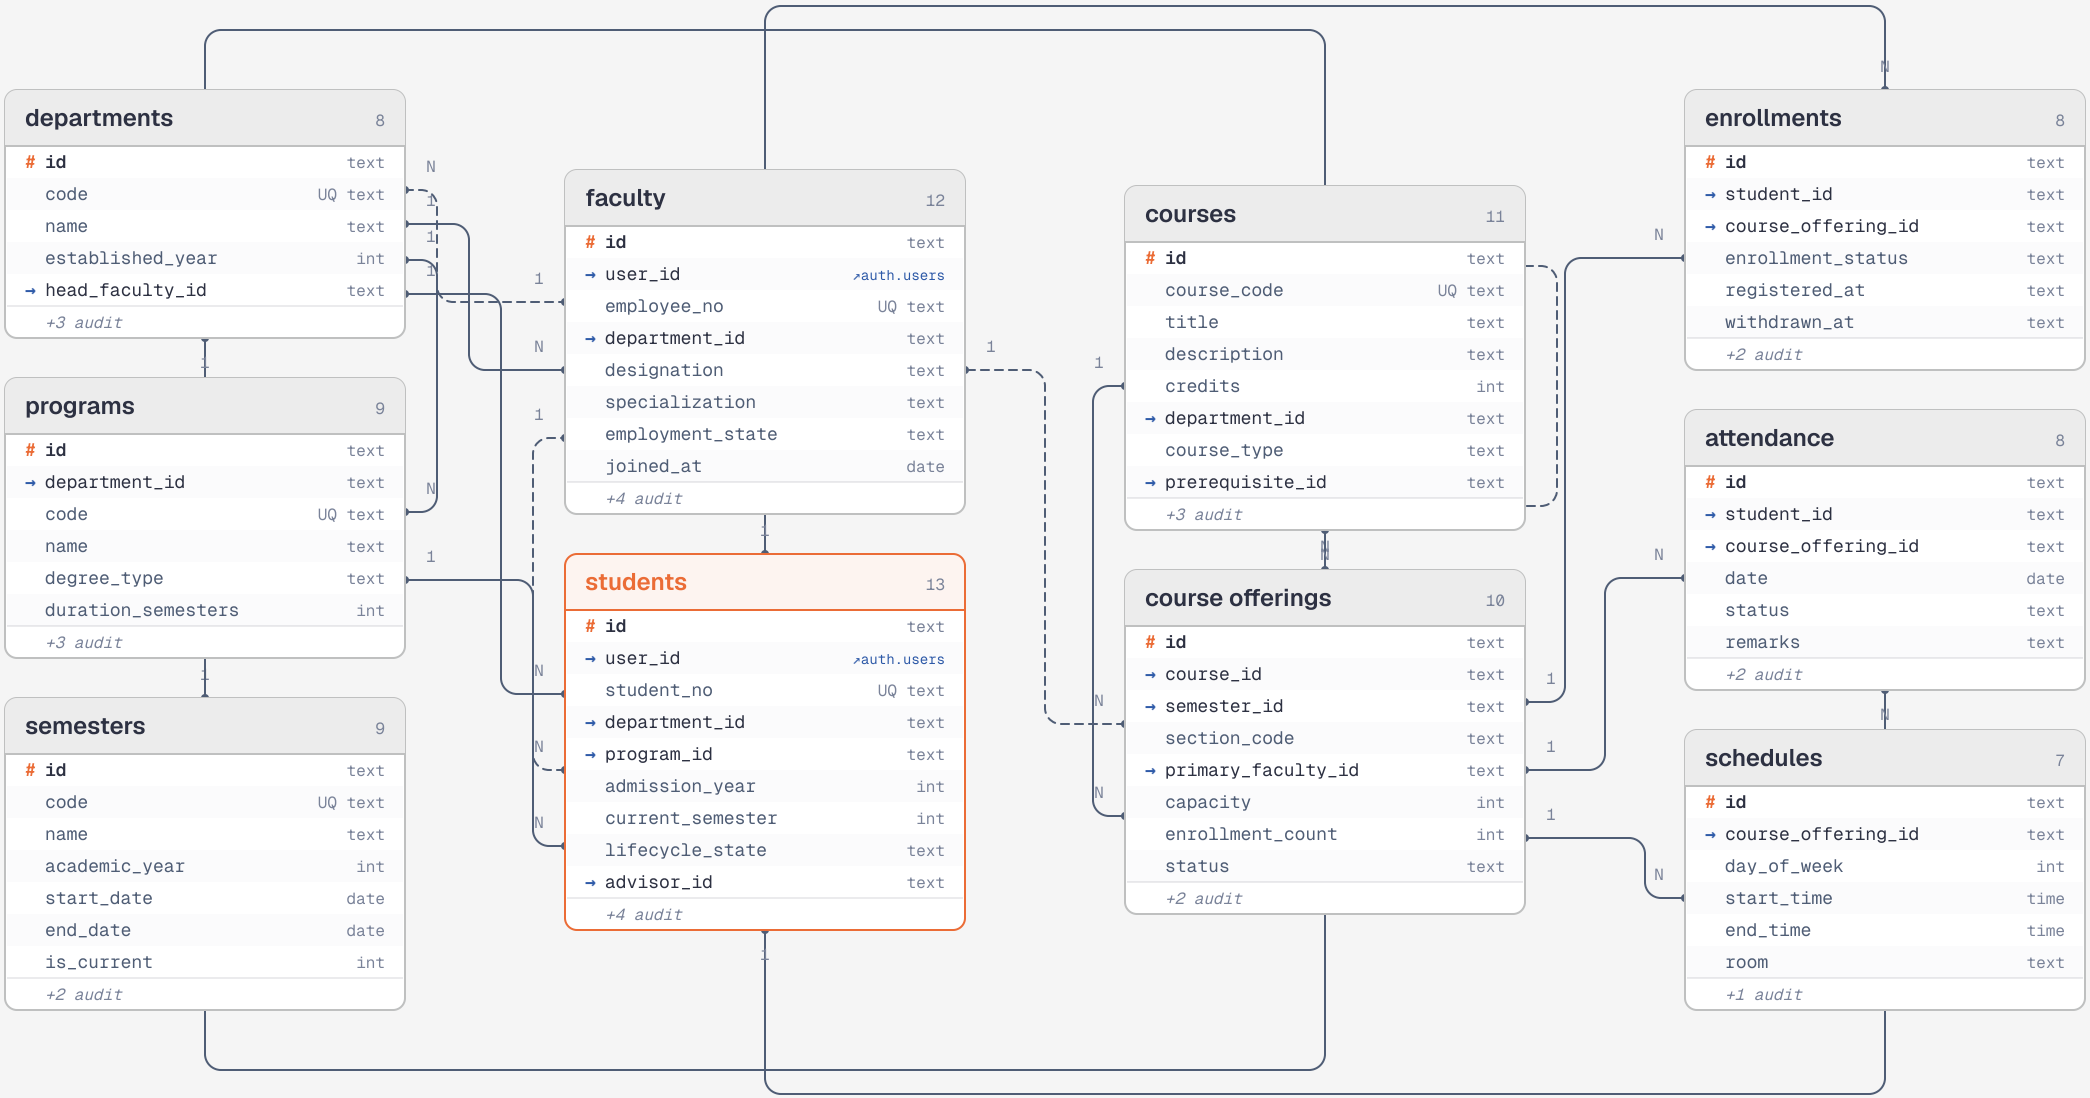

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ↗ cross-module ref

Examination


6 tables · 3 internal relationships · 7 cross-module references

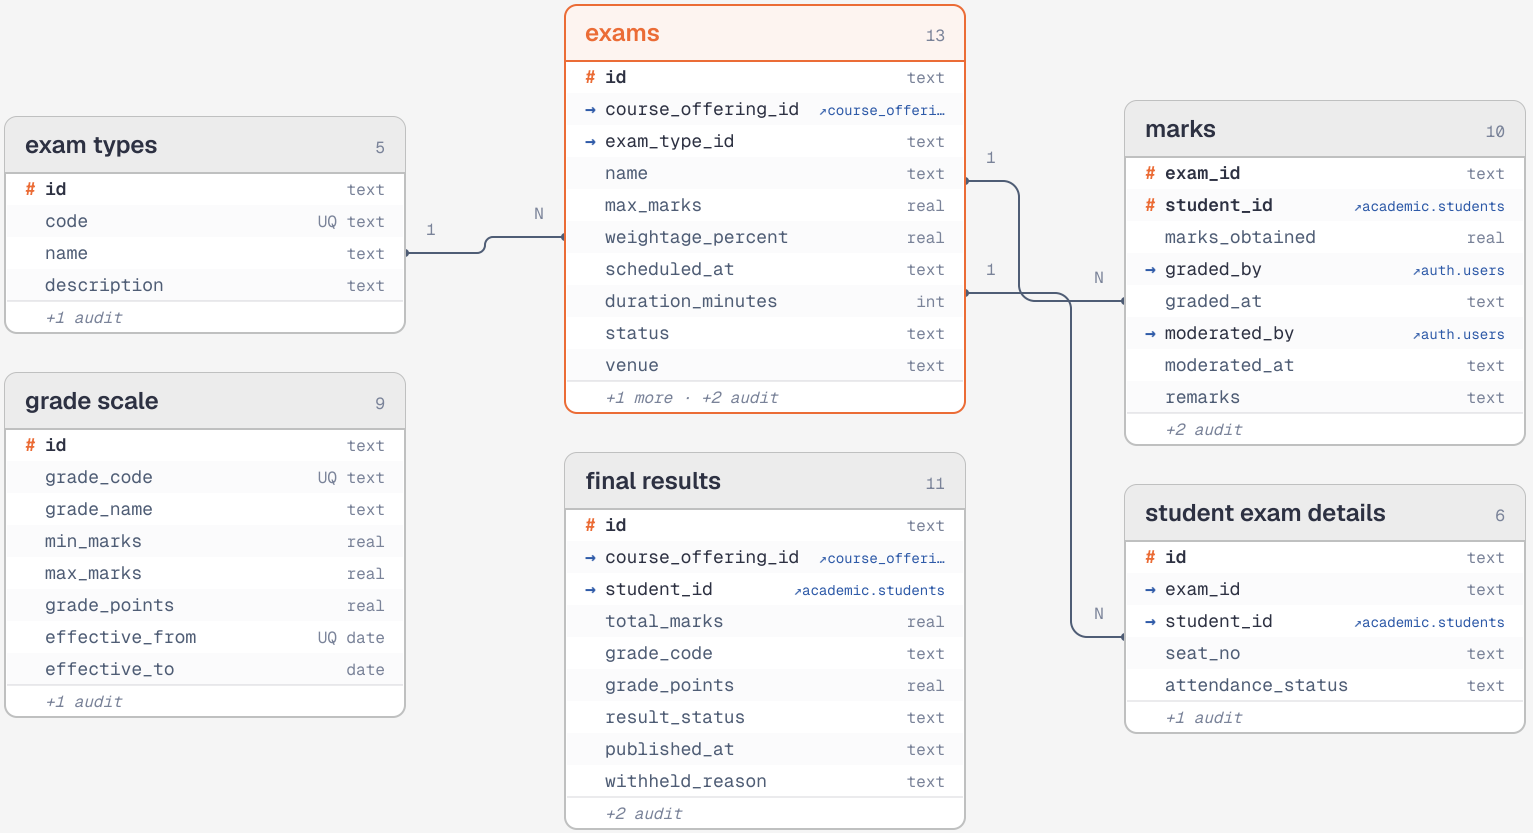

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ↗ cross-module ref

Hostel & Residence


8 tables · 6 internal relationships · 8 cross-module references

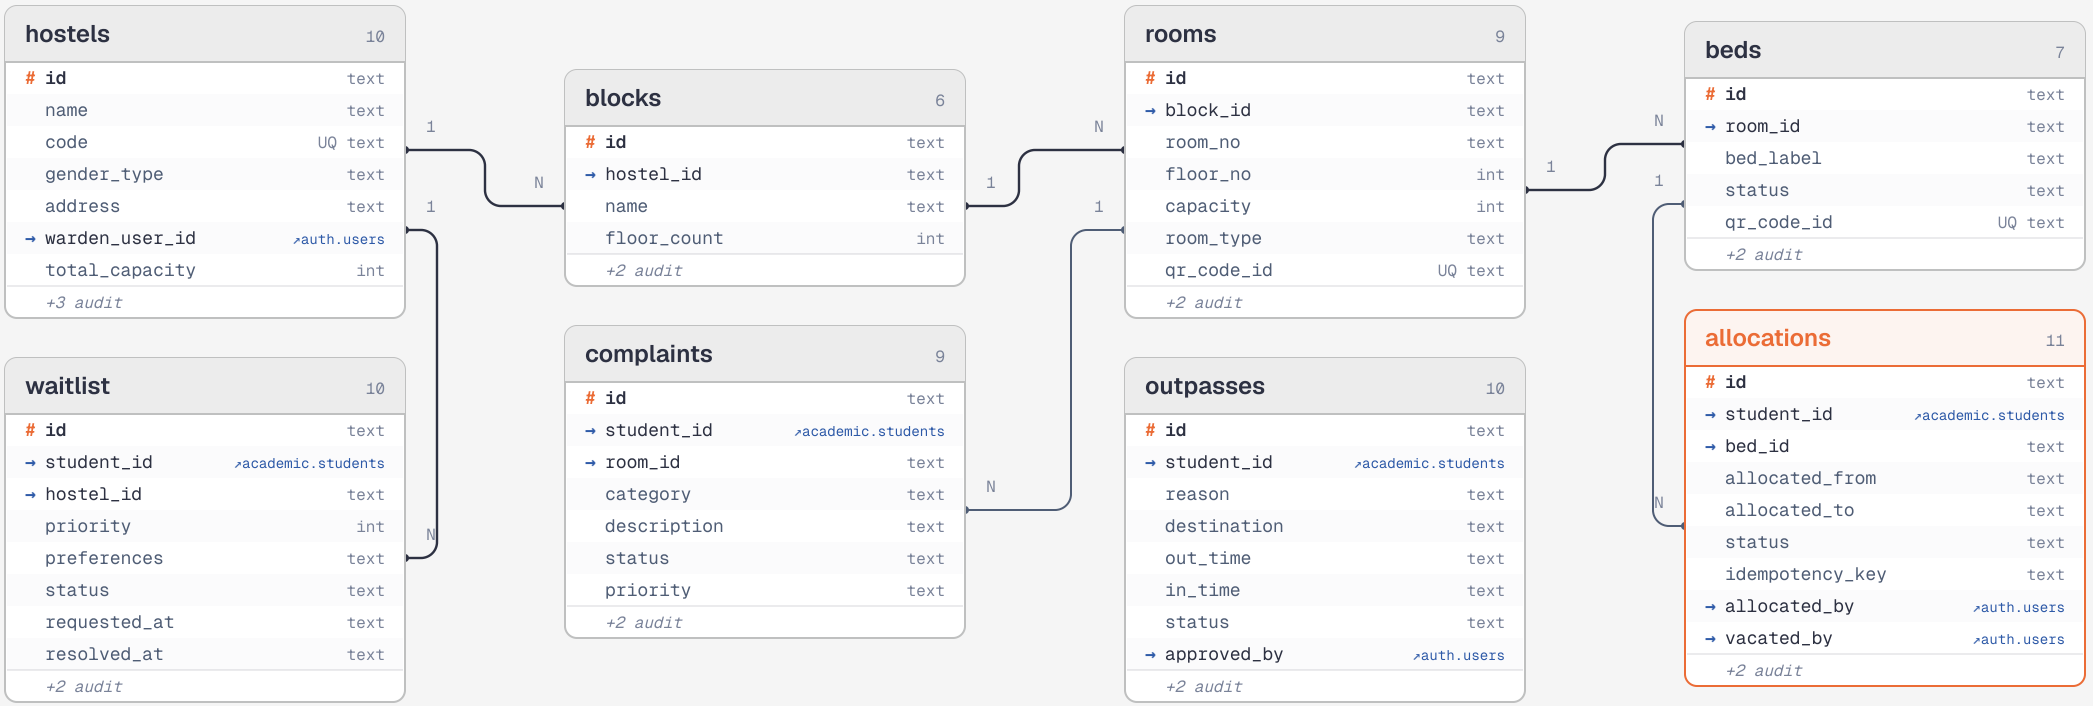

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ↗ cross-module ref

Library

9 tables · 9 internal relationships · 6 cross-module references

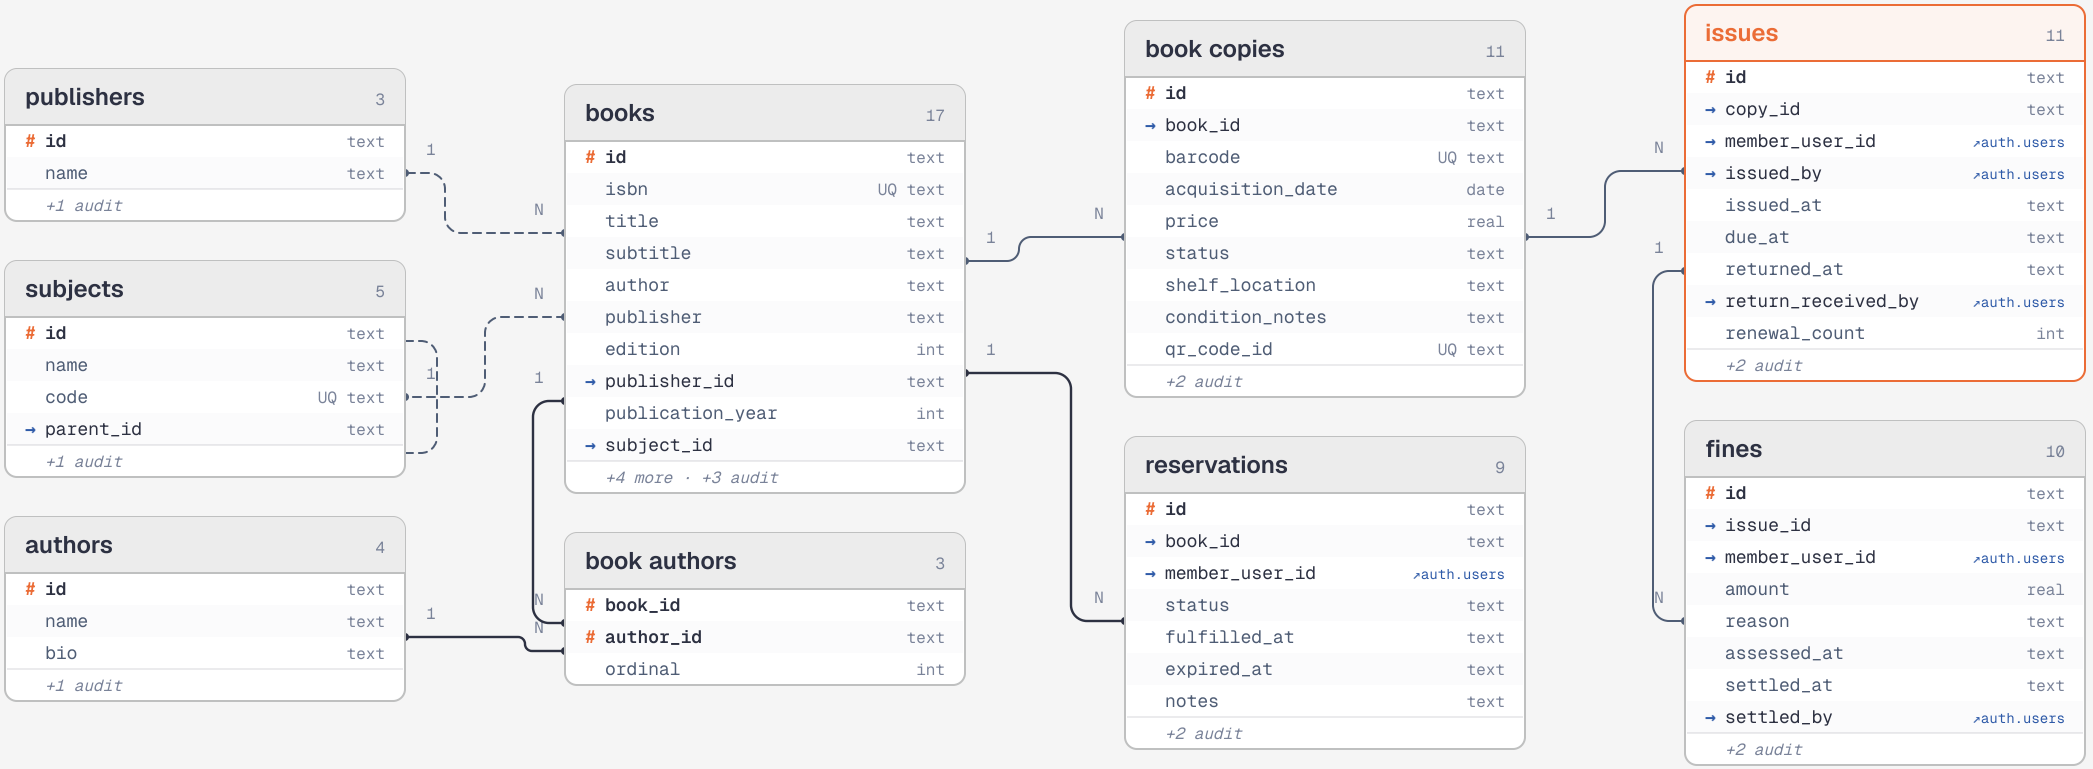

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ↗ cross-module ref

Campus Ops, Audit & Admin

8 tables · 0 internal relationships · 5 cross-module references

support tickets — core · 11

#	id	text
→	student_id	↗academic.students
→	faculty_id	↗academic.faculty
	title	text
	description	text
	category	text
	status	text
	priority	text
→	assigned_to	↗auth.users
	+2 audit	

notifications — core · 8

#	id	text
→	user_id	↗auth.users
	title	text
	message	text
	type	text
	is_read	int
	link	text
	+1 audit	

facility requests — core · 8

#	id	text
	facility_name	text
→	requester_id	↗auth.users
	request_date	date
	purpose	text
	status	text
	+2 audit	

campus events — core · 10

#	id	text
	title	text
	description	text
	location	text
	start_time	text
	end_time	text
	organizer	text
	category	text
	+2 audit	

system settings — core · 4

#	id	text
	setting_key	UQ text
	setting_value	text
	+1 audit	

action logs — admin · 4

#	id	text
	action	text
	user_id	text
	+1 audit	

audit logs — audit · 10

	id	text
	table_name	text
	record_pk	text
	operation	text
	old_values	text
	new_values	text
	changed_by	text
	changed_at	text
	request_id	text
	source_module	text

outbox — audit · 7

#	id	text
	aggregate_type	text
	aggregate_id	text
	event_type	text
	payload	text
	published_at	text
	+1 audit	

LEGEND — on delete cascade — restrict --- set null # primary key → foreign key ↗ cross-module ref