Image 053-create-sources-one-found-added.png

What it shows: One found source added with its Add button; it appears in Sources in this case on the right.
How to reach it: Press Add on IIS web log · Default Web Site (W3SVC1).

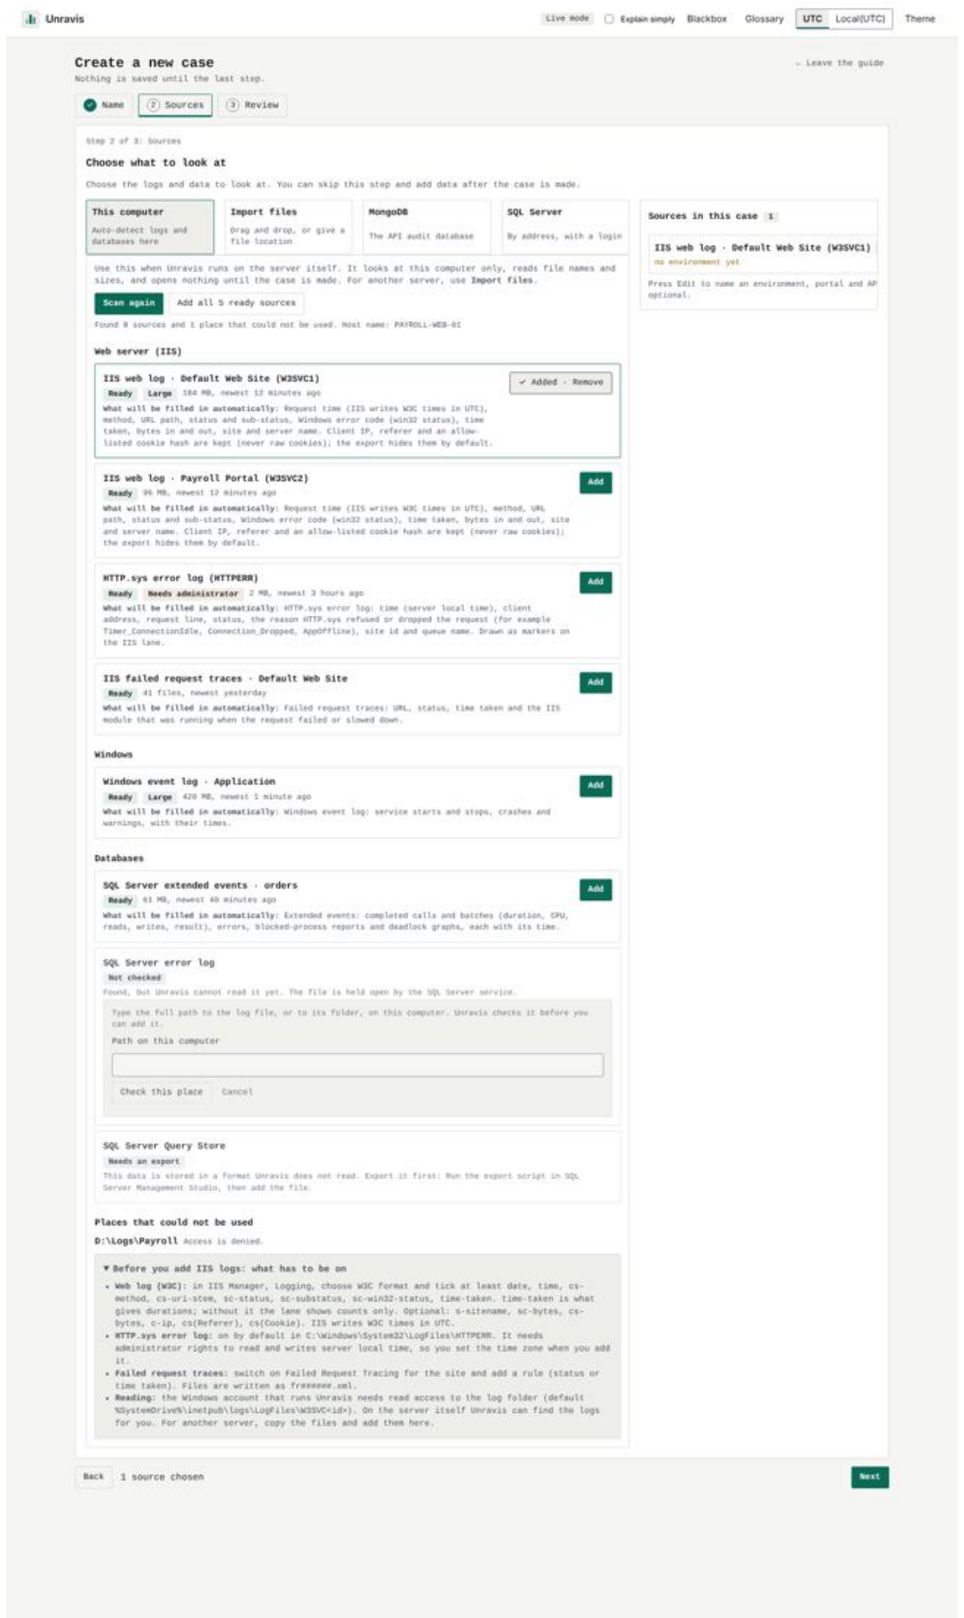


Image 054-create-sources-add-all-ready.png

What it shows: Add all ready sources adds every source that is ready in one go.
How to reach it: Press Add all N ready sources.

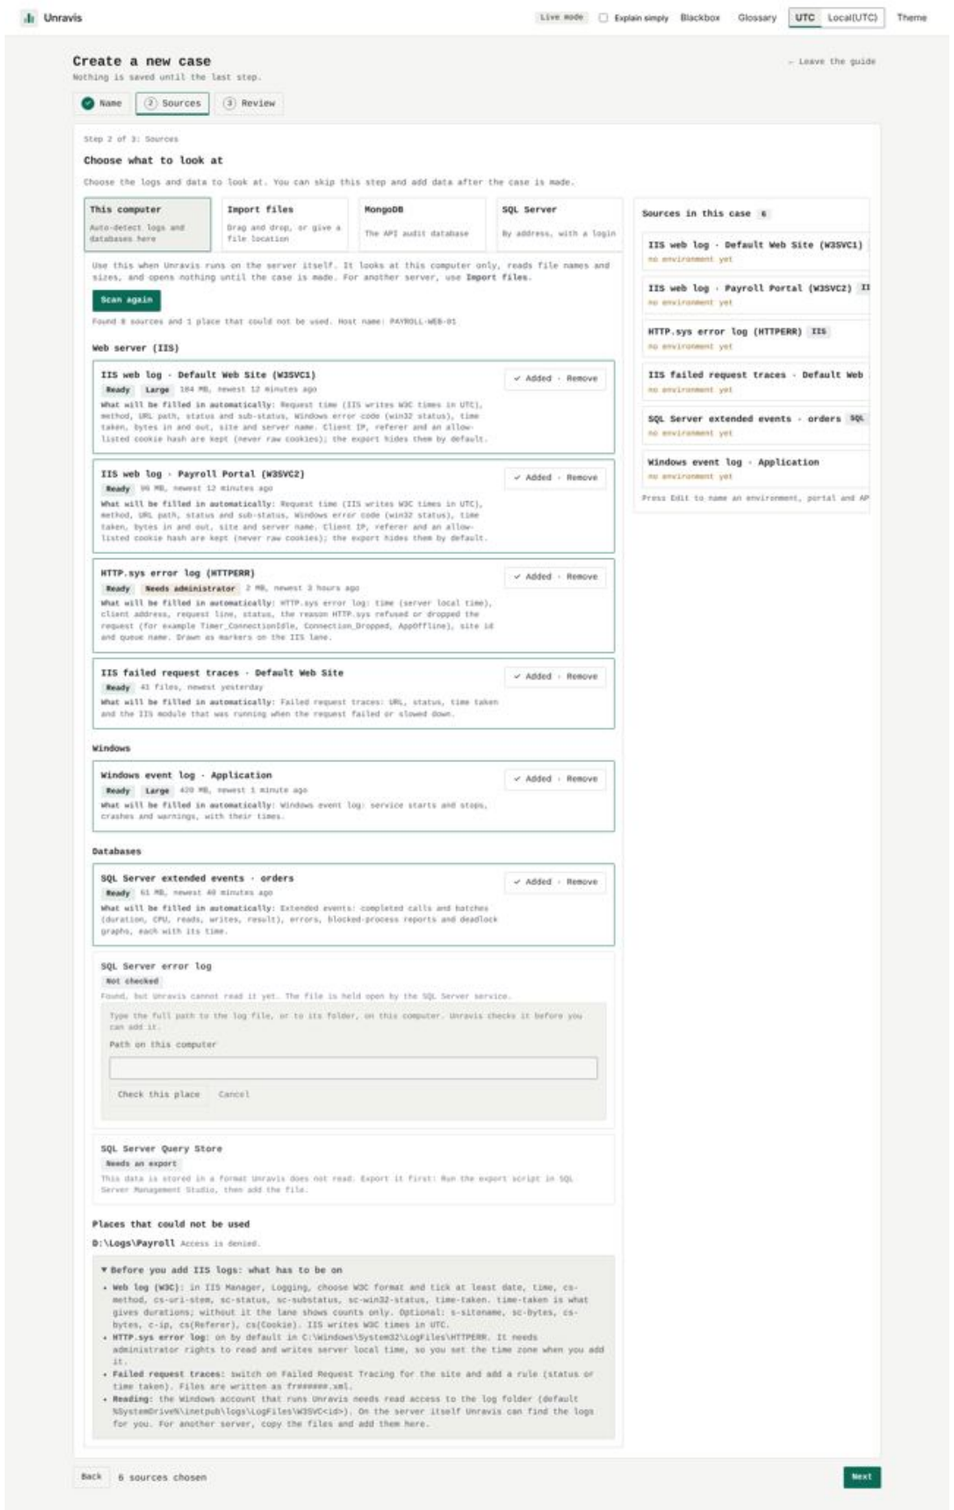


Image 055-create-sources-mongo-empty.png

What it shows: MongoDB method: saved connection list, address, user, TLS, password, Test and list databases, and the roles script.
How to reach it: Tab MongoDB.

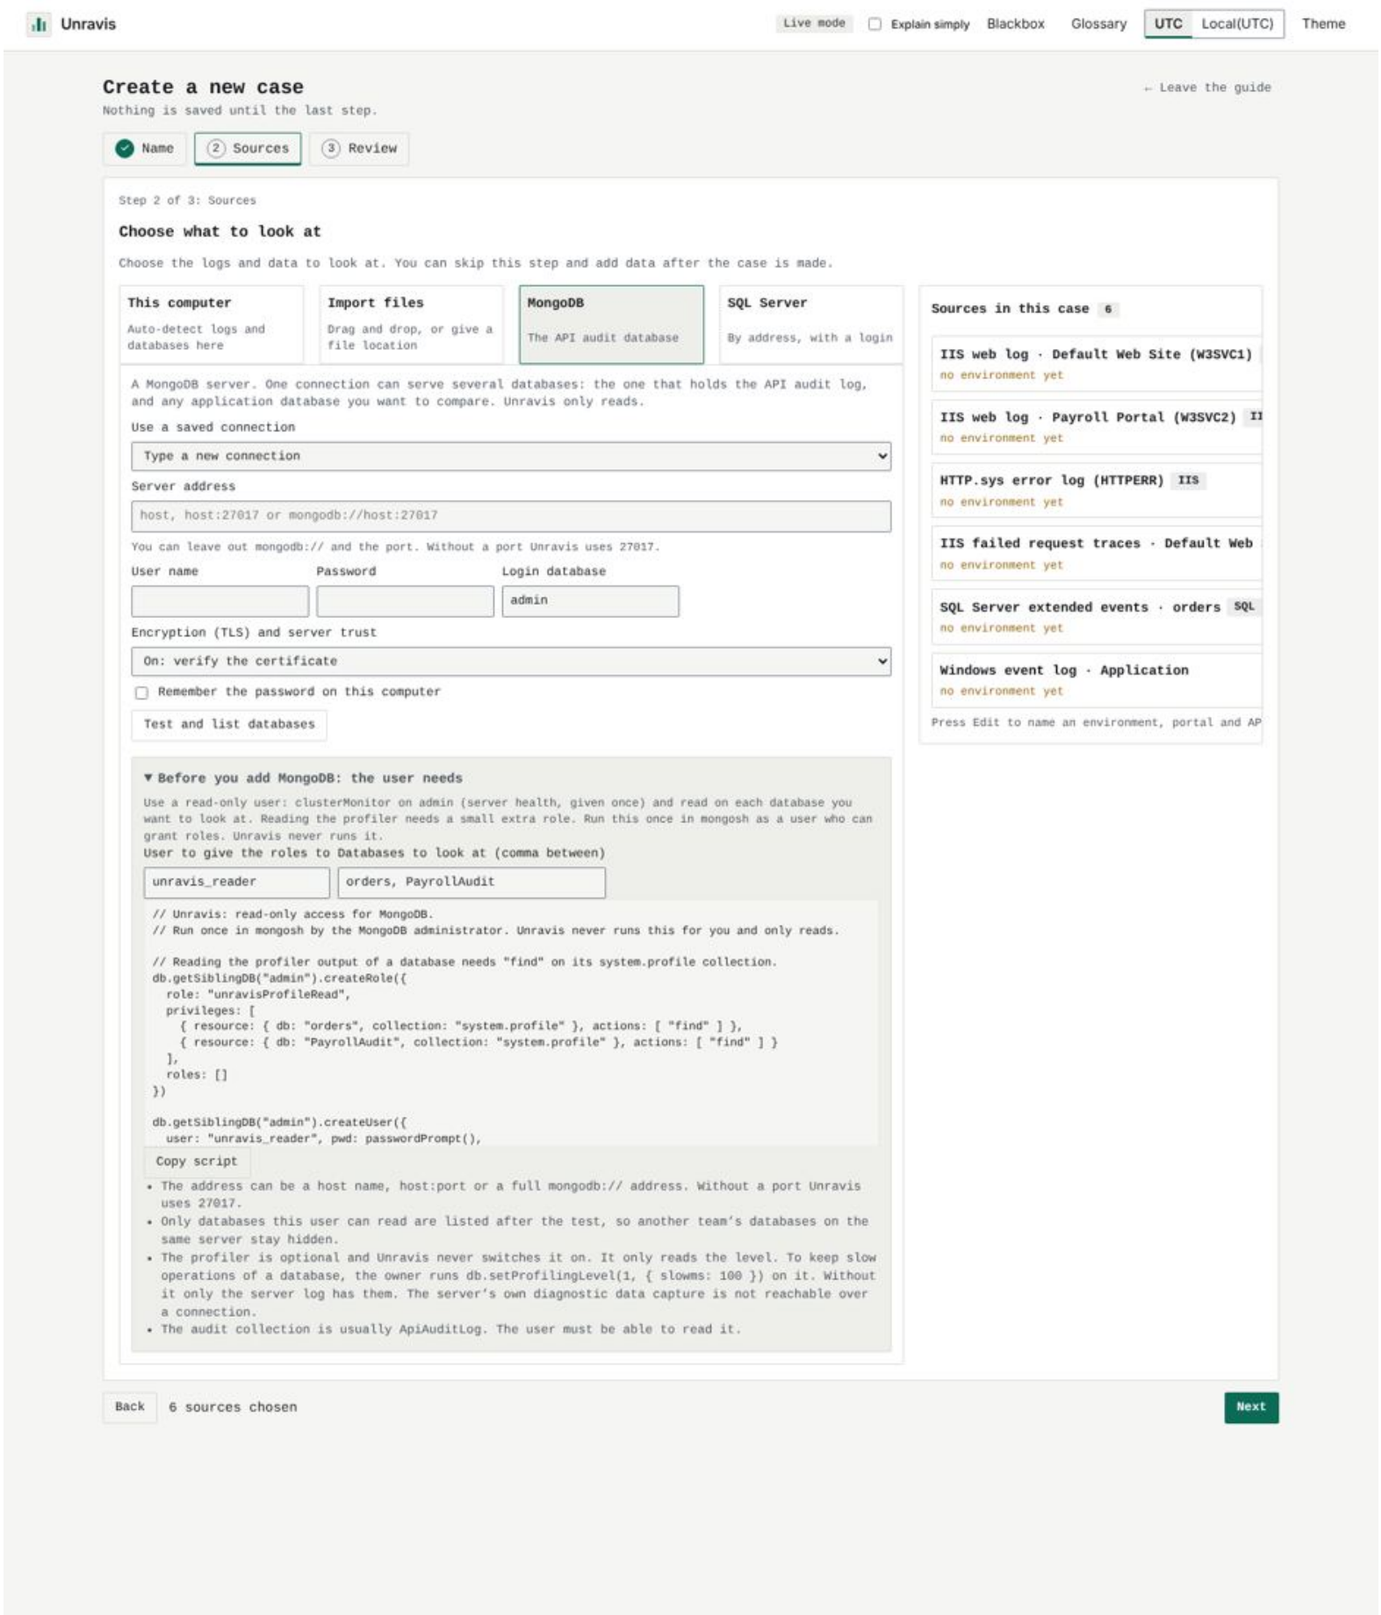


Image 056-create-mongo-saved-connection.png

What it shows: Choosing a saved connection fills in the address.
How to reach it: Pick Payroll audit Mongo (password saved) in the saved-connection list.

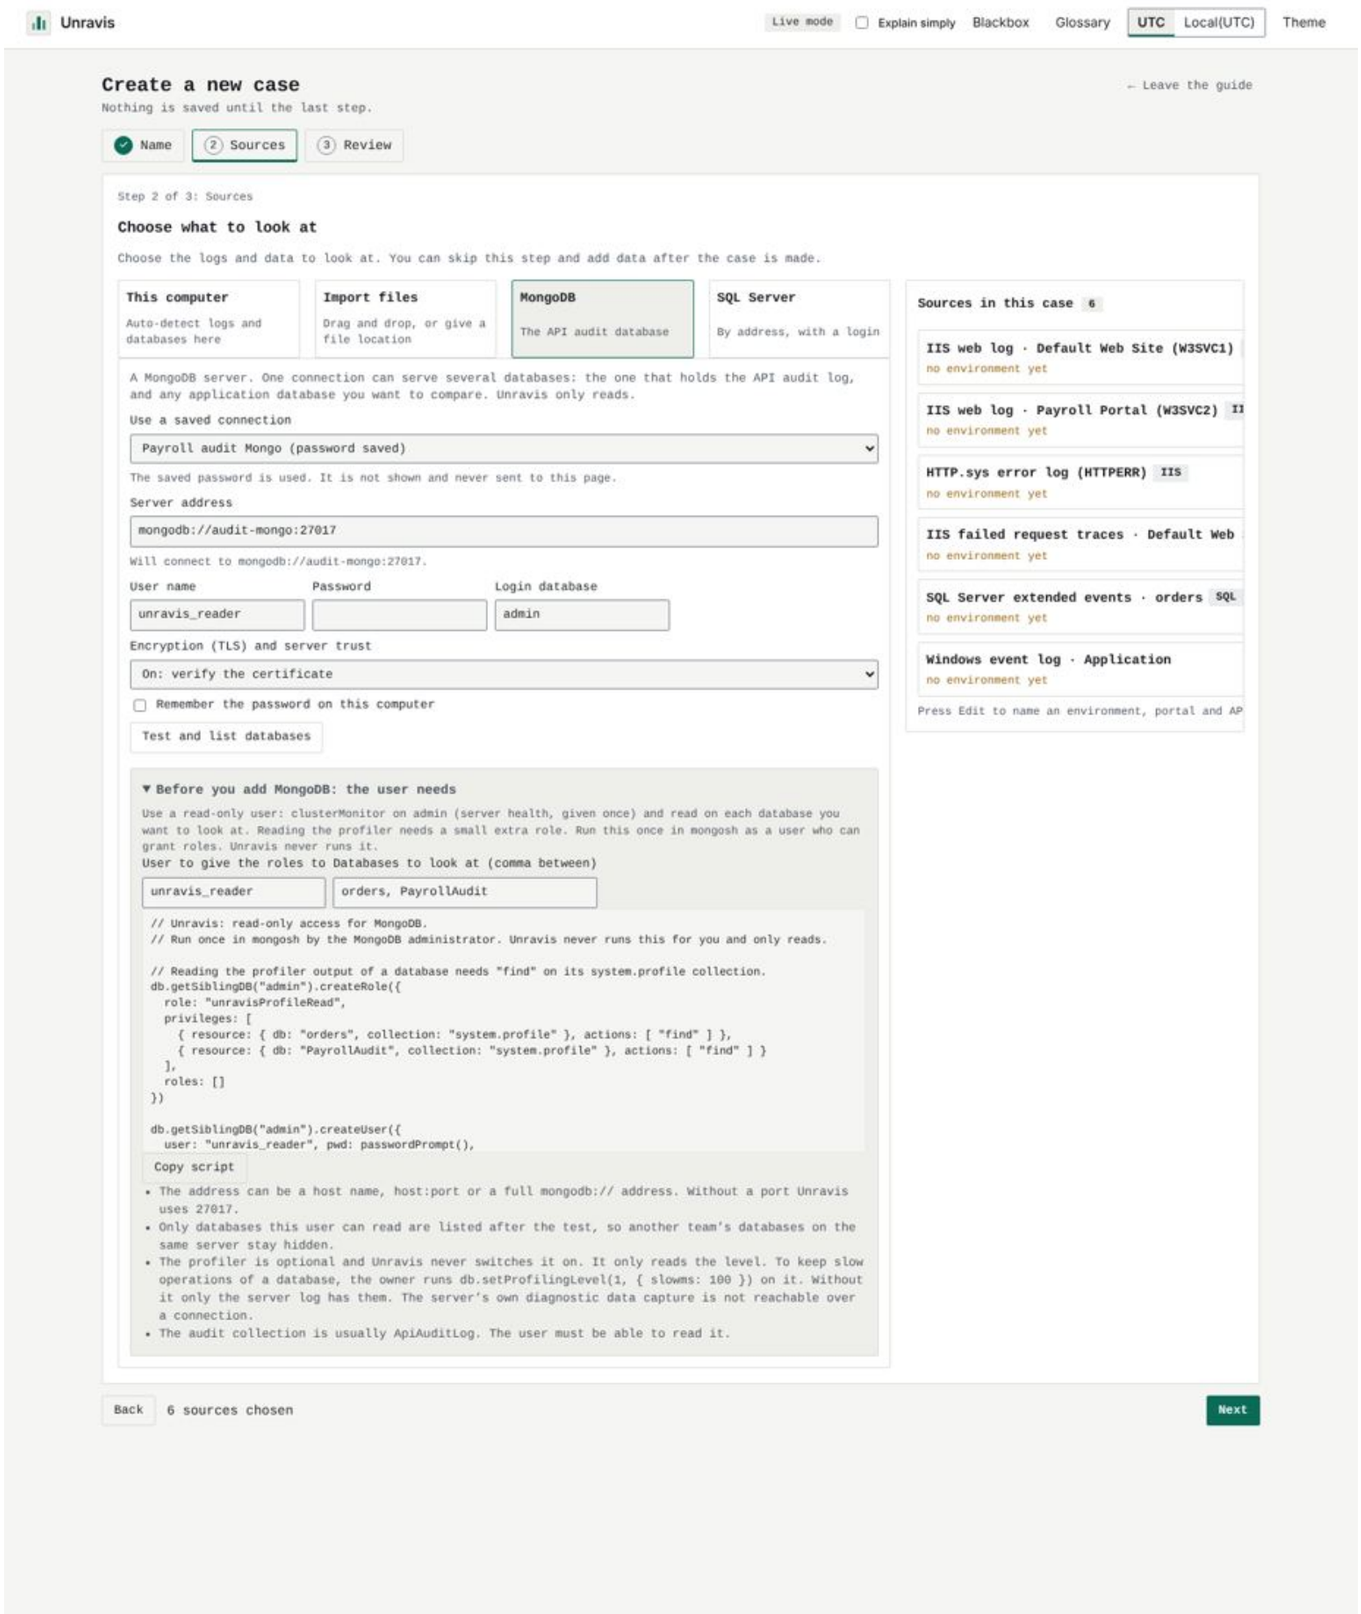


Image 057-create-mongo-address-no-port.png

What it shows: An address with no scheme and no port: the default port 27017 is used and shown.
How to reach it: Type audit-mongo in the address field.

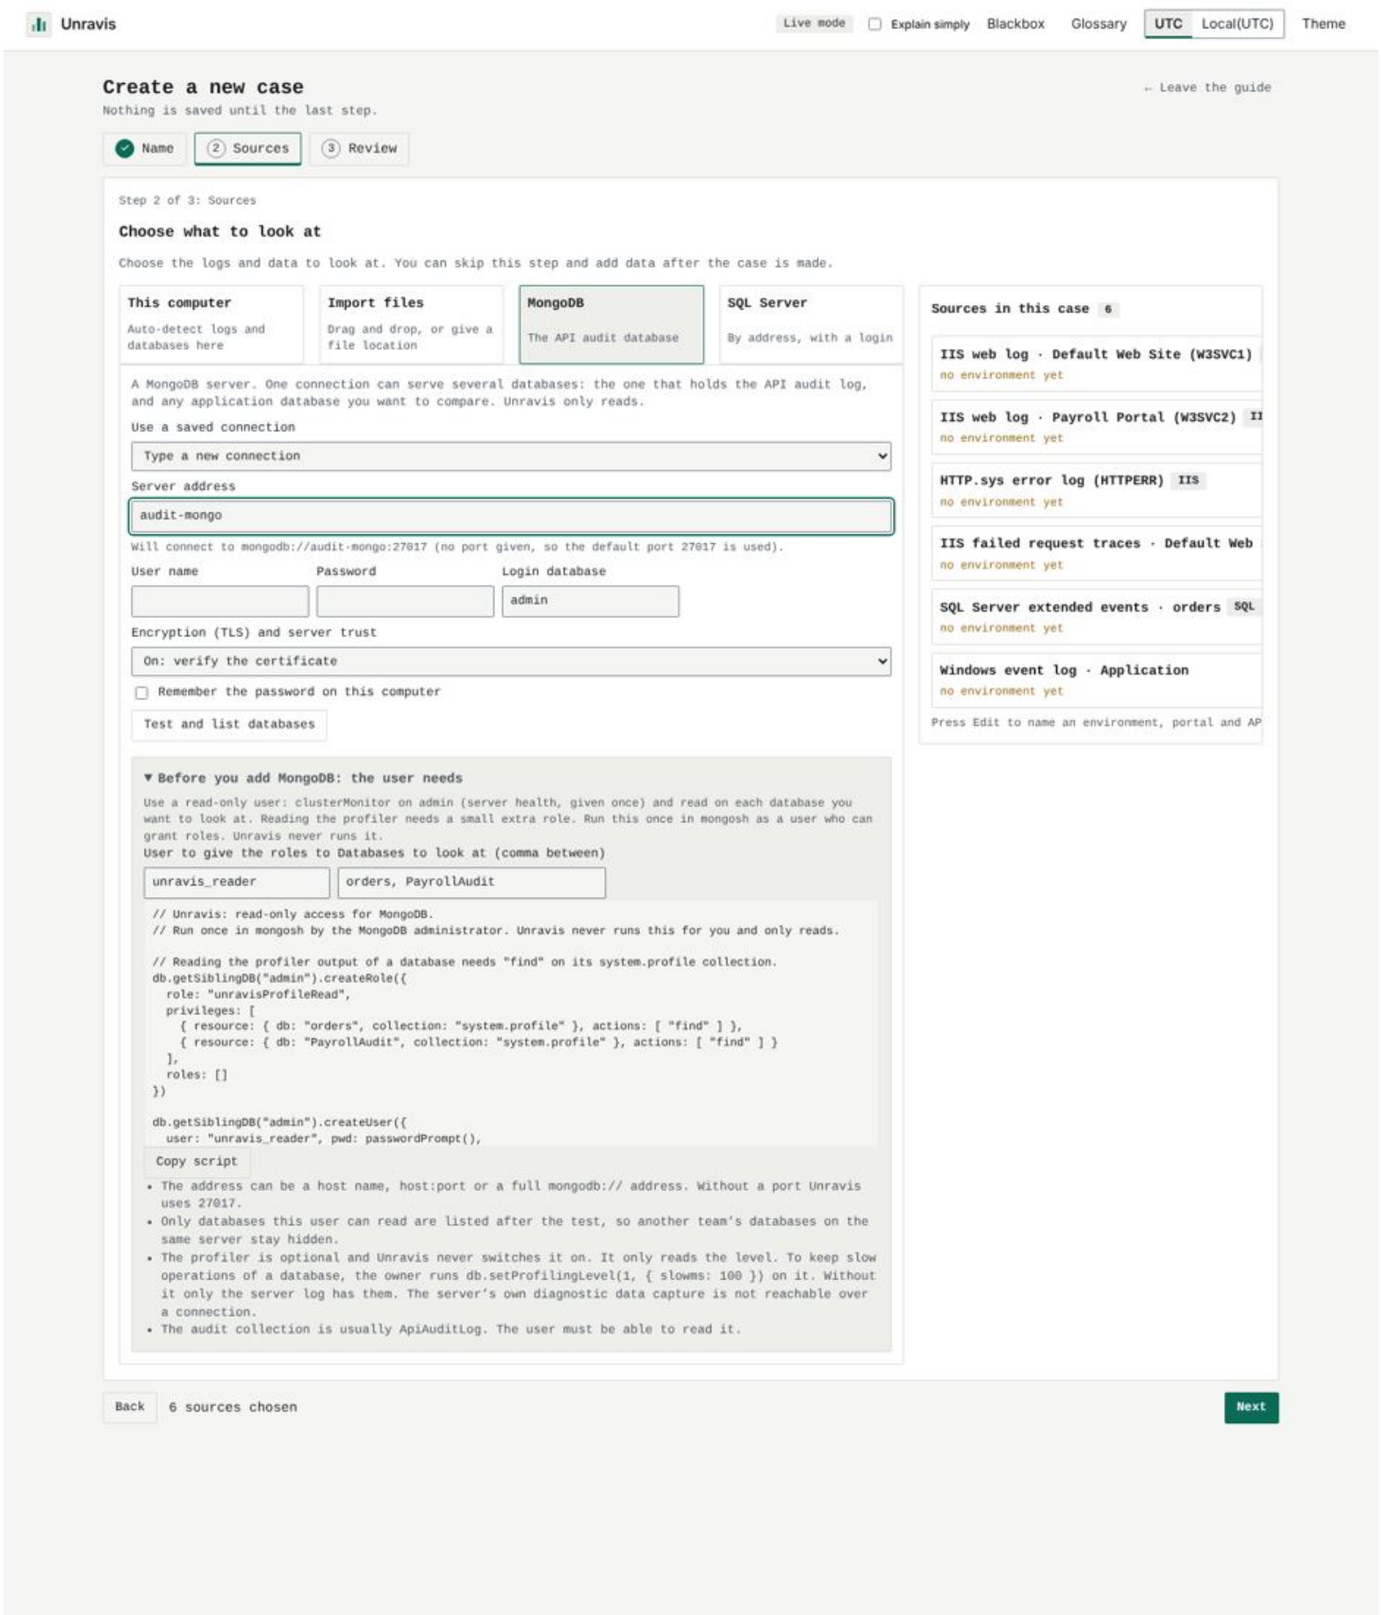


Image 058-create-mongo-bad-port.png

What it shows: A bad port is named in words.
How to reach it: Type host:99999.

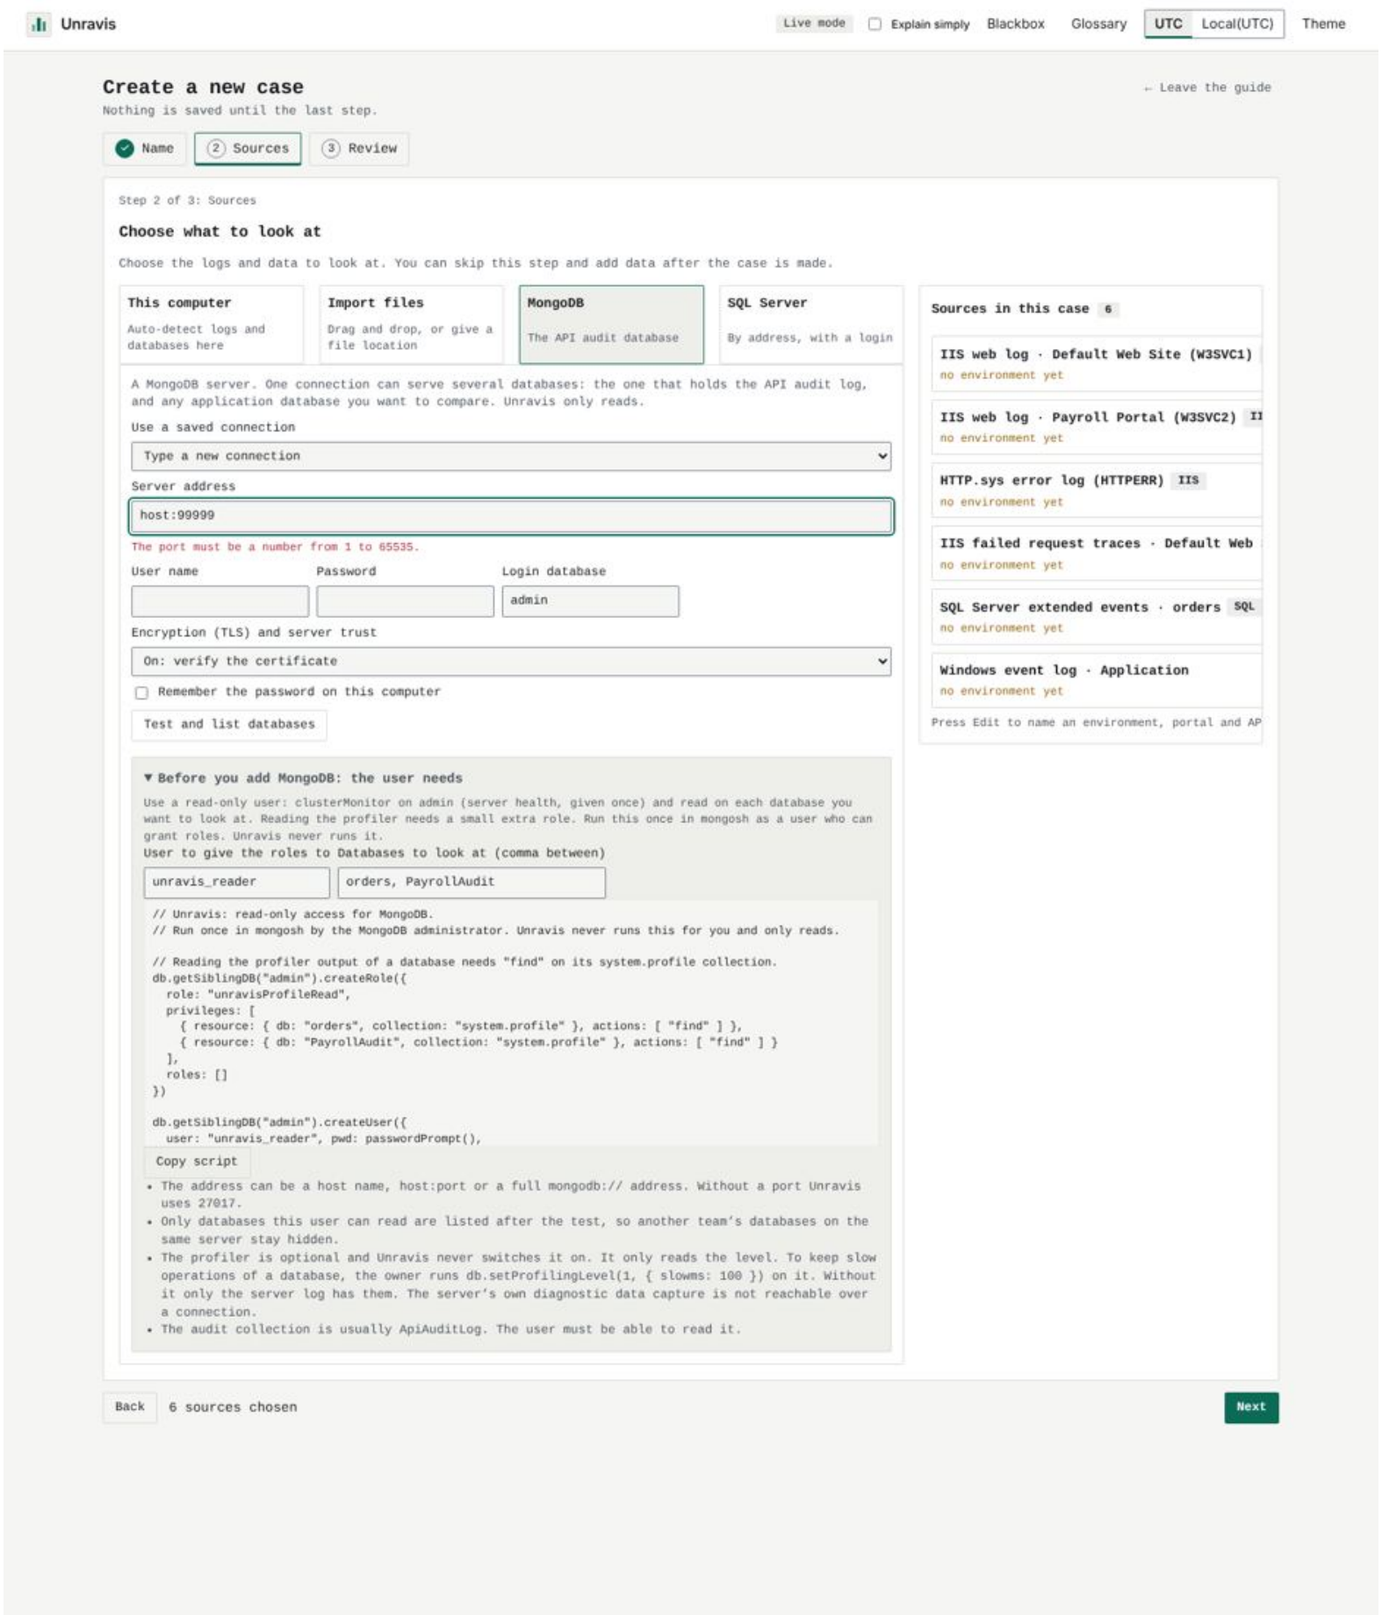


Image 059-create-mongo-databases-listed.png

What it shows: After Test and list databases: a database checklist with a profiler chip each; system databases left out.
How to reach it: Address audit-mongo, press Test and list databases.

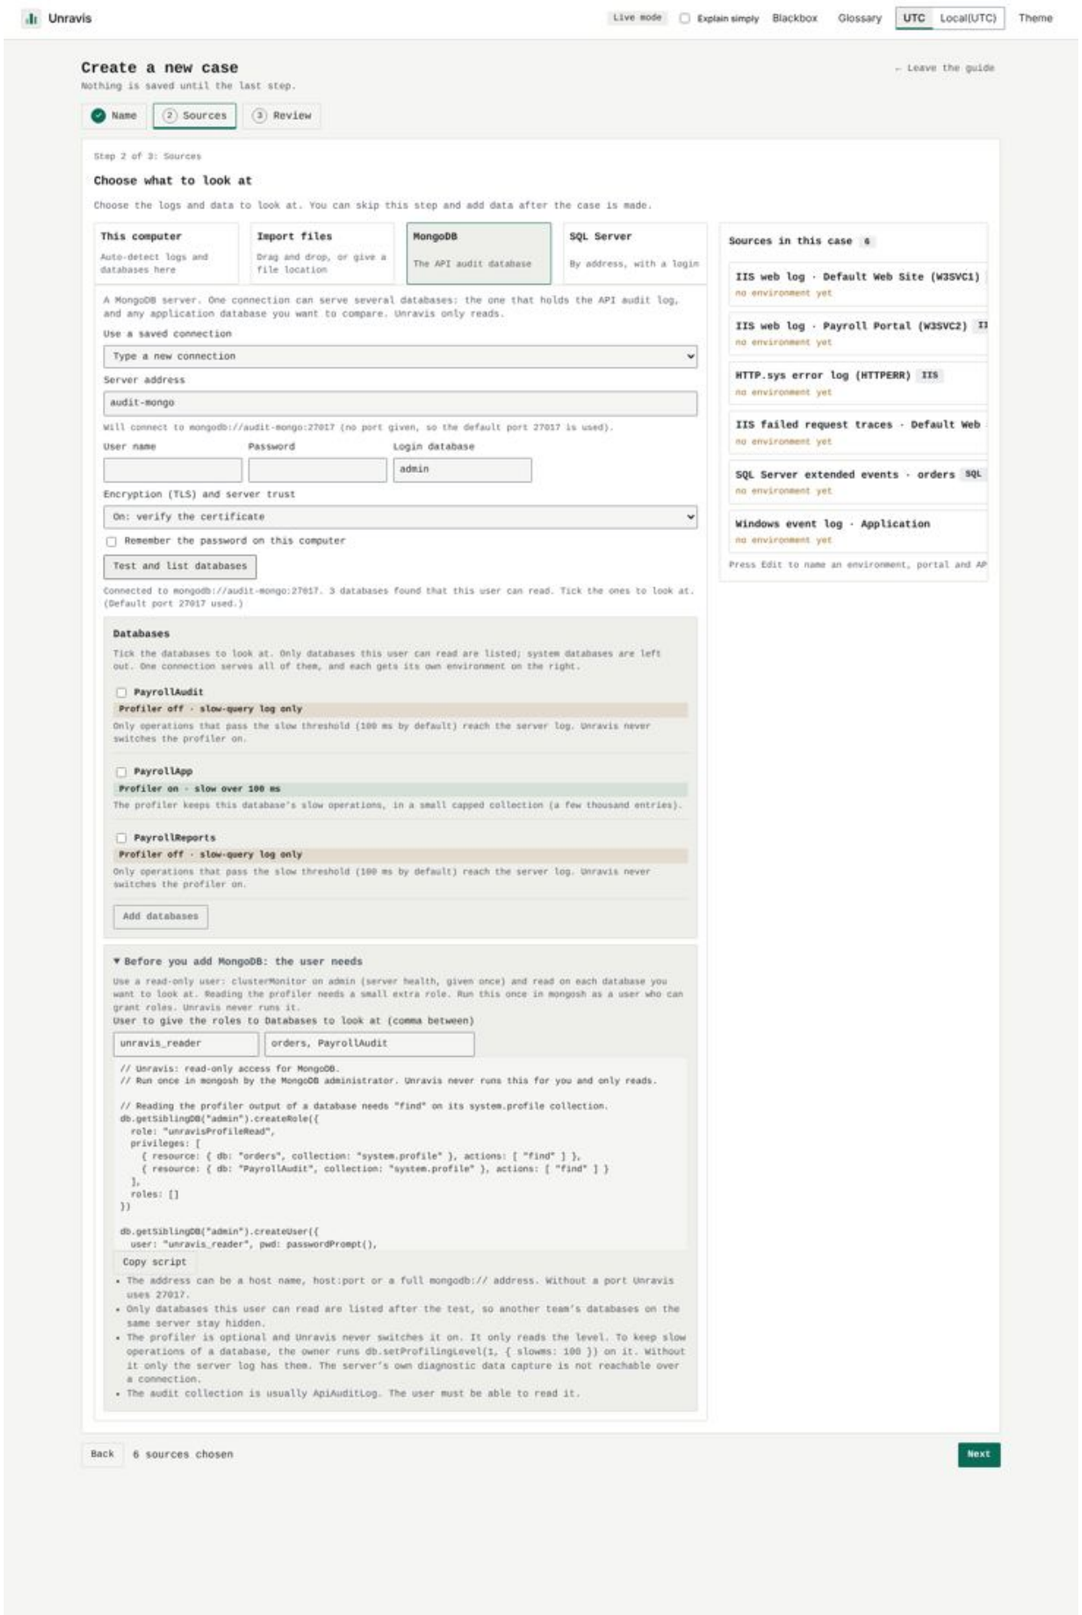


Image 060-create-mongo-databases-ticked.png

What it shows: Two databases ticked; an audit-named one defaults to audit data, the other to application data; each can be both.
How to reach it: Tick PayrollAudit and PayrollApp, then also tick application data on PayrollAudit.

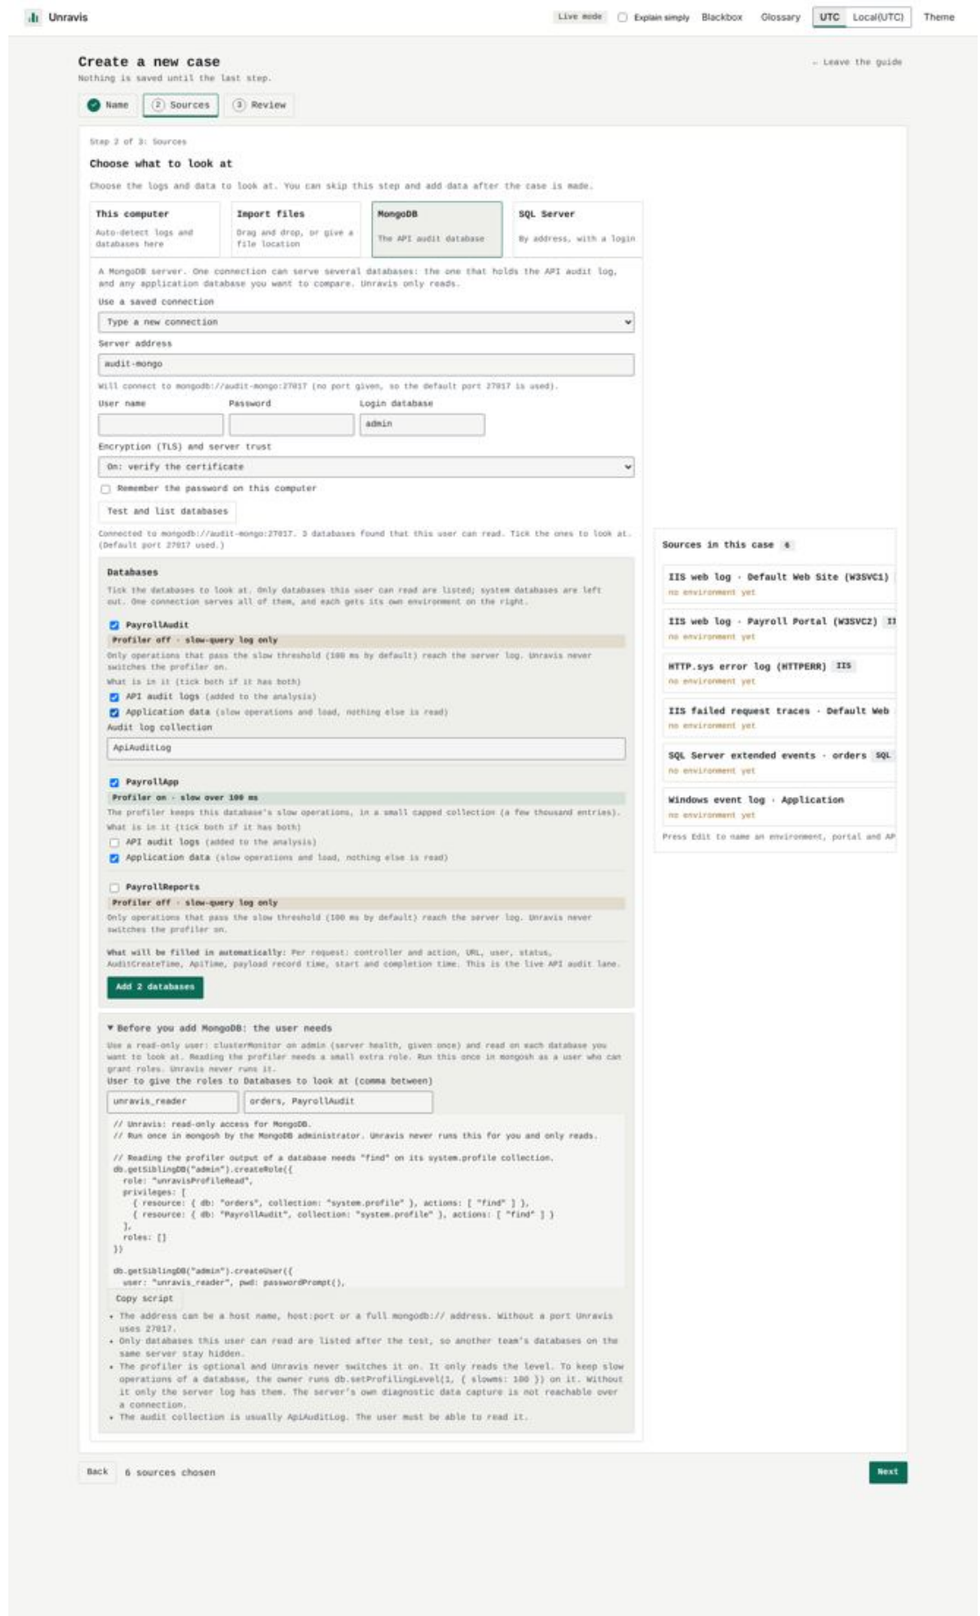


Image 061-create-mongo-added.png

What it shows: The two databases added as sources from one connection.
How to reach it: Press Add 2 databases.

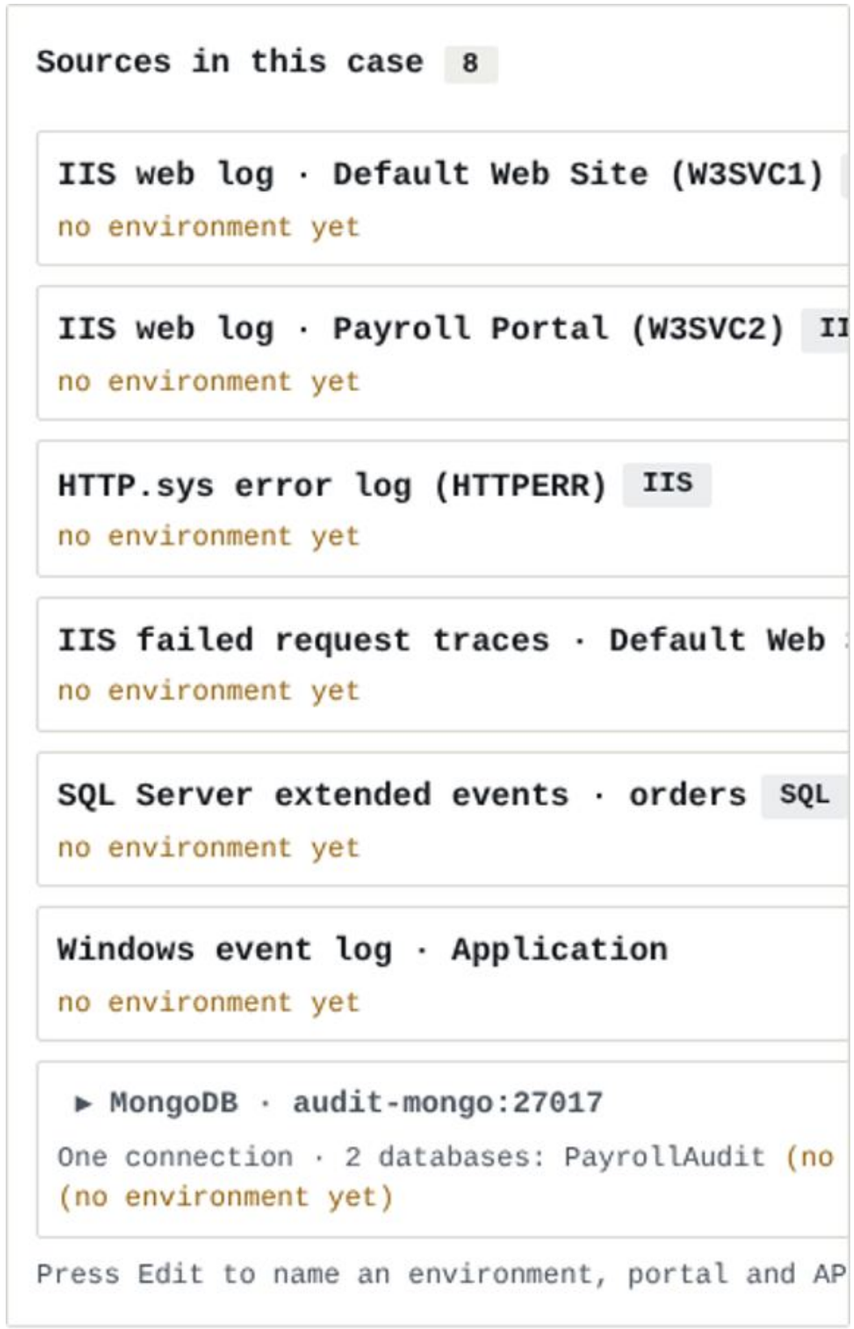


Image 062-create-mongo-permission-script.png

What it shows: The MongoDB permission script (roles) that Unravis shows but never runs.
How to reach it: MongoDB tab, scroll to the roles script.

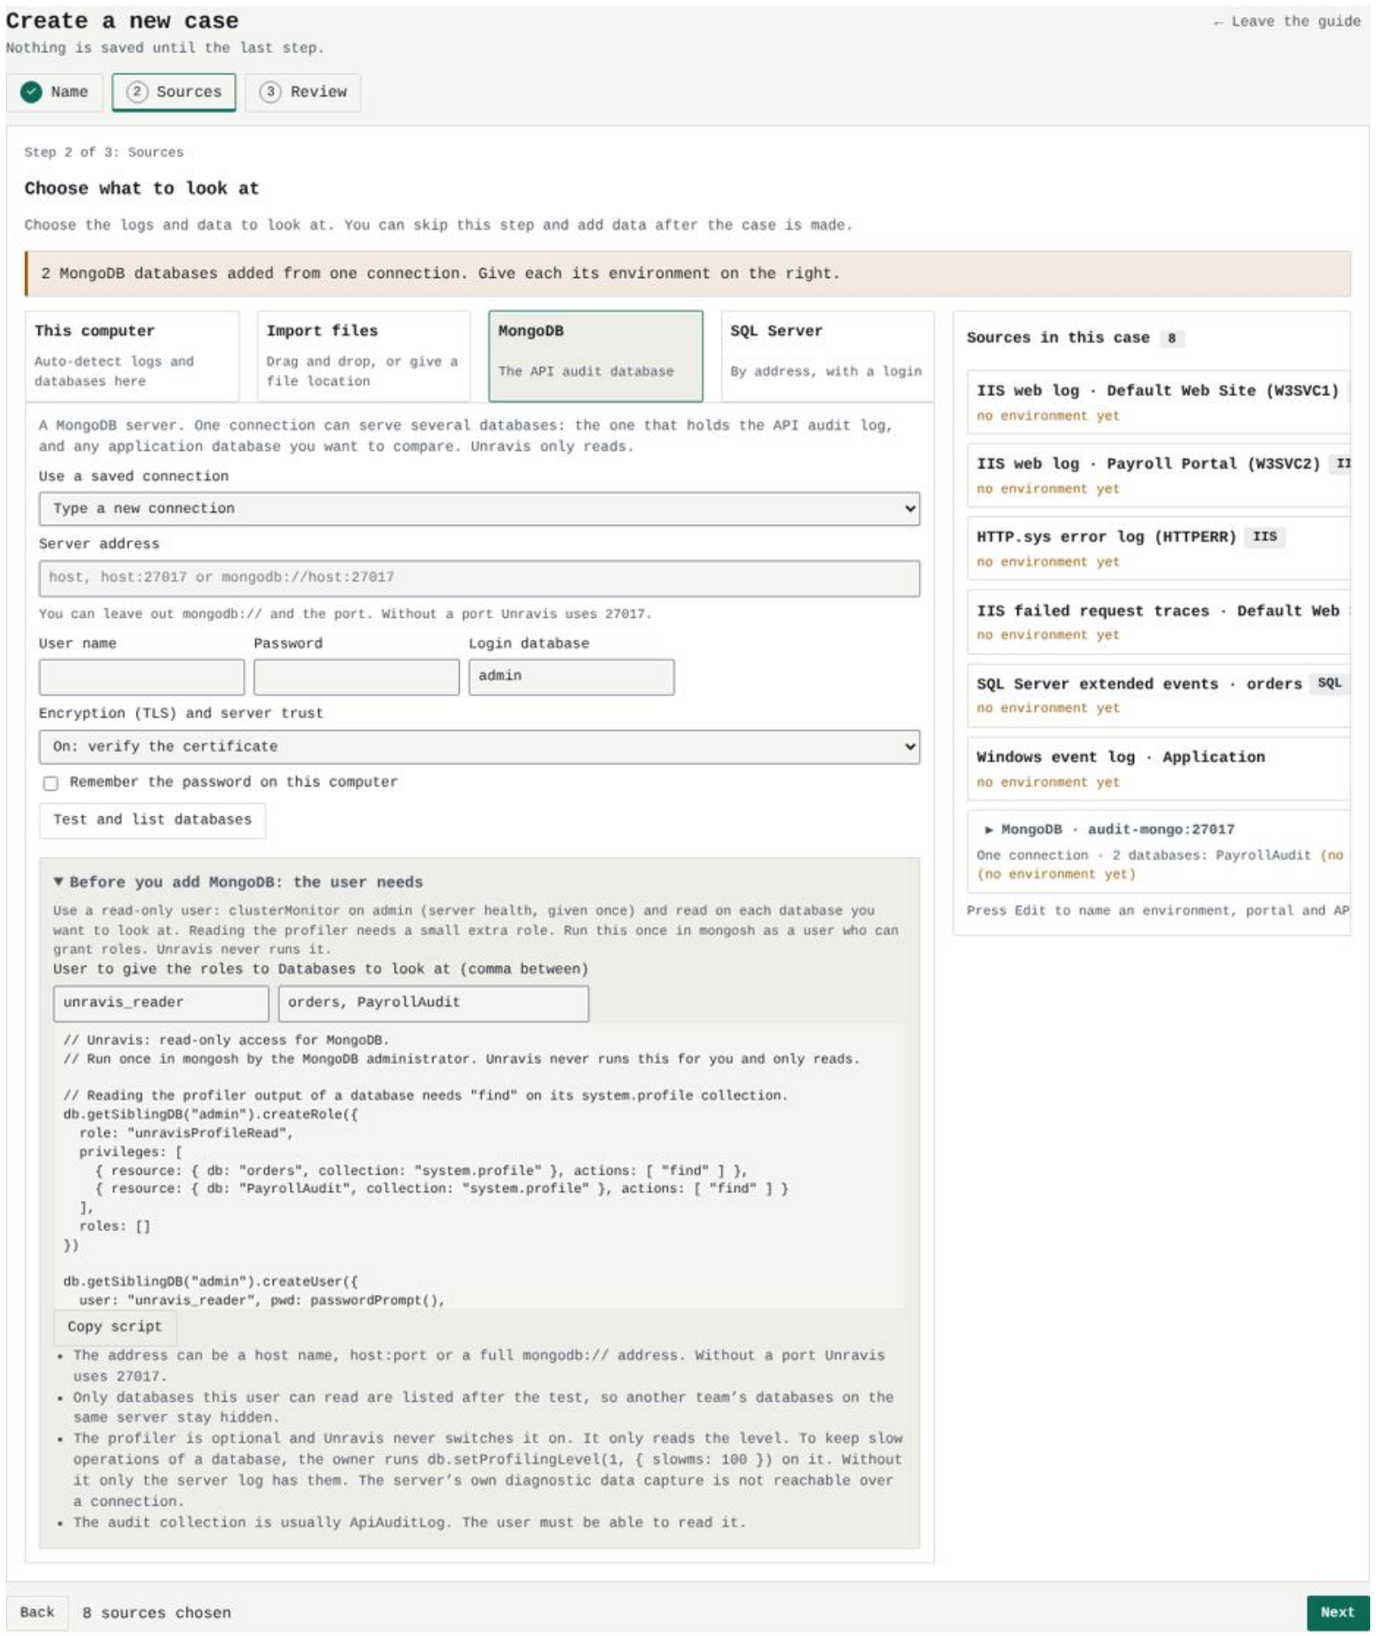


Image 063-create-sql-form-empty.png

What it shows: SQL Server method: where it runs, authentication, encrypt, trust certificate, remember password.
How to reach it: Tab SQL Server.

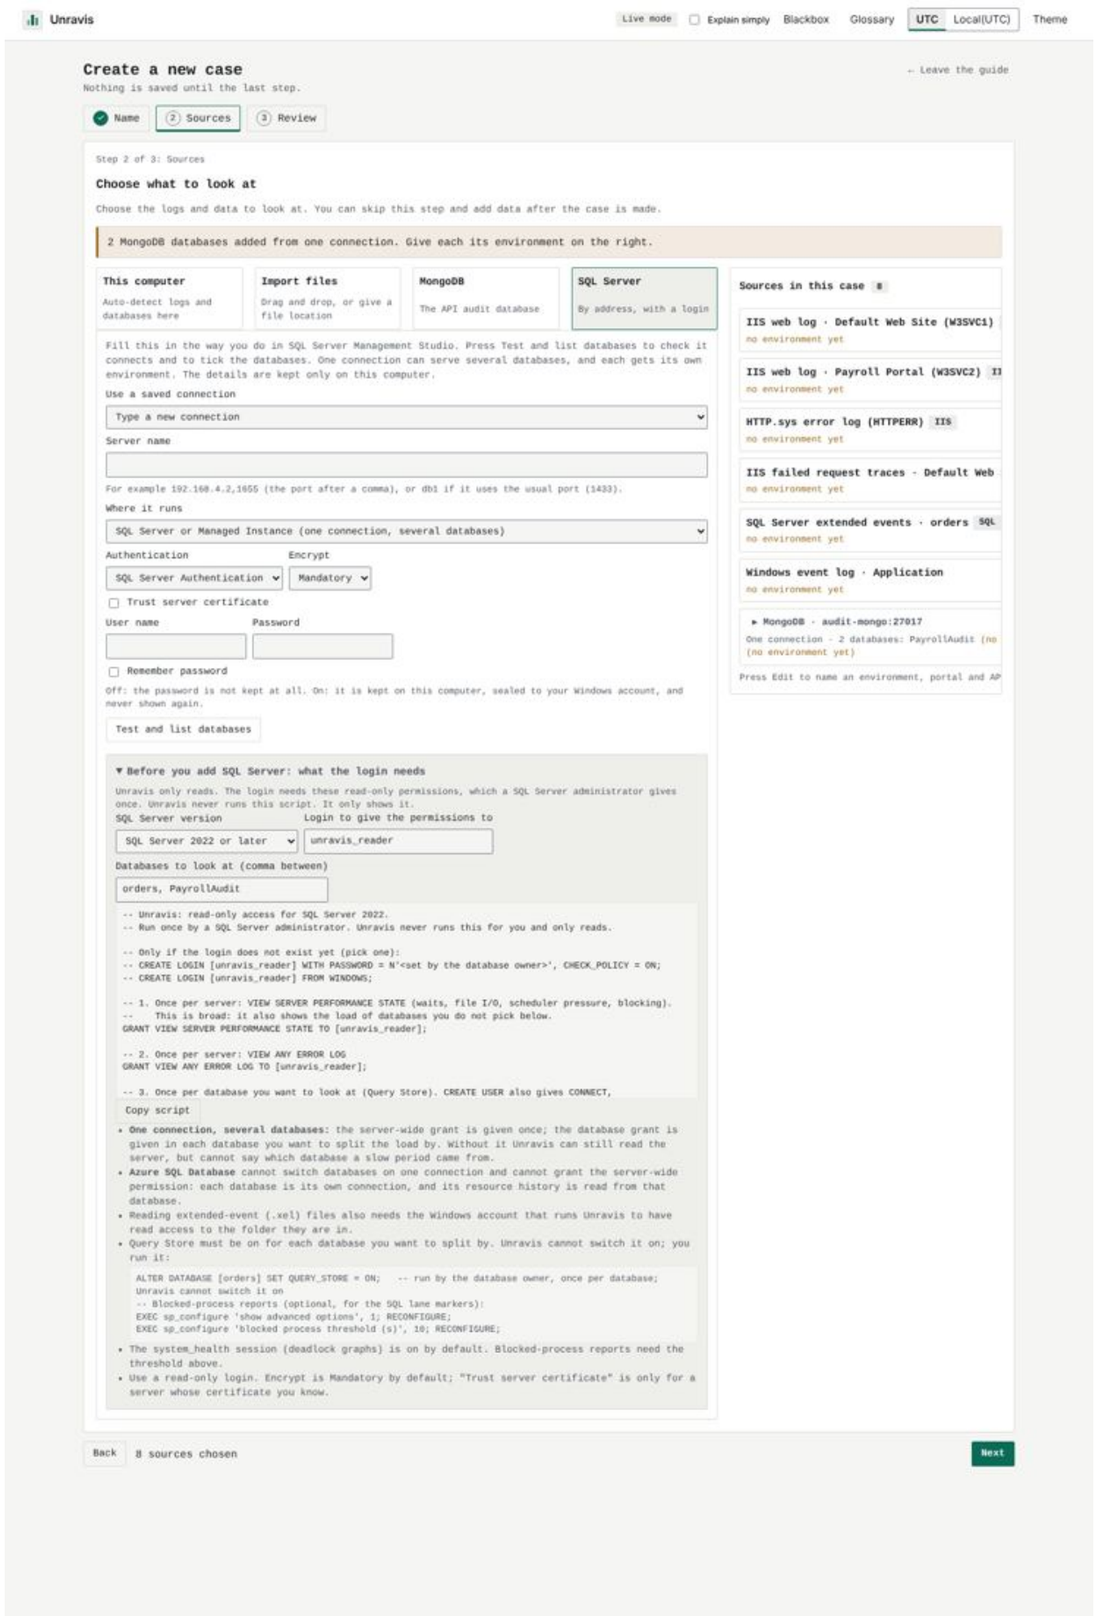


Image 064-create-sql-no-port.png

What it shows: Server name with no port: the usual port 1433 is used.
How to reach it: Type db1 in the server field.

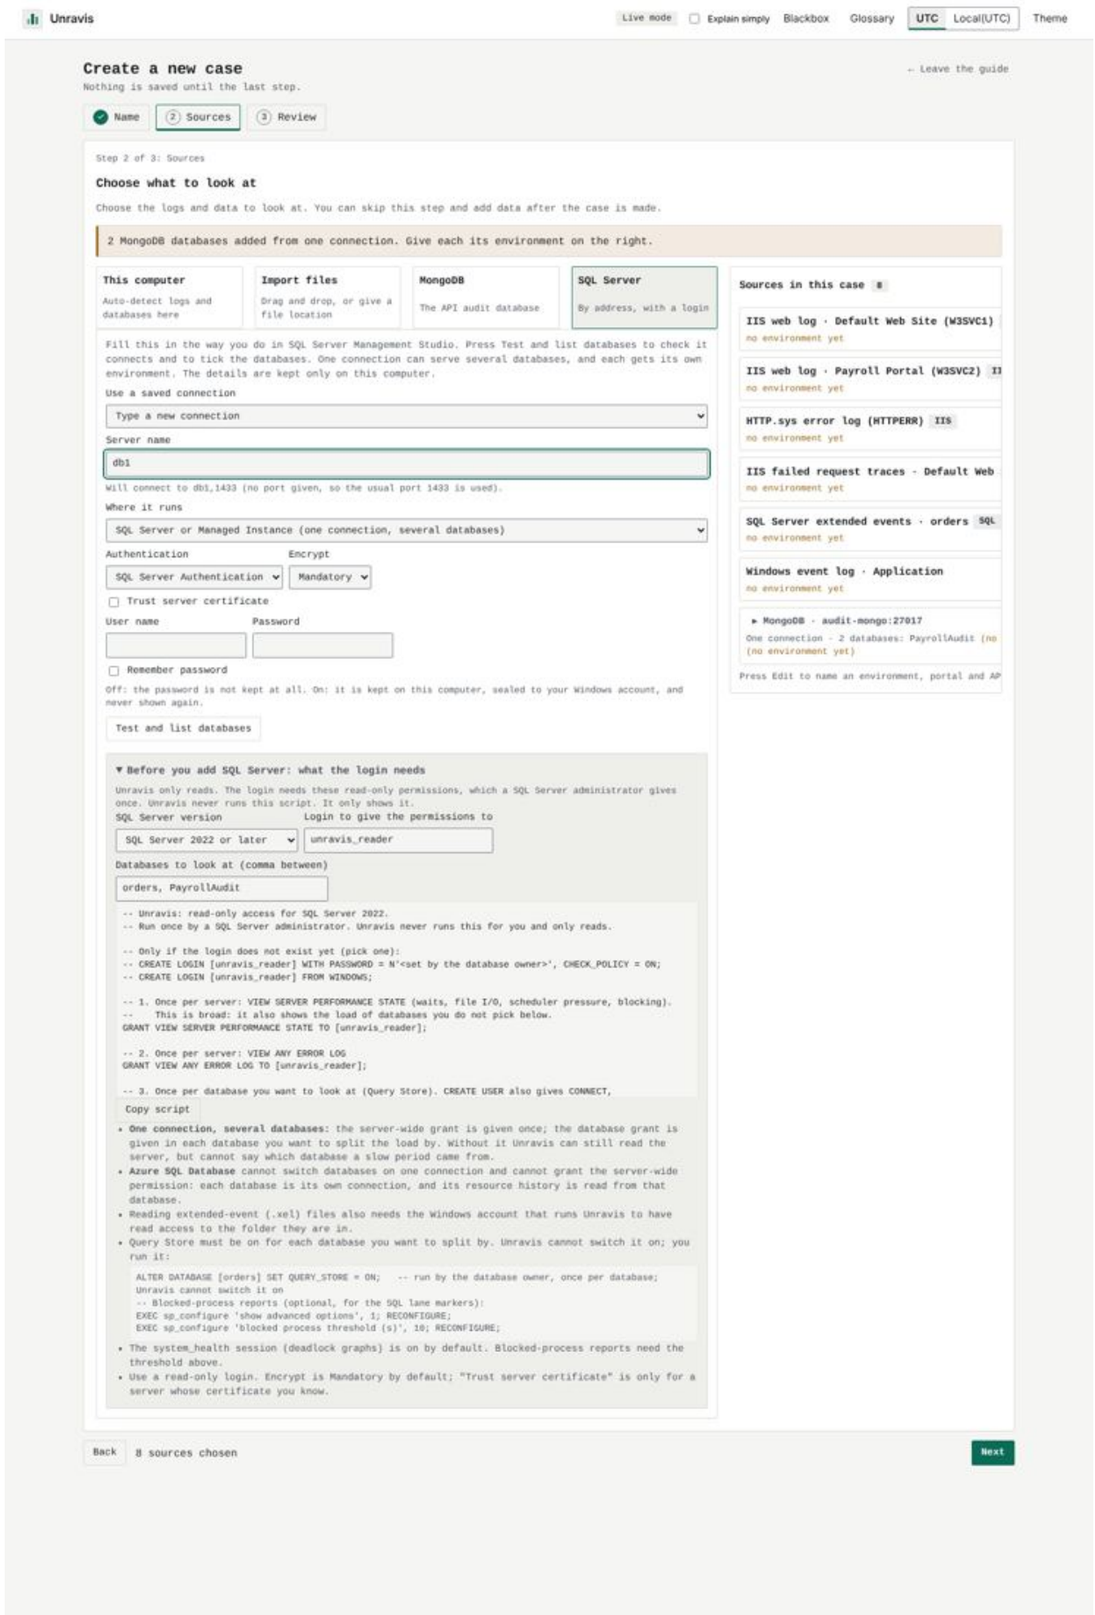


Image 065-create-sql-azure-flavor.png

What it shows: Where it runs: Azure SQL Database (one connection per database).
How to reach it: Choose Azure SQL Database in the where-it-runs list.

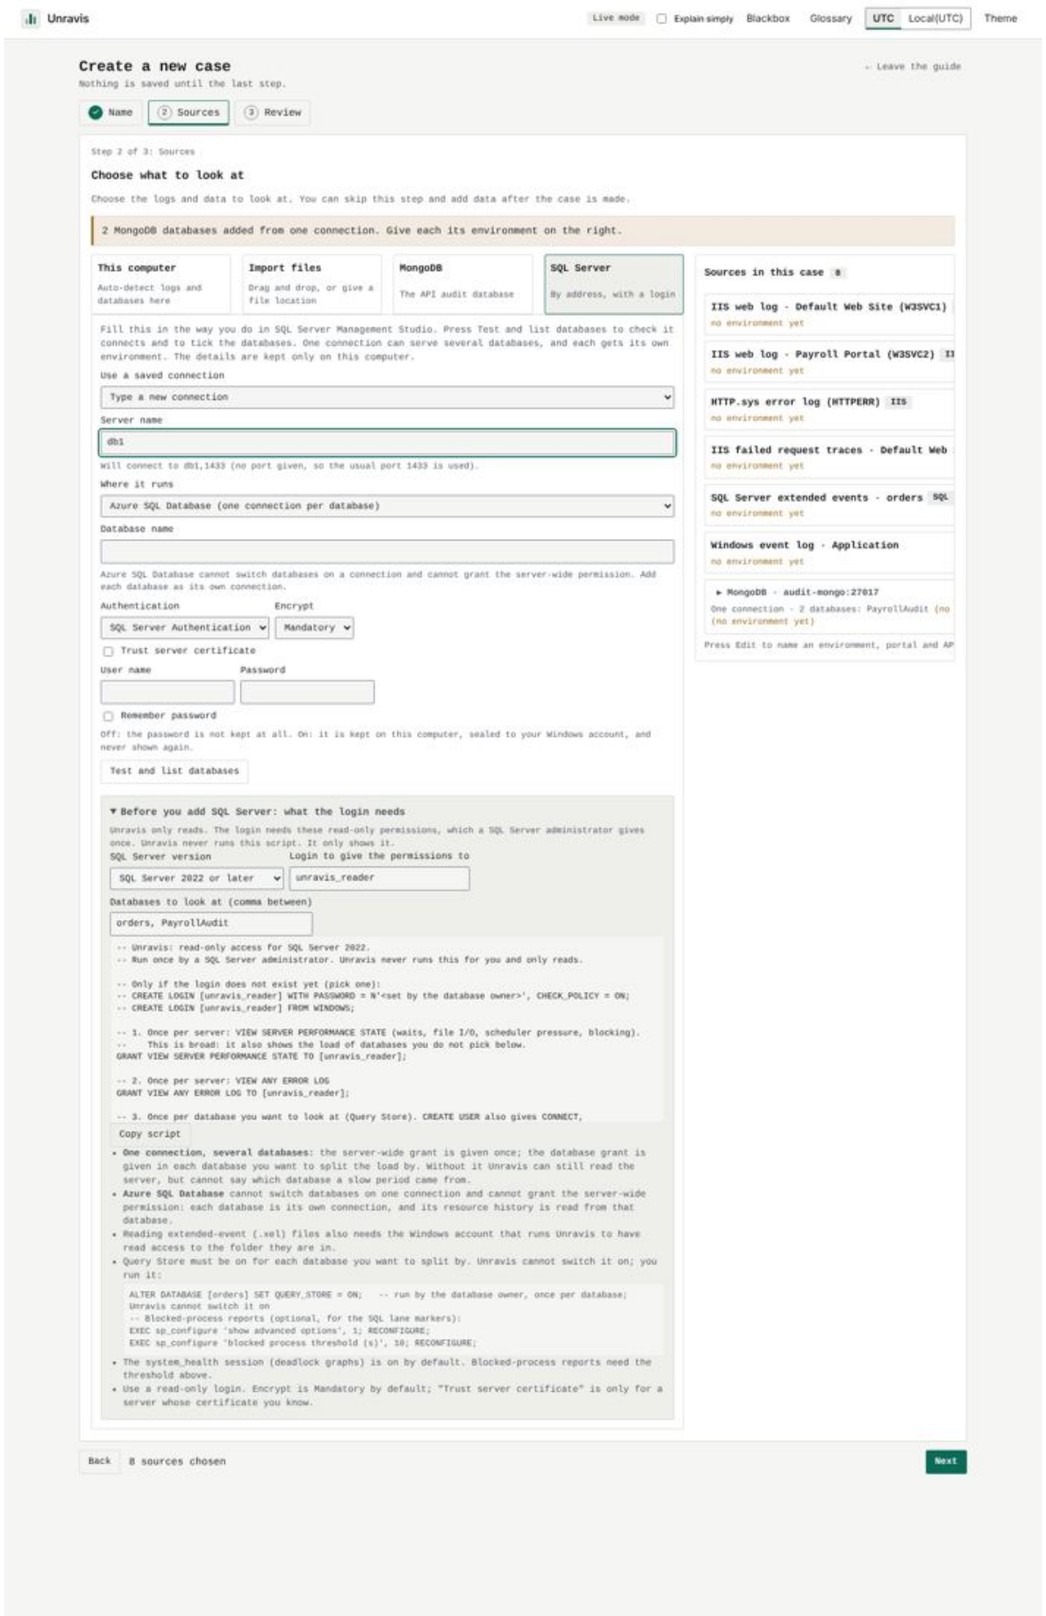


Image 066-create-sql-windows-auth.png

What it shows: Windows Authentication hides the user and password fields.
How to reach it: Choose Windows Authentication.

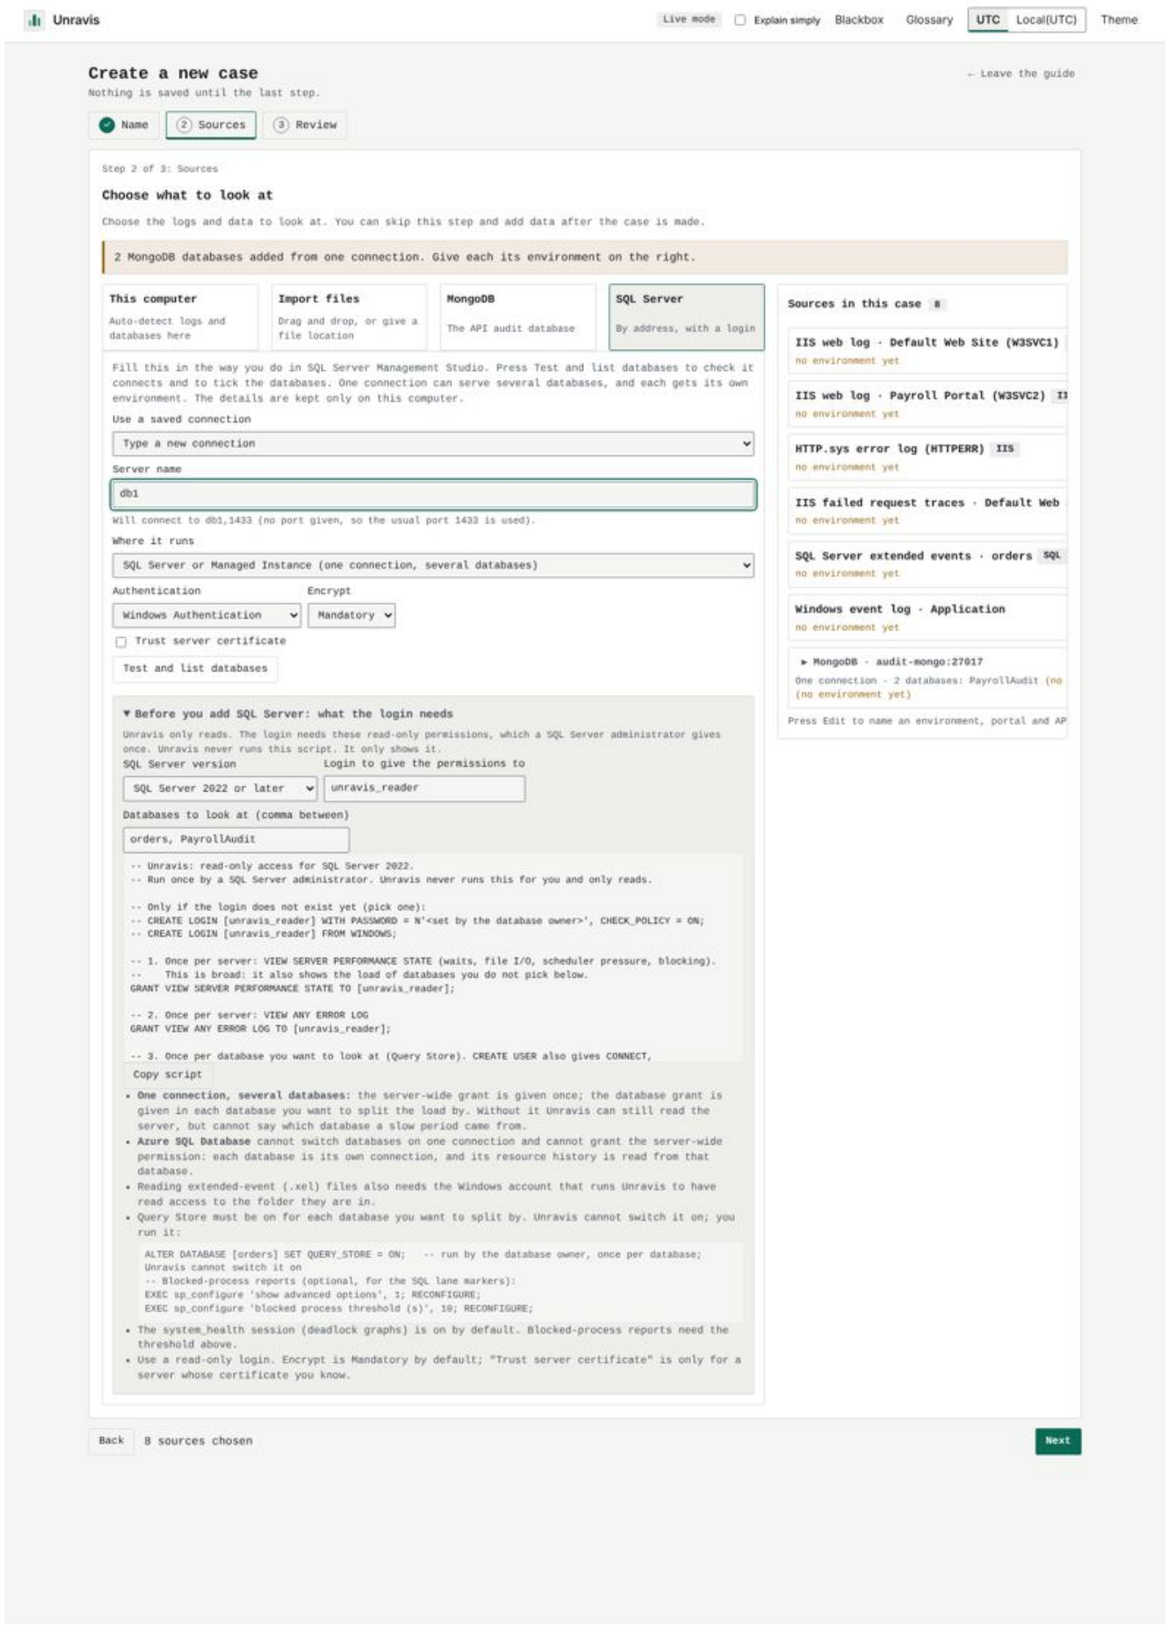


Image 067-create-sql-encrypt-trust-remember.png

What it shows: Encrypt options, Trust server certificate and Remember password.
How to reach it: SQL authentication, Encrypt Strict, tick Trust server certificate and Remember password.

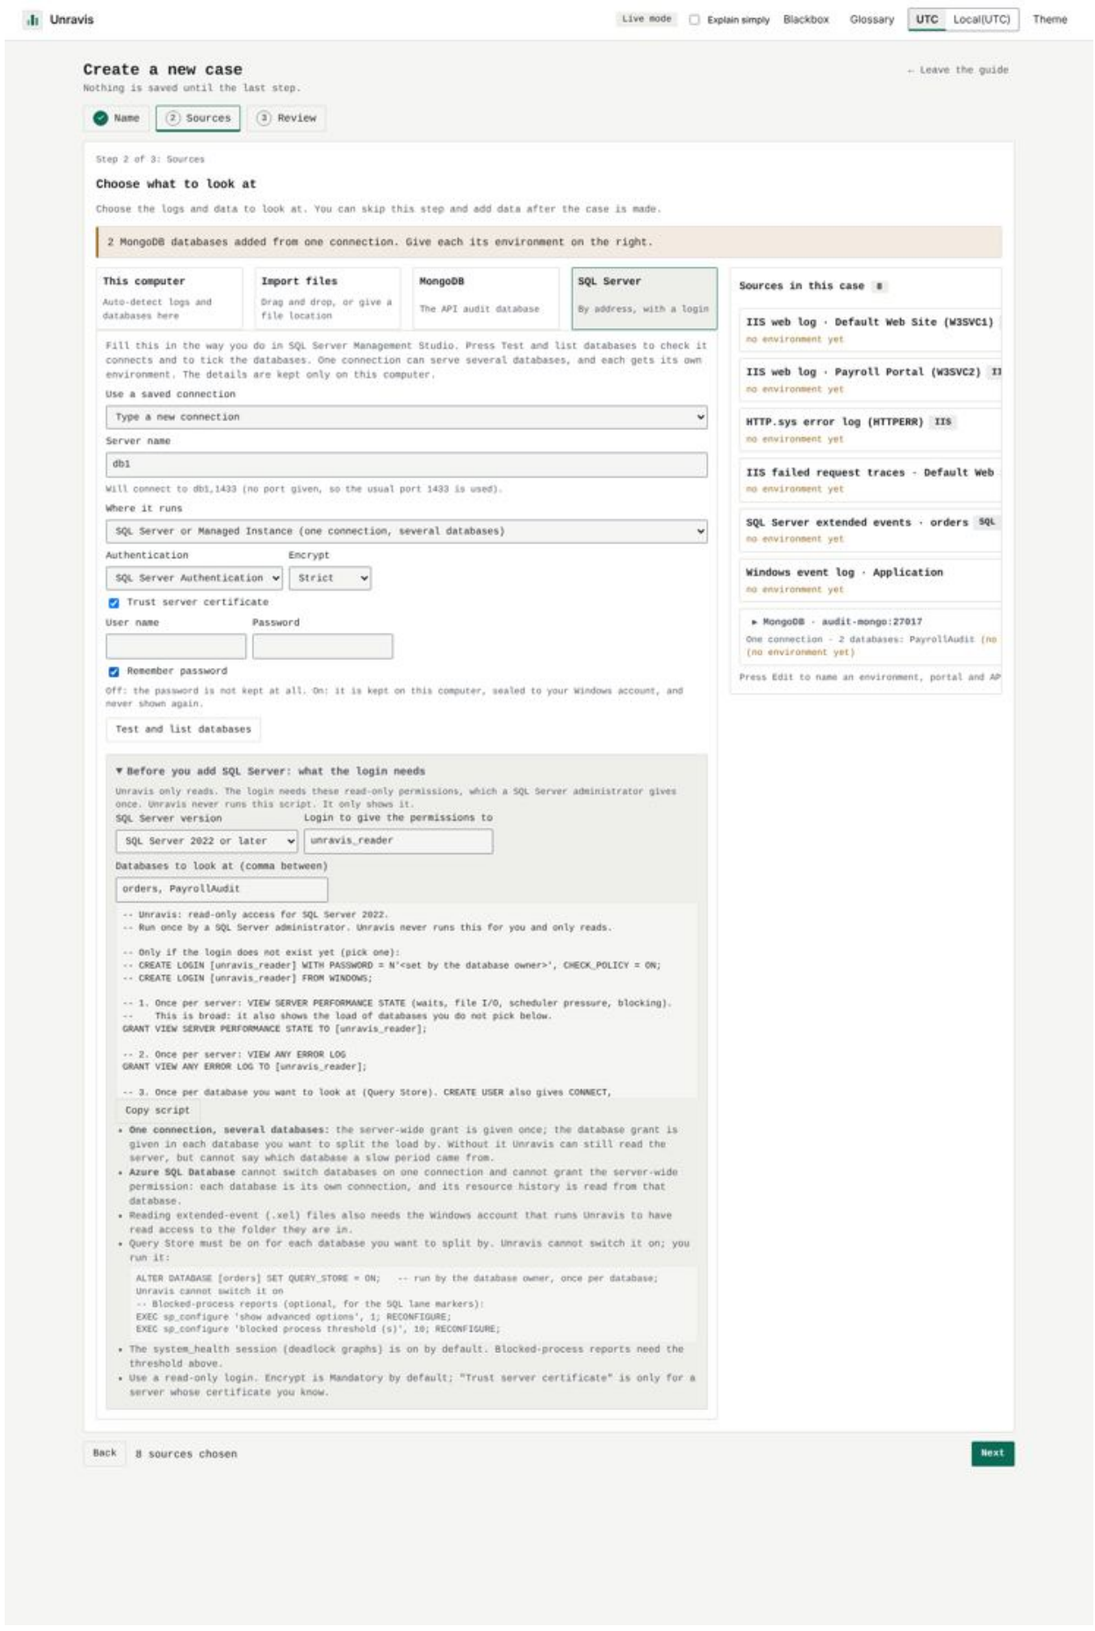


Image 068-create-sql-saved-connection.png

What it shows: Choosing a saved SQL connection fills the form.
How to reach it: Pick PROD-SQL-01 (orders) (password saved) in the saved list.

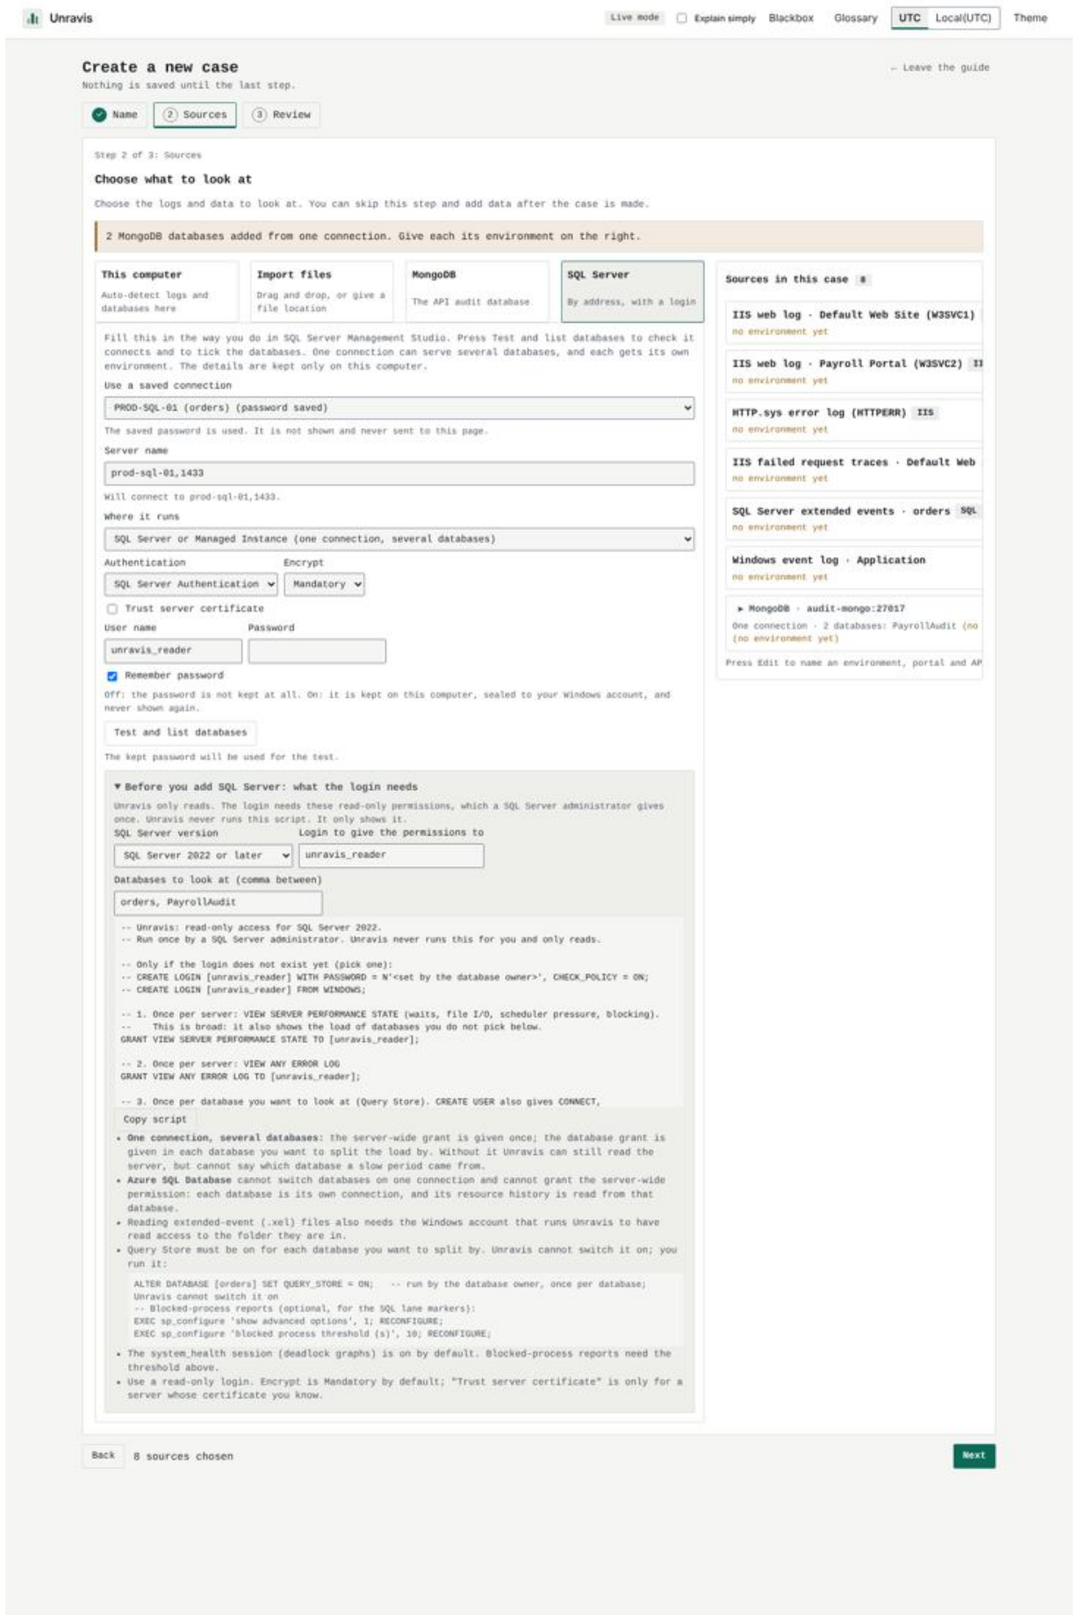


Image 069-create-sql-login-failed.png

What it shows: A wrong login is refused in words.
How to reach it: New connection, server db1, user unravis_reader, password wrong, Test and list databases.

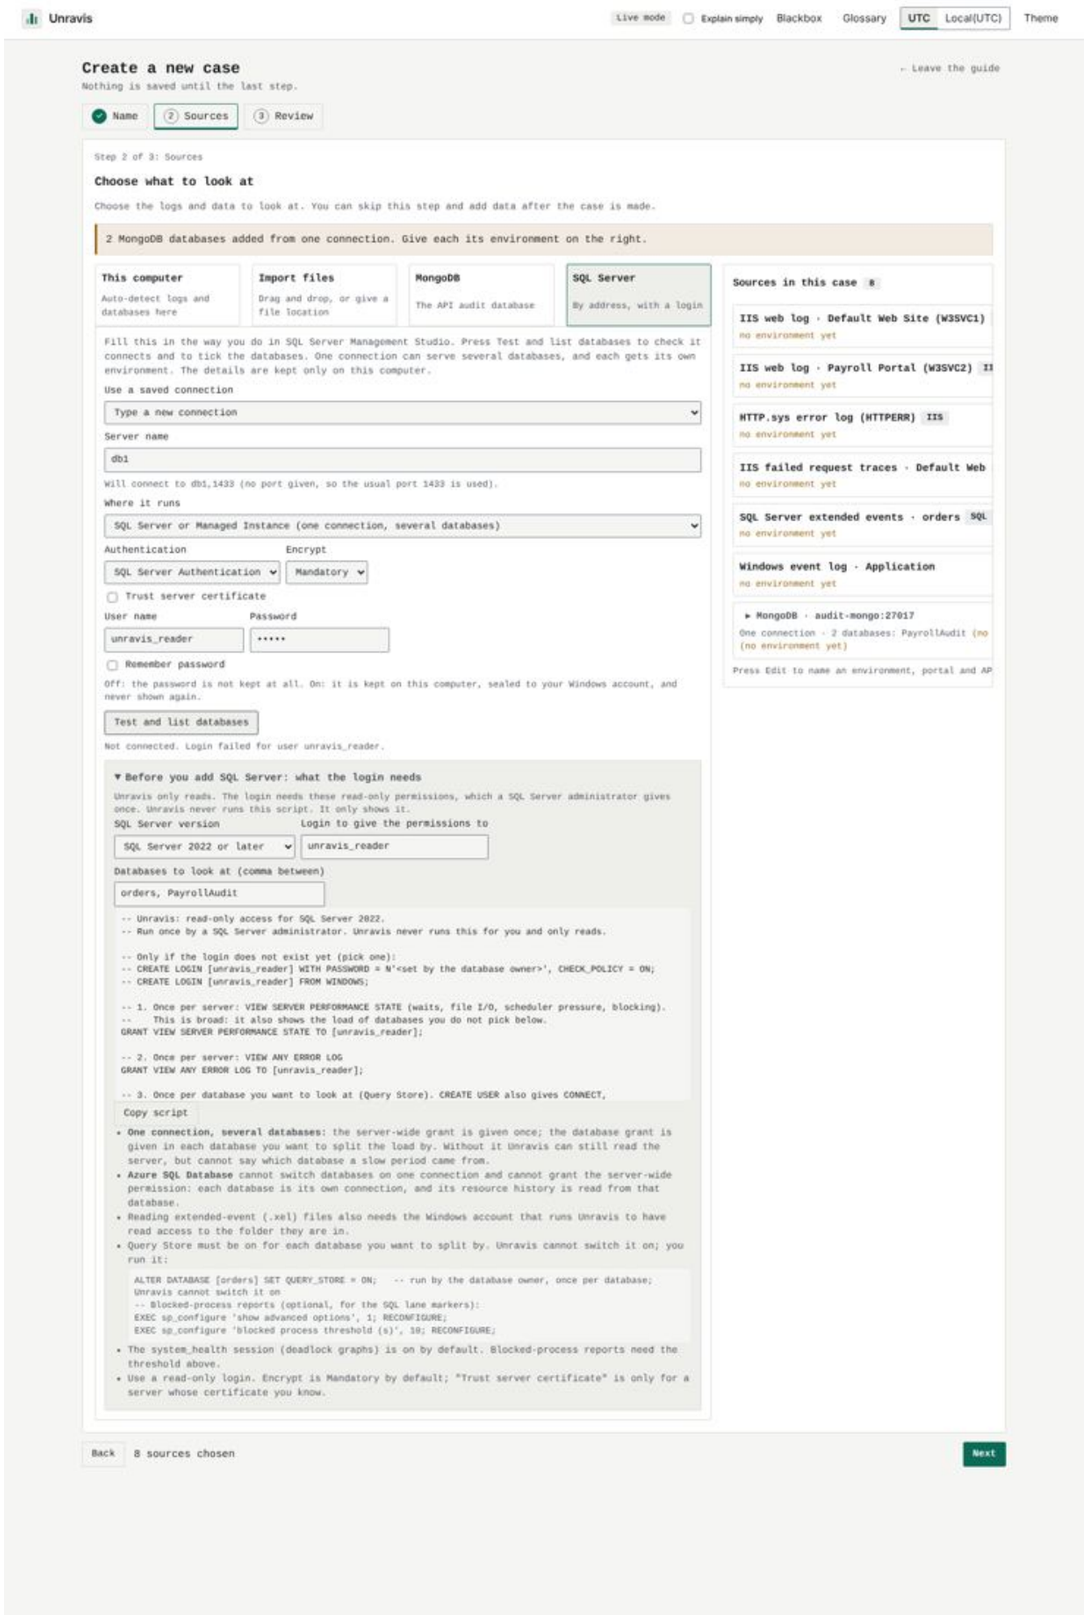


Image 070-create-sql-databases-listed.png

What it shows: After a good Test: database checklist with Query Store chips; system databases hidden.
How to reach it: Correct password "secret", Test and list databases.

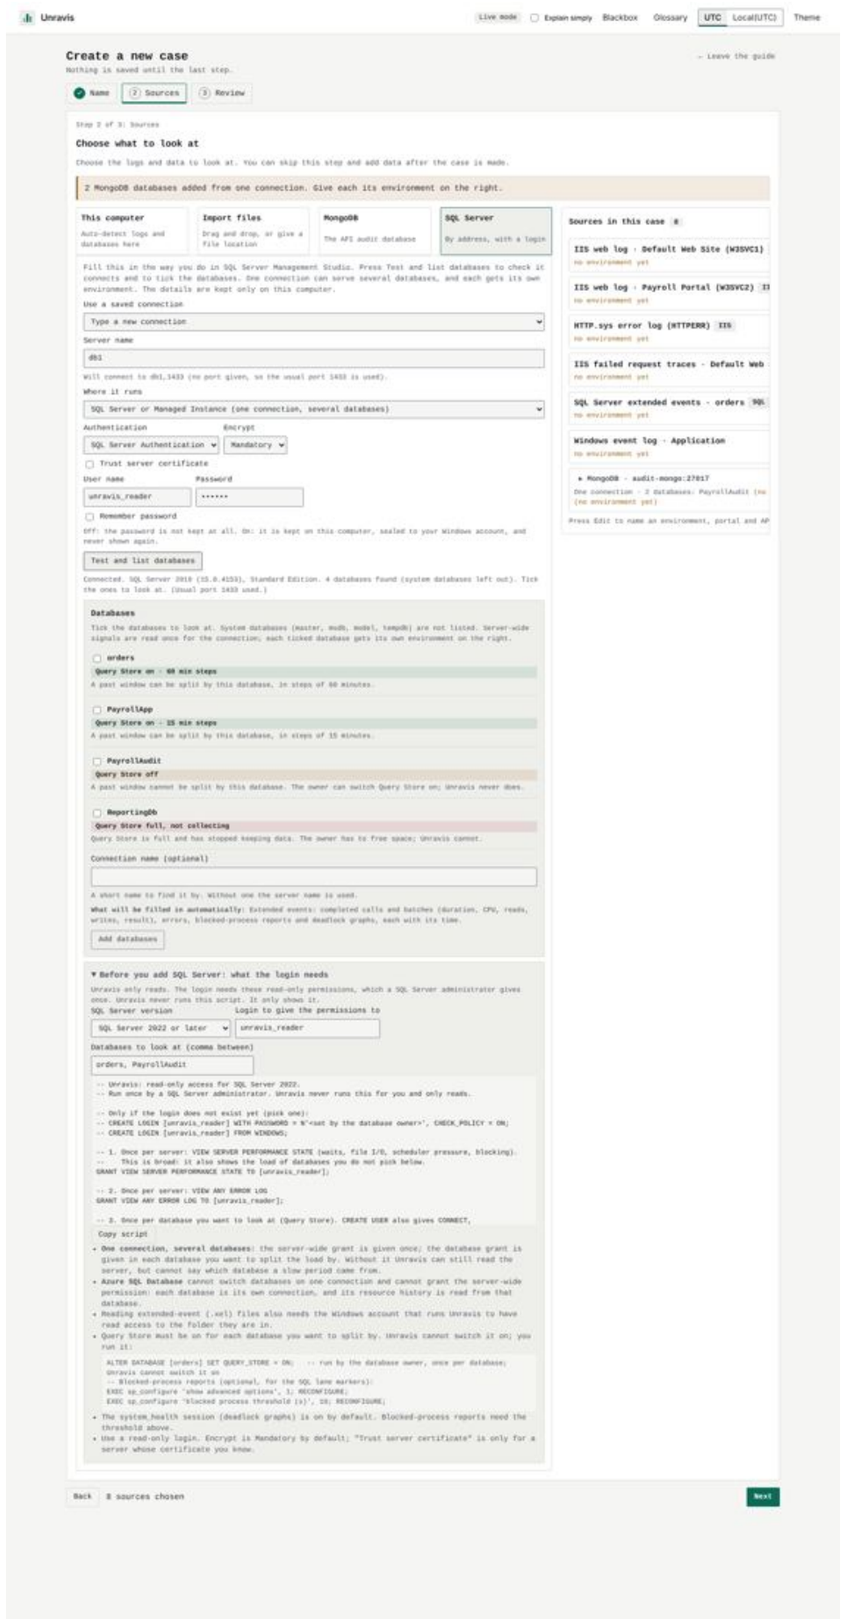


Image 071-create-sql-databases-ticked.png

What it shows: Two databases ticked; Add button counts them.
How to reach it: Tick orders and PayrollApp.

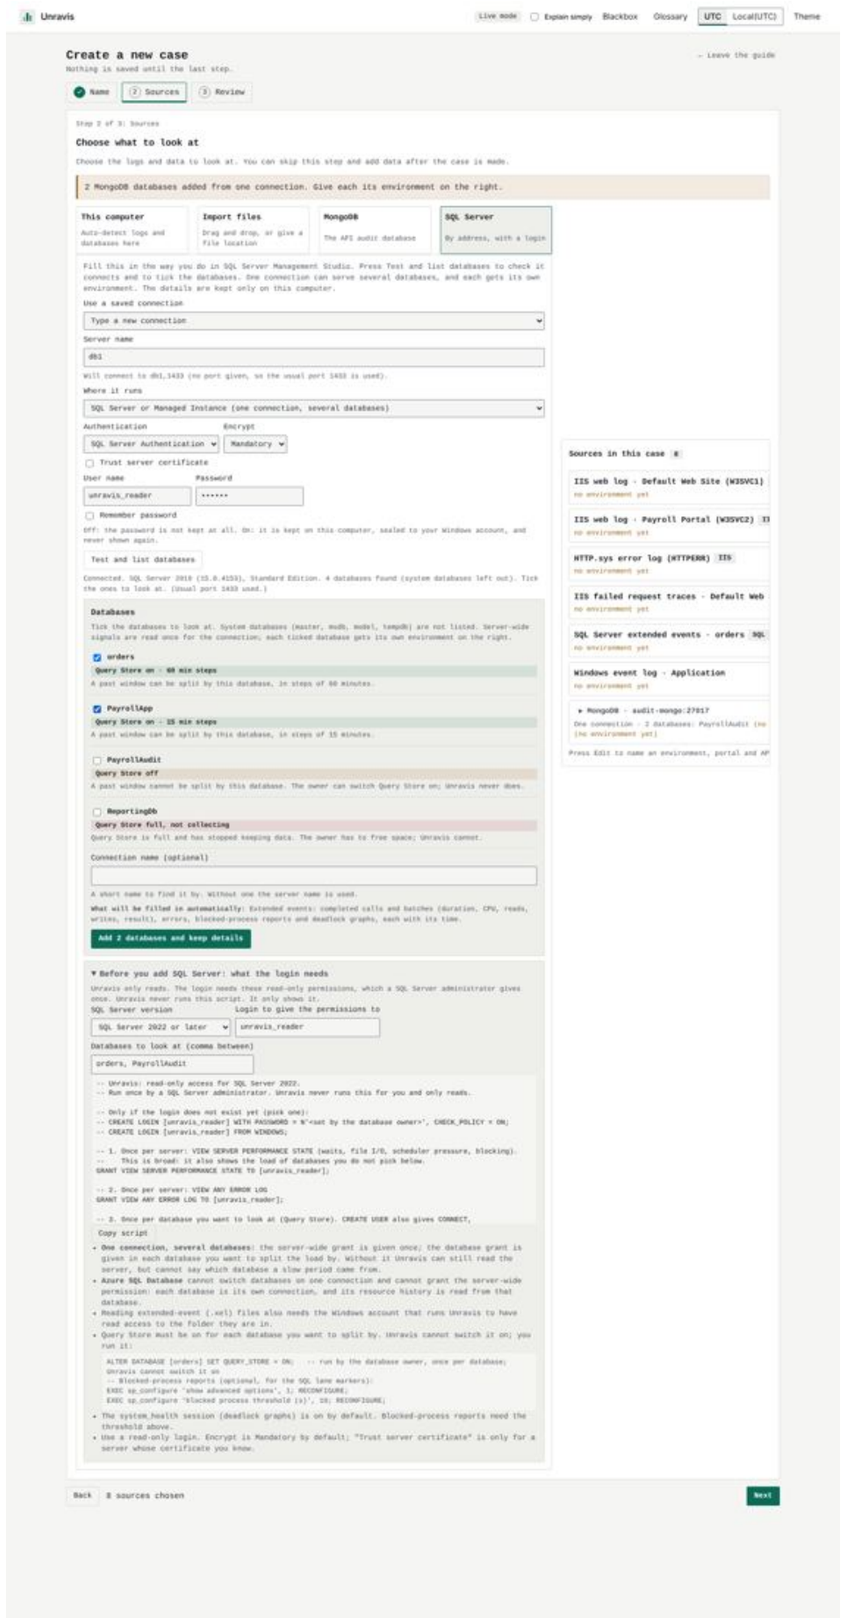


Image 072-create-sql-added-grouped.png

What it shows: One connection, two databases, added together and grouped in the sources panel.
How to reach it: Press Add 2 databases and keep details.

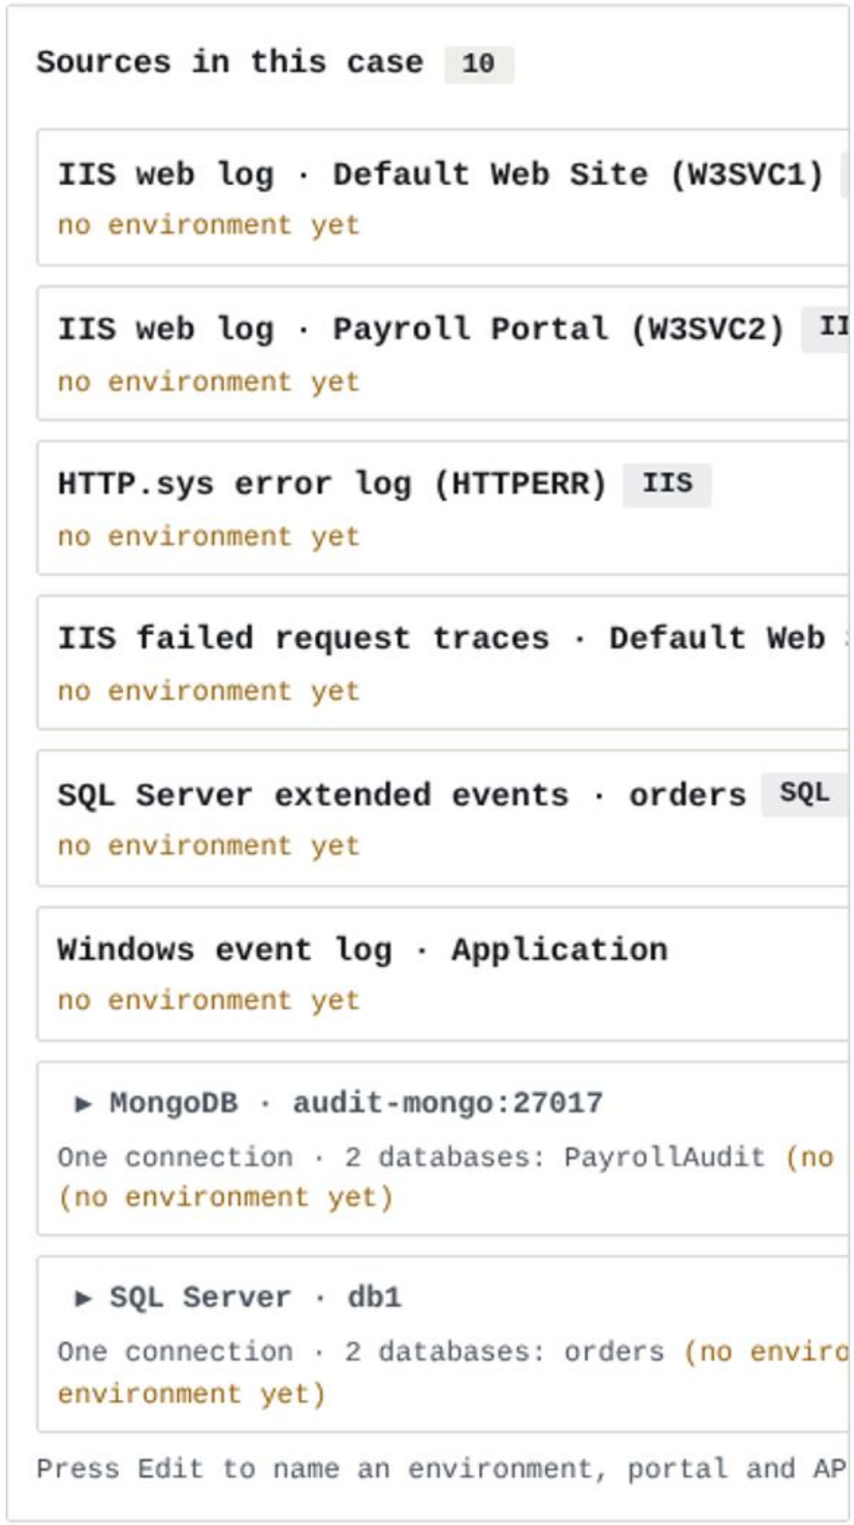


Image 073-create-sql-permission-script.png

What it shows: The SQL permission script (per server and per database), with a version switch and Copy.
How to reach it: SQL Server tab, scroll to the permission script.

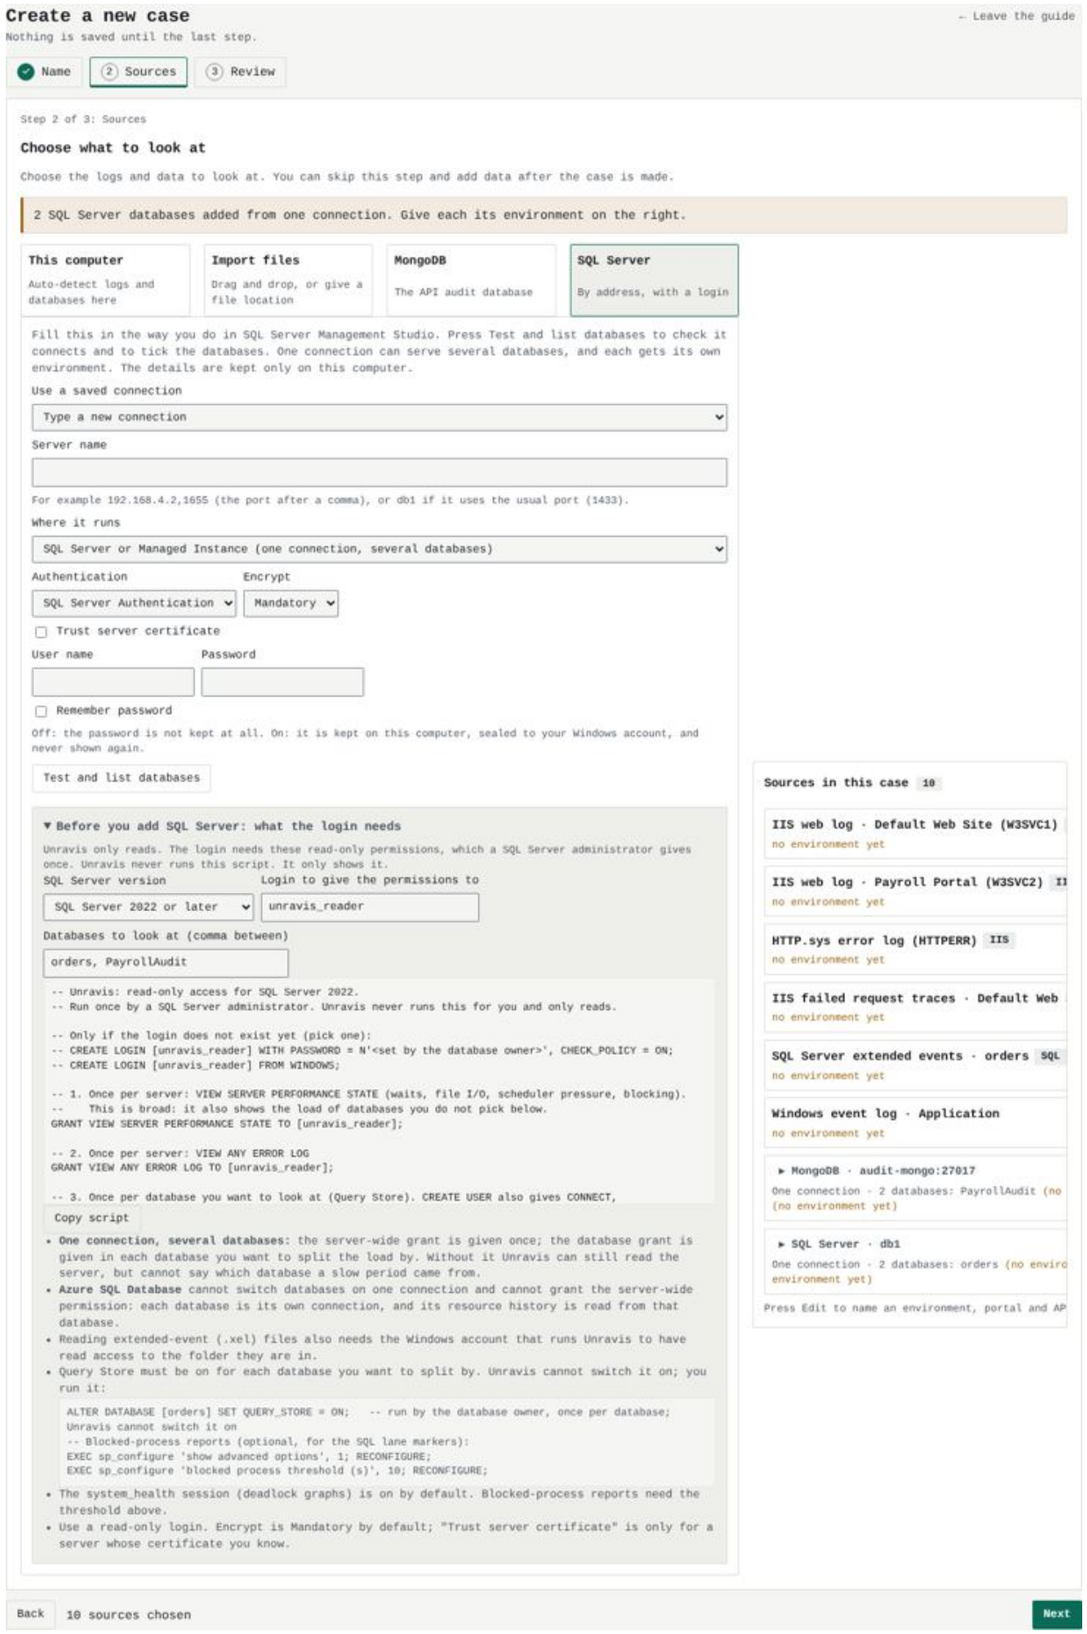


Image 074-create-files-method-empty.png

What it shows: Import files method: folder or file location, Look here, and a drop zone.
How to reach it: Tab Import files.

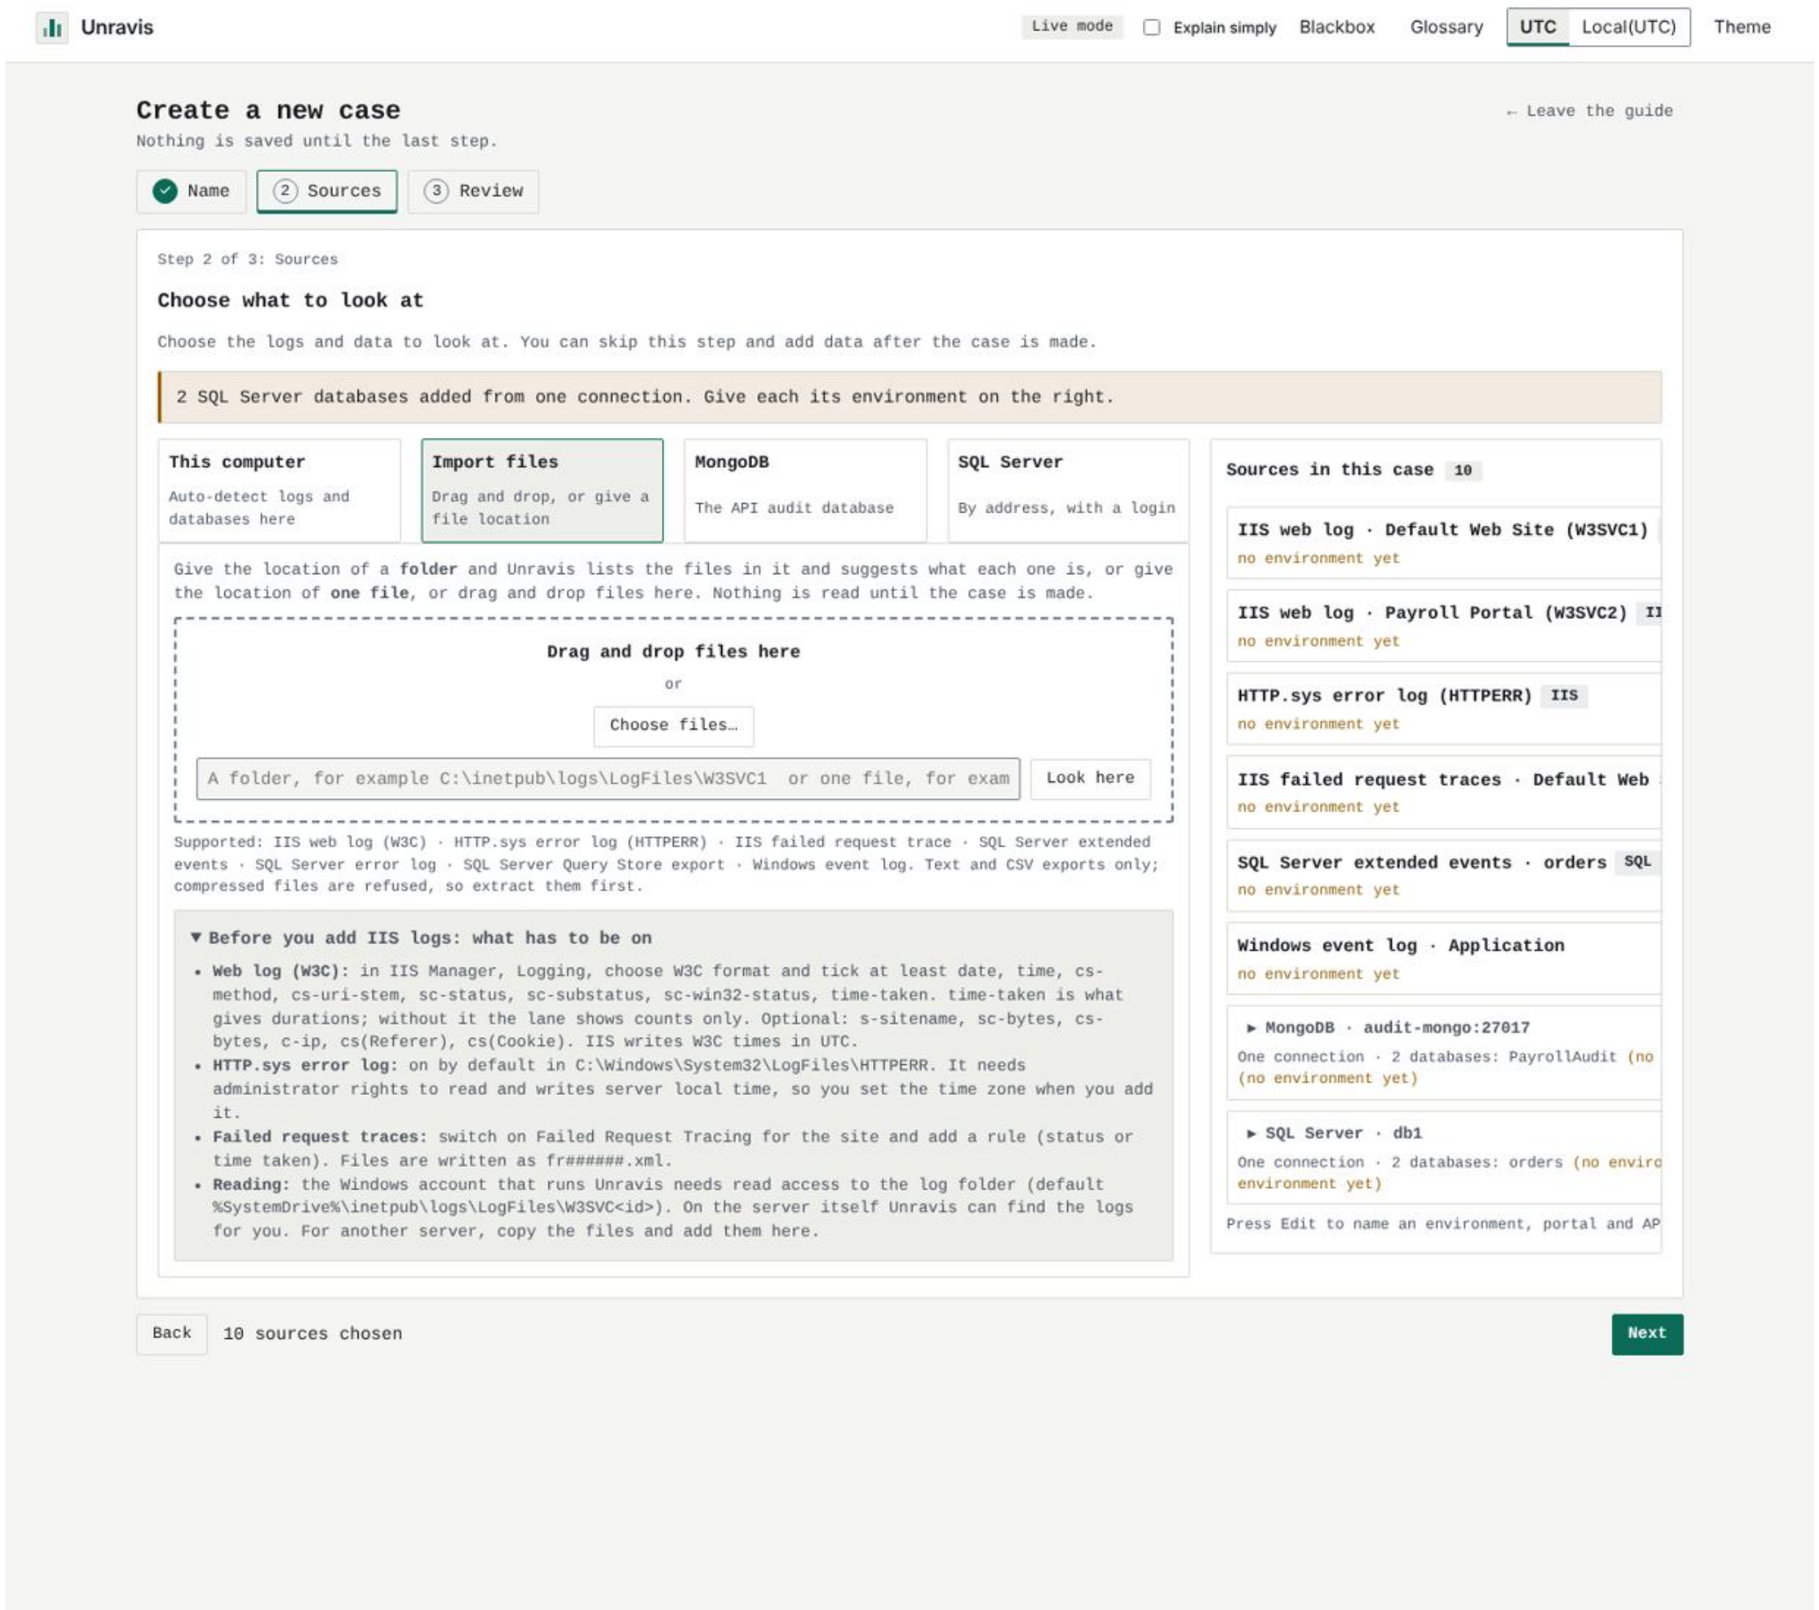


Image 075-create-files-drag-drop-file.png

What it shows: A dropped file is recognised: suggested type and, where needed, a time-zone choice.
How to reach it: Drop (or choose in the drop zone) a file named HTTPERR1.log.

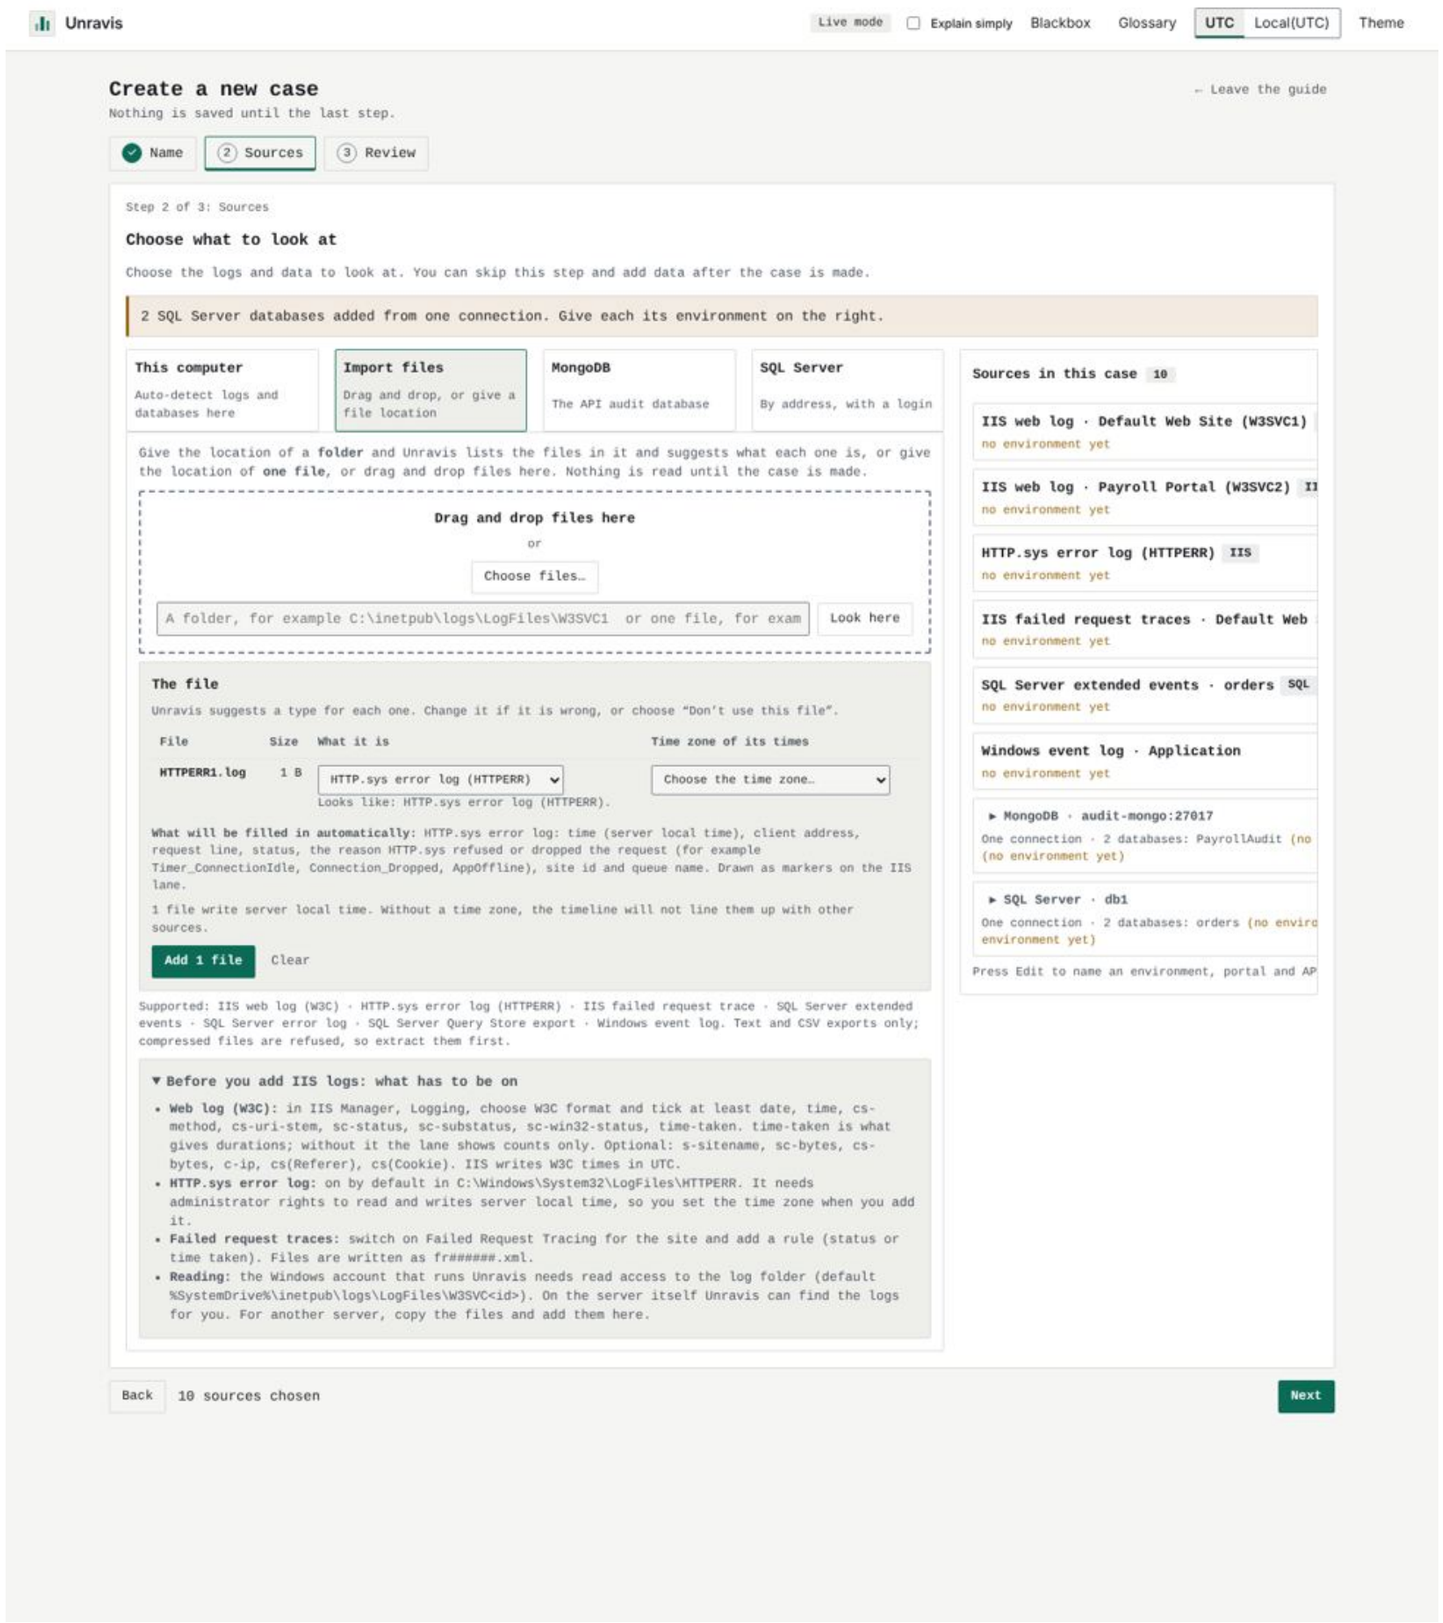


Image 076-create-files-timezone-chosen.png

What it shows: HTTPERR writes server local time, so the time zone must be chosen; Add 1 file is then available.
How to reach it: Choose a time zone (+04:00) for the dropped file.

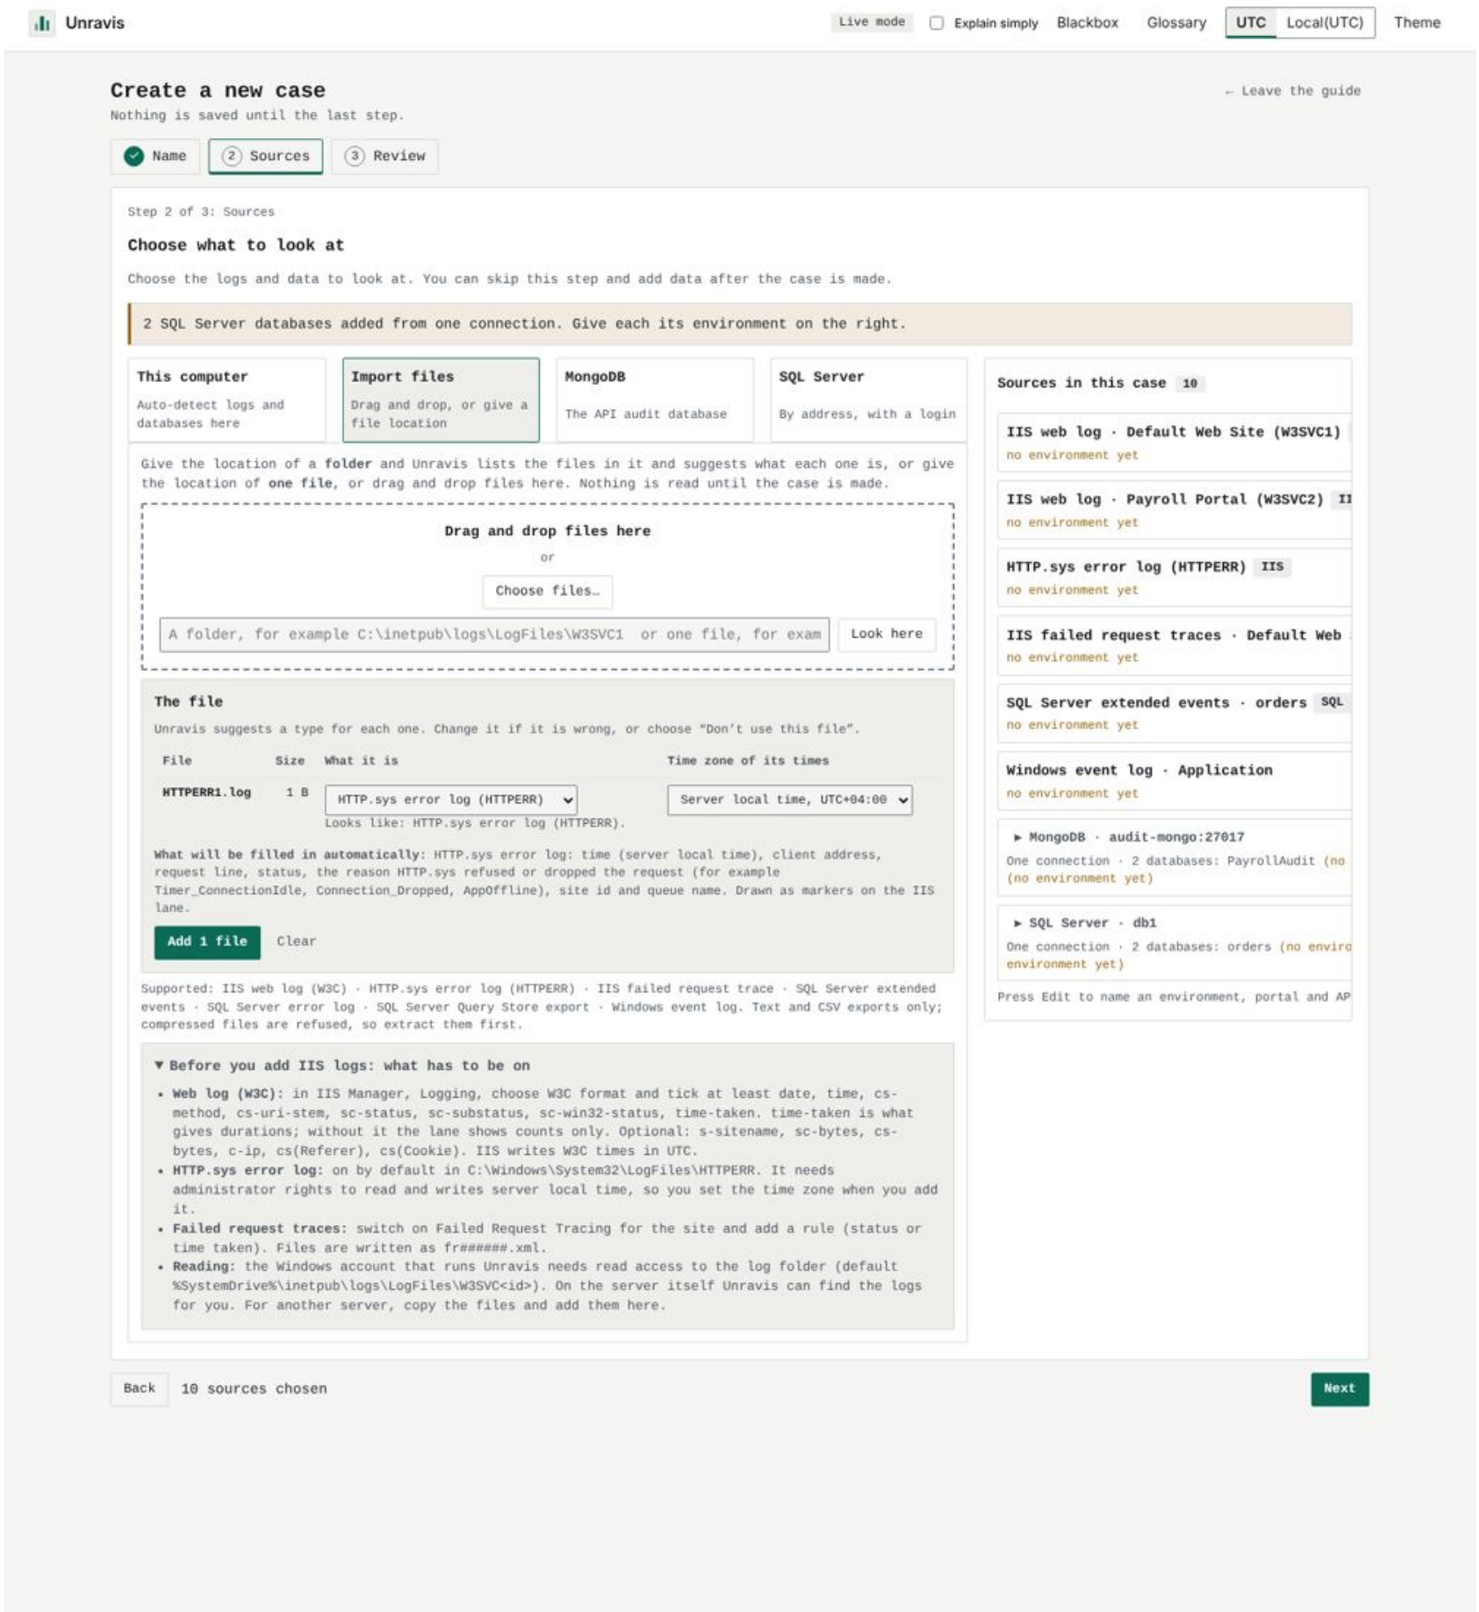


Image 077-create-files-added.png

What it shows: The file lands in the sources panel.
How to reach it: Press Add 1 file.

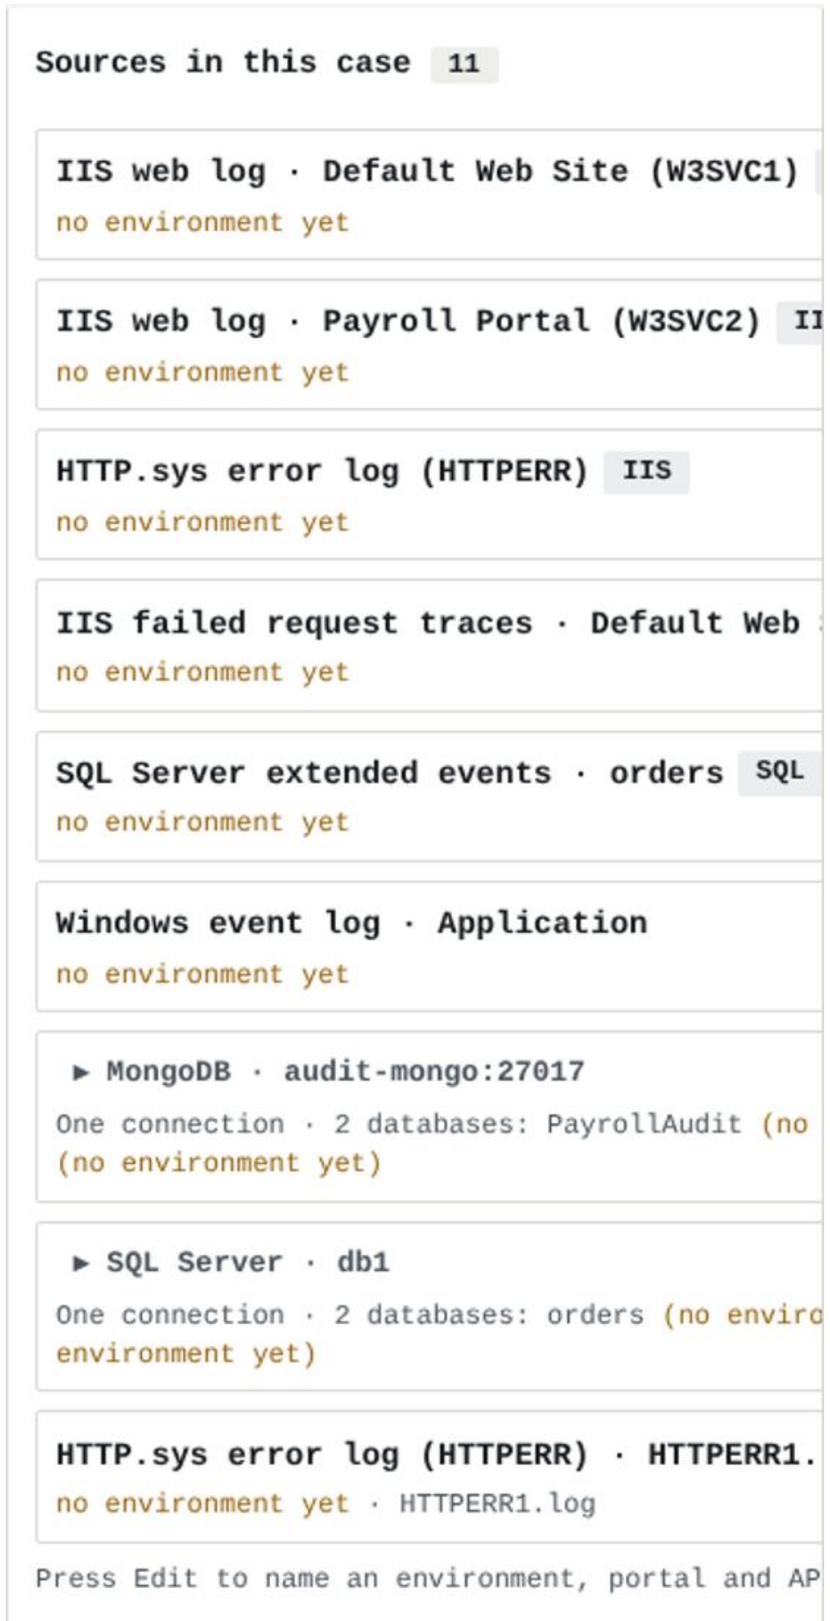


Image 078-create-files-by-folder.png

What it shows: A folder location lists its files, each with a suggested type; unrecognised ones are left out; compressed ones are refused.
How to reach it: Tab Import files, type C:\inetpub\logs\LogFiles\W3SVC1, press Look here.

