

Session 5: Conditional Statements Topics: If, Else If Ladder, Nested If, Switch Case. Example: “Study Mood Bot” – takes user’s input and prints motivation message

- 1) Create a simple IPL Fan Bot that takes your favorite IPL team name as input and uses if-else-if statements to print a unique cheer message for each team (e.g., 'Go Mumbai Indians!', 'Chennai Super Kings for the win!'). If the team is not recognized, print 'Team not found!'**

Code –

```
#include <stdio.h>
#include <string.h>

int main() {
    char team[30];

    printf("Enter your favorite IPL team: ");
    scanf("%29s", team);

    if (strcmp(team, "Mumbai") == 0) {
        printf("Go Mumbai Indians!\n");
    }
    else if (strcmp(team, "Chennai") == 0) {
        printf("Chennai Super Kings for the win!\n");
    }
    else if (strcmp(team, "RCB") == 0) {
        printf("Ee Sala Cup Namde!\n");
    }
}
```

```
else if (strcmp(team, "KKR") == 0) {
    printf("Korbo Lorbo Jeetbo Re!\n");
}
else if (strcmp(team, "SRH") == 0) {
    printf("Rise Up, Orange Army!\n");
}
else if (strcmp(team, "GT") == 0) {
    printf("Go Gujarat Titans!\n");
}
else if (strcmp(team, "RR") == 0) {
    printf("Halla Bol, Rajasthan Royals!\n");
}
else if (strcmp(team, "PBKS") == 0) {
    printf("Shers are ready to roar!\n");
}
else if (strcmp(team, "DC") == 0) {
    printf("Roar for Delhi Capitals!\n");
}
else if (strcmp(team, "LSG") == 0) {
    printf("Let's Go Super Giants!\n");
}
else {
    printf("Team not found!\n");
}

return 0;
}
```

Output-

```
Team not found!
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> .\team.exe
Enter your favorite IPL team: LSG
Let's Go Super Giants!
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> |
```

2) Build a Zomato-style food suggestion tool: take the user's preferred meal time ('breakfast', 'lunch', 'dinner', or 'snack') and use a switch-case statement to suggest a popular dish for that time. If the input doesn't match any meal, suggest 'Try some fruits!'.

Code-

```
#include <stdio.h>
```

```
int main() {
```

```
    int choice;
```

```
    printf("=== Zomato Food Suggestion Tool ===\n");
```

```
    printf("1. Breakfast\n");
```

```
    printf("2. Lunch\n");
```

```
    printf("3. Dinner\n");
```

```
    printf("4. Snack\n");
```

```
    printf("Enter your choice (1-4): ");
```

```
    scanf("%d", &choice);
```

```
    switch (choice) {
```

```
        case 1:
```

```
            printf("Suggested Dish: Masala Dosa\n");
```

```
            break;
```

```
        case 2:
```

```
            printf("Suggested Dish: Veg Biryani\n");
```

```
            break;
```

```
        case 3:
```

```
            printf("Suggested Dish: Paneer Butter Masala with Naan\n");
```


```
        break;

    case 4:
        printf("Suggested Dish: Samosa with Tea\n");
        break;

    default:
        printf("Try some fruits!\n");
    }

    return 0;
}
```

Output-

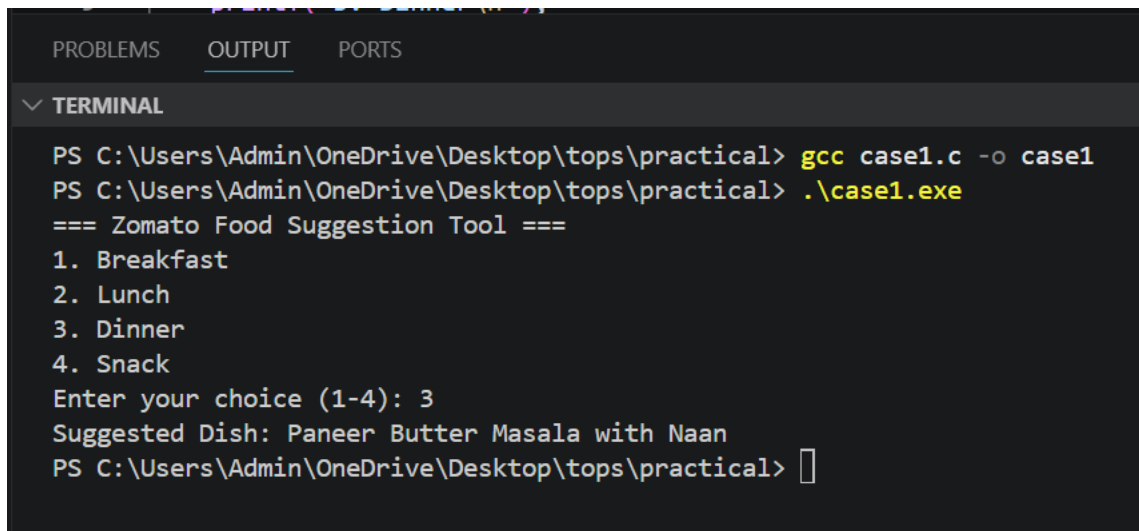

```
PROBLEMS OUTPUT PORTS
▼ TERMINAL
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> gcc case1.c -o case1
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> .\case1.exe
=== Zomato Food Suggestion Tool ===
1. Breakfast
2. Lunch
3. Dinner
4. Snack
Enter your choice (1-4): 3
Suggested Dish: Paneer Butter Masala with Naan
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> 
```

**3) Create a Flipkart discount calculator that asks the user for the total cart amount. Use nested if statements to check: if amount > 2000, apply 20% discount; else if amount > 1000, apply 10% discount; else, no discount. Print the final amount to pay.

Hint: Use nested ifs to check each discount slab.**

Code-

```
#include <stdio.h>

int main() {
    float amount, discount = 0, finalAmount;

    printf("Enter the total cart amount: ");
    scanf("%f", &amount);


    if (amount > 1000) {
        if (amount > 2000) {
            discount = amount * 0.20; // 20% discount
        } else {
            discount = amount * 0.10; // 10% discount
        }
    } else {
        discount = 0; // No discount
    }

    finalAmount = amount - discount;

    printf("\nCart Amount    : %.2f", amount);
    printf("\nDiscount        : %.2f", discount);
    printf("\nFinal Amount Pay : %.2f\n", finalAmount);
}
```

```
    return 0;
}
```

Output-

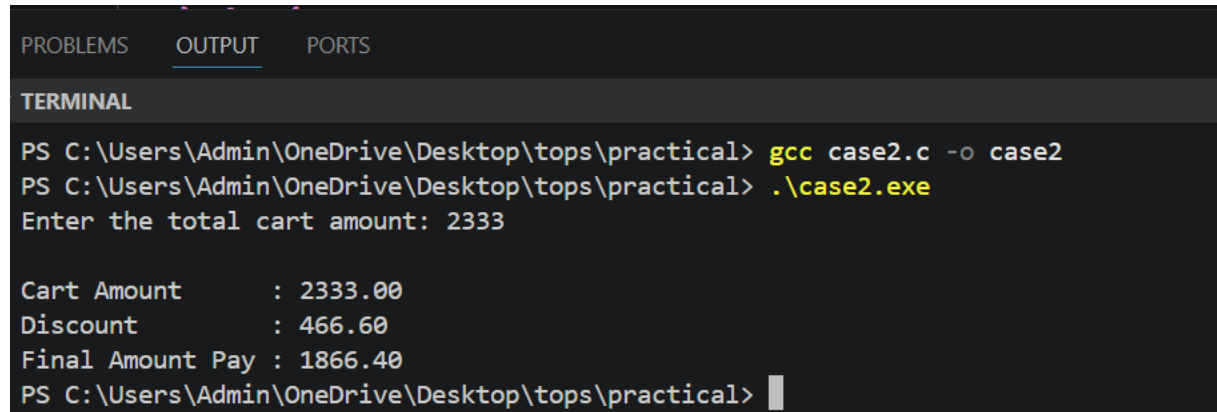

```
PROBLEMS  OUTPUT  PORTS
TERMINAL
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> gcc case2.c -o case2
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> .\case2.exe
Enter the total cart amount: 2333

Cart Amount      : 2333.00
Discount         : 466.60
Final Amount Pay : 1866.40
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> |
```

- 4) Write a program that takes a user's age and checks eligibility for three things using if-else statements: if age ≥ 18 , print 'Eligible for Driving License'; if age ≥ 21 , also print 'Eligible for Credit Card'; if age ≥ 25 , also print 'Eligible for Car Rental'. Print all applicable messages for the given age.


Code-

```
#include <stdio.h>

int main() {
    int age;
    printf("Enter your age: ");
    scanf("%d", &age);
```

```
if (age >= 18) {  
    printf("Eligible for Driving License\n");  
  
    if (age >= 21) {  
        printf("Eligible for Credit Card\n");  
  
        if (age >= 25) {  
            printf("Eligible for Car Rental\n");  
        }  
    }  
} else {  
    printf("Not eligible for Driving License\n");  
}  
  
return 0;  
}
```

Output-

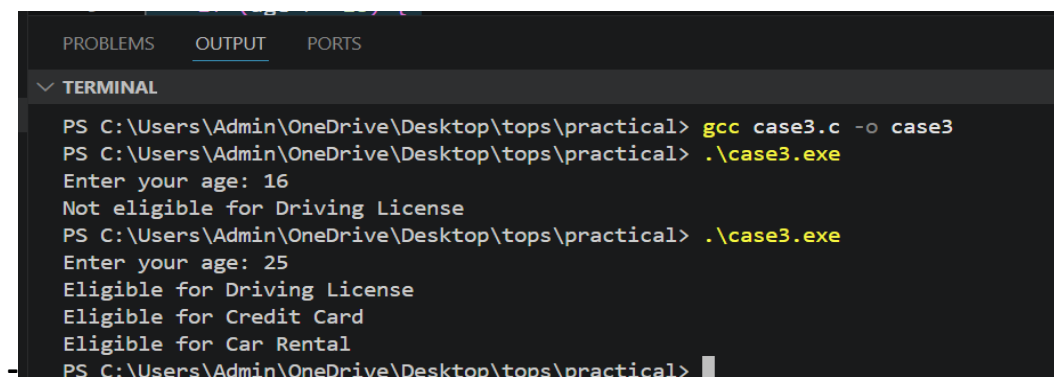

```
PROBLEMS  OUTPUT  PORTS  
▼ TERMINAL  
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> gcc case3.c -o case3  
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> .\case3.exe  
Enter your age: 16  
Not eligible for Driving License  
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> .\case3.exe  
Enter your age: 25  
Eligible for Driving License  
Eligible for Credit Card  
Eligible for Car Rental  
PS C:\Users\Admin\OneDrive\Desktop\tops\practical> |
```

