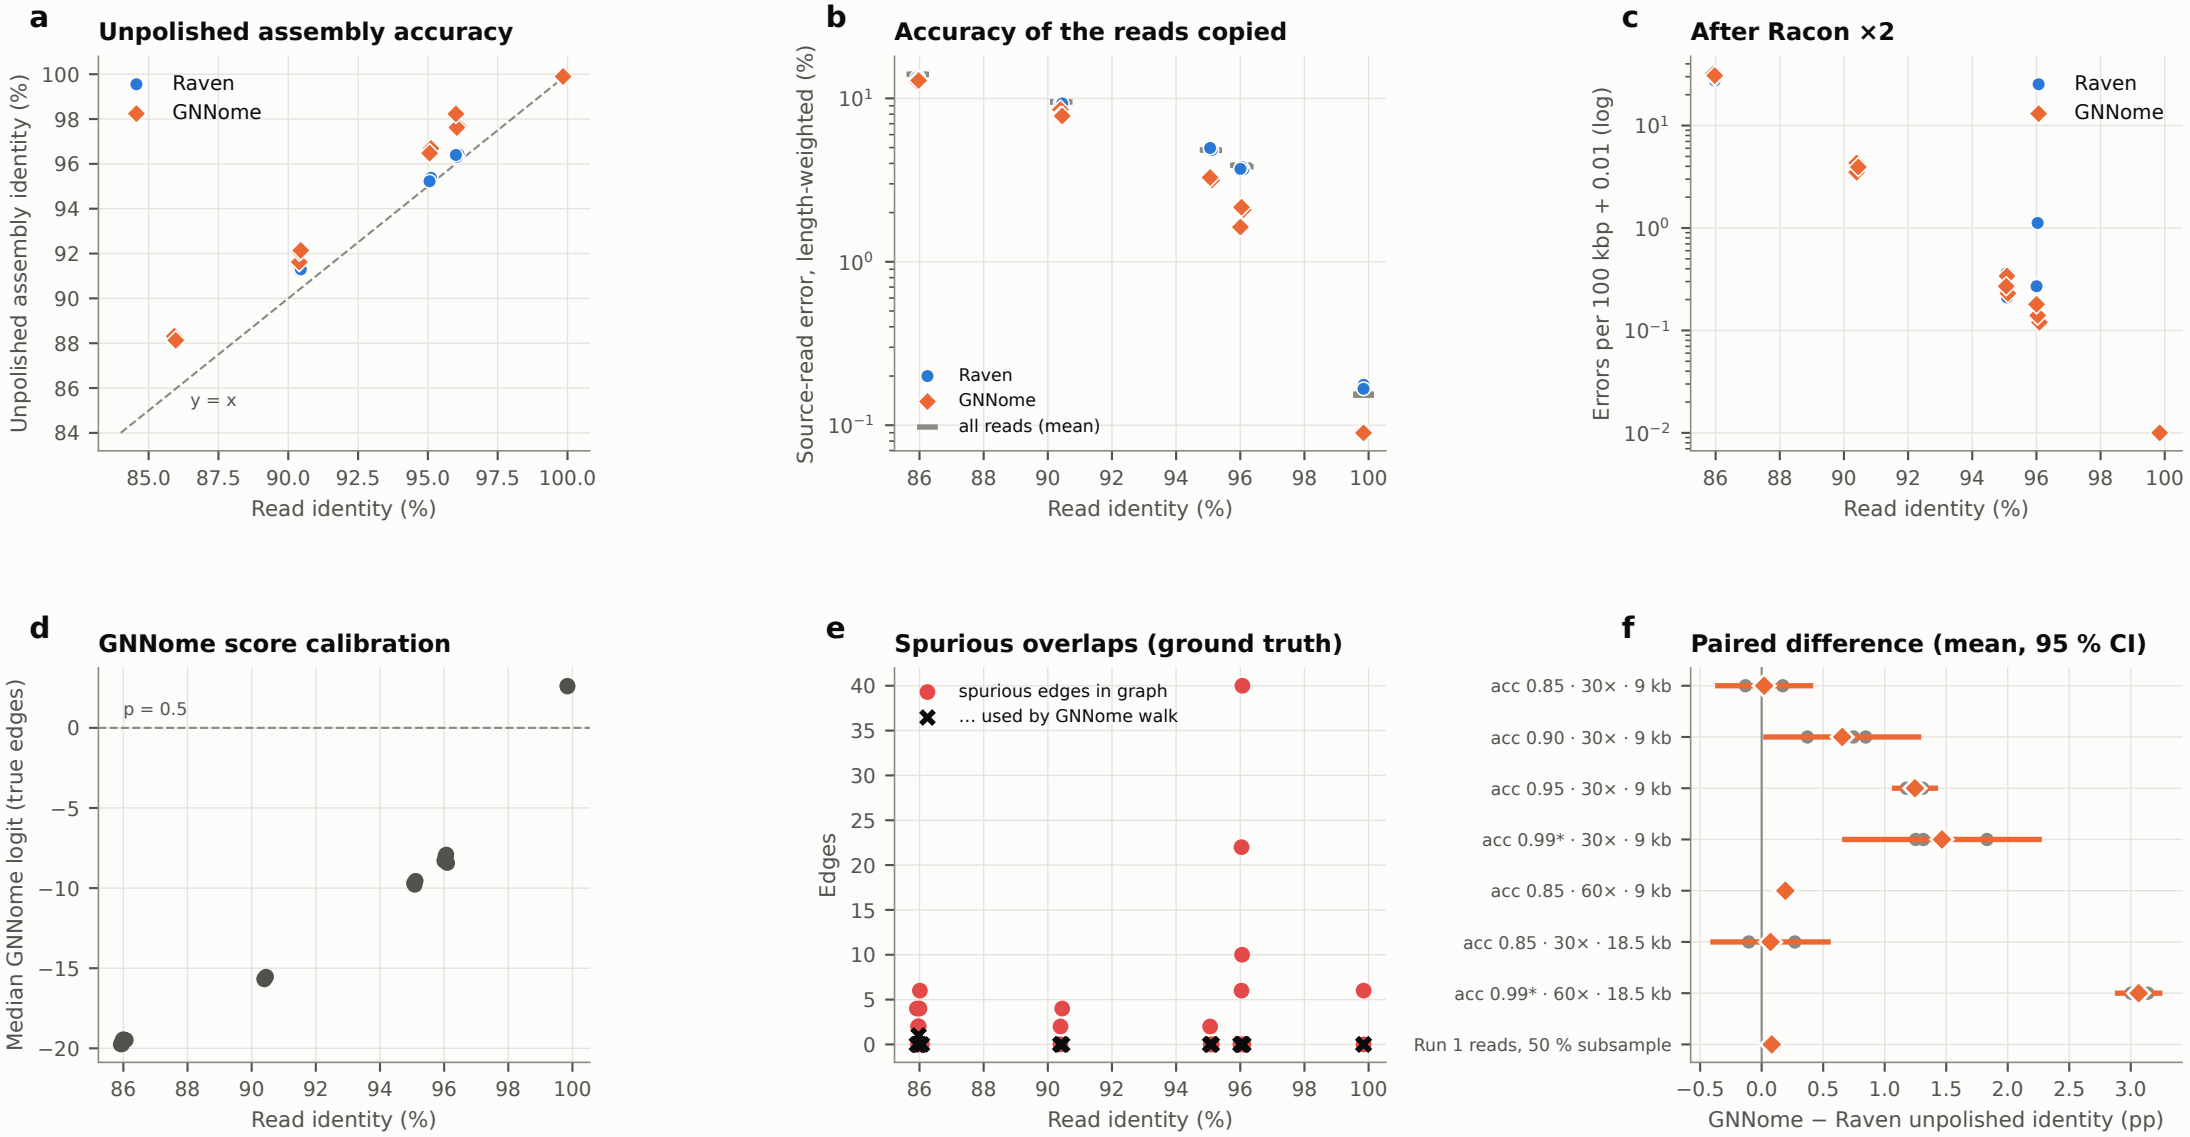
a
Unpolished assembly accuracy
Raven
GNNome
y = x
Unpolished assembly identity (%)
Read identity (%)
b
Accuracy of the reads copied
Raven
GNNome
all reads (mean)
Source-read error, length-weighted (%)
Read identity (%)
c
After Racon ×2
Raven
GNNome
Errors per 100 kbp + 0.01 (log)
Read identity (%)
d
GNNome score calibration
p = 0.5
Median GNNome logit (true edges)
Read identity (%)
e
Spurious overlaps (ground truth)
spurious edges in graph
... used by GNNome walk
Edges
Read identity (%)
f
Paired difference (mean, 95 % CI)
acc 0.85 · 30× · 9 kb
acc 0.90 · 30× · 9 kb
acc 0.95 · 30× · 9 kb
acc 0.99* · 30× · 9 kb
acc 0.85 · 60× · 9 kb
acc 0.85 · 30× · 18.5 kb
acc 0.99* · 60× · 18.5 kb
Run 1 reads, 50 % subsample
GNNome − Raven unpolished identity (pp)