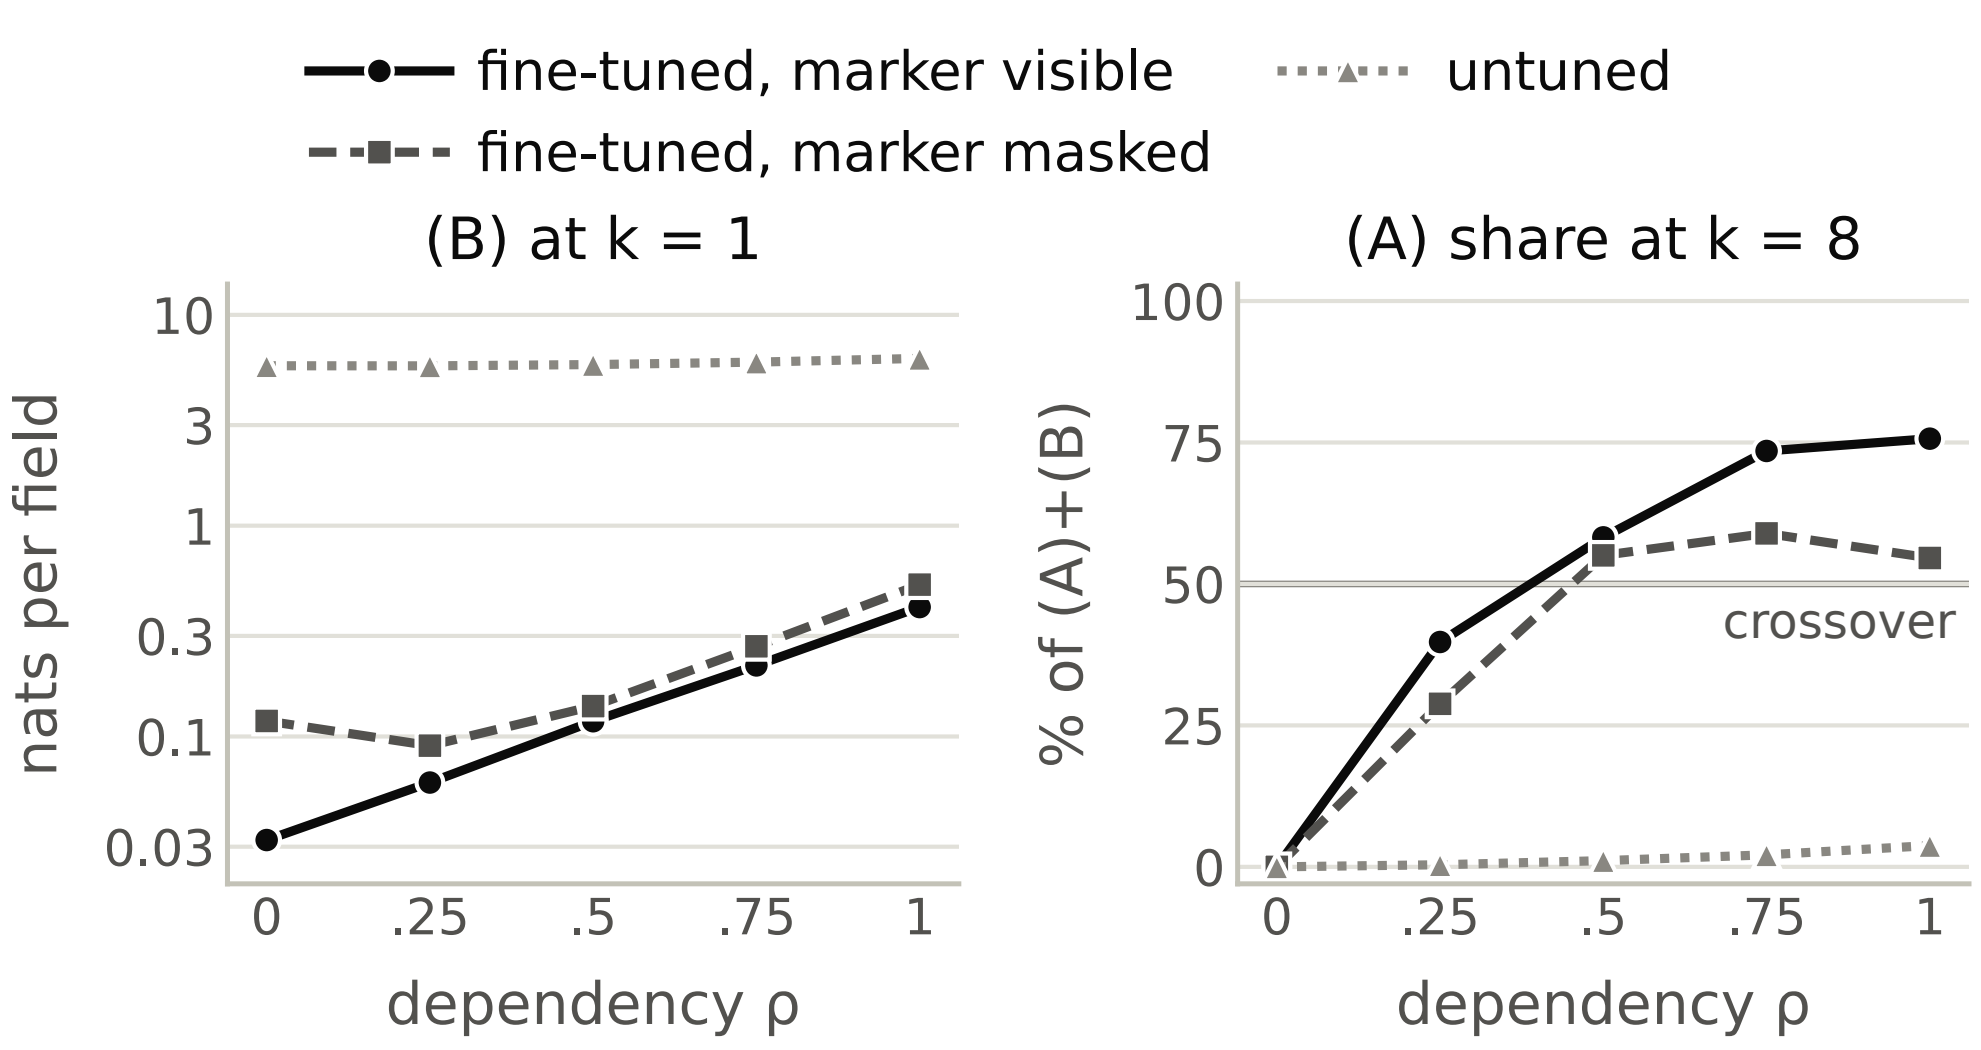
fine-tuned, marker visible
untuned
fine-tuned, marker masked
(B) at k = 1
nats per field
10
3
1
0.3
0.1
0.03
0
.25
.5
.75
1
dependency ρ
(A) share at k = 8
% of (A)+(B)
100
75
50
25
0
crossover
0
.25
.5
.75
1
dependency ρ