



Creating JSON file :

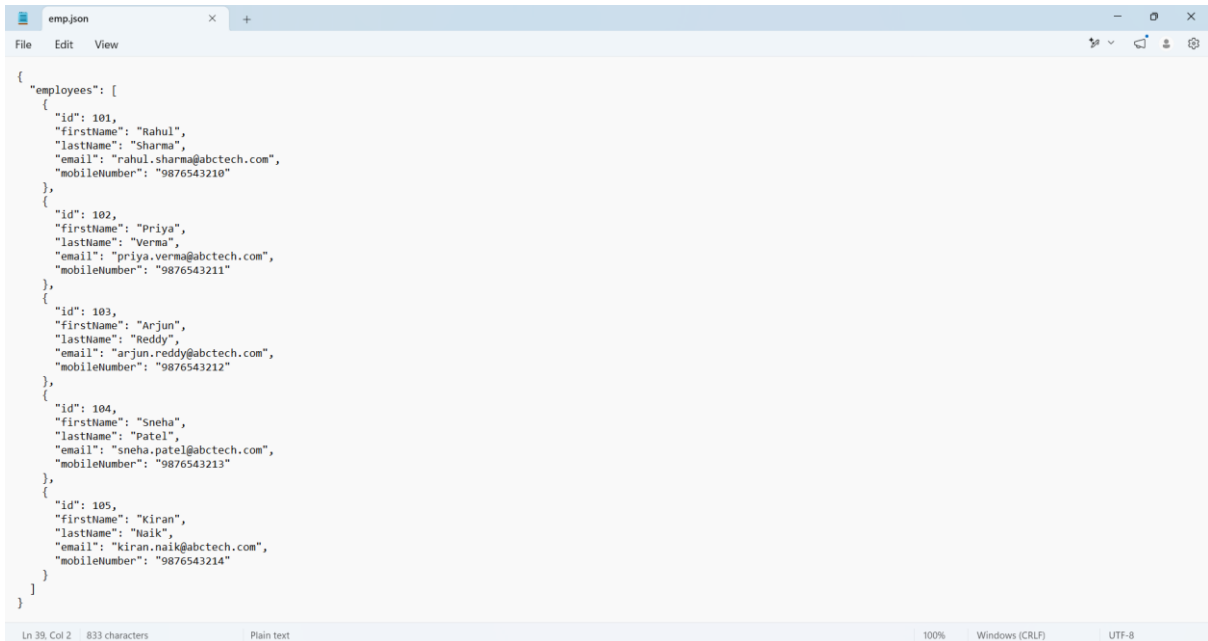

```
{
  "employees": [
    {
      "id": 101,
      "firstName": "Rahul",
      "lastName": "Sharma",
      "email": "rahul.sharma@abctech.com",
      "mobileNumber": "9876543210"
    },
    {
      "id": 102,
      "firstName": "Priya",
      "lastName": "Verma",
      "email": "priya.verma@abctech.com",
      "mobileNumber": "9876543211"
    },
    {
      "id": 103,
      "firstName": "Arjun",
      "lastName": "Reddy",
      "email": "arjun.reddy@abctech.com",
      "mobileNumber": "9876543212"
    },
    {
      "id": 104,
      "firstName": "Sneha",
      "lastName": "Patel",
      "email": "sneha.patel@abctech.com",
      "mobileNumber": "9876543213"
    },
    {
      "id": 105,
      "firstName": "Kiran",
      "lastName": "Naik",
      "email": "kiran.naik@abctech.com",
      "mobileNumber": "9876543214"
    }
  ]
}
```

Starting the Server :

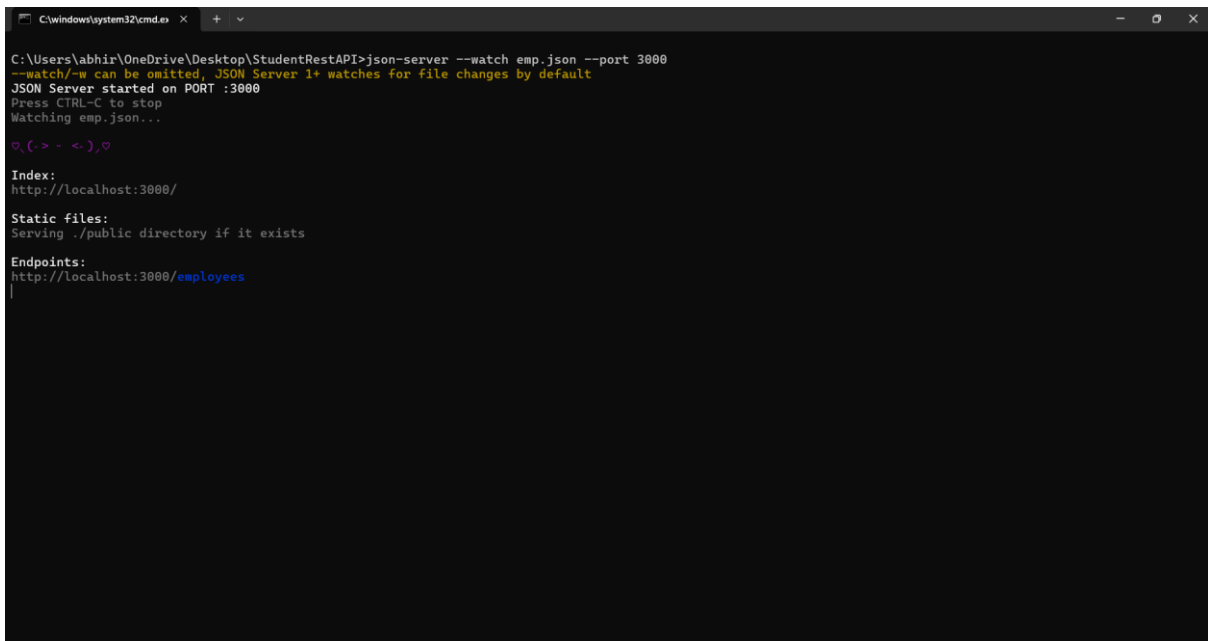


```
C:\Windows\system32\cmd.exe
C:\Users\abhir\OneDrive\Desktop\StudentRestAPI>json-server --watch emp.json --port 3000
--watch/-w can be omitted, JSON Server 1+ watches for file changes by default
JSON Server started on PORT :3000
Press CTRL-C to stop
Watching emp.json...

Index:
http://localhost:3000/


Static files:
Serving ./public directory if it exists

Endpoints:
http://localhost:3000/employees
```

GET Method – Displaying All Employees :

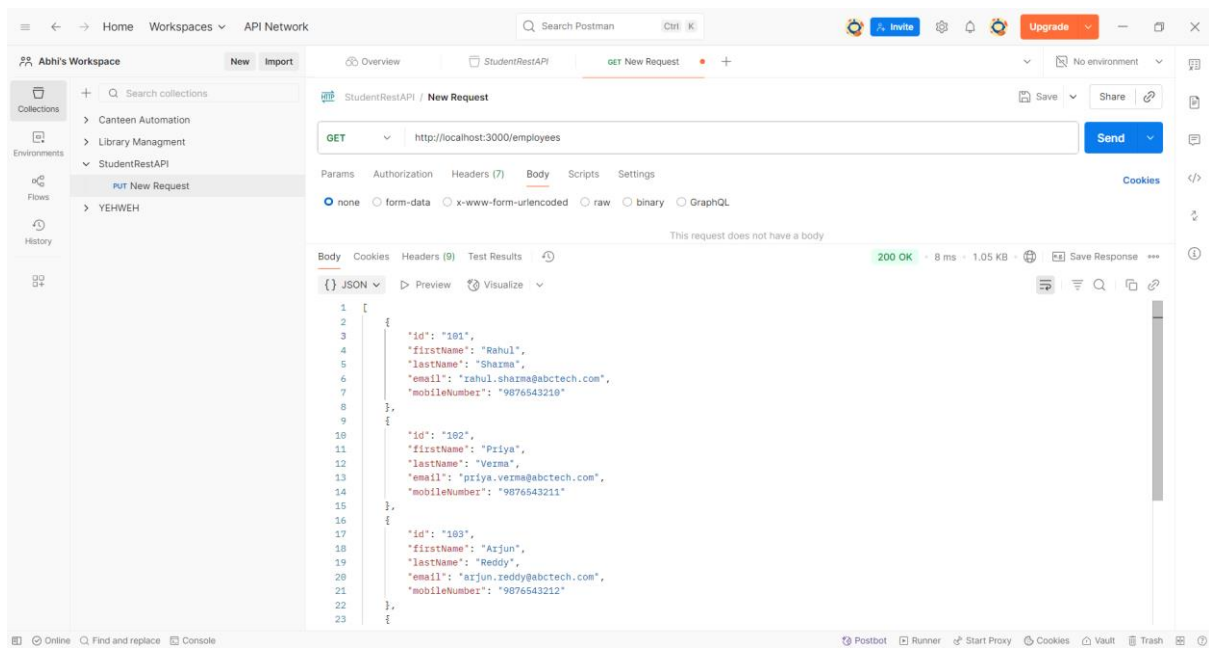

GET Method – Displaying Employee by ID:

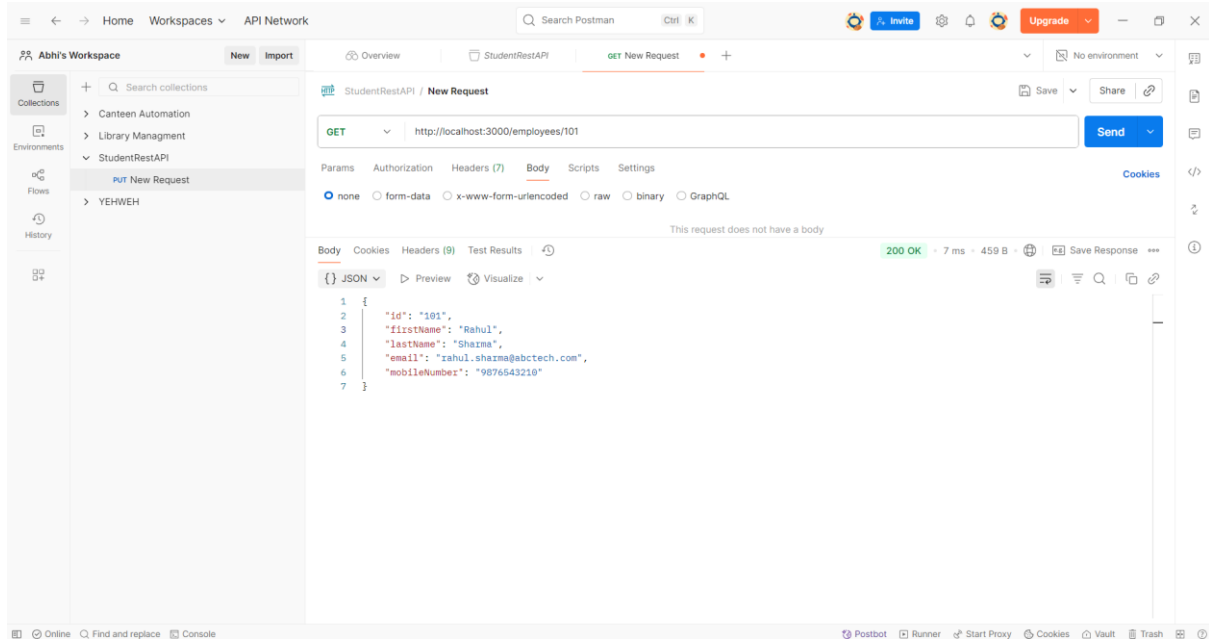

POST Method – Creating a New Employee:

The screenshot shows the Postman application interface. On the left, the 'Abhi's Workspace' sidebar is visible with a tree view containing 'Collections' (Canteen Automation, Library Managment, StudentRestAPI) and 'Environments' (YEHWEH). The 'StudentRestAPI' collection is expanded, showing a 'PUT New Request' item. The main panel displays the 'New Request' configuration for a POST method to the URL 'http://localhost:3000/employees/'. The 'Body' tab is selected, showing a JSON payload:

```
{  "id": "106",  "firstName": "Ishaan",  "lastName": "Sharma",  "email": "ishaan.sharma@abcotech.com",  "mobileNumber": "9876543120"}
```

. The response section shows a '201 Created' status with a response time of 14 ms and a body size of 474 B. The response body is displayed in JSON format:

```
{  "id": "Hkh4she3a7A",  "firstName": "Ishaan",  "lastName": "Sharma",  "email": "ishaan.sharma@abcotech.com",  "mobileNumber": "9876543120"}
```

PUT Method – Updating Employee Details:


The screenshot shows the Postman application interface. On the left, the 'Abhi's Workspace' sidebar is visible with a tree view containing 'Collections' (Canteen Automation, Library Managment, StudentRestAPI) and 'Environments' (YEHWEH). The 'StudentRestAPI' collection is expanded, showing a 'PUT New Request' item. The main panel displays the 'New Request' configuration for a PUT method to the URL 'http://localhost:3000/employees/Hkh4she3a7A'. The 'Body' tab is selected, showing a JSON payload:

```
{  "id": "106",  "firstName": "Ishan",  "lastName": "Sharma",  "email": "ishan.sharma@abcotech.com",  "mobileNumber": "9876543120"}
```

. The response section shows a '200 OK' status with a response time of 10 ms and a body size of 467 B. The response body is displayed in JSON format:

```
{  "id": "Hkh4she3a7A",  "firstName": "Ishan",  "lastName": "Sharma",  "email": "ishan.sharma@abcotech.com",  "mobileNumber": "9876543120"}
```

PATCH Method – Partially Updating Employee Details :

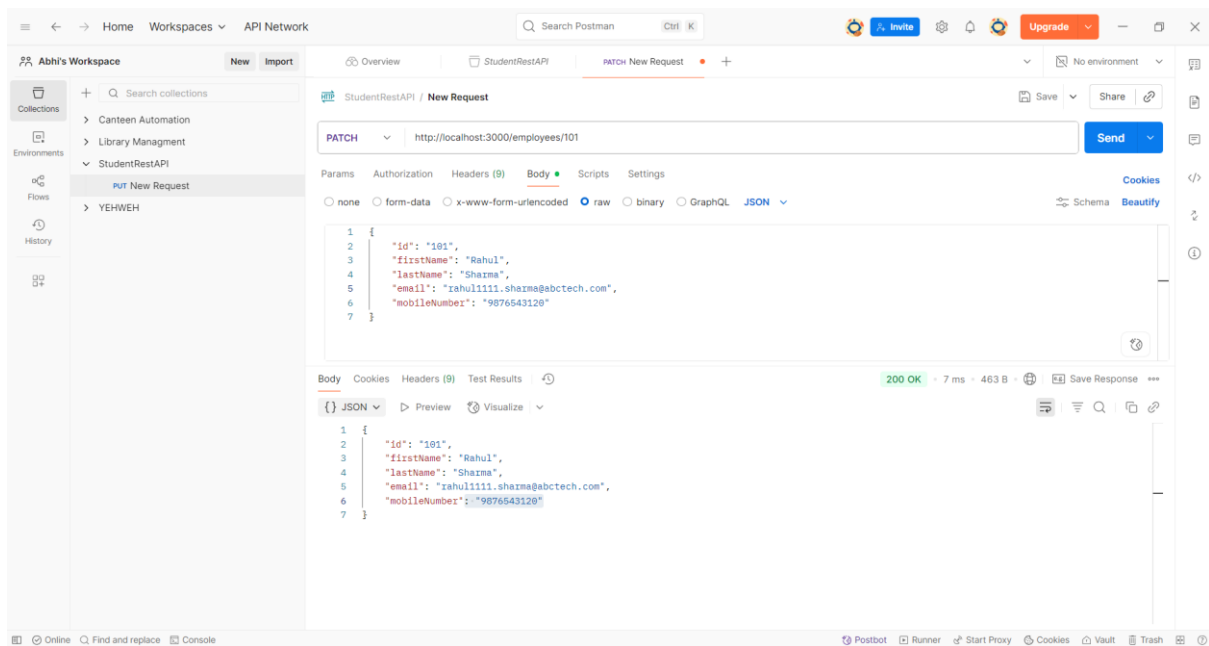

DELETE – Deleting Employee Details :

