

Executing the Repository Creation Utility

The RCU populates the backend database with schemas and respective tables required by the Oracle IDAM components.

Note: *This is one of the few manual steps in the overall deployment process*


Use below commands to initiate the RCU


```
cd /u01/oracle_idam_installer/ofm_iam_deployment_repo/installers/rcu/bin
```

```
./rcu
```

A screenshot of a terminal window. The title bar is blue and contains the text 'oracle@localhost:/u01/oracle_idam_installer/ofm_iam_deployment_repo/installers/rcu/bin'. Below the title bar is a menu bar with 'File', 'Edit', 'View', 'Terminal', 'Tabs', and 'Help'. The terminal content shows the following commands and output:

```
[oracle@localhost bin]$ pwd
/u01/oracle_idam_installer/ofm_iam_deployment_repo/installers/rcu/bin
[oracle@localhost bin]$ ./rcu
```

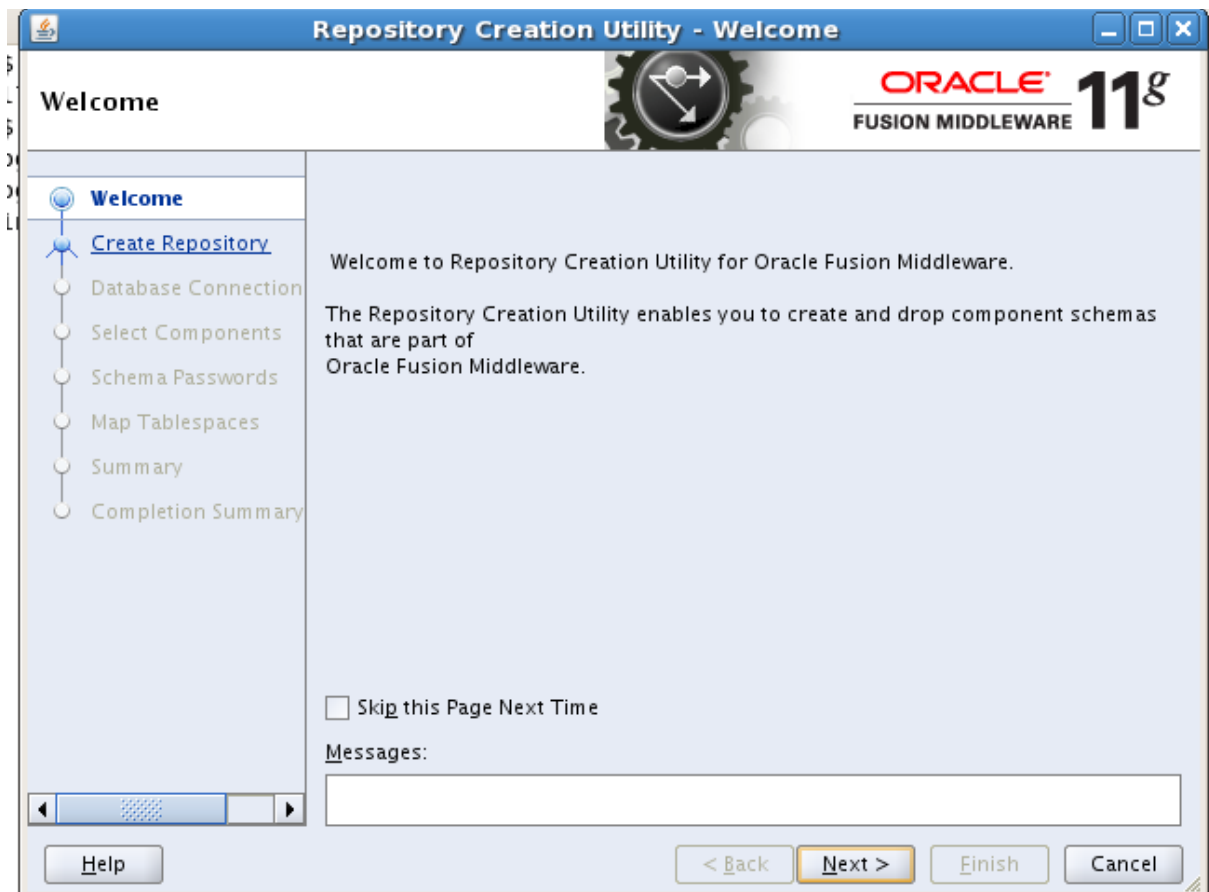

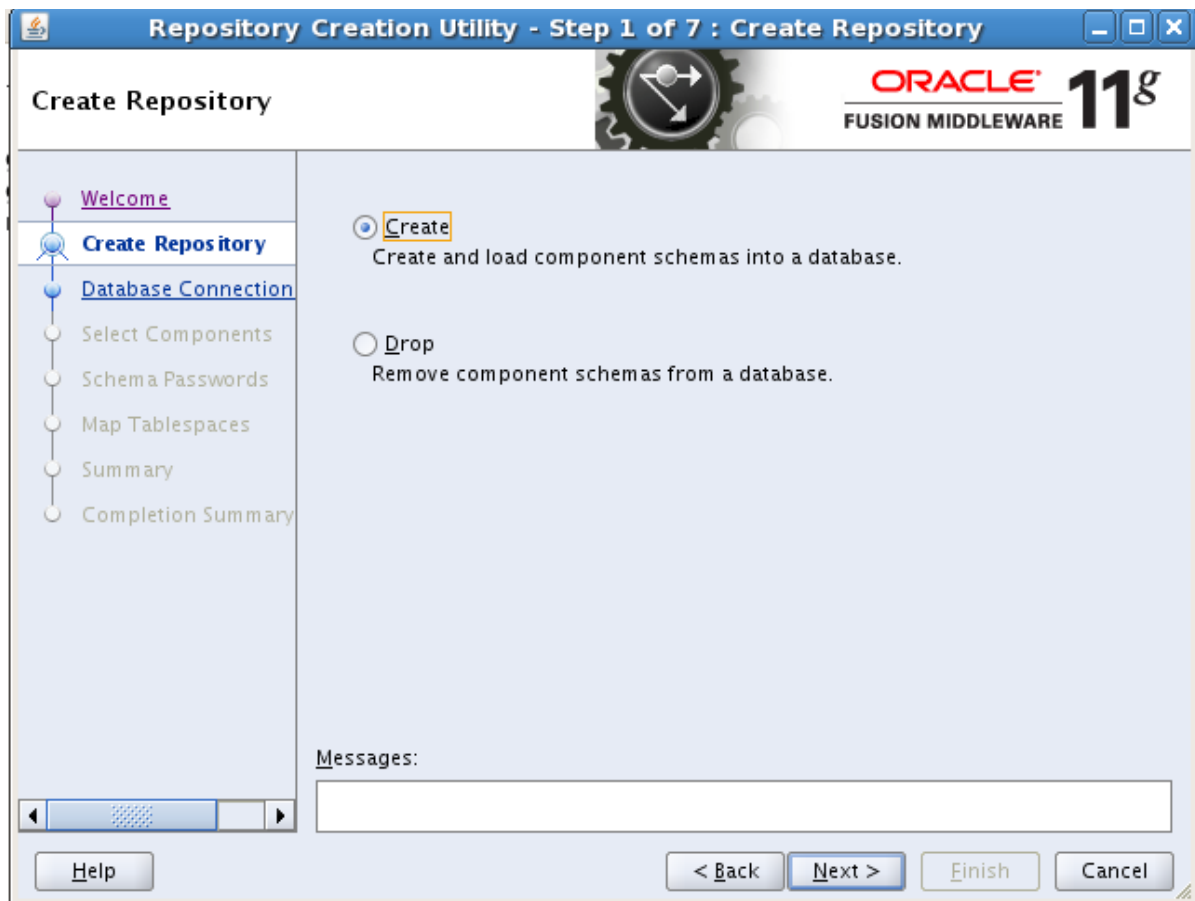

Repository Creation Utility - Step 2 of 7 : Database Connection Details

Database Connection Details

ORACLE 11g
FUSION MIDDLEWARE

Database Type:

Host Name:
For RAC database, specify VIP name or one of the Node name as Host name.
For SCAN enabled RAC database, specify SCAN host as Host name.

Port:

Service Name:

Username:
User with DBA or SYSDBA privileges. Example:sys


Password:

Role:


Messages:


Help < Back Next > Finish Cancel

Navigation: Welcome, Create Repository, Database Connection (selected), Select Components, Schema Passwords, Map Tablespaces, Summary, Completion Summary

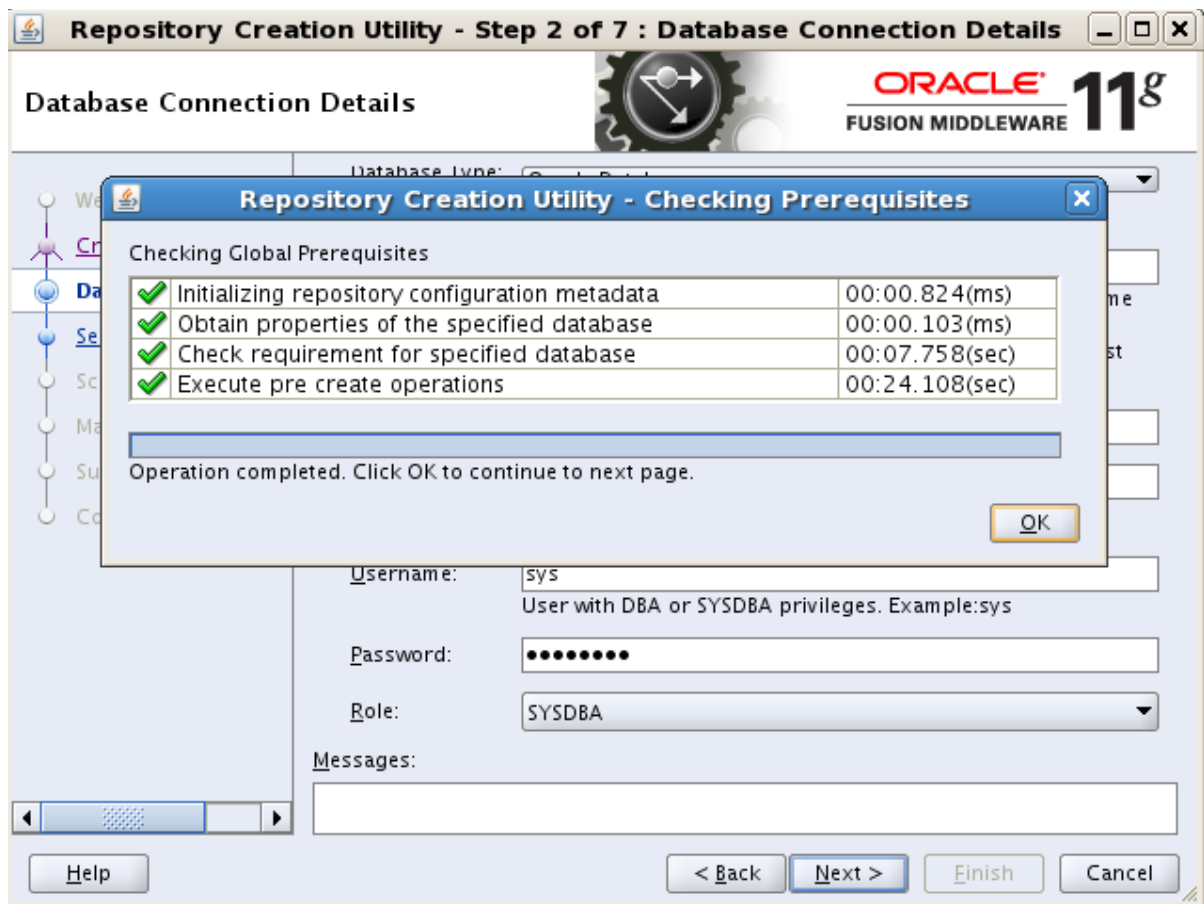

Select **Oracle Identity Manager**

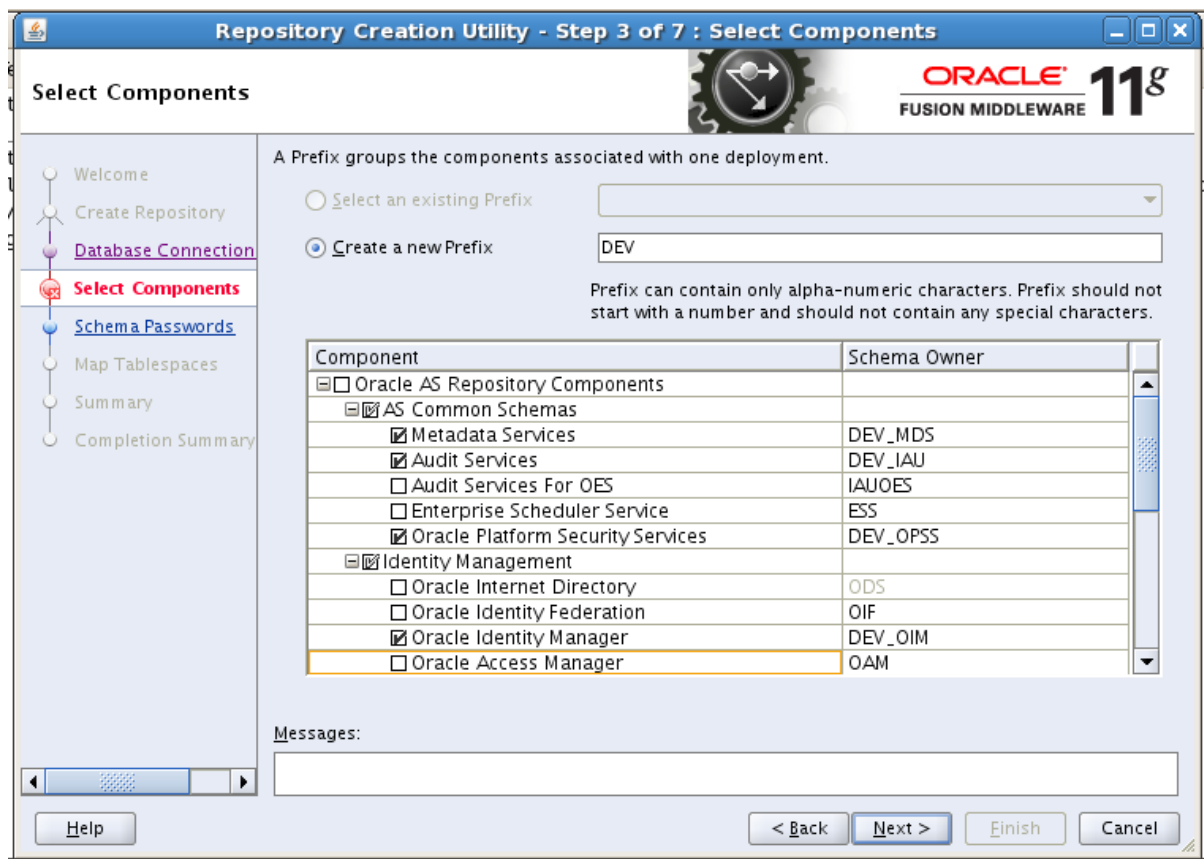

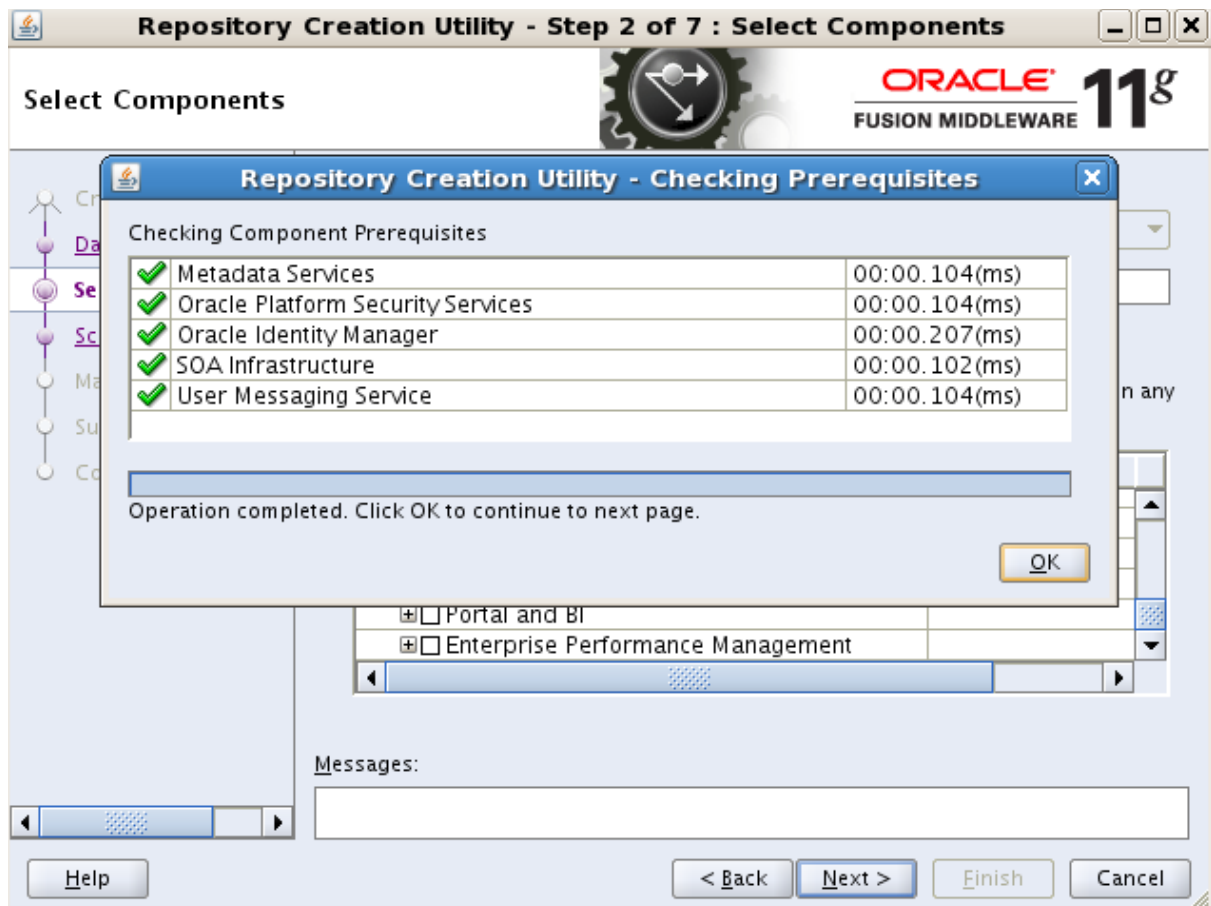

Schema Passwords

Create Repository

Database Connection

Select Components

Schema Passwords

Map Tablespaces

Summary

Completion Summary

Please enter the passwords for the main and additional (auxiliary) schema users. Password can contain alphabets, numbers and the following special characters: \$, #, _ . Password should not start with a number or a special character.

☒ Use same passwords for all schemas

 Password

 Confirm Password

☐ Use main schema passwords for auxiliary schemas

☐ Specify different passwords for all schemas

Component	Schema Owner	Schema Passwo...	Confirm Passwo...
Metadata Services	DEV_MDS		
Oracle Platform Security Services	DEV_OPSS		
Oracle Identity Manager	DEV_OIM		
SOA Infrastructure	DEV_SOAINFRA		
User Messaging Service	DEV_ORASDPM		

Messages:


Help


< Back


Next >

Finish

Cancel

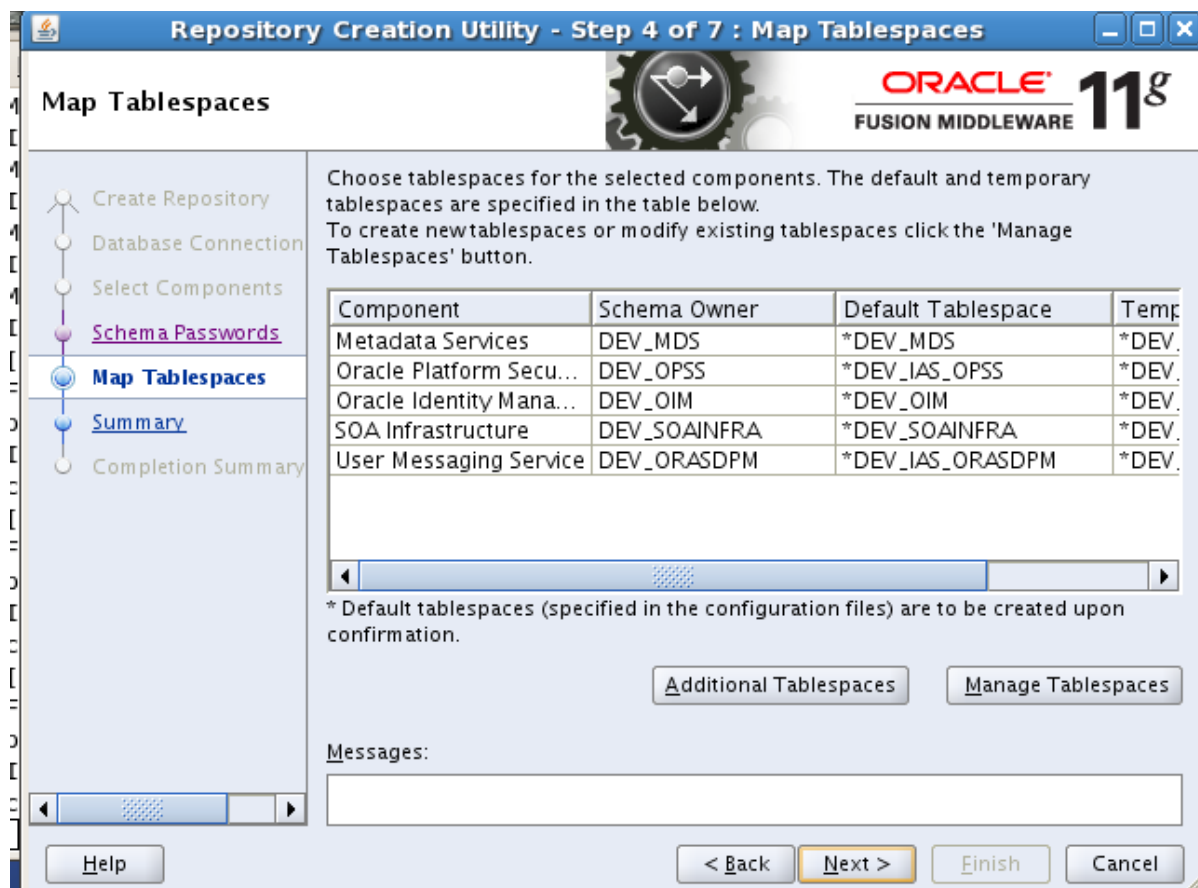

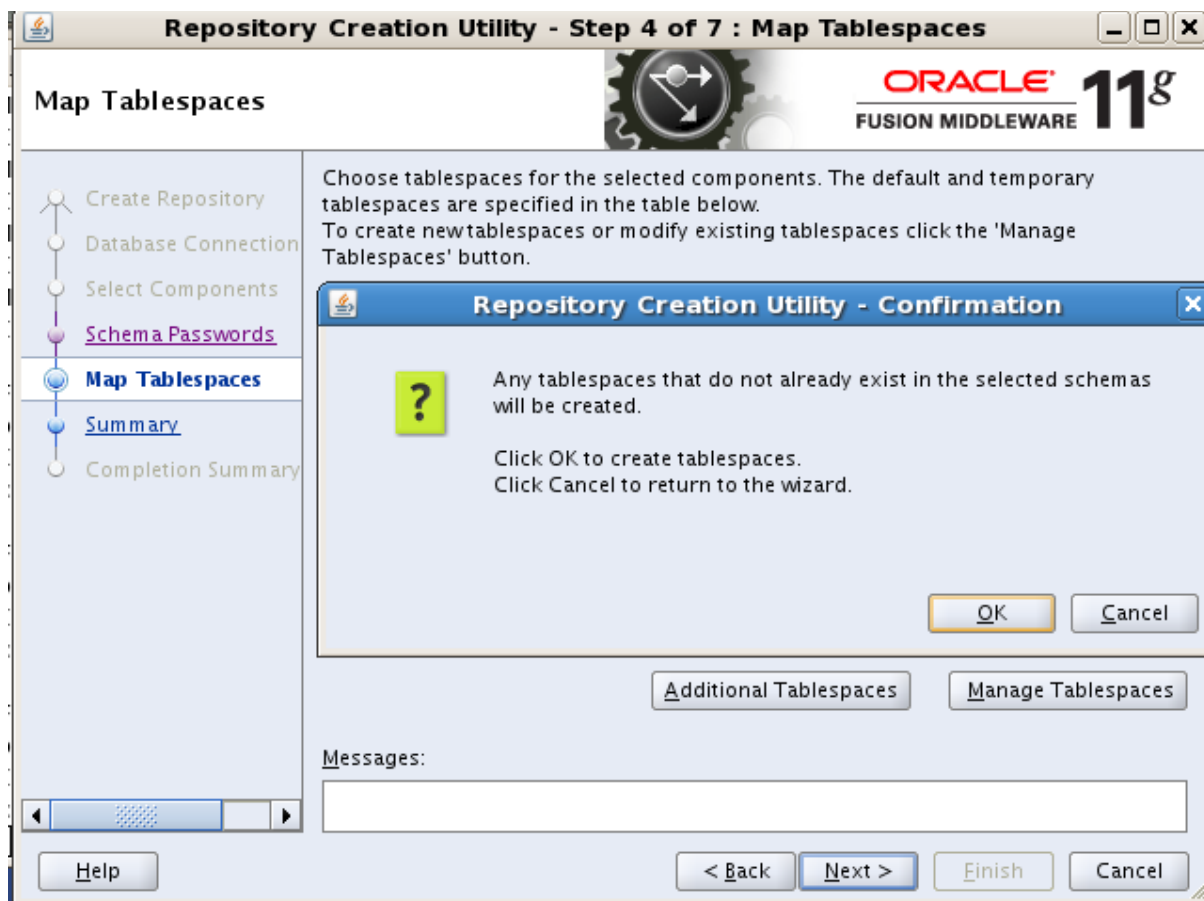

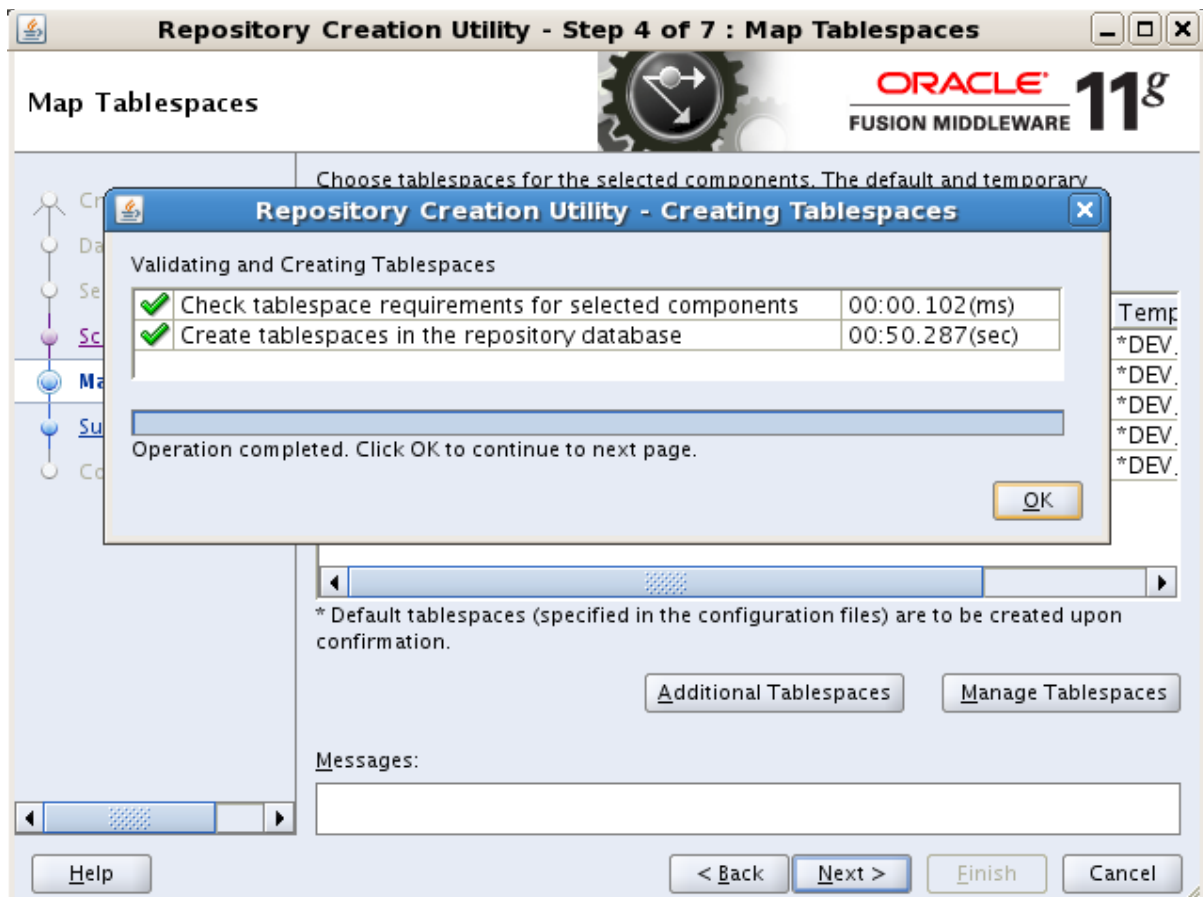

Repository Creation Utility - Step 5 of 7 : Summary

Summary

Create Repository

Database Connection

Select Components

Schema Passwords

Map Tablespaces

Summary

Completion Summary

Database details:

Host Name:

dhcppc2

Port:

1521

Service Name:

ORCL

Connected As:

sys

Operation:

Create

Prefix for (prefixable) Schema Owners:DEV

Component	Schema Own...	Tablespace T...	Tablespace Name
Metadata Services	DEV_MDS	Default	DEV_MDS
		Temp	DEV_IAS_TEMP
		Additional	None
Oracle Platform Security Ser...	DEV_OPSS	Default	DEV_IAS_OPSS
		Temp	DEV_IAS_TEMP
		Additional	None
Oracle Identity Manager	DEV_OIM	Default	DEV_OIM
		Temp	DEV_OIM_TEMP
		Additional	DEV_OIM_LOB
SOA Infrastructure	DEV_SOAINF...	Default	DEV_OIM_ARCH_D...
		Temp	DEV_SOAINFRA
			DEV_IAS_TEMP

Help

< Back

Next >

Create

Cancel

