
thedataguy16

SAVE FOR LATER

24 Excel tasks written in SQL, with the answers

Filters, SUMIF, pivots, VLOOKUP.
Each query run, each result shown.

11-PAGE PDF

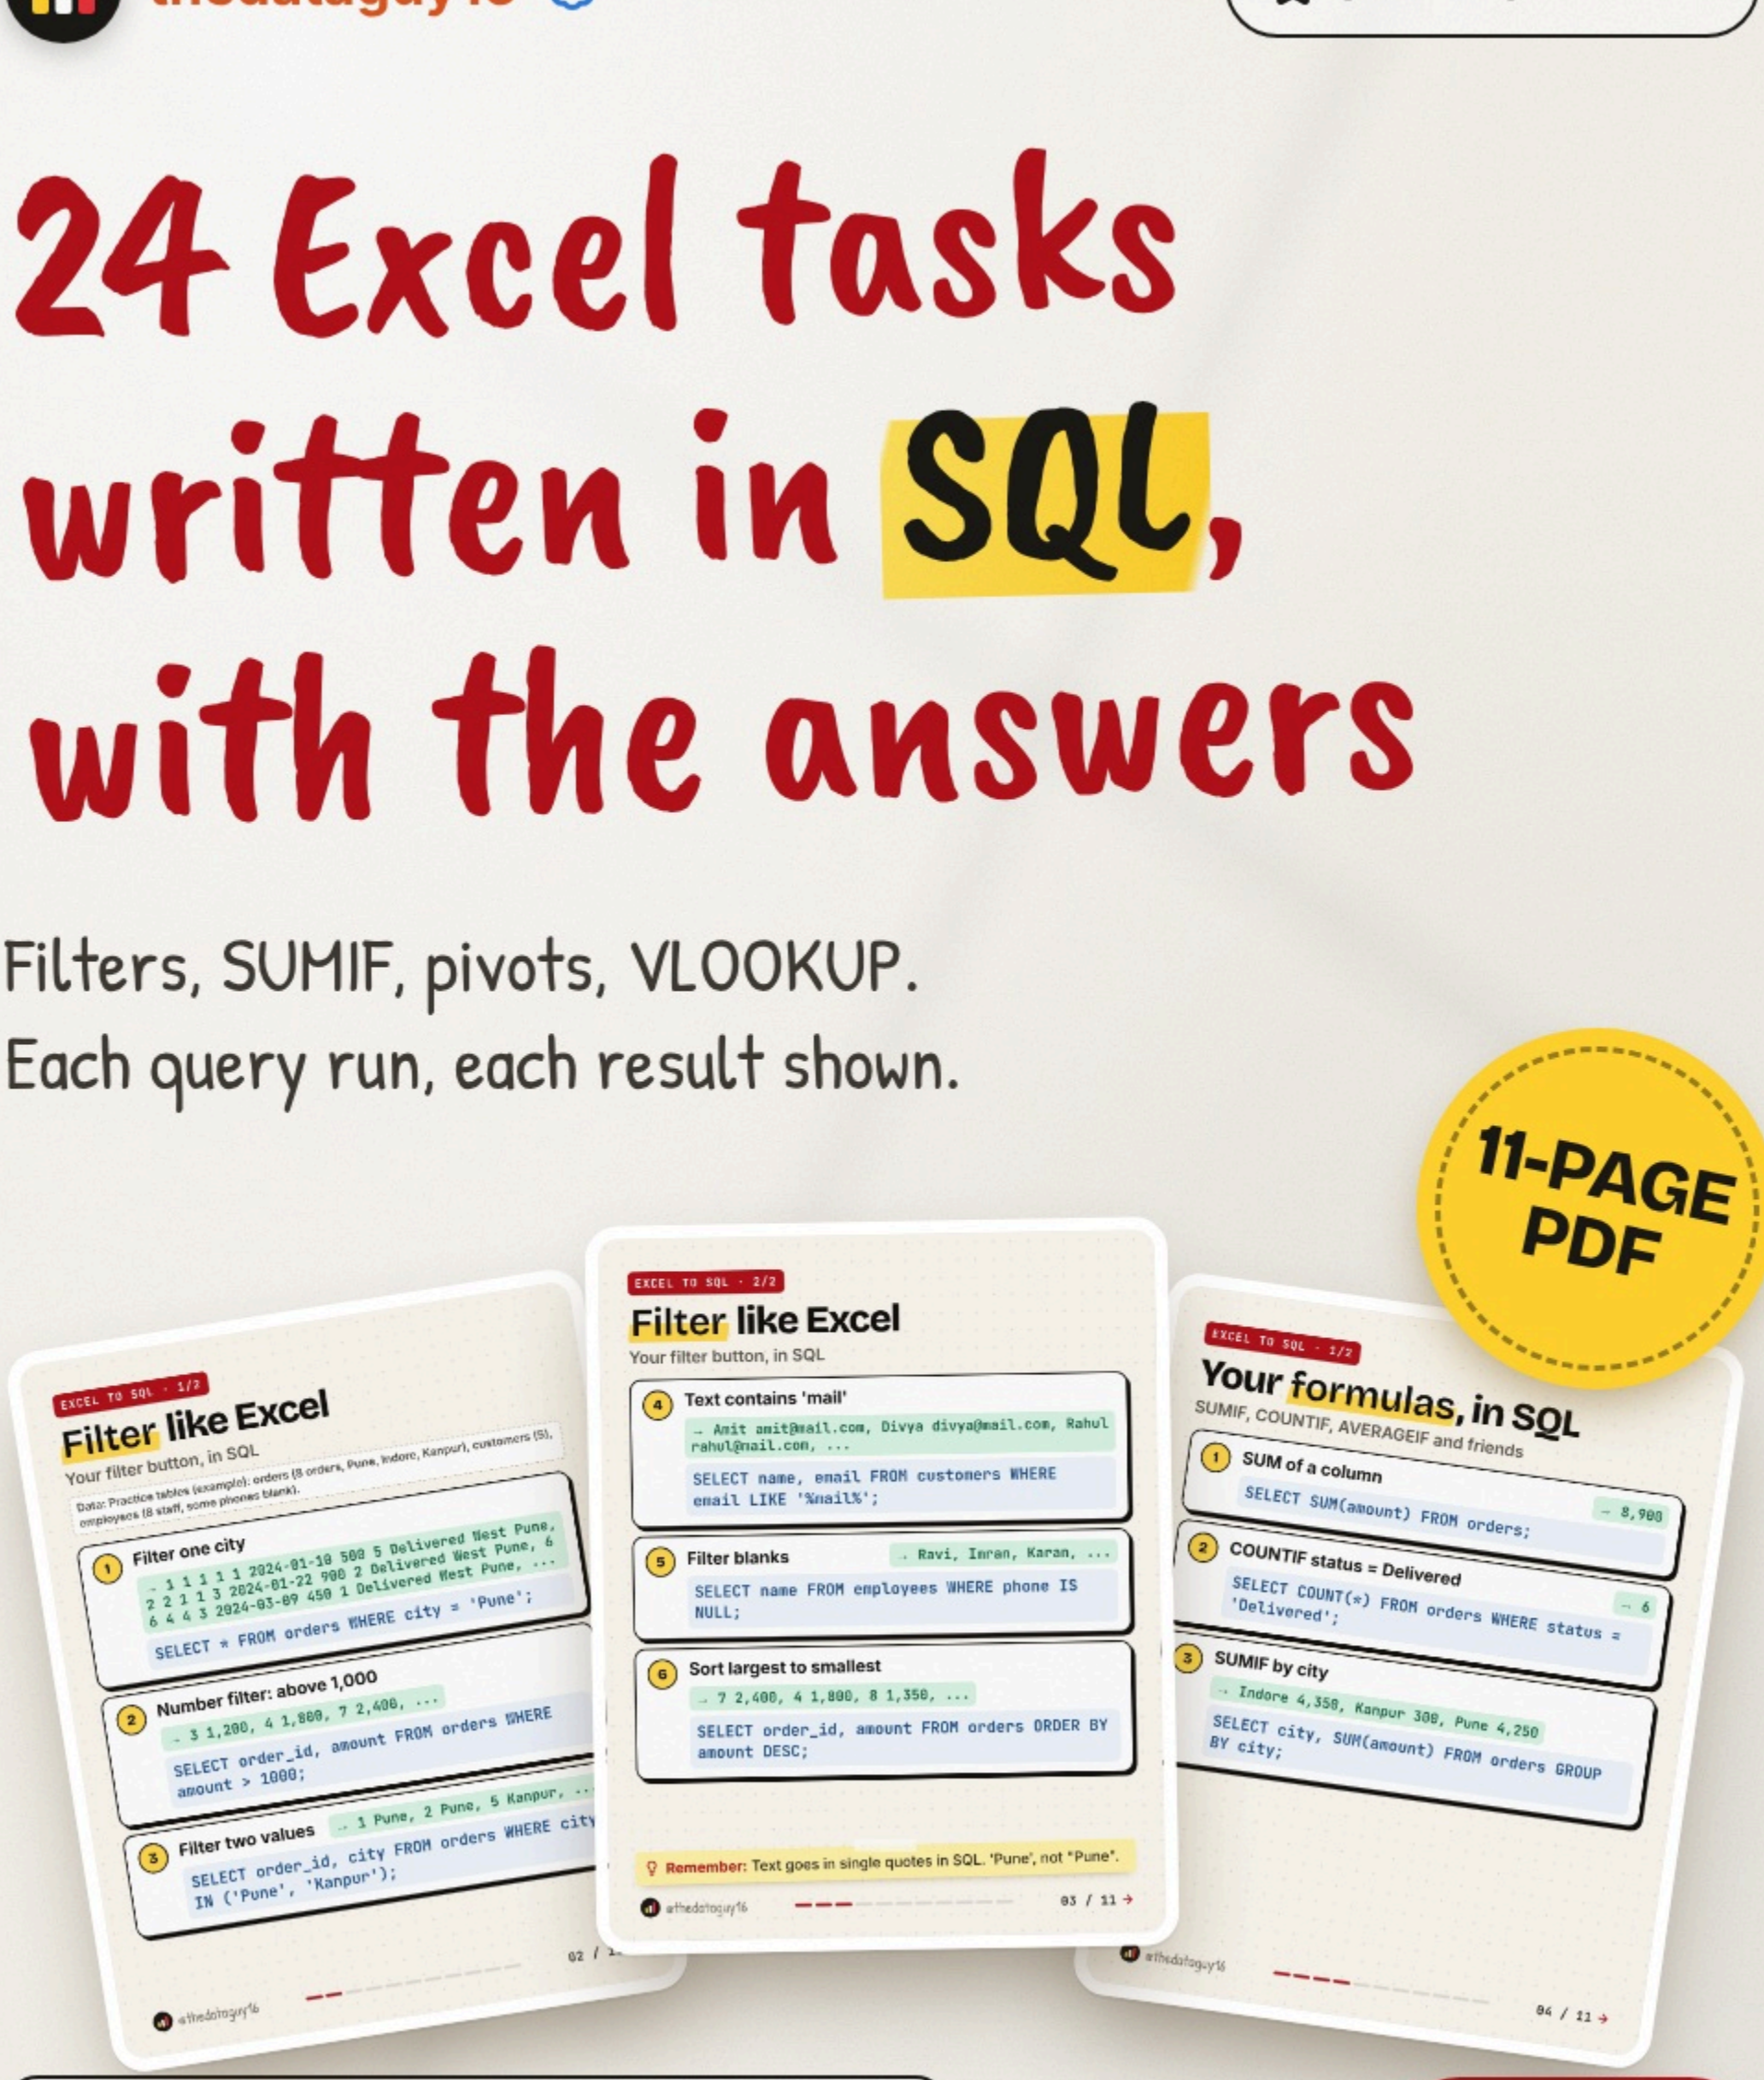

Comment XLSQL for the PDF

Swipe →

EXCEL TO SQL · 1/2

Filter like Excel

Your filter button, in SQL

Data: Practice tables (example): orders (8 orders, Pune, Indore, Kanpur), customers (5), employees (8 staff, some phones blank).

1 Filter one city

```
→ 1 1 1 1 1 2024-01-10 500 5 Delivered West Pune,
2 2 1 1 3 2024-01-22 900 2 Delivered West Pune, 6
6 4 4 3 2024-03-09 450 1 Delivered West Pune, ...
```

```
SELECT * FROM orders WHERE city = 'Pune';
```

2 Number filter: above 1,000

```
→ 3 1,200, 4 1,800, 7 2,400, ...
```

```
SELECT order_id, amount FROM orders WHERE
amount > 1000;
```

3 Filter two values

```
→ 1 Pune, 2 Pune, 5 Kanpur, ...
```

```
SELECT order_id, city FROM orders WHERE city
IN ('Pune', 'Kanpur');
```

EXCEL TO SQL · 2/2

Filter like Excel

Your filter button, in SQL

4 Text contains 'mail'

```
→ Amit amit@mail.com, Divya divya@mail.com, Rahul rahul@mail.com, ...
```

```
SELECT name, email FROM customers WHERE email LIKE '%mail%';
```

5 Filter blanks

```
→ Ravi, Imran, Karan, ...
```

```
SELECT name FROM employees WHERE phone IS NULL;
```

6 Sort largest to smallest

```
→ 7 2,400, 4 1,800, 8 1,350, ...
```

```
SELECT order_id, amount FROM orders ORDER BY amount DESC;
```

Remember: Text goes in single quotes in SQL. 'Pune', not "Pune".

EXCEL TO SQL · 1/2

Your formulas, in SQL

SUMIF, COUNTIF, AVERAGEIF and friends

1 SUM of a column

→ 8,900

```
SELECT SUM(amount) FROM orders;
```

2 COUNTIF status = Delivered

→ 6

```
SELECT COUNT(*) FROM orders WHERE status =
'Delivered';
```

3 SUMIF by city

→ Indore 4,350, Kanpur 300, Pune 4,250

```
SELECT city, SUM(amount) FROM orders GROUP
BY city;
```

EXCEL TO SQL · 2/2

Your formulas, in SQL

SUMIF, COUNTIF, AVERAGEIF and friends

4 AVERAGEIF by dept

→ HR 46,500, IT 64,667, Sales 55,000

```
SELECT dept, ROUND(AVG(salary)) FROM
employees GROUP BY dept;
```

5 MAX and MIN together

→ 72,000 45,000

```
SELECT MAX(salary), MIN(salary) FROM
employees;
```

6 COUNTA vs COUNT

→ 8 4

```
SELECT COUNT(*), COUNT(phone) FROM
employees;
```

Interview trap: COUNT(*) counts rows. COUNT(phone) skips the blanks.

EXCEL TO SQL · 1/2

Pivot tables, in SQL

Rows, values, filters

1 Pivot: city x total and count

→ Indore 3 4,350, Kanpur 1 300, Pune 4 4,250

```
SELECT city, COUNT(*), SUM(amount) FROM
orders GROUP BY city;
```

2 Pivot with a report filter

→ Central 3,150, West 4,250

```
SELECT region, SUM(amount) FROM orders WHERE
status = 'Delivered' GROUP BY region;
```

3 Value filter: totals above 3,000

→ Indore 4,350, Pune 4,250

```
SELECT city, SUM(amount) FROM orders GROUP
BY city HAVING SUM(amount) > 3000;
```

EXCEL TO SQL · 2/2

Pivot tables, in SQL

Rows, values, filters

4 Top 2 cities by sales

→ Indore 4,350, Pune 4,250

```
SELECT city, SUM(amount) AS total FROM
orders GROUP BY city ORDER BY total DESC
LIMIT 2;
```

5 Remove duplicates

→ Pune, Indore, Kanpur

```
SELECT DISTINCT city FROM orders;
```

6 Count unique customers

→ 4

```
SELECT COUNT(DISTINCT customer_id) FROM
orders;
```

Say this: WHERE filters rows before grouping. HAVING filters the groups after.

EXCEL TO SQL · 1/2

VLOOKUP and IF, in SQL

Joins and CASE

1 VLOOKUP customer name

→ 1 Amit, 2 Amit, 3 Divya, ...

```
SELECT o.order_id, c.name FROM orders o JOIN
customers c ON o.customer_id =
c.customer_id;
```

2 VLOOKUP that keeps missing

→ Sanjay NULL

```
SELECT c.name, o.order_id FROM customers c
LEFT JOIN orders o ON c.customer_id =
o.customer_id WHERE o.order_id IS NULL;
```

3 IF: label big orders

→ 1 Small, 2 Small, 3 Big, ...

```
SELECT order_id, CASE WHEN amount >= 1000
THEN 'Big' ELSE 'Small' END FROM orders;
```

EXCEL TO SQL · 2/2

VLOOKUP and IF, in SQL

Joins and CASE

4 IFERROR for blanks

→ Asha 98200 11111, Ravi Not given, Neha 98200 33333, ...

```
SELECT name, COALESCE(phone, 'Not given')
FROM employees;
```

5 Text: UPPER and LENGTH

→ PUNE 4, INDORE 6, KANPUR 6, ...

```
SELECT UPPER(city), LENGTH(city) FROM
customers;
```

6 Month from a date

→ 1 01, 2 01, 3 02, ...

```
SELECT order_id, strftime('%m', order_date)
FROM orders;
```

Interview trap: LEFT JOIN keeps every order, like VLOOKUP. Missing matches show NULL, not #N/A.

☆ THE 90-DAY SYSTEM · 5.0 BEST SELLER

Become a data analyst in 90 days.

Open it every morning. It tells you what to learn, build and ship that day. 1 hour a day, no coding background needed.

DAY 1-21 — Excel + Stats

DAY 22-45 — SQL

DAY 46-65 — Power BI

DAY 66-90 — Python + Jobs

27 portfolio projects with real data

100+ interview Q&As with model answers

365 days of 1:1 mentor access

10+ job applications sent by Day 90


0 to job-ready, one day at a time

Built by Abhishek · 7 yrs in data · 31,000+ helped

Link in bio →

Open Excel. Then open SQL.

Comment XLSQL and I'll DM you the full 11-page PDF.

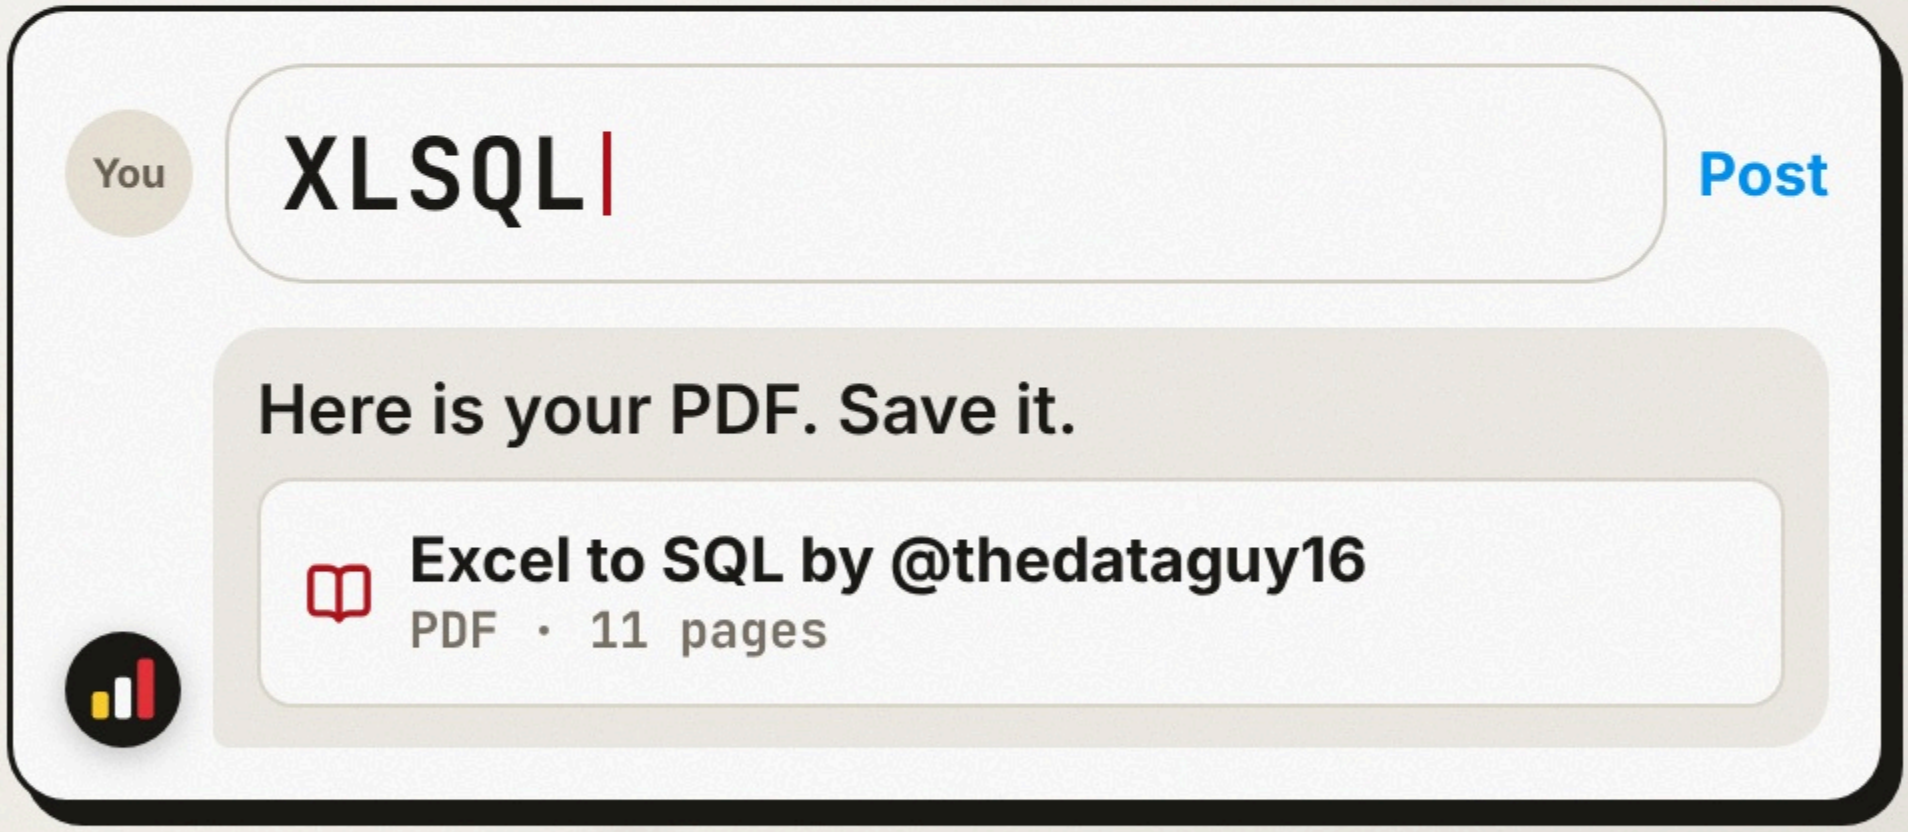

Follow @thedataguy16

Send to a friend