RFP Intelligence Platform

4.5-minute demo, entirely inside the web app: what to click, what to say, what the result shows.

Before you press record (2 minutes of setup)

- Terminal 1: uvicorn rfp_intel.api.server:app --port 8001 (frontend/.env has VITE_API_URL=http://localhost:8001).
- Terminal 2: cd frontend && npm run dev -- --port 5174 then open http://localhost:5174 in Chrome at 1440x900, light theme, 100% zoom, no other tabs.
- Bid1 must already be extracted (python main.py --bid ./data/Bid1 once, before starting the API) so its fields, addendum changes and go/no-go are ready. Bid2 is the one you extract live in scene 2.
- Compare once beforehand (Compare page, Bid1 + Bid2, 'Compare 2 bids') so scene 7 can show the saved result instantly.
- The live extraction of Bid2 takes 4-8 minutes, longer than the video: start it in scene 2, do scenes 3-9 while it runs, and come back to it in scene 10. If it is not finished by then, show the run card still running and cut to the finished Fields tab from an earlier run.
- Each 'What to say' box is 12-20 seconds at a normal pace. Total 4:30.

Scene list

#	Time	Screen	Key message
1	0:00	Bids page	What the tool is: bids in, cited fields and answers out
2	0:20	Bid2 page: Run extraction	One click runs the agents; live steps appear
3	0:50	Bid1: Fields tab + citation drawer	20 fields, Due Date after Addendum 2, exact quote, open the PDF
4	1:30	Bid1: Addendum changes tab	What each addendum changed, with its source
5	1:50	Ask page	Cited answers; 'Not found in documents' instead of a guess
6	2:30	Search page	Hybrid search with filters; every hit cites file and page
7	2:55	Compare page	Side-by-side comparison of two bids
8	3:20	Bid1: Go / no-go tab	Recommendation against your company profile
9	3:45	Evaluation page	Measured retrieval and extraction quality
10	4:05	Bid2: finished run, Fields tab, Full trace	The live run's results and its agent trace; close

How the scenes map to the assignment's evaluation criteria

Criterion (weight)	What they look for	Shown in
RAG search engine (25%)	Recall@k / MRR, hybrid search, re-ranking, metadata filtering, citations, search API/UI	Scenes 6, 9; citations in 3, 5
Multi-agent system (25%)	Clear agent roles, orchestration, shared state, validation / feedback loop, error handling, observability	Scenes 2, 10 (trace); 3, 4 (validator, reconciler)
Extraction accuracy (20%)	Correctness and completeness of the 20 fields incl. addendum updates	Scenes 3, 4, 9, 10
Robustness (10%)	Different document structures, missing fields, tables, unseen bids without code changes	Scene 1 (MiniBid card), 3 (not found), 5 (not found answer)
Code quality & architecture (10%)	Modular, typed, tested, configured, reproducible	Scene 8 (YAML profile), close of scene 10 (API, CLI, tests)
Documentation & demo (10%)	README, architecture diagram, design decisions, evaluation results, demo	This video + README, docs/ARCHITECTURE.md

Recording tips for an assessment review: say the brief's words (hybrid search, re-ranking, metadata filtering, citations, orchestrator, validator, feedback loop, shared state, structured outputs, observability) exactly when the screen shows them; keep the cursor on the element you name; do not apologise for latency, explain it (retrieval over large documents, reasoning models). After the scenes there is a page of likely interviewer questions with short answers, then the UI glossary.

Scene 1	0:00-0:20	What the tool is


On screen: Bids page (home)

What to do

- Open http://localhost:5174. Hover the Bid1 card: due date, 'changed by Addendum 2', 15 passed / 1 failed / 4 not found.

What to say

This is my RFP Intelligence Platform for the assignment: a hybrid RAG search engine over bid documents, and a multi-agent system on top of it that extracts the twenty required fields with citations, reconciles addendums, validates every value and answers questions. Each card is one bid folder processed as a unit: its due date, the addendum that changed it, and how many of the twenty fields passed validation. The third card is a synthetic unseen bid the system handles with no code changes.

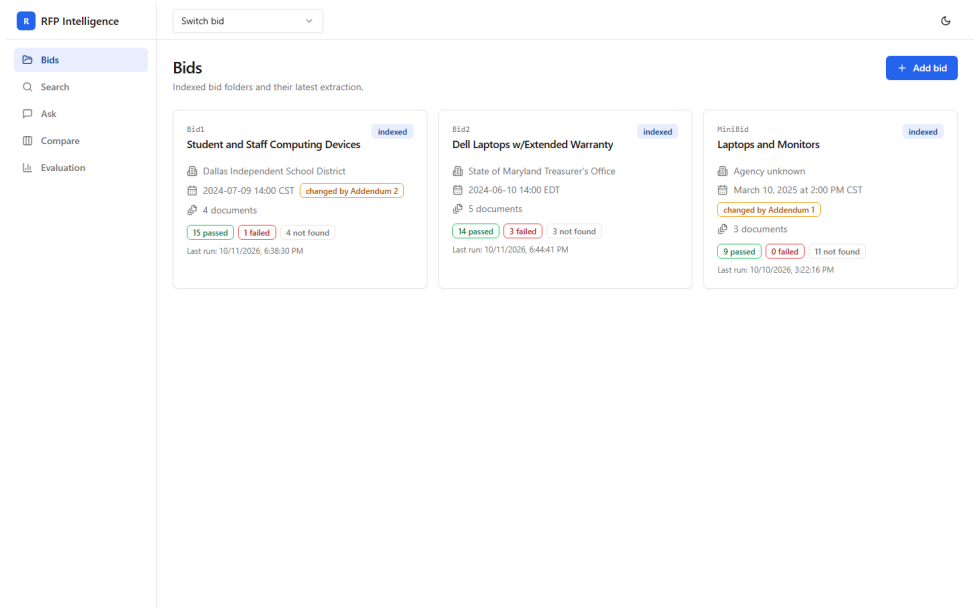

Scene 2	0:20-0:50	Run an extraction live


On screen: Bid2 page (click the Bid2 card), then 'Run extraction'

What to do

- Click the Bid2 card. Click 'Run extraction' (top right). The run card appears with a 'running' pill and the first steps: Ingestion, Orchestrator, then Retrieval and the extractors.
- Leave it running; we come back to it at the end.

What to say

One click runs the LangGraph pipeline. The Ingestion agent parses and indexes incrementally, the Orchestrator plans three field groups, and for each group the Retrieval agent, the only agent allowed to call the search engine, gathers evidence and an Extraction agent fills the fields from that evidence only. The three extractors run in parallel, then the Addendum Reconciler, the Validator with its retry loop, and the Report agent. Every step is traced with latency and token cost. It takes a few minutes, so let's look at a finished bid while it runs.

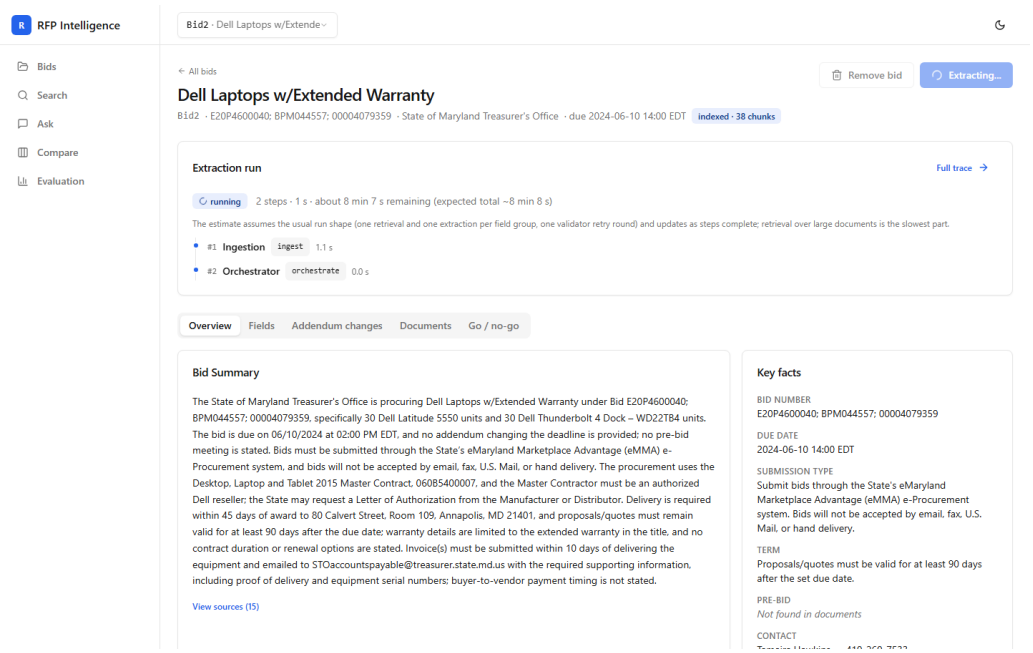

Scene 3	0:50-1:30	The extracted fields and their citations


On screen: Bid1 page, Fields tab, then the citation drawer

What to do

- Use the 'Switch bid' box (top) to open Bid1. Click the 'Fields' tab.
- Point at the columns: Value, Confidence bar, Status pill, Citations.
- Click the citation chip on the 'Due Date' row. In the drawer point at the quote, then the Notes ('As written: July 9, 2024 at 2:00 PM CST'; changed by Addendum 2, originally June 27).
- Click 'Open PDF at page 1' to show the source document, then close it.

What to say

Here is a finished record: twenty fields, each with a value, a confidence score, a status and its citations. The due date is 2024-07-09 2 PM Central, and it is cited to Addendum 2, not to the original RFP, because the addendum moved it from June 27. The drawer shows the exact quote the value came from, and one click opens the PDF at that page. A field the documents never mention, like the bid bond here, is shown as 'Not found in documents', never invented.

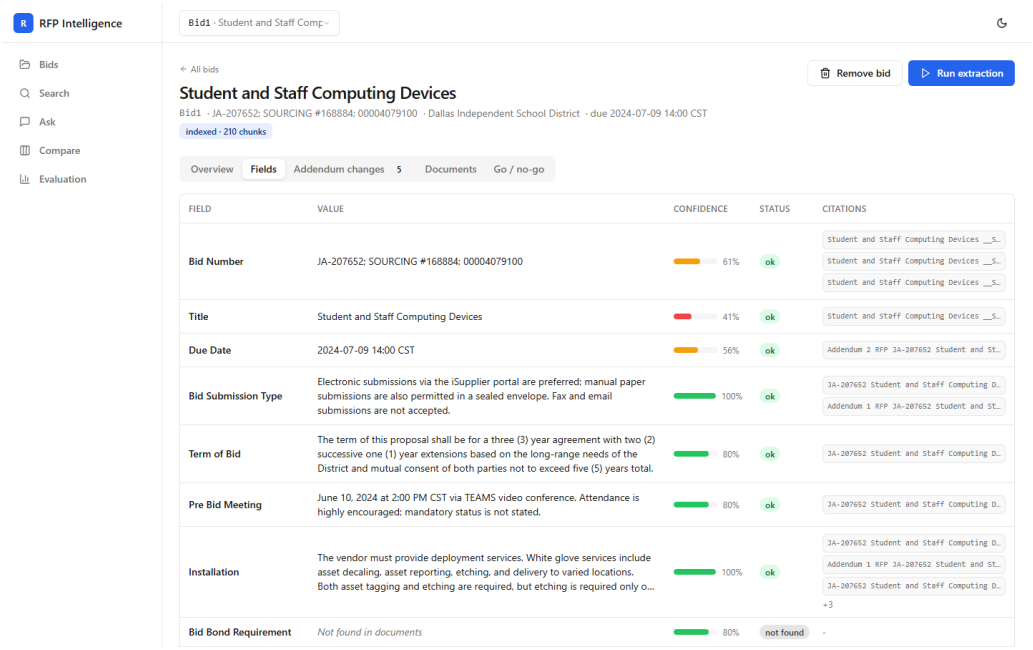

Scene 4	1:30-1:50	What the addendums changed


On screen: Bid1 page, 'Addendum changes' tab

What to do

- Click the 'Addendum changes' tab (the badge shows the count).
- Point at one entry: field name, kind badge (override / clarification), old value on the left, new on the right, citation chip below.

What to say

> The Addendum Reconciliation agent compares the base RFP with each addendum and records every override, clarification and addition with its source. This is how the system knows the due date moved and why, and the same log is in the JSON output.

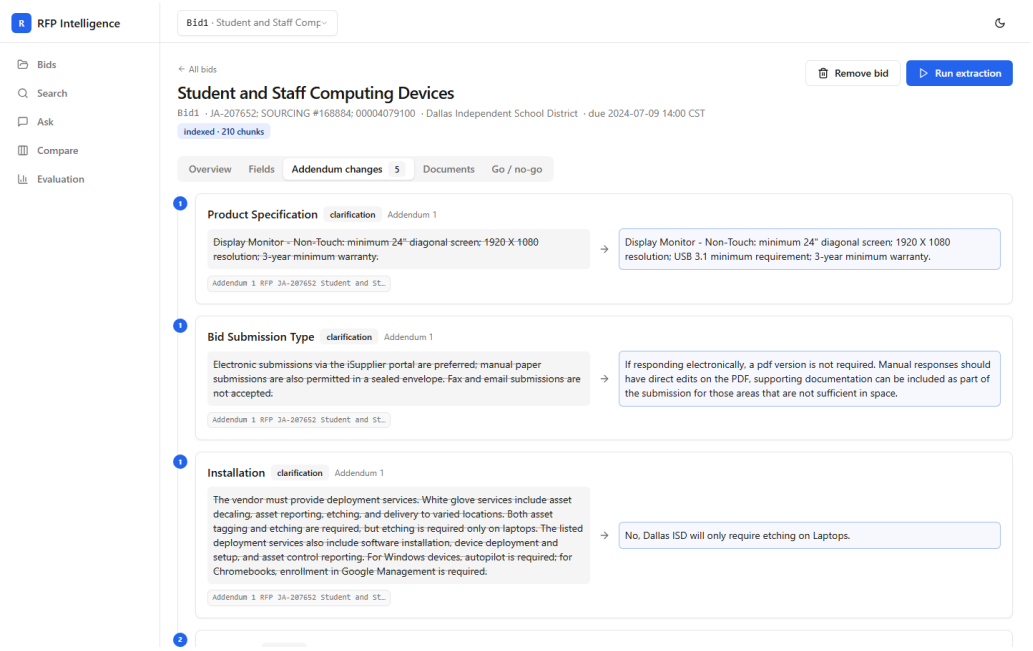

Scene 5	1:50-2:30	Ask questions


On screen: Ask page

What to do

- Click 'Ask' in the sidebar. Select Bid1 in the scope row.
- Click the suggested chip 'What changed in Addendum 2 compared to the original RFP?' (or type it). Wait 10-20 s.
- Point at the answer, the citation chips and the confidence badge. Click a chip to show the drawer, close it.
- Switch scope to Bid2, type 'Is a bid bond required, and if so, how much?', submit. Point at 'Not found in documents'.

What to say

The same agents answer free-form questions. The answer about Addendum 2 names the new due date and the signed-addendum requirement, each sentence cited to the passage it came from. The bid bond question comes back 'Not found in documents' with no citations: the documents do not state one, so the system does not guess an amount. Ask the same question again and it is served from the answer cache.

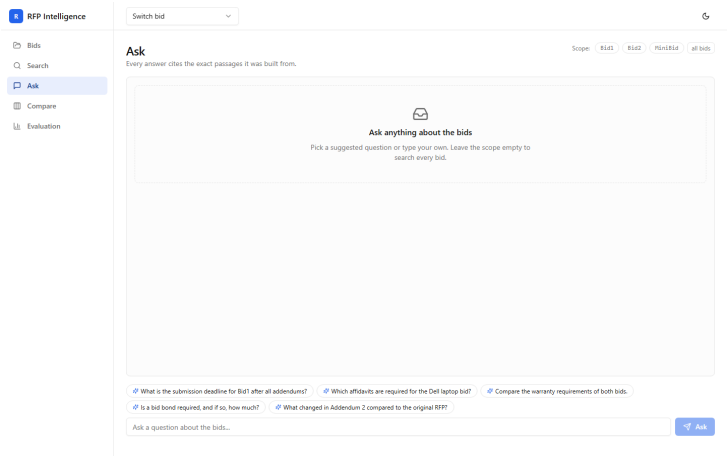


```
Q1: What changed in Addendum 2 compared to the original RFP?

Addendum 2 changed the RFP due date for Bid1 from the original due date to July 9, 2024 at 2:00 PM CST. It also
required bidders to sign and return the addendum with their proposal, while stating that all other provisions
and terms and conditions remain unchanged. The evidence provided does not include the original RFP due date, so
only the new due date is directly supported here.

- Due date: original value not found in the provided evidence; new value: July 9, 2024 at 2:00 PM CST. [E1, E2]
- Addendum acknowledgment: bidders must sign and return/submit a copy of Addendum 2 with the proposal. [E1, E2]
- No other changes stated: all other provisions and terms and conditions remain unchanged. [E2]

Citations: Addendum 2 RFP JA-207652 Student and Staff Computing Devices.pdf p.1; Addendum 2 RFP JA-207652
Student and Staff Computing Devices.pdf p.1   confidence=1.0

Q2: Is a bid bond required, and if so, how much?

Not found in documents
Citations: none   confidence=0.8
```

Scene 6	2:30-2:55	The search engine itself


On screen: Search page

What to do

- Click 'Search'. Type 'due date', choose Bid1, keep 'hybrid_rerank', press Search.
- Point at the first hit: Addendum 2, page 1, badges vector #1 / bm25 #1 / rerank #1, highlighted words.
- Change 'All document types' to 'addendum' and search again: only addendum chunks remain.

What to say

Under the agents is a real search engine you can use directly. Every query runs dense vector search and BM25 keyword search, merges them, and a cross-encoder re-ranks the top results. The addendum that moved the due date ranks first. Each hit carries the file, the page and the text, and the filters narrow a search to one bid, one document type or one addendum.

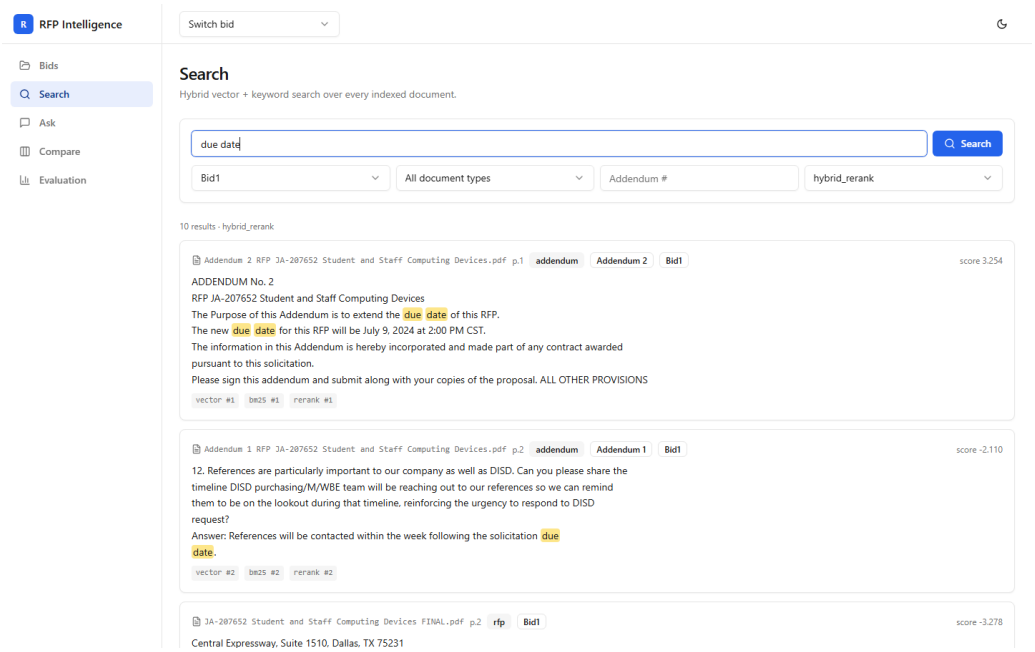

Scene 7	2:55-3:20	Compare two bids


On screen: Compare page

What to do

- Click 'Compare'. Bid1 and Bid2 are ticked; the saved comparison is shown (or click 'Compare 2 bids' and wait 20 s).
- Scroll the summary paragraph, then the highlights with their citation chips, then the field table: rows with the coloured left border differ.

What to say

The Comparison agent lines two bids up field by field from their validated records: different due dates, submission channels, contract terms, delivery rules and documentation burden, with a short narrative and citations for every value. Nothing here comes from outside the extracted, cited records.

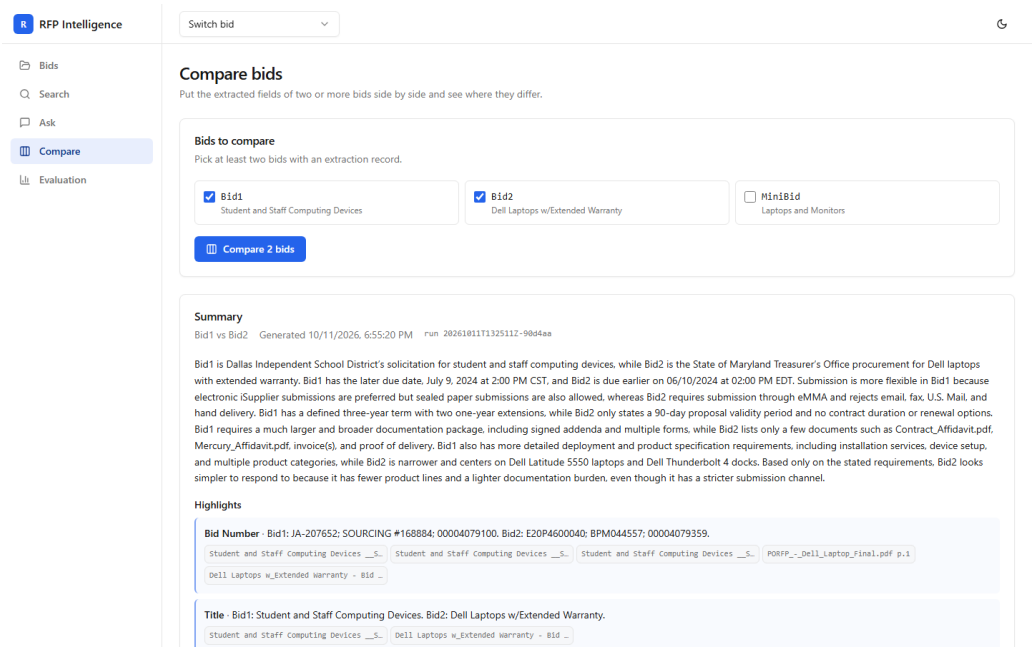

Scene 8	3:20-3:45	Go / no-go recommendation


On screen: Bid1 page, 'Go / no-go' tab

What to do

- Switch bid to Bid1, click the 'Go / no-go' tab.
- Point at the recommendation badge ('Needs review'), the '6 met · 0 not met · 1 unknown' line, then one criterion row: status, reason, fields used, citations.

What to say

The Go/No-Go agent judges the bid against your own company profile, a small YAML file: authorized manufacturers, delivery window, bonding, region, contract term, submission method, contract vehicles. Each criterion gets met, not met or unknown with a reason and the fields it used; a critical miss is a no-go, an unknown sends it to review. Change the profile and the verdict changes, no code involved.

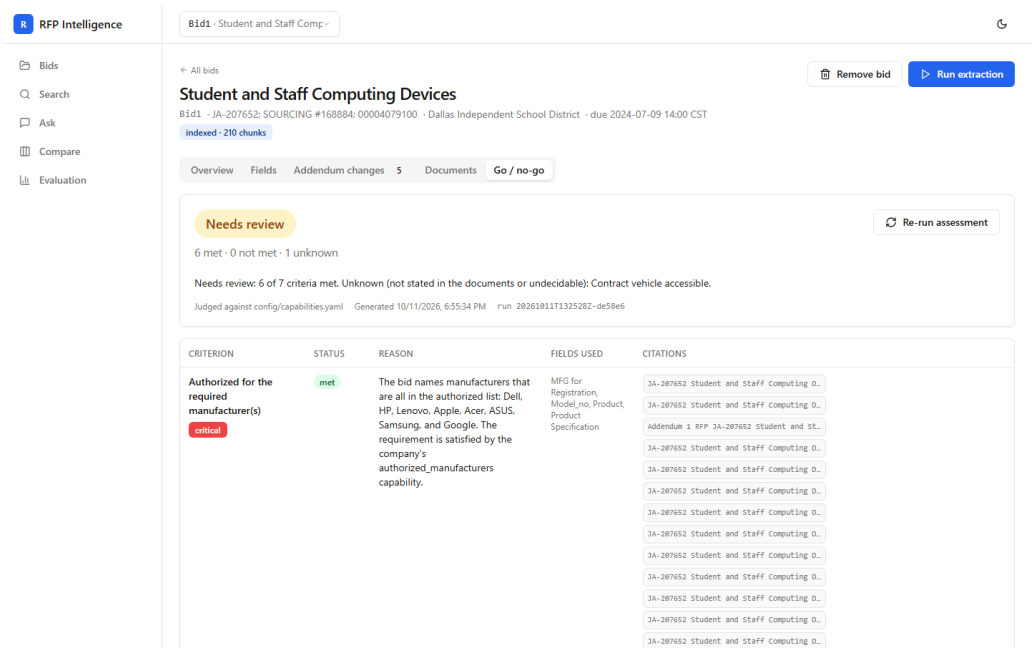

Scene 9	3:45-4:05	Measured quality


On screen: Evaluation page

What to do

- Click 'Evaluation'. Point at the bar chart and the summary table: recall@5 0.85 -> 0.90 -> 1.00, MRR 0.72 -> 0.86.
- Scroll to the Extraction section: accuracy badges per bid, exact / partial / wrong, 'values without citation 0'.

What to say

Quality is measured, not claimed. Retrieval is scored on twenty questions across both bids: recall at five goes from 0.85 with vectors alone to 1.0 with hybrid search plus the re-ranker. Extraction is scored against gold answers for every field of both bids, and the check that every value has a citation is part of the same report.

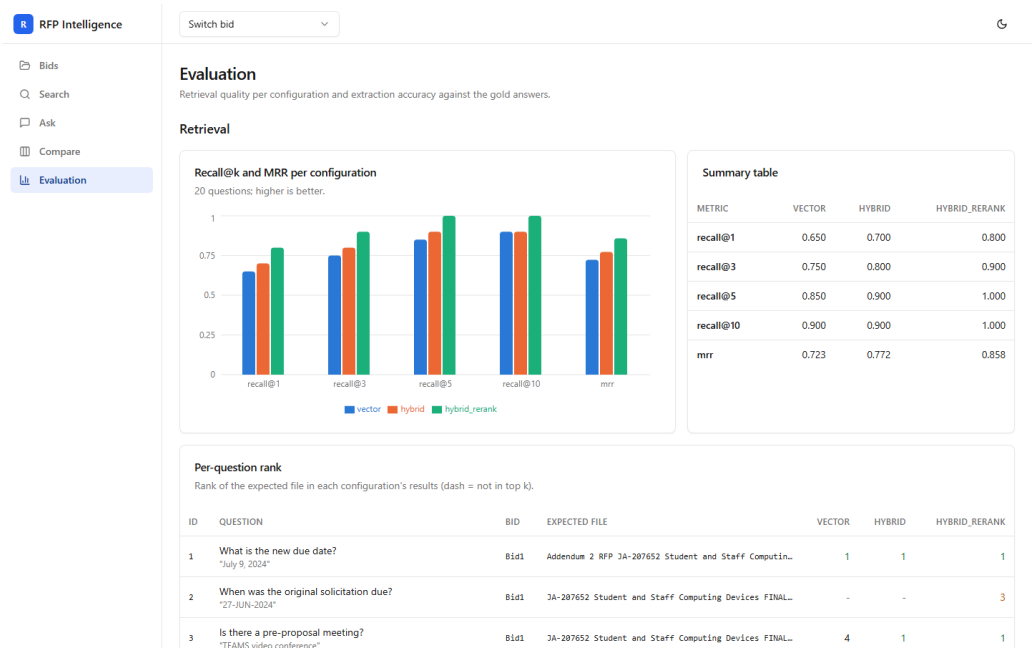

Scene 10	4:05-4:30	Back to the live run: results and trace, then close


On screen: Bid2 page: run card, Fields tab, 'Full trace'

What to do

- Switch bid to Bid2. The run card now shows 'done' with steps, tokens, cost and duration (if you reloaded the page the card is gone; the 'Validation: N passed ...' line under the Overview shows the new run id instead).
- Click the 'Fields' tab: the fresh record. Point at a not-found row and at the citations column.
- Click 'Full trace' on the run card: scroll once through the steps (Retrieval before each extractor, the Validator, the retries, the Report). End on that screen.

What to say

> The extraction we started has finished: twenty fields for the Dell laptop bid, each cited, with the ones the documents do not state marked not found, and the JSON record written to outputs. The trace is the observability deliverable: every agent step with input, tool calls, output, tokens, cost and latency, including the Validator sending failed fields back through retrieval and extraction, at most twice, before marking them failed. Everything here is also a FastAPI endpoint and a CLI, every agent message is a Pydantic model, and the repo ships the README with design decisions, the architecture diagram, the evaluation report, the Q&A log, this trace and 300-plus tests. Thank you.

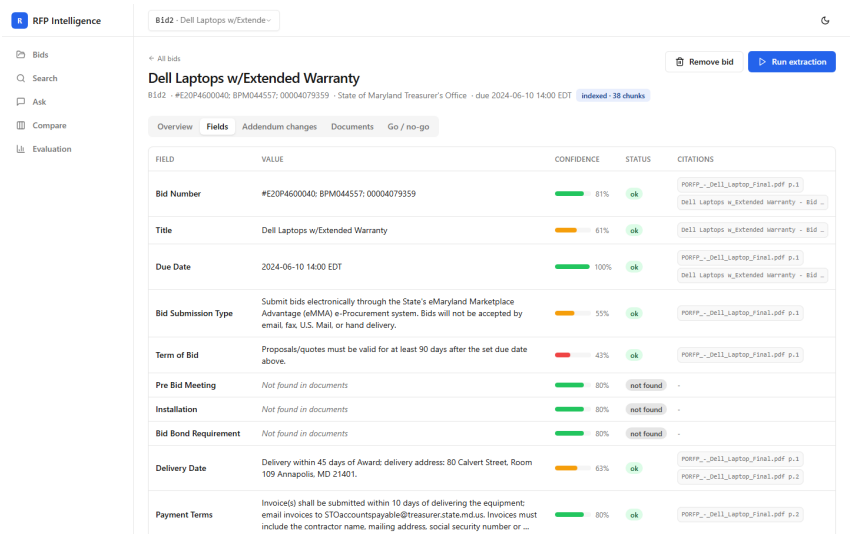

If they ask: likely review questions and short answers

Each answer is 15-30 seconds. All facts are from the README and docs/ASSUMPTIONS.md.

How do you chunk the documents, and why that size?
RFPs are not prose, so the chunker keeps the units that carry facts whole: an addendum question with its answer, a requirements heading with its bullet list, a table (rows as 'a | b | c', header repeated when split) and the HTML bid page as one record. Only free text is packed, to 400 tokens with 60 tokens of overlap: one or two RFP paragraphs, enough to keep a requirement and its numbers together and small enough for the cross-encoder to score one topic. Every chunk carries bid_id, file, doc_type, addendum_number, page and the section header.

Which embedding model and vector store, and why?
BAAI bge-small-en-v1.5 run locally through sentence-transformers: free, fast on CPU and strong on short passages; the provider is a config switch and OpenAI embeddings are supported. Qdrant in embedded mode for a one-command setup, or a Qdrant server via docker compose. Indexing is incremental: a manifest of file hashes per bid means an unchanged folder adds zero chunks.

How does hybrid search work here?
Dense search and BM25 keyword search each return 30 candidates; Reciprocal Rank Fusion with k = 60 merges the two ranked lists without comparing raw scores; the top 20 are re-ranked by the cross-encoder ms-marco-MiniLM-L-6-v2. Queries are expanded with a synonym table (deadline -> due date, closing date) and metadata filters apply inside the vector and keyword stores, not after. The evaluation shows each stage helping: recall@5 0.85 -> 0.90 -> 1.00, MRR 0.72 -> 0.86.

Why LangGraph, and what is the shared state?
The control flow is a graph: a fan-out to three parallel extractors, a reconciler, and a validator edge back to retrieval with a retry cap. LangGraph expresses that as declarative edges over a typed shared state. The state object holds the plan, the evidence bundles per field, the draft fields, the addendum change log, the validation results, retry counters, errors and usage, and the final record.

How does the validation / feedback loop work?
Deterministic rules first: every value has a citation, each quote really occurs in the cited chunk, dates parse, contacts contain an email or phone, cross-field consistency such as the pre-bid meeting before the due date with time zones normalized. Then one LLM support check per field group: is each value stated by its evidence. A failed field goes back to retrieval with widened search and re-extraction, at most twice; then it is marked failed with confidence 0.2 and kept visible. A list value whose items are only partly supported keeps the supported items and names the dropped ones.

How do you prevent hallucinated values?
Agents never see whole documents, only numbered evidence passages from the search tool, and must cite passage ids with verbatim quotes. Code maps ids to citations and verifies the quotes; a value without a verified citation cannot pass. Anything not in the evidence is null with status not_found and the note 'Not found in documents', and the question agent answers the same way.

How are addendums handled?
Each field also gets addendum-only evidence. The reconciler compares the base value with the addendum passages and decides override, clarification or addition; the latest addendum wins; the old value and the addendum number go into the notes and into an addendum_changes log in the record.

What happens on errors: LLM timeout, bad JSON, empty retrieval, a bad file?
Every LLM call goes through one wrapper that uses strict JSON schema mode, retries invalid output once with the validation error, and raises a typed error after that; a failed group marks only its fields failed. A truncated reply is detected and named. Empty retrieval yields not_found. Unreadable, empty or scanned files are logged as warnings and skipped. Provider key problems fall back to a second provider. None of these stop the run; the tests cover each case.

How did you make sure it works on an unseen bid?
Nothing bid-specific in the source: field definitions, hints, synonyms, document-type rules and the company profile are YAML; bid facts live only in the evaluation data. A synthetic third bid with a different structure runs end to end unchanged, and I checked that no bid-specific string appears in the source, only in the evaluation data and test fixtures.

How did you measure extraction accuracy?
A gold file per bid with the expected value and strict must-contain tokens for every field. A field is exact when all tokens are present, partial when some are or when an LLM judge finds free text equivalent, wrong otherwise; accuracy is exact plus half of partial over nineteen scored fields. The single-pass baseline and the agent graph are both reported.

What does a run cost and how long does it take?
About five to ten cents per bid in LLM calls, two to six minutes on CPU, most of it retrieval and re-ranking over the large PDFs; the trace shows the split per step. A semantic answer cache serves repeated questions without new calls, and GET /metrics reports tokens, cost, cache hits and queue depth.

What would you improve next?
Entity-aware chunking of specification tables, a learned re-ranker fine-tuned on RFP questions, parallel retrieval across field groups, and streaming partial results to the UI. Also OCR enabled by default once Tesseract is packaged in the Docker image.

Appendix: what every element on the screen means

Use this when a viewer (or you, mid-recording) asks what a badge, column, number or score stands for. Each table names the element as it appears on screen and what it means in the system.


Common to every page

The left sidebar lists the five pages. The top bar has a bid switcher and a theme toggle.

Element on screen	What it means
Bids / Search / Ask / Compare / Evaluation	The five pages. Bids is the home page; a bid's own page opens from a card or the switcher.
Switch bid (top bar)	Jumps straight to the detail page of any indexed bid.
Moon / sun icon	Light or dark theme; a viewer preference only, nothing in the data changes.
Citation chips (grey monospace boxes)	Every chip is one citation: the file name (and page) a value came from. Clicking a chip opens the citation drawer, see 'Citation drawer' below. A '+N' chip means N more citations are hidden for space.
Status pills ok / not found / failed	Green 'ok': the value passed every validator check. Grey 'not found': the documents do not state it; the value is null and the notes say 'Not found in documents'. Red 'failed': a value was extracted and cited but did not pass validation after the retries; it is kept so you can see it, with confidence forced to 0.20.

Bids page

One card per bid folder under data/. A card is the headline of the latest extraction record.

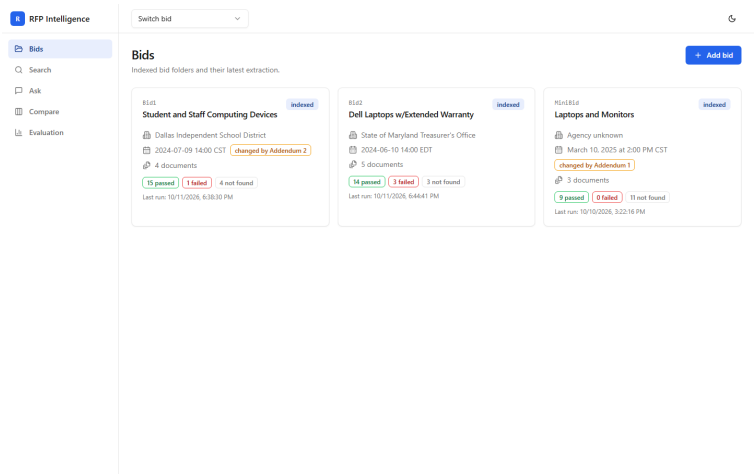


Element on screen	What it means
Bid id (monospace, e.g. Bid1)	The folder name under data/. It is the id used by the API and the CLI.
Title	The extracted 'Title' field; 'Untitled bid' until an extraction has run.
indexed / not indexed	Whether the folder's documents are chunked and stored in the search index. 'not indexed' bids cannot be searched or extracted yet.
Building icon line	The extracted 'company_name' field: the issuing agency.
Calendar line	The extracted 'Due Date' field, normalized to YYYY-MM-DD HH:MM TZ.
'changed by Addendum N' (amber)	The reconciler found that addendum N overrode the due date; the value shown is the post-addendum one.
N documents	Count of PDF and HTML files in the folder.
N passed / N failed / N not found	Validation counts of the record: how many of the 20 fields are ok, failed and not found. They always add up to 20.
Last run	When the record was generated.

Element on screen	What it means
Add bid	Upload PDFs / HTML pages as a new bid id; they are saved under data/<id>, indexed, and the page offers to run the extraction.

Bid page header and Overview tab


The header summarises the record; the Overview tab shows the generated summary and the key facts.

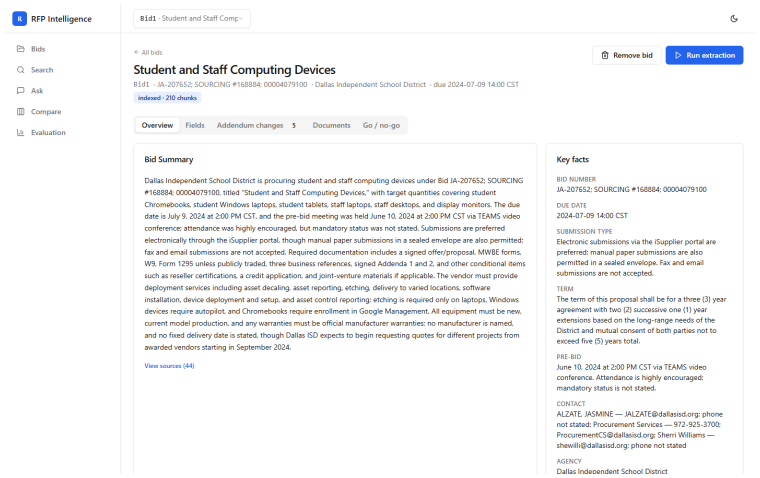

Element on screen	What it means
Header line under the title	Bid id, then the extracted Bid Number(s), the agency and the due date, taken from the record.
'indexed · N chunks'	The bid is in the search index and its documents were split into N chunks (the units that search and citations point at).
Remove bid	Deletes the bid everywhere: index entries, outputs/ files and the data folder. Asks for confirmation.
Run extraction	Starts the multi-agent extraction in the background; the button shows 'Extracting...' and a run card with live steps appears. Only one extraction runs at a time; the button says 'Busy: extracting X' while another bid is running.
Extraction run card	Appears during and after a run: status pill (running / done / failed), step count, tokens, cost and duration, with a link to the full run trace.
Bid Summary card	The 3-6 sentence summary written by the Report agent from the validated fields only; it is the 'Bid Summary' field of the record and inherits the citations of the fields it used.
Key facts grid	Seven fields pulled from the record for a quick read: Bid Number, Due Date, Submission type, Term, Pre-bid, Contact, Agency.
Tabs	Overview, Fields (all 20), Addendum changes (with a count badge), Documents, Go / no-go.

Fields tab

The full record: one row per field in the order of config/fields.yaml.

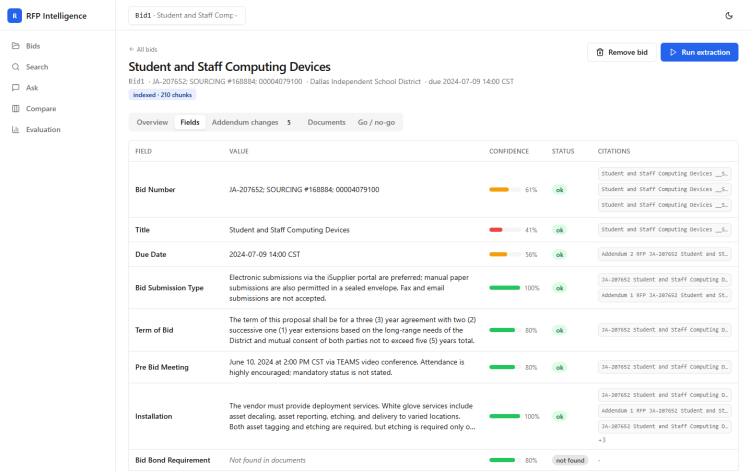

Element on screen	What it means
Field	The field name from the brief's Section 8 list (20 fields).
Value	The extracted value as text; list values are shown one item per line. 'Not found in documents' in italics for null values.
Confidence bar and %	Green at 80% or more, amber between 50% and 80%, red below 50%. For a found value it is 0.4 x the normalized re-rank score of the best cited passage + 0.3 if validation passed + 0.2 if two or more sources cite it + 0.1 if no cross-field conflict. A not-found value gets 0.80 when at least six passages were checked, else 0.50. A failed value is fixed at 0.20.
Status	ok / not found / failed, see 'Common to every page'.
Citations	One chip per source; '+N' hides the rest. A non-null value always has at least one.
Notes (in the drawer)	Free text attached to the value: 'As written: ...' (the wording before date normalization), 'Changed by Addendum N: originally ...', 'Clarified by Addendum N: ...', 'Validator removed N unsupported item(s): ...' (list items the critic could not support, dropped from the value), or 'Validation failed: <check>' for failed fields.


Citation drawer (opens from any citation chip)

The same drawer is used on the Fields, Addendum changes, Go / no-go, Search, Ask and Compare pages.

Element on screen	What it means
Title	The field (or criterion / answer) the citations belong to.
File name and 'page N'	The source document and page the chunk came from; HTML bid pages are page 1.
Quote	The exact passage the agent quoted as evidence. The validator checks that this text really occurs in the cited chunk.
Chunk id (small monospace)	The id of the indexed chunk; GET /chunks/{id} returns it in full.
Notes	The value's notes (see Fields tab).
Open PDF at page N / Open file	Opens the original document served by the API, jumping to that page for PDFs.
Previous / next	When a value has several citations, steps through them.

Addendum changes tab

The reconciler's change log; the number on the tab is the number of entries.

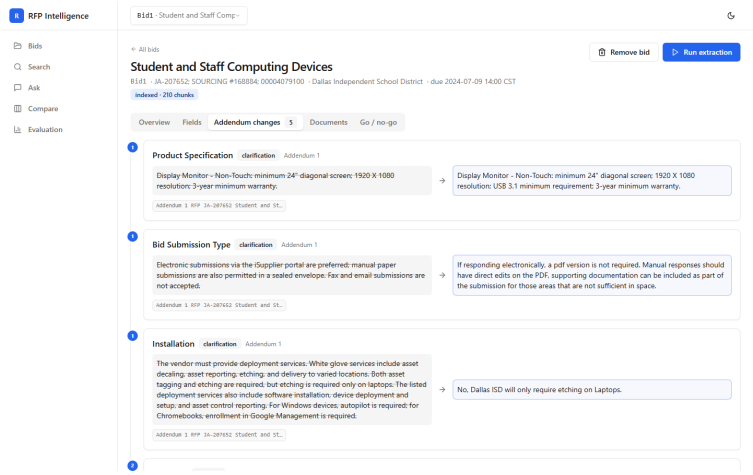

Element on screen	What it means
Field name	The field the addendum affected.
Kind badge: override / clarification / addition	override: the addendum replaced the value (e.g. a new due date). clarification: the addendum explains or confirms the value; the note is added, the value kept. addition: the addendum adds an item to a list value.
Addendum N	Which addendum made the change; the latest addendum wins when several touch the same field.
Left box -> right box	Old value (from the RFP or an earlier addendum) and the new value or clarification text.
Citation chip under the entry	The addendum passage the change was taken from.


Documents tab

What the ingestion step parsed for this bid.

Element on screen	What it means
File	The original file name under data/<bid>.
Type	The document type the classifier assigned: bid page (portal HTML), RFP, addendum, specs, affidavit, form, other. Types drive search filters and field-specific retrieval.
Addendum	The addendum number parsed from the file name or its first page; blank for other types.
Pages / Tables	Pages parsed and tables detected (tables are kept as rows so part numbers and quantities stay searchable).
Warnings	Ingestion problems that did not stop the run: empty or scanned pages, unreadable files, duplicate files. OCR is applied to scanned pages only when enabled in config and Tesseract is installed.

Go / no-go tab


The Go/No-Go agent's verdict against the company profile in config/capabilities.yaml.

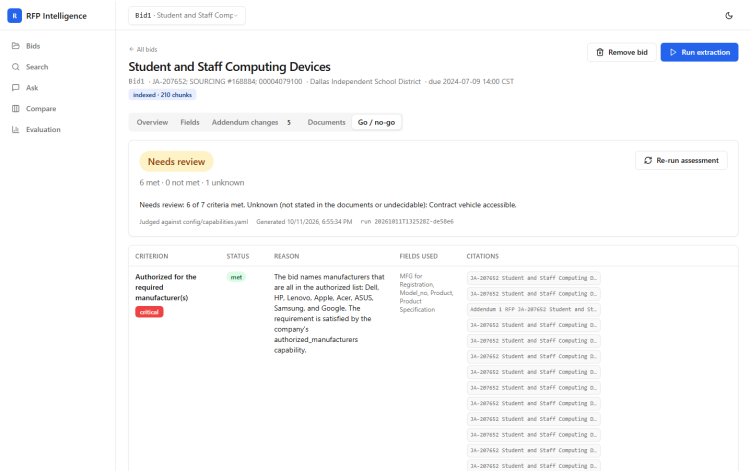

Element on screen	What it means
Go / No-go / Needs review	No-go: a critical criterion is not met. Needs review: nothing critical failed, but something is unknown or a non-critical criterion is not met. Go: every critical criterion is met and nothing is not met. The decision is computed in code from the criterion statuses, not by the LLM.
'N met · N not met · N unknown'	Counts over the criteria in the profile.
Summary line	One sentence naming what drove the recommendation (e.g. the unknown criterion).
'Judged against config/capabilities.yaml · Generated ... · run ...'	Which profile, when, and the run id (the run has its own trace).
Criterion	The profile criterion's label; 'critical' marks the ones whose failure alone forces No-go.
Status met / not met / unknown	The LLM's verdict from the named fields only; 'unknown' means the bid does not state what is needed to decide.
Reason	The one-sentence justification for the verdict.
Fields used	The record fields the criterion is judged on (from the profile).
Citations	Inherited from those fields, so every verdict traces back to the documents.
Re-run assessment	Runs the agent again against the current profile and record.

Search page

Direct access to the search engine, the same tool the agents call.

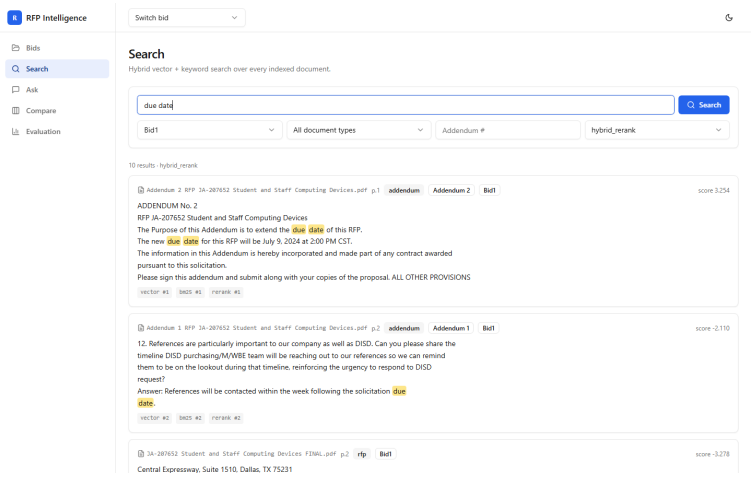


Element on screen	What it means
Query box	Free text. Keyword search makes exact ids findable (bid numbers, part numbers, model numbers).

Element on screen	What it means
Bid filter	Restrict to one bid; 'All bids' searches everything indexed.
Document type filter	Restrict to a document type (e.g. only addendums, only specs).
Addendum # filter	Restrict to a given addendum number.
Configuration: vector / hybrid / hybrid_rerank	vector: dense embeddings only. hybrid: dense + BM25 keyword search merged with Reciprocal Rank Fusion. hybrid_rerank (default): hybrid, then a cross-encoder re-ranks the top candidates. The evaluation page compares the three.
'N results · config'	How many hits were returned and with which configuration.
Result card header	File name and page, document type badge, 'Addendum N' badge when applicable, bid id badge.
score	With hybrid_rerank: the cross-encoder relevance score (higher is better; negative values are normal, it is a logit, not a probability). With vector or hybrid: the fused RRF score.
Highlighted words	Query terms found in the chunk text.
vector #n / bm25 #n / rerank #n badges	The rank of this chunk in each stage: n-th by dense similarity, n-th by keyword match, n-th after re-ranking. A chunk missing one badge was not in that stage's top list and came in through the other.
Clicking a result	Opens the citation drawer with the full chunk and the 'Open PDF at page' button.

Ask page


Question answering over the bids with cited answers.

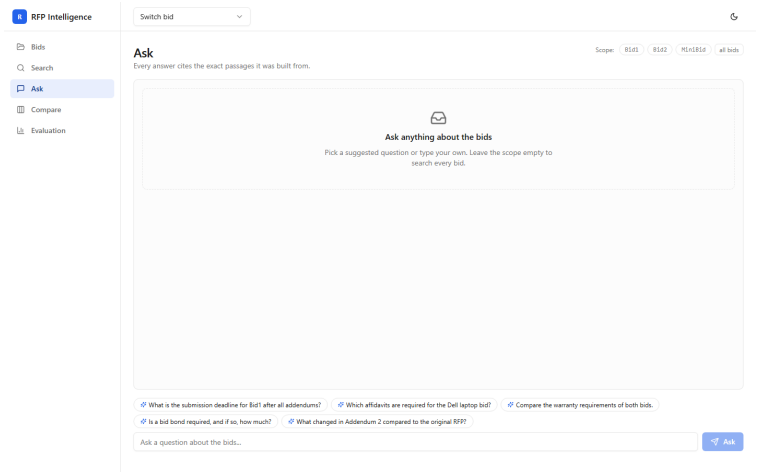

Element on screen	What it means
Bid scope buttons and 'all bids' / 'N selected'	Which bids the question is asked about; with none selected every indexed bid is in scope. Comparison questions need two or more.
Suggested questions	The brief's example questions as one-click chips.
Answer bubble	The Q&A agent's answer; bullets and [E1]-style markers refer to the cited passages in the order of the chips.
Citation chips under the answer	The passages the answer was built from; click to open the drawer. An answer with no citations always reads 'Not found in documents'.
confidence N%	The validator's confidence in the answer: green at 80% or more, amber 50-80%, red below.
cached	The identical or a semantically equivalent question was answered before, so the saved answer is returned without new LLM calls (semantic answer cache). Cache hits and misses are counted in GET /metrics.
Progress line while waiting	The agent currently working (planning, retrieving, answering, validating); questions run in the background with a timeout.

Compare page


The Comparison agent over two or more extracted records.

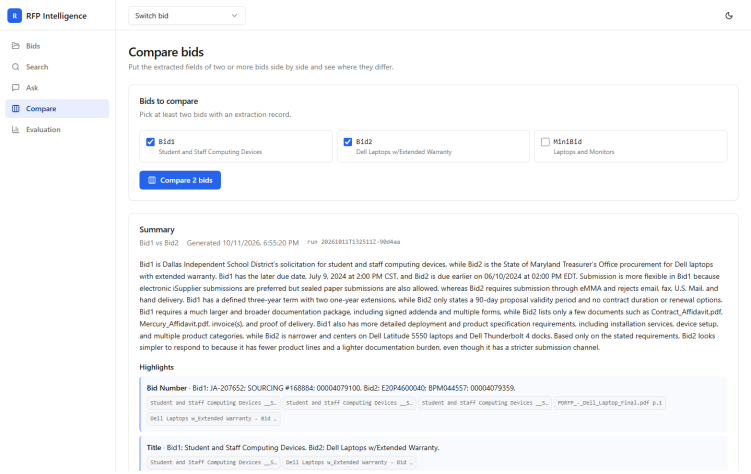

Element on screen	What it means
Bids to compare	Tick at least two bids that have a record; 'Compare N bids' runs the agent (10-30 s).
Summary	Which bids, when it was generated, and the run id. The paragraph is the agent's narrative written only from the validated field values.
Highlights	The differences the agent considers most important, one per field, each with the citation chips of the values it used.
Field table	One row per field, one column per bid; each cell shows the value and its status pill. A row with a coloured left border and tinted background 'differs': the values are not equivalent. 'Only differences' hides the rows that match.
Clicking a cell	Opens the citation drawer for that bid's value.

Evaluation page

The retrieval and extraction evaluation results (files under eval/results, produced by python main.py eval ...).

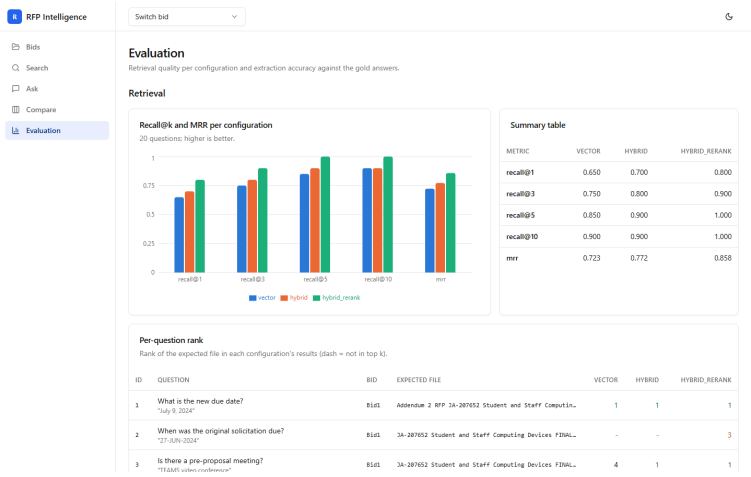


Element on screen	What it means
Recall@k	Share of the 20 evaluation questions whose expected source passage appears in the top k results (k = 1, 3, 5, 10). 1.000 at recall@5 means every question's answer passage is in the top five.
MRR (mean reciprocal rank)	Average of 1 / rank of the expected passage; 1.0 would mean it is always first.
vector / hybrid / hybrid_rerank columns	The three retrieval configurations, see Search page. Each step should improve the numbers; the re-ranker gives the best.
Per-question rank table	For each question: the bid, the expected file, and the rank the expected passage got in each configuration. A dash means it was not in the top 10. Blue = rank 1, amber = found but low.

Element on screen	What it means
Extraction: accuracy N%	(exact + 0.5 x partial) / scored fields, per bid, against the gold answers in eval/gold.
exact / partial / wrong	exact: every required token of the gold answer is present (or both say 'not found'). partial: some tokens present, or the LLM judge finds the meaning close. wrong: no value, or the value contradicts the gold answer.
scored	Fields counted in the accuracy (Bid Summary is judged but not counted).
values without citation	Must be 0: a non-null value with no source would break the guardrail.
Per-field table	Field, gold answer, system output and the score with its reason.

Run trace page


The agent trace of one run (extraction, question, comparison or go/no-go); the same data is in logs/trace_<run_id>.jsonl.

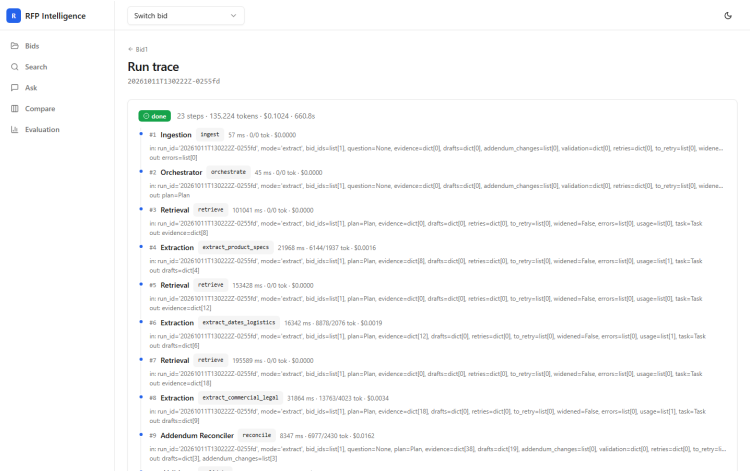

Element on screen	What it means
run id	Timestamp plus a short hash; it also appears in the record and in outputs/.
Status pill running / done / failed	Whether the run is still going, finished, or stopped on an error.
'N steps · tokens · $ · s'	Totals over all steps: number of agent steps, LLM tokens in and out, cost at the configured model prices, wall-clock duration; '· N error(s)' when a step recorded an error.
Step row: #n Agent node	Step number, the agent name (Ingestion, Orchestrator, Retrieval, Extraction, Addendum Reconciler, Validator, Report, Q&A, Comparison, Go/No-Go) and the graph node that ran (e.g. extract_product_specs: the extractor for the product group).
ms · in/out tok · $	Latency of the step, tokens sent / received by its LLM calls (0/0 for steps without an LLM such as Retrieval), and cost.
in: ... / out: ...	A summary of the shared state the step received and of what it changed (e.g. evidence=dict[12] means twelve evidence bundles; drafts=dict[9] nine draft fields; to_retry=list[2] two fields sent back for retry).
Repeated Retrieval -> Extraction pairs	The feedback loop: after the Validator, failed fields go back to Retrieval (widened search) and their extractor, at most twice, then they are marked failed.
Three extractors	extract_dates_logistics, extract_commercial_legal and extract_product_specs each work on their own field group and run in parallel.
Red error line	An error the step handled without crashing the run (LLM timeout, invalid JSON, empty retrieval), kept for the record.

API docs (http://localhost:8001/docs)

The FastAPI Swagger page; every UI action is one of these calls.

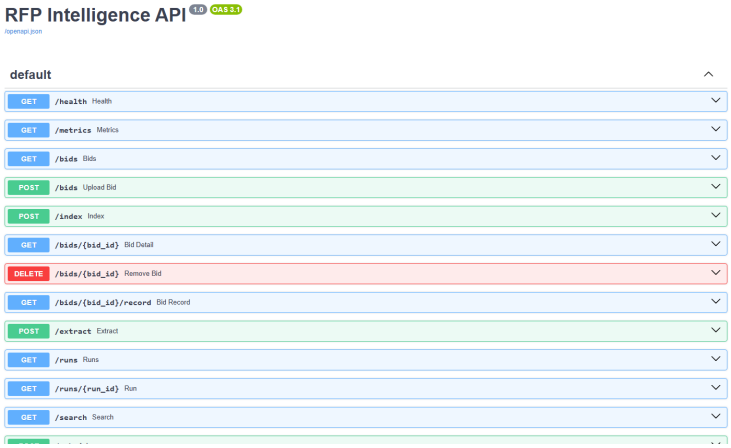

Element on screen	What it means
GET /health, GET /metrics	Liveness with the indexed bids and LLM provider; counters for runs, the question queue and the answer cache.
GET /bids, POST /bids, GET /bids/{id}, DELETE /bids/{id}	List bids, upload a bid, its documents and index state, remove a bid everywhere.
POST /index	Index a folder (incremental: unchanged files add 0 chunks; --force re-indexes).
GET /search	The search engine: q, bid_id, doc_type, addendum, top_k, config.
POST /ask, POST /ask/runs	Answer a question now, or in the background with a run id to poll.
POST /extract, GET /runs, GET /runs/{id}	Start an extraction, list runs, get a run's status and trace.
GET /bids/{id}/record, GET /chunks/{id}, GET /files/{bid}/{file}	The saved JSON record, one indexed chunk, the original document.
POST/GET /compare, POST/GET /bids/{id}/go-no-go	Run or fetch the comparison and the go/no-go assessment.
GET /eval/retrieval, GET /eval/extraction	The evaluation results shown on the Evaluation page.